



Solenoid Valves F Series







New Easy Assembly Type Manifold (internal wiring connector type) for the F10/F15! Now easier to use.



Power consumption
0.1W
(low-current type)


With reverse current protection circuit

NEW

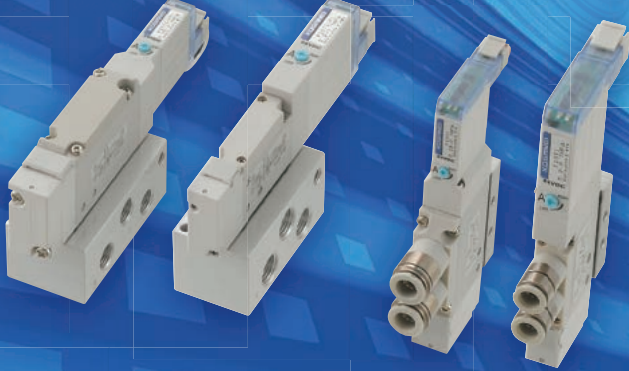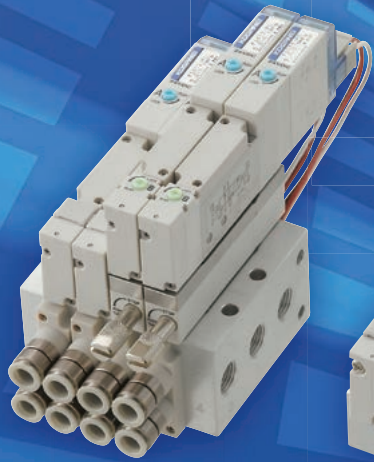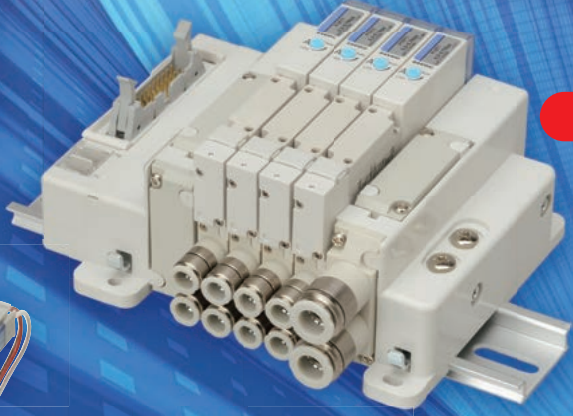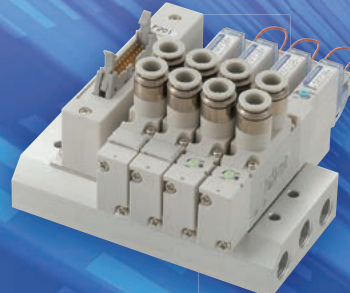

Redesigned Solenoid Valves F18 Series!

Solenoid shared with F Series for low wattage and shorter total length. Tandem solenoid specifications, IP specifications, and serial transmission type added.

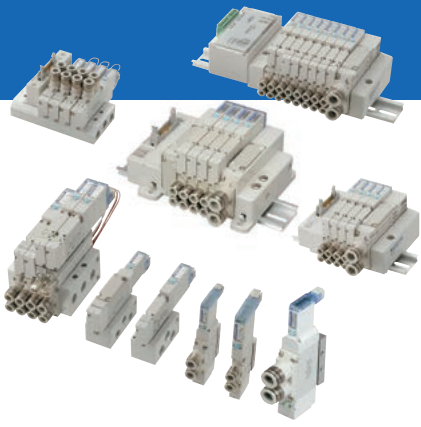


SOLENOID VALVES F SERIES


F10, F15, F18 SERIES

Contents

Features	2	Operating Principles and Indicated Codes	19
Variations	8	Handling Instructions and Precautions	21
Energy Saving Proposals Using the F Series of Solenoid Valves	13	Exploded Views of Split Type Manifold and Easy Build Type Manifold	30
Materials for Selecting F Series Solenoid Valves and Air Cylinders	14	Serial Transmission Type Product Configuration	41
Safety Precautions	16	Serial Transmission Type List of Specifications	42

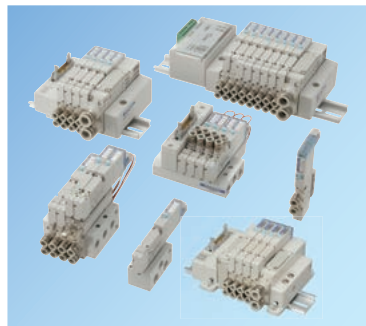


Solenoid valve F10 Series	59
List of Specifications	60
Order Codes	66
Dimensions	118

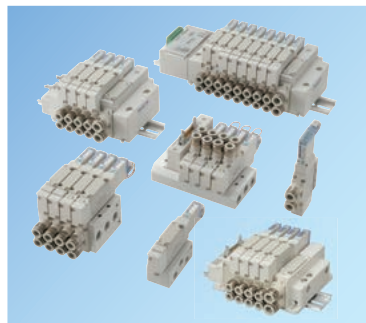

Solenoid valve F15 Series	155
List of Specifications	156
Order Codes	162
Dimensions	216



Solenoid valve F18 Series	253
List of Specifications	254
Order Codes	259
Dimensions	278

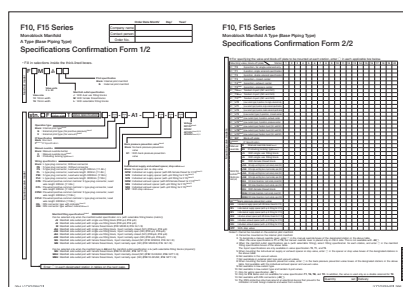

F Series Specification Confirmation Form	291
--	-----

F10 SERIES

F15 SERIES

F18 SERIES

SPECIFICATION CHECK SHEET

New
release

Solenoid Valves F Series

Easy Assembly Type

Easy Assembly Type Manifold

A new connector type manifold has been added to the F10/F15 series solenoid valves.

This allows for easy addition, removal, and assembly, as the internal wiring is connected simply by linking the manifold bases.

Direction conversion is possible without connector disassembly. A knob can be turned 90 degrees to change the direction of the wiring.


Negative common specifications type can also be selected.

Direction convertible by 90 degrees
Flat cable connector
D-sub connector

Internal wiring connector

Connecting rod

Patent pending

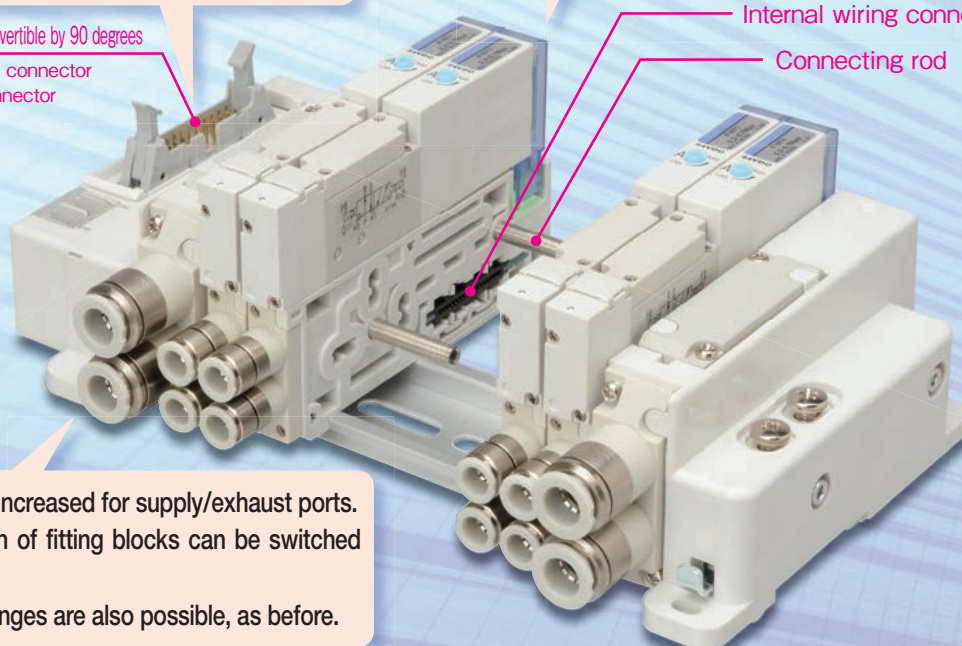

The degree of freedom has been increased for supply/exhaust ports. With one-side piping, the position of fitting blocks can be switched between left and right.


Base piping and direct piping changes are also possible, as before.

An optional stop valve can be selected for the non-plug-in type.

Connector wiring


For both single wiring and double wiring, simply connecting a valve base assembly enables the valve signals on the wiring side to be assigned in order. No wiring work is required at all.

Internal wiring example

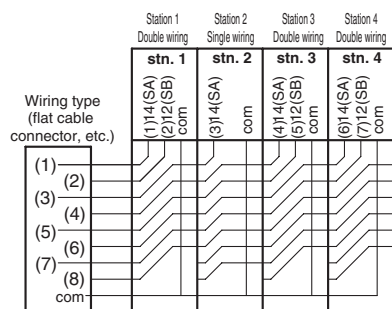

(with single wiring and double wiring mixed)



Internal wiring connectors

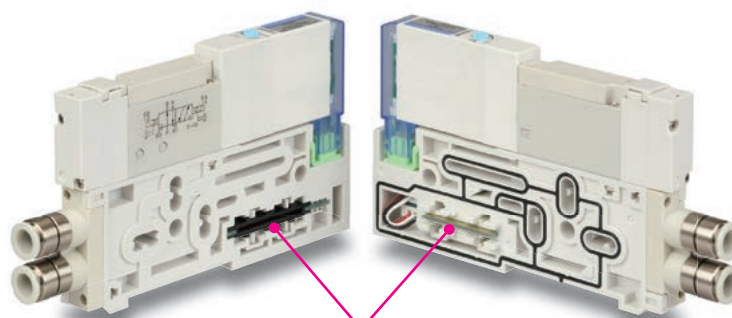


Internal wiring connector

Method for adding and removing manifolds (see page 36 and page 37 for details)

- ① Remove the connecting screw from the right end block.
(If there is a DIN rail, loosen the DIN rail fixing screw.)
- ② Disassemble the manifold into two sides while pushing the lever on the DIN bracket. (only when there is a DIN bracket)

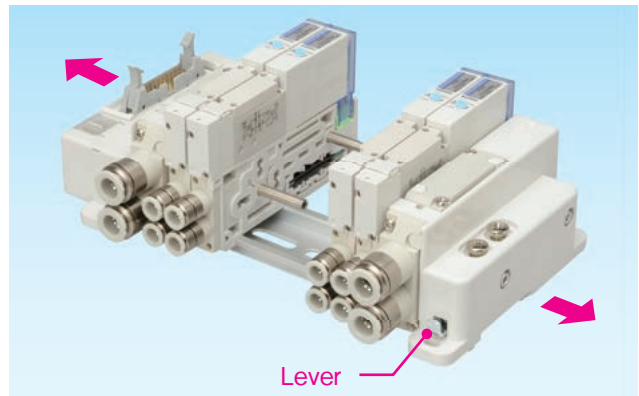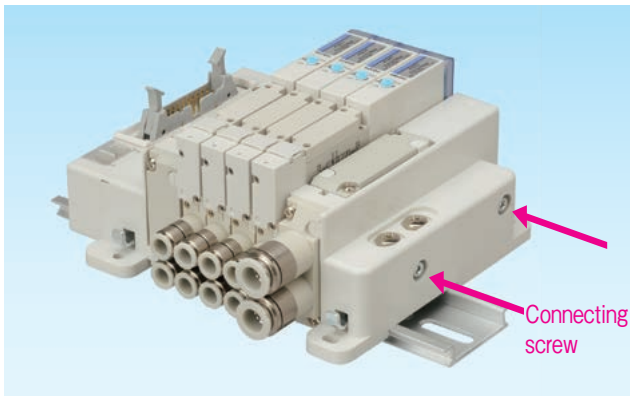

- ③ Remove the valve from the connecting rod.

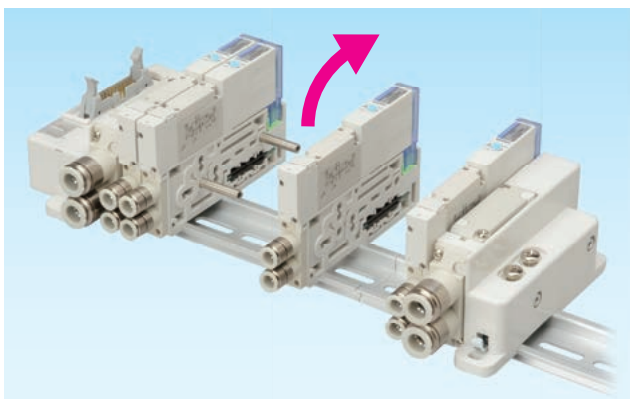

- ④ When adding: Install the connecting rod included with the valve to add, and insert the valve to add.

- ⑤ When removing: Remove the valve, and switch the connecting rod to the new length.

- ⑥ Return the right end block to its original position and tighten the connecting screw. Then, tighten the DIN rail fixing screw.


Two installation methods available

Select either DIN rail mounting or direct mounting (using the four main unit mounting holes).


DIN rail mounting



Direct mounting

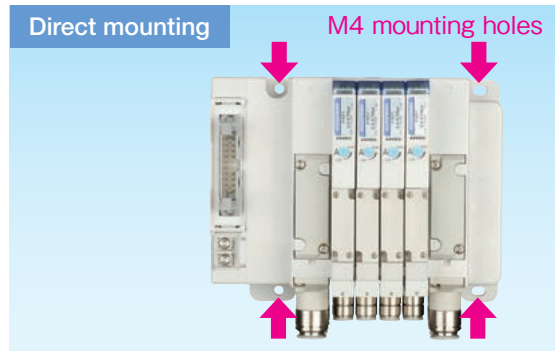

The intermediate piping block can now be selected when ordering.

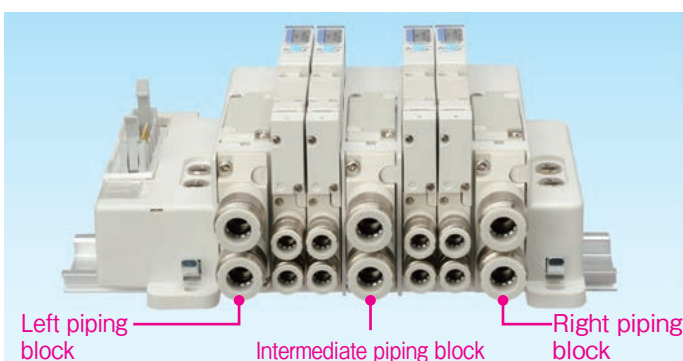


- Reduce risk of flow rate shortage.
- Three different air pressures can be supplied by using port isolators.

Solenoid Valves F Series


Environmentally friendly **RoHS** Compliant product!

The F Series is the Result of a Focus on Usability.


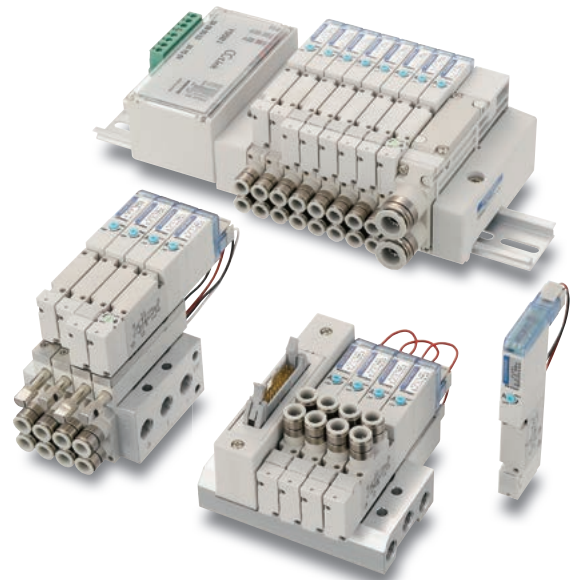


1 Single or double dual use valve

- With the F series 2-position valves, you can use a manual override to select either the single solenoid valve or the double solenoid valve function. Note: A dedicated single solenoid valve is also available.



※2-position valve (Excluding T0 type)

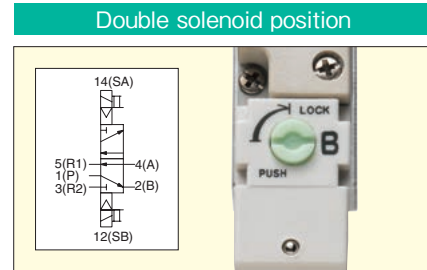
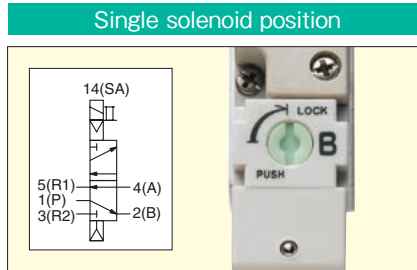


2 Employs dual use fittings

- Koganei's unique dual use fittings can be connected to two different types of tubes with differing outer diameters.
- No need to waste time selecting fittings based on the tube size.

Dual use fitting

※Mountable tube sizes:
 F10 series: $\phi 4$ and $\phi 6$
 F15 series: $\phi 6$ and $\phi 8$
 F18 series: $\phi 8$ and $\phi 10$
 Note: A single use fitting can also be selected.


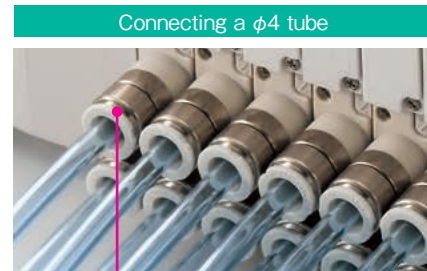
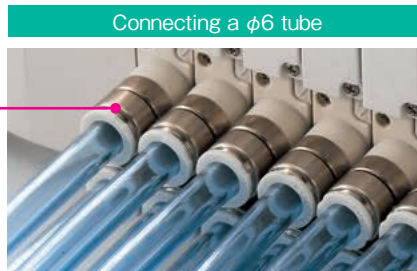


The same fitting as in the left photograph

3 Allows the fitting block to be changed for either base piping or direct piping

- Since the direction of the fitting blocks can be changed after purchase, the user is free to change the piping direction.

(Excluding monoblock manifold F type, and PC board manifold F type)

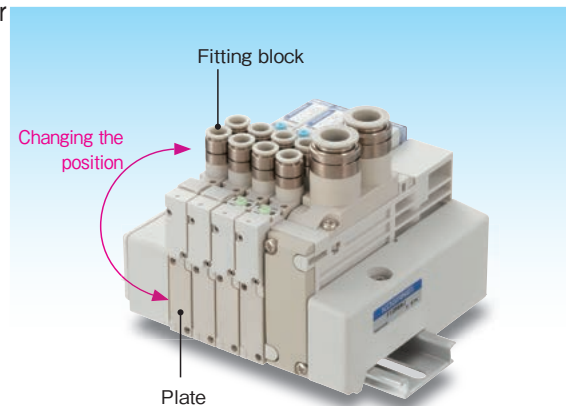


Caution

Before use, be sure to read the "Safety Precautions" on p.16.


4 Easy assembly type manifold has newly been added (F10/F15)

- This allows for easy addition, removal, and assembly, as the internal wiring is connected simply by linking the manifold bases.

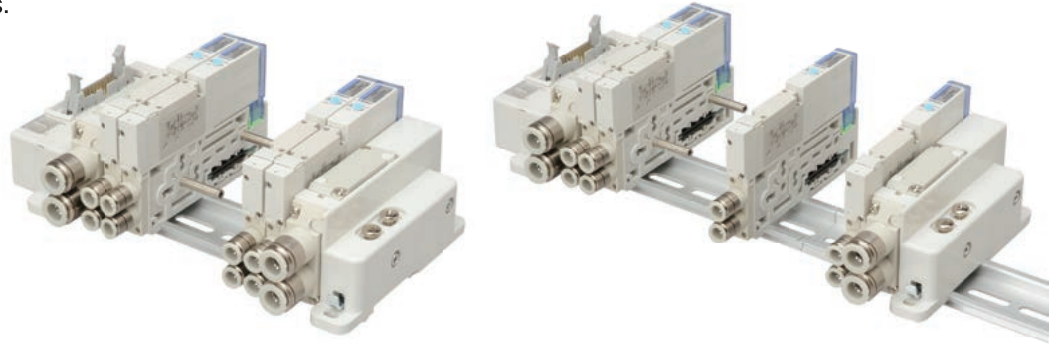

5 The intermediate piping block can now be selected when ordering (F10/F15 easy assembly type manifold)


- The easy assembly type manifold (F10/F15) supports large flow rate consumption. Three different air pressures can be supplied by setting two port isolators.

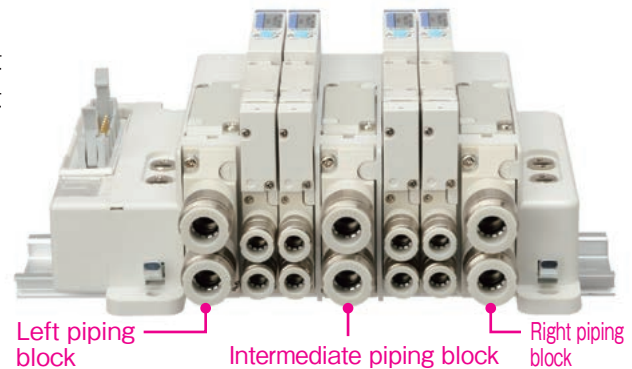

6 Color identification for positive/negative common (F10/F15 easy assembly type manifold)

- The F10/F15 easy assembly type manifold enables color identification of specifications via a small window on the solenoid side of the valve base, which indicates the positive common, negative common, single wiring, and double wiring.

Patent pending

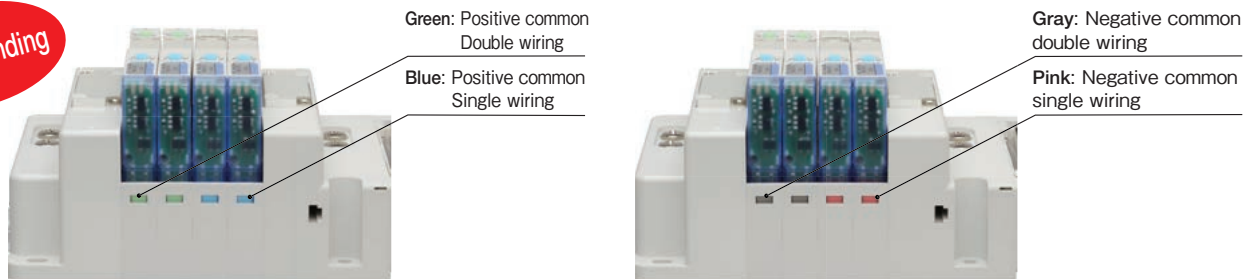

7 Easy replacement of wiring blocks (F10/F15 easy assembly type manifold)

- ① Loosen the two screws of the wiring block assembly.



- ② Remove the connector from the piping block left.



- ③ Insert the connector to the piping block left.




- ④ Tighten the two screws of the wiring block assembly to complete the procedure.



8 Tandem 3-port valve (4-position)


- Two 3-port valve functions in one valve body.
- Using F series valves as an air-operated valve or for single-acting cylinder control saves space.
- Allows combined mounting with 5-port valve. **Also added to F18**

Model	4 (A) side	2 (B) side	Symbol
F10 <input type="checkbox"/> TA	Normally closed	Normally closed	
F15 <input type="checkbox"/> TA	Normally closed (NC)	Normally closed (NC)	
NEW F18 <input type="checkbox"/> TA	Normally closed (NC)	Normally closed (NC)	
F10 <input type="checkbox"/> TB	Normally open	Normally open	
F15 <input type="checkbox"/> TB	Normally open (NO)	Normally open (NO)	
NEW F18 <input type="checkbox"/> TB	Normally open (NO)	Normally open (NO)	
F10 <input type="checkbox"/> TC	Normally closed	Normally open	
F15 <input type="checkbox"/> TC	Normally closed (NC)	Normally open (NO)	
NEW F18 <input type="checkbox"/> TC	Normally closed (NC)	Normally open (NO)	

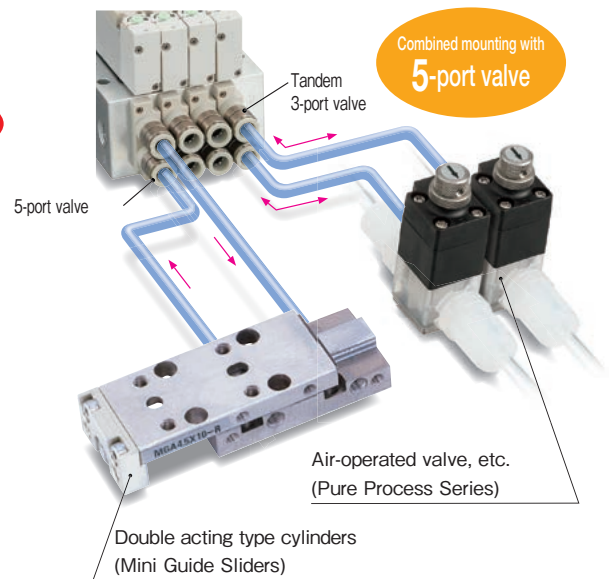


9 Wire-saving type provided for monoblock manifold (F10/F15)

- Wire-saving type is also available for monoblock manifold A and F types. Slim and compact.
- Wiring specifications for flat cable connector and D-sub connector can be selected.

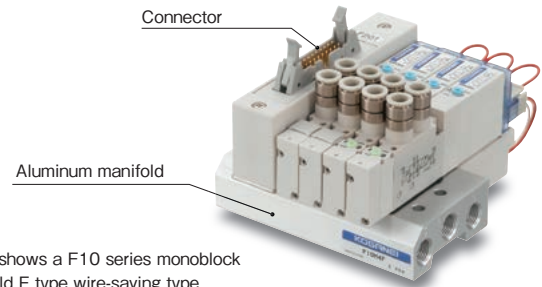



10 Stop valve (optional) (F10/F15 monoblock manifold/easy assembly type manifold)

- Enables replacement of valves without stopping operation of various devices and instrumentation lines.
- Stop valve enables the opening and closing of each unit's flow path without shutting off the main air supply.

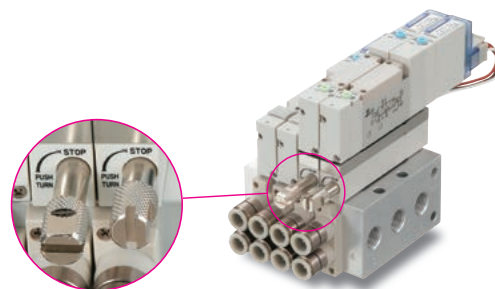

11 Back pressure prevention valve (optional) (F10/F15)

- Prevents back pressure problems caused when operating single acting cylinders, etc.

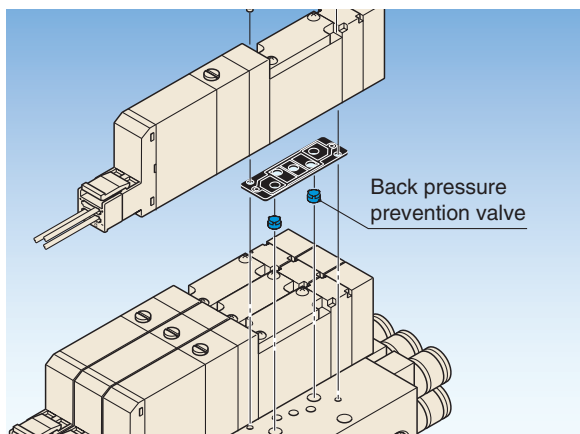


Back pressure prevention valve

Two back pressure prevention valves are mounted on the manifold side. This prevents cylinder malfunctions caused by the exhaust air from other valves.

Remark: Standard with F18 split manifolds.
Not provided with F18 monoblock manifolds.

12 Slim and compact

■ Monoblock manifold F type (F10/F15)

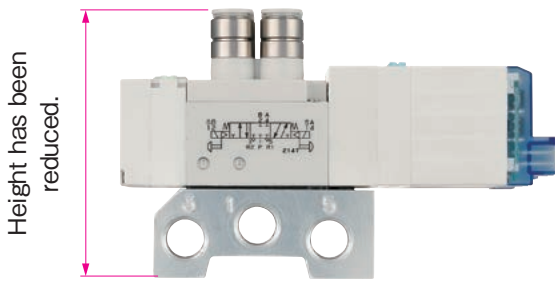

*Photo shows F10 series.


13 Optional IP65 protective structure

- Waterproof seal has been adopted in the plug connector and solenoid to comply with the requirements for an IP65 protective structure. Supports a wide variety of environments.

Applicable product range

- Single valve unit
- Monoblock manifold A type
- Monoblock manifold F type
- Split Manifold Non-Plug-in Type
- Easy assembly type Non-Plug-in Type

Also added to F18

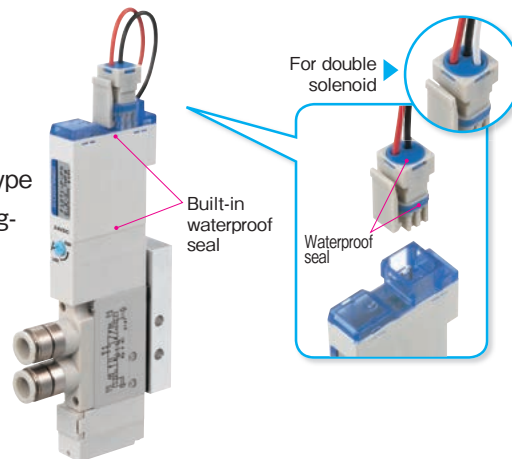

Definition of protective structure (from IEC60529)

The protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.

Protection code
(International Protection)

IP65

"Code 2" protection class
for water infiltration^{Note}

Does not receive any
detrimental effect from direct
jets of water in any direction.


"Code 1" protection class
for solid foreign material
Dust does not infiltrate the inside.

Note: Cannot be used while submerged
in water.

14 Support for various types of serial transmission (F10/F15/F18)

- Compatible devices with serial transmission manifold


- For OMRON B7A Link Terminal
- For CC-Link (16 outputs)
- For CC-Link (32 outputs)
- For DeviceNet (16 outputs)
- For DeviceNet (32 outputs)
- For CompoNet (16 outputs)
- For EtherCAT (16 outputs)
- For EtherCAT (32 outputs)
- For EtherNet/IP (16 outputs)
- For EtherNet/IP (32 outputs)

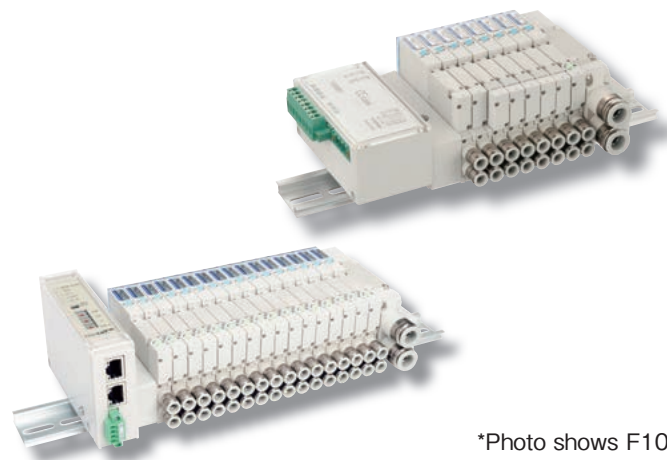

*Photo shows F10 series.


Product Range

Solenoid Valves F10 Series

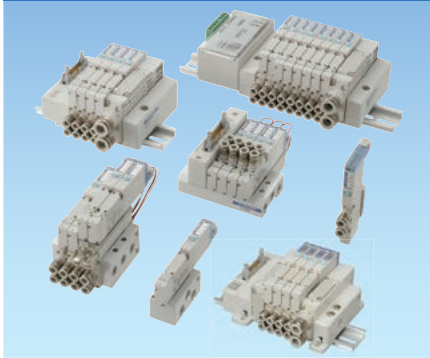

- Valve width: 10 mm [0.394 in.]
- Sonic conductance C: 0.97 dm³/(s/bar) [Cv: 0.27]
- Applicable cylinder bore sizes: φ20 [0.787 in.] to φ50 [1.969 in.]

Solenoid Valves F15 Series

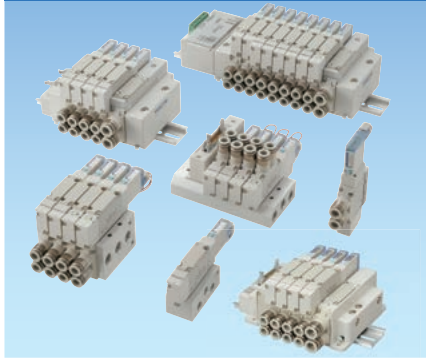

- Valve width: 15 mm [0.591 in.]
- Sonic conductance C: 2.05dm³/(s/bar) [Cv: 0.57]
- Applicable cylinder bore sizes: φ40 [1.575 in.] to φ80 [3.150 in.]

Solenoid Valve F18 Series



- Valve width: 18 mm [0.709 in.]
- Sonic conductance C: 3.48dm³/(s/bar) [Cv: 0.97]
- Applicable cylinder bore sizes: φ50 [1.969 in.] to φ100 [3.937 in.]

Single Valve Unit (F10/F15/F18)

Valves can be used as single units by attaching inlet port blocks. Mounting brackets are also available.

Outlet port specifications

Series	With sub-base		For single valve unit or manifold use									
	Female thread		With female thread block			With dual use fitting block			With single use fitting block			
	Rc1/8 NPT1/8	Rc1/4 NPT1/4	M5 10-32 UNF	Rc1/8 NPT1/8	Rc1/4 NPT1/4	φ4 & φ6	φ6 & φ8	φ8 & φ10	φ4	φ6	φ8	φ10
F10	●		●			●			●	●		
F15	●			●			●			●	●	
F18		●			●			●			●	●

With fitting block




With female thread block



With A type sub-base



With mounting bracket



F10 Series Order codes [Page 66](#)

F10 Series Dimensions [Page 118](#)

F15 Series Order codes [Page 162](#)

F15 Series Dimensions [Page 216](#)

F18 Series Order codes [Page 259](#)

F18 Series Dimensions [Page 278](#)

Monoblock Manifold A Type (Base Piping Type) (F10/F15/F18)

This base piping type manifold offers easy maintenance and cost performance. Replacing the outlet block enables its use as a direct piping type manifold. Using a pre-wired common terminal plug connector greatly reduces wiring work.

With fitting block



With female thread block



Pre-wired common terminal plug connector



F10 Series Order codes [Page 69](#)

F10 Series Dimensions [Page 121](#)

F15 Series Order codes [Page 166](#)

F15 Series Dimensions [Page 219](#)

F18 Series Order codes [Page 261](#)

F18 Series Dimensions [Page 281](#)

Monoblock Manifold F Type (Direct Piping Type) (F10/F15/F18)

The direct piping type manifold offers excellent cost performance. Using a pre-wired common terminal plug connector greatly reduces wiring work.

With fitting block



With female thread block



Pre-wired common terminal plug connector



F10 Series Order codes [Page 72](#)

F10 Series Dimensions [Page 122](#)

F15 Series Order codes [Page 170](#)

F15 Series Dimensions [Page 221](#)

F18 Series Order codes [Page 263](#)

F18 Series Dimensions [Page 282](#)

Monoblock Manifold A Type, Wire-Saving Type (Base Piping Type) (F10/F15)

Wire-saving type of monoblock manifold A type.
Wiring specifications include the flat cable connector mounting type and the D-sub connector mounting type.



F10 Series Order codes	Page 76
F10 Series Dimensions	Page 123
F15 Series Order codes	Page 174
F15 Series Dimensions	Page 222

Monoblock Manifold F Type, Wire-Saving Type (Direct Piping Type) (F10/F15)


Wire-saving type of monoblock manifold F type.
Wiring specifications include the flat cable connector mounting type and the D-sub connector mounting type.



F10 Series Order codes	Page 78
F10 Series Dimensions	Page 123
F15 Series Order codes	Page 176
F15 Series Dimensions	Page 222

PC Board Manifold (F10/F15)

A MIL type 20-pin flat cable connector is installed on the monoblock manifold to achieve both wiring savings and cost performance. Combined use of the PC wiring system and wiring specification -F201 allows for more effective wiring savings.



F10 Series Order codes	Pages 80 and 84
F10 Series Dimensions	Page 125
F15 Series Order codes	Pages 178 and 182
F15 Series Dimensions	Page 224

Split Manifold Non-Plug-in Type (F10/F15/F18)

Enables easy addition or removal of manifold blocks. This system offers more flexibility in conforming to changes in specifications.




F10 Series Order codes	Page 86
F10 Series Dimensions	Page 126
F15 Series Order codes	Page 184
F15 Series Dimensions	Page 225
F18 Series Order codes	Page 266
F18 Series Dimensions	Page 283

Split Manifold Plug-in Type

Manifold conforms to reducing wiring work. Adding on wiring allows adding manifold units.
 Combined use of the PC wiring system and wiring specification -F201 offers more effective wiring savings.

F10 Series Order codes	Page 92
F10 Series Dimensions	Page 128
F15 Series Order codes	Page 190
F15 Series Dimensions	Page 227
F18 Series Order codes	Page 270
F18 Series Dimensions	Page 284

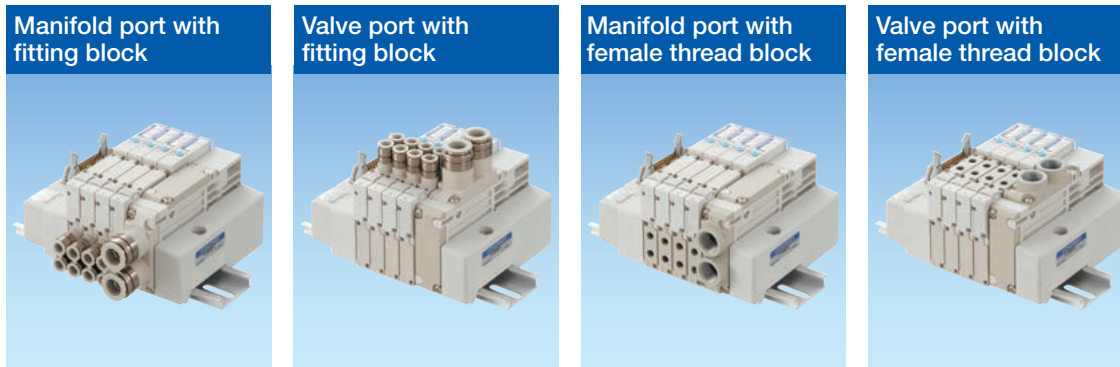

Wiring Specifications




Flat cable connector top surface (vertical) wiring type Note

Flat cable connector side surface (horizontal) wiring type Note

D-sub connector top surface (vertical) wiring type Note

D-sub connector side surface (horizontal) wiring type Note

Terminal block



Photograph shows flat cable connector.

For the flat cable connector and D-sub connector, the no power supply terminal type is also available.

Note: You can change the connector direction.

Caution: For the F18 series, neither the connector side surface (horizontal) wiring type nor the no power supply terminal type is available.

Remark: You can also select the wiring position (wiring block) for right-side mounting.

Split Manifold Serial Transmission Type (F10/F15/F18)



Integrated type

Stand-alone type

- For CC-Link
- For OMRON B7A Link Terminal
- For CompoNet
- For DeviceNet
- For EtherCAT
- For EtherNet/IP

※ For details, see p. 42-44.



For EtherCAT
For EtherNet/IP

F10 Series Order codes	Page 96
F10 Series Dimensions	Page 137
F15 Series Order codes	Page 194
F15 Series Dimensions	Page 236
F18 Series Order codes	Page 274
F18 Series Dimensions	Page 287

Remark: You can also select the wiring position (transmission block) for right-side mounting.

Easy Assembly Type Manifold Non-Plug-in Type (F10/F15)



Enables easy addition or removal of manifold blocks. Direct mounting (mounting without DIN rail) is selectable.

F10 Series Order codes [Page 100](#)

F10 Series Dimensions [Page 144](#)

F15 Series Order codes [Page 198](#)

F15 Series Dimensions [Page 242](#)

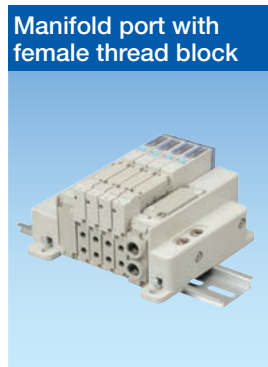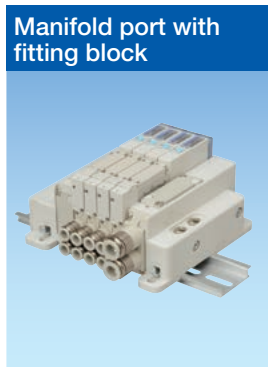

Easy Assembly Type Manifold Plug-in Type (F10/F15)




Manifold conforms to reducing wiring work, and enables easy addition or removal of manifold blocks. Direct mounting (mounting without DIN rail) is selectable. Combination use of five wiring specifications offers more effective wiring savings.

F10 Series Order codes [Page 106](#)

F10 Series Dimensions [Page 145](#)

F15 Series Order codes [Page 204](#)

F15 Series Dimensions [Page 244](#)

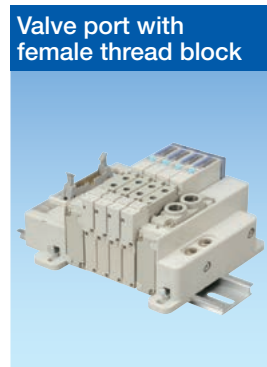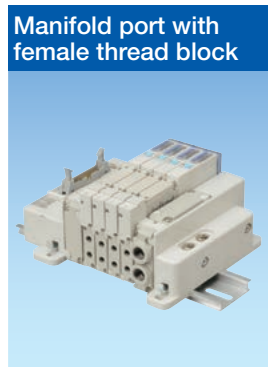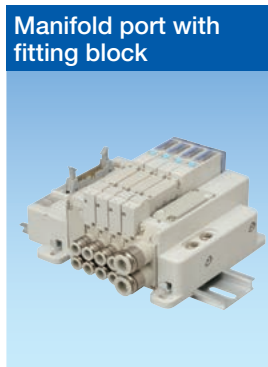

Wiring Specifications(F10/F15)



Flat cable connector top surface (vertical) wiring type Note



Flat cable connector side surface (horizontal) wiring type Note



D-sub connector top surface (vertical) wiring type Note



D-sub connector side surface (horizontal) wiring type Note



Terminal block




Photograph shows D-sub connector.

For the flat cable connector and D-sub connector, the no power supply terminal type is also available.

Note: You can easily change the connector direction.

Patent pending

Easy Assembly Type Manifold Serial Transmission Type (F10/F15)



- For CC-Link
- For CompoNet
- For DeviceNet
- For EtherCAT
- For EtherNet/IP

※ For details, [see p. 42-44.](#)

F10 Series
Order codes Page 112

F10 Series
Dimensions Page 151

F15 Series
Order codes Page 210

F15 Series
Dimensions Page 249



For EtherCAT
For EtherNet/IP

Energy-Saving Proposal Using the Solenoid Valves F Series


Comparison of Power Consumption (Reference)

With the cylinder conditions operating 5 seconds in the extended side and 5 seconds in the retracted side, and an operating time of 12 hours per day, five days per week, and 50 weeks per year, the power consumption for one year is calculated. (Annual power consumption: Power consumption per hour × 12 hours × 5 days × 50 weeks)

■ Case 1: when single solenoid is used (0.4W: Standard type)




■ Case 2: when single solenoid is used (0.1W: Low current type)

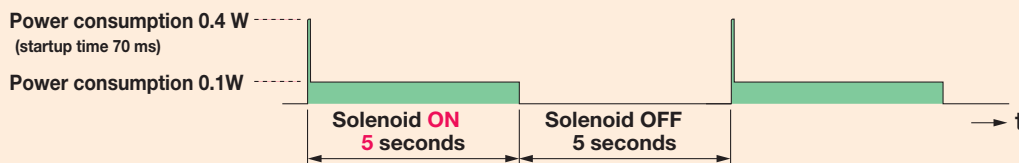

■ Case 3: when double solenoid is used (0.4W: Standard type)


<Pulse control using self-holding function>

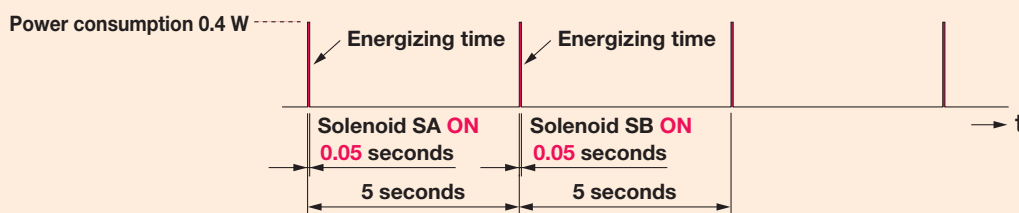

● Results for calculation of power consumption under the above conditions, and power consumption graph

Solenoid	Power consumption (W)	Energizing time (s)		Number of operations per hour (cycles)	Electric energy per hour (Wh)	Annual electric energy (kWh) and annual electric energy cost
		SA: ON	SB: ON			
Single solenoid (standard type)	0.4	5	-	360	0.200	0.6 [13.2 yen]
Single solenoid (low-current type)	Starting: 0.4/holding: 0.1	5	-	360	0.052	0.156 [3.43 yen]
Double solenoid (standard type)	0.4	0.05	0.05	360	0.004	0.012 [0.264 yen]

Remarks: Comparison with a new type DC 24 V solenoid. When power costs 22 yen/kWh.

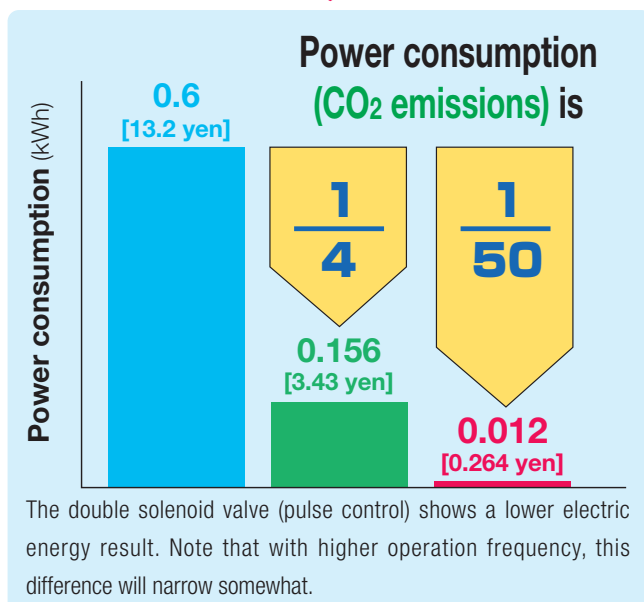

● With use of 0.1W low-current type, the power consumption is reduced to 1/4.

Furthermore

- If pulse control is performed using a double solenoid, power consumption can be sharply reduced.
- Solenoid valves F series is **single/double dual use valves**.
- Since the single solenoid and double solenoid are **the same price**^{Note}, it also enables cost benefits.


Note: For 2-position valve. Excluding T0 type.

Criteria for Selection: Solenoid Valve and Air Cylinders (1)

1. Cylinder and valve selection

1 Select bore size of the cylinder according to the required cylinder thrust.


2 Decide valve size according to the cylinder bore size and speed.

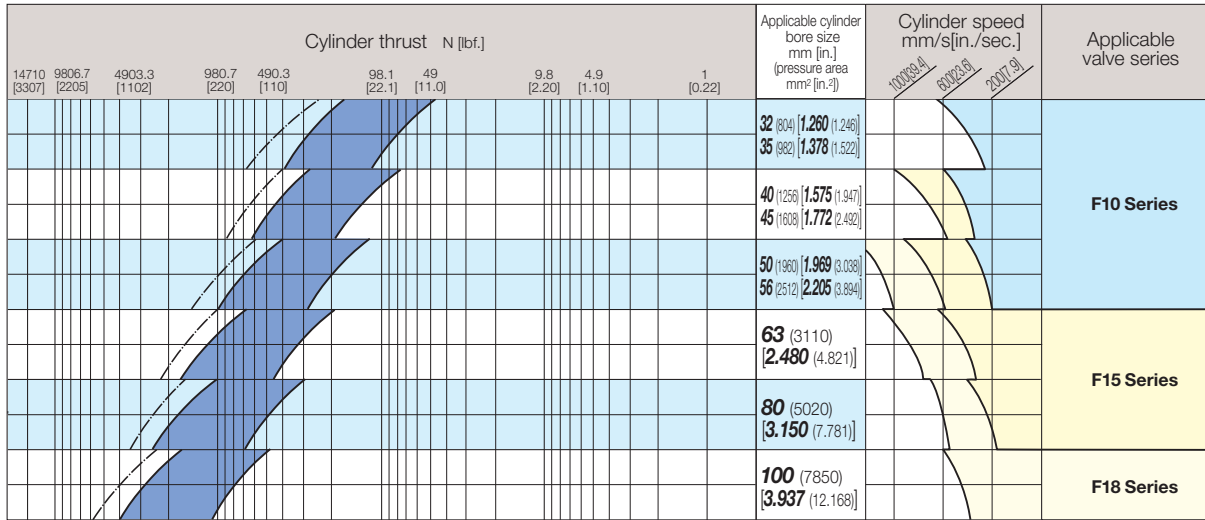

How to Use the Diagram

1. Selection of Cylinder Bore size

Select the cylinder bore size so that the load is within the of the diagram. Where the requirements call for 0.5MPa [73psi.] of operating air pressure and 98.1N [22.1lbf.] of thrust, three cylinder bore sizes can be selected, $\phi 20$ (load ratio of 70%), $\phi 25$ (load ratio of 50%), and $\phi 32$ (load ratio of 30%).

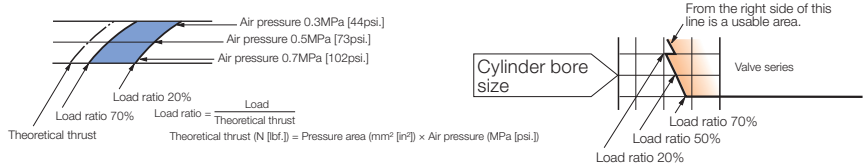

2. Selection of Applicable Valve

With the required cylinder speed set at 400mm/s [15.748 in./sec.], the load ratio at the bore size $\phi 32$ [1.260 in.] is about 50%, and the applicable valve is therefore F10 series. At bore size $\phi 35$ [1.378 in.], as well, where the load ratio is about 50%, the applicable valve is F10 series. And when the load ratio is about 50% for the bore size $\phi 63$ [2.480 in.], the applicable valve should be F15 series.

3. Selection Precautions

For high-speed operations or for other cases where a constant operating speed is required whereas the load has some variation, select a larger cylinder bore size where the load ratio is 50% or less. For valve, piping, and fitting sizes, as well, select sizes that provide enough margin.

2. Selection of F.R.L. Combinations

For F.R.L. combinations, watch the flow rate characteristics graph in order to select sizes that let pressure fall to 10% or to 0.05 MPa [7.25 psi.] or less when the system is at maximum flow (total air volume). Use the same criteria for selecting air filters, regulators, and lubricators. Moreover, when the flow is small, ensure that the flow exceeds the lubricator's minimum flow rate for drips.

3. Selection of Piping and Fitting Sizes

Select piping and fitting sizes that fit the piping connection port sizes for the equipment, and avoid over-throttling with bushings or other equipment. In addition, use of quick fittings, which do not have a throttle on the inner diameter, can assure adequate flow volume and prevent pressure drops.

Reference

● Actual air cylinder thrust

$$F_A = F \times \eta = \frac{\pi D^2}{4} \times P \times \eta$$

- D : Bore size mm
- d : Piping inner diameter mm
- F : Theoretical cylinder thrust
- F_A : Actual cylinder thrust
- L : Cylinder stroke mm
- ℓ : Piping length mm
- n : Number of cylinder reciprocations per minute times/min
- P : Air pressure MPa
- Q₁ : Air flow rate required for cylinder [ℓ/min (ANR)]

● For valve/F.R.L. unit selection

Air cylinder air flow rate

$$Q_1 = \frac{\pi D^2}{4} \times L \times \frac{60}{t} \times \frac{P+0.1}{0.1} \times 10^{-6}$$

Air flow rate of piping from valve to cylinder

$$Q_2 = \frac{\pi d^2}{4} \times \ell \times \frac{60}{t} \times \frac{P}{0.1} \times 10^{-6}$$

Total air flow rate

$$Q_3 = Q_1 + Q_2$$

- Q₂ : Air flow rate required for piping [ℓ/min (ANR)]
- Q₃ : Total air flow rate [ℓ/min (ANR)]
- q₁ : Cylinder air consumption [ℓ/min (ANR)]
- q₂ : Air consumption of piping [ℓ/min (ANR)]
- q₃ : Total air consumption [ℓ/min (ANR)]
- t : Time required for one cylinder stroke s
- η : Cylinder thrust efficiency (approx. 70%, but 50% or lower for high speed)

● For compressor selection

Air cylinder air consumption

$$q_1 = \frac{\pi D^2}{4} \times L \times 2 \times n \times \frac{P+0.1}{0.1} \times 10^{-6}$$

Air consumption of piping from valve to cylinder

$$q_2 = \frac{\pi d^2}{4} \times \ell \times 2 \times n \times \frac{P}{0.1} \times 10^{-6}$$

Total air consumption

$$q_3 = q_1 + q_2$$

Criteria for Selection: Solenoid Valve and Air Cylinders (2)

Cylinder thrust (Theoretical value)





N [lbf.]

Cylinder bore size mm [in.]	Rod dia. mm [in.]	Operating type	Operation direction	Pressure area mm ² [in. ²]	Air pressure MPa [psi.]								
					0.1 [15]	0.2 [24]	0.3 [44]	0.4 [58]	0.5 [73]	0.6 [87]	0.7 [102]	0.8 [116] ^{Note}	0.9 [131] ^{Note}
2.5 [0.098]	1 [0.039]	Single acting push type		4.9 [0.0076]	—	—	—	0.8 [0.18]	1.3 [0.29]	1.7 [0.38]	2.2 [0.49]	—	—
4 [0.157]	2 [0.079]	Single acting push type		12.6 [0.0195]	—	—	—	2.2 [0.49]	3.5 [0.79]	4.8 [1.08]	6.0 [1.35]	—	—
4.5 [0.177]	2 [0.079]	Double acting type	Push side	15.9 [0.0246]	—	3.2 [0.72]	4.8 [1.08]	6.4 [1.44]	8.0 [1.80]	9.5 [2.14]	11.1 [2.50]	—	—
			Pull side	12.8 [0.0198]	—	2.6 [0.58]	3.8 [0.85]	5.1 [1.15]	6.4 [1.44]	7.7 [1.73]	9.0 [2.02]	—	—
		Single acting push type		15.9 [0.0246]	—	—	1.9 [0.43]	3.5 [0.79]	5.1 [1.15]	6.6 [1.48]	8.2 [1.84]	—	—
6 [0.236]	3 [0.118]	Single acting push type		28.3 [0.0439]	—	—	5.0 [1.12]	7.8 [1.75]	10.7 [2.41]	13.5 [3.03]	16.3 [3.66]	—	—
		Single acting pull type		21.2 [0.0329]	—	—	2.9 [0.65]	5.0 [1.12]	7.1 [1.60]	9.2 [2.07]	11.3 [2.54]	—	—
		Double acting type	Push side	28.3 [0.0439]	—	5.7 [1.28]	8.5 [1.91]	11.3 [2.54]	14.2 [3.19]	17 [3.82]	19.8 [4.45]	—	—
			Pull side	21.2 [0.0329]	—	4.2 [0.94]	6.4 [1.44]	8.5 [1.91]	10.6 [2.38]	12.7 [2.85]	14.8 [3.33]	—	—
10 [0.394]	4 [0.157]	Single acting push type		78.5 [0.1217]	—	9.8 [2.20]	17.7 [3.98]	25.5 [5.73]	33.4 [7.51]	41.2 [9.26]	49.1 [11.0]	—	—
		Single acting pull type		66 [0.102]	—	7.3 [1.64]	13.9 [3.12]	20.5 [4.61]	27.1 [6.09]	33.7 [7.58]	40.3 [9.06]	—	—
		Double acting type	Push side	78.5 [0.1217]	7.9 [1.78]	15.7 [3.53]	23.6 [5.31]	31.4 [7.06]	39.3 [8.83]	47.1 [10.6]	55 [12.4]	—	—
			Pull side	66 [0.102]	6.6 [1.48]	13.2 [2.97]	19.8 [4.45]	26.4 [5.93]	33 [7.42]	39.6 [8.90]	46.2 [10.4]	—	—
16 [0.630]	5 [0.197]	Single acting push type		201 [0.312]	—	30.4 [6.83]	50.5 [11.4]	70.6 [15.9]	90.7 [20.4]	110.8 [24.91]	130.9 [29.43]	—	—
		Single acting pull type		181 [0.281]	—	26.4 [5.93]	44.5 [10.0]	62.6 [14.1]	80.7 [18.1]	98.8 [22.2]	116.9 [26.28]	—	—
		Double acting type	Push side	201 [0.312]	20.1 [4.52]	40.2 [9.04]	60.3 [13.6]	80.4 [18.1]	100.5 [22.59]	120.6 [27.11]	140.7 [31.63]	—	—
			Pull side	181 [0.281]	18.1 [4.07]	36.2 [8.14]	54.3 [12.2]	72.4 [16.3]	90.5 [20.3]	108.6 [24.41]	126.7 [28.48]	—	—
20 [0.787]	8 [0.315]	Single acting push type		314 [0.487]	—	24.6 [5.53]	56 [12.6]	87.4 [19.6]	118.8 [26.71]	150.2 [33.76]	181.6 [40.82]	213 [47.88]	244.4 [54.94]
		Double acting type	Push side	314 [0.487]	31.4 [7.06]	62.8 [14.1]	94.2 [21.2]	125.6 [28.23]	157 [35.29]	188.4 [42.35]	219.8 [49.41]	251.2 [56.47]	282.6 [63.53]
			Pull side	264 [0.409]	26.4 [5.93]	52.8 [11.9]	79.2 [17.8]	105.6 [23.74]	132 [29.67]	158.4 [35.61]	184.8 [41.54]	211.2 [47.48]	237.6 [53.41]
		Single acting pull type		264 [0.409]	—	—	—	—	—	—	—	—	—
25 [0.984]	10 [0.394]	Single acting push type		490 [0.760]	—	98 [22.0]	147 [33.0]	196 [44.1]	245 [55.1]	294 [66.1]	343 [77.1]	392 [88.1]	441 [99.1]
		Double acting type	Push side	490 [0.760]	49 [11.0]	98 [22.0]	147 [33.0]	196 [44.1]	245 [55.1]	294 [66.1]	343 [77.1]	392 [88.1]	441 [99.1]
			Pull side	412 [0.639]	41.2 [9.26]	82.4 [18.5]	123.6 [27.79]	164.8 [37.05]	206 [46.31]	247.2 [55.57]	288.4 [64.83]	329.6 [74.09]	370.8 [83.36]
		Single acting pull type		412 [0.639]	—	—	—	—	—	—	—	—	—
32 [1.260]	12 [0.472]	Single acting push type		804 [1.246]	—	161 [36.2]	241 [54.2]	322 [72.4]	402 [90.4]	482 [108]	563 [127]	643 [145]	724 [163]
		Double acting type	Push side	804 [1.246]	80 [18.0]	161 [36.2]	241 [54.2]	322 [72.4]	402 [90.4]	482 [108]	563 [127]	643 [145]	724 [163]
			Pull side	690 [1.070]	69 [15.5]	138 [31.0]	207 [46.5]	276 [62.0]	345 [77.6]	414 [93.1]	483 [109]	552 [124]	621 [140]
		Single acting pull type		690 [1.070]	—	—	—	—	—	—	—	—	—
40 [1.575]	16 [0.630]	Single acting push type		1256 [1.947]	—	251 [56.4]	377 [84.7]	502 [113]	628 [141]	754 [169]	879 [198]	1005 [225.9]	1130 [254.0]
		Double acting type	Push side	1256 [1.947]	126 [28.3]	251 [56.4]	377 [84.7]	502 [113]	628 [141]	754 [169]	879 [198]	1005 [225.9]	1130 [254.0]
			Pull side	1055 [1.635]	106 [23.8]	211 [47.4]	317 [71.3]	422 [94.9]	528 [119]	633 [142]	739 [166]	844 [190]	950 [214]
		Single acting pull type		1055 [1.635]	—	—	—	—	—	—	—	—	—
50 [1.969]	16 [0.630]	Double acting type		1963 [3.043]	196 [44.1]	393 [88.3]	589 [132]	785 [176]	982 [221]	1178 [264.8]	1374 [308.9]	—	—
		Double acting type	Push side	1963 [3.043]	196 [44.1]	393 [88.3]	589 [132]	785 [176]	982 [221]	1178 [264.8]	1374 [308.9]	—	—
			Pull side	1762 [2.731]	176 [39.6]	352 [79.1]	529 [119]	705 [158]	881 [198]	1057 [237.6]	1233 [277.2]	—	—
		Single acting pull type		1762 [2.731]	—	—	—	—	—	—	—	—	—
63 [2.480]	20 [0.787]	Double acting type		3117 [4.831]	312 [70.1]	623 [140]	935 [210]	1247 [280.3]	1559 [350.5]	1870 [420.4]	2182 [490.5]	2494 [560.7]	2805 [630.6]
		Double acting type	Push side	3117 [4.831]	312 [70.1]	623 [140]	935 [210]	1247 [280.3]	1559 [350.5]	1870 [420.4]	2182 [490.5]	2494 [560.7]	2805 [630.6]
			Pull side	2803 [4.345]	280 [62.9]	561 [126]	841 [189]	1121 [252.0]	1402 [315.2]	1682 [378.1]	1962 [441.1]	2242 [504.0]	2523 [567.2]
		Single acting pull type		2803 [4.345]	—	—	—	—	—	—	—	—	—
80 [3.150]	25 [0.984]	Double acting type		5026 [7.790]	503 [113]	1005 [225.9]	1508 [339.0]	2010 [451.8]	2513 [564.9]	3016 [678.0]	3518 [790.8]	4021 [903.9]	4523 [1017]
		Double acting type	Push side	5026 [7.790]	503 [113]	1005 [225.9]	1508 [339.0]	2010 [451.8]	2513 [564.9]	3016 [678.0]	3518 [790.8]	4021 [903.9]	4523 [1017]
			Pull side	4536 [7.031]	454 [102]	907 [204]	1361 [306.0]	1814 [407.8]	2268 [509.8]	2722 [611.9]	3175 [713.7]	3629 [815.8]	4082 [917.6]
		Single acting pull type		4536 [7.031]	—	—	—	—	—	—	—	—	—
100 [3.937]	30 [1.181]	Double acting type		7853 [12.172]	785 [176]	1571 [353.2]	2356 [529.6]	3141 [706.1]	3927 [882.8]	4712 [1059]	5497 [1236]	6282 [1412]	7068 [1589]
		Double acting type	Push side	7853 [12.172]	785 [176]	1571 [353.2]	2356 [529.6]	3141 [706.1]	3927 [882.8]	4712 [1059]	5497 [1236]	6282 [1412]	7068 [1589]
			Pull side	7147 [11.078]	715 [161]	1429 [321.2]	2144 [482.0]	2859 [642.7]	3574 [803.4]	4288 [963.9]	5003 [1125]	5718 [1285]	6432 [1446]
		Single acting pull type		7147 [11.078]	—	—	—	—	—	—	—	—	—
125 [4.921]	36 [1.417]	Double acting type		12271 [19.020]	1227 [275.8]	2454 [551.7]	3681 [827.5]	4908 [1103]	6136 [1379]	7363 [1655]	8590 [1931]	9817 [2207]	11044 [2483]
		Double acting type	Push side	12271 [19.020]	1227 [275.8]	2454 [551.7]	3681 [827.5]	4908 [1103]	6136 [1379]	7363 [1655]	8590 [1931]	9817 [2207]	11044 [2483]
			Pull side	11254 [17.443]	1125 [252.9]	2251 [506.0]	3376 [758.9]	4502 [1012]	5627 [1265]	6752 [1518]	7878 [1771]	9003 [2024]	10129 [2277]
		Single acting pull type		11254 [17.443]	—	—	—	—	—	—	—	—	—

Note: This air pressure is not available for Solenoid Valves F series.

Before selecting and using the products, please read all the "Safety Precautions" carefully to ensure proper product use. The Safety Precautions described below are to help you use the product safely and correctly, and to prevent injury or damage to you, other people, and assets. Be sure to observe these safety precautions together with the following safety regulations of ISO4414 (Pneumatic fluid power - General rules and safety requirements for systems and their components), and JIS B 8370 (General rules relating to systems).

The directions are ranked according to degree of potential danger or damage: "DANGER", "WARNING", "CAUTION" and "ATTENTION."

 DANGER	Indicates situations that can be clearly predicted as dangerous. Death or serious injury may result if the situation is not avoided. It could also result in damage or destruction of assets.
 WARNING	Indicates situations that, while not immediately dangerous, could become dangerous. Death or serious injury may result if the situation is not avoided. It could also result in damage or destruction of assets.
 CAUTION	Indicates situations that, while not immediately dangerous, could become dangerous. Failure to avoid the situation creates the risk of minor or semi-serious injury. It could also result in damage or destruction of assets.
 ATTENTION	While there is little chance of injury, this content refers to points that should be observed for appropriate use of the product.

- This product was designed and manufactured for use in general industrial machinery.
- When selecting and handling equipment, the system designer or another person with sufficient knowledge and experience should always read the "Safety Precautions", "catalog", "instruction manual", and other literature before commencing operation. Improper handling is dangerous.
- After reading the instruction manual, catalog, and other documentation, always place them in a location that allows easy availability for reference to users of this product.
- Whenever transferring or lending the product to another person, always attach the catalog, instruction manual, and other information to the product where they are easily visible in order to ensure that the new user can use the product safely and properly.
- The danger, warning and caution items listed under these "Safety Precautions" do not cover all possible contingencies. Read the catalog and instruction manual carefully, and always keep safety first.

 **DANGER**

- Do not use for the purposes listed below:
 1. Medical equipment related to maintenance or management of human lives or bodies.
 2. Mechanical devices or equipment designed for the purpose of moving or transporting people.
 3. Critical safety components in mechanical devices.
 This product has not been planned or designed for purposes that require advanced stages of safety. It could cause injury to human life.
- Do not use in locations with or near dangerous substances such as flammable or ignitable substances. This product is not explosion-proof. It could ignite or burst into flames.
- When attaching the product, always firmly support and secure them (including workpieces) in place. Dropping or falling of the product or improper operation could result in injury.
- Persons who use a pacemaker, etc., should keep a distance of at least 1 meter [3.28 ft.] away from the product. There is a possibility that the pacemaker will malfunction due to the strong magnet built into the product.
- Never attempt to modify the product. It could result in abnormal operation leading to injury, etc.
- Never attempt inappropriate disassembly, assembly or repair of the product's basic construction, or of its performance or functions. This could result in injury, electric shock, fire, etc.
- Do not splash water on the product. Spraying it with water, washing it, or using it underwater could result in malfunction of the product leading to injury, electric shock, fire, etc.
- While the product is in operation, avoid touching it with your hands or otherwise approaching too close. In addition, do not make any adjustments to the interior or to the attached mechanisms (manual override, connecting and disconnecting of wiring connectors, adjustment of pressure switches, or release or connection of piping tubes or plugs) while in operation. The actuator can move suddenly, possibly resulting in injury.

 **WARNING**

- Do not use the product in excess of its specification range. Such use could result in product breakdowns, function stop, damage or drastically reduce the operating life.
- Before supplying air or electricity to the device and before starting operation, always conduct a safety check of the area of machine operation. Unintentional supply of air or electricity could possibly result in electric shock, or in injury caused by contact with moving parts.

- Do not touch the terminal and the miscellaneous switches, etc., while the device is powered on. There is a possibility of electric shock and abnormal operation.
- Do not throw the product into fire. The product could explode and/or release toxic gases.
- Do not sit on the product, place your foot on it, or place other objects on it. Accidents such as falling or tripping over the product could result in injury. Dropping the product could result in injury, or also damage or break it resulting in abnormal or erratic operation, or runaway, etc.
- When conducting any kind of operation for the product, such as maintenance, inspection, repair, or connection/disconnection or replacement of piping, always turn off the air supply completely and confirm that residual pressure inside the product or in piping connected to the product is zero before proceeding. In particular, be aware that residual air will still be in the air compressor, vacuum pump or air storage tank. The actuator could abruptly move if residual air pressure remains inside the piping, causing injury.
- Before commencing normal operation, always release the lock of the locking type manual override, and confirm that the manual override is in the normal position and that the main valve is in the proper switching position, and only then commence the operation. Failure to do so could lead to erroneous operation.
- Always shut OFF the power before wiring operations. Wiring with the power ON could result in electric shock.
- Always apply the specified voltage to the solenoid. Applying the wrong voltage could result in failure to perform the intended function, and could damage or burn the product itself.
- Avoid scratching the cords of lead wires, etc. Letting the cords be subject to scratching, excessive bending, pulling, rolling up, or being placed under heavy objects or squeezed between two objects, may result in current leaks or defective continuity that lead to fire, electric shock, or abnormal operation.
- Do not pull out the connectors while the power is ON. Also, do not apply unnecessary stress on the connector. It could result in erratic equipment operation that could lead to personal injury, equipment breakdown, or electrical shock, etc.
- Always check the Catalog to ensure that the product wiring and piping is done correctly. Errors in wiring and piping could lead to abnormal operation of the actuators, etc.
- In the first operation after the equipment has been idle for 48 hours or more, or has been in storage, there is a possibility that contacting parts have got stuck, resulting in equipment operation delays or sudden movements. For these first operations, always run a test operation before use to check that operating performance is normal.

- In low frequency use (more than 30 days between uses), there is a possibility that contacting parts may have stuck together, resulting in equipment operation delays or sudden movements that could lead to personal injury. Run a test operation at least once every 30 days to confirm that movement is normal.
- For double solenoid type (excluding the Tandem 3-port valve), do not apply current through both solenoids simultaneously. It is impossible in such a situation to maintain the correct valve position, and the equipment may operate in an unintended direction, leading to the possibility of equipment breakdown or personal injury.
- Do not use the solenoid valves or the wiring that controls them, near power lines where large electrical currents are flowing, or in locations subject to high magnetic fields or power surges. Such application could lead to unintended operation.
- The solenoid valve can generate surge voltage and electromagnetic waves when the switch is turned OFF, affecting the operations of surrounding equipment. Use solenoids with surge suppression, or take countermeasures in the electrical circuits for surges or electromagnetic waves.
- Do not use the product where ozone may be generated, such as near ocean beaches or other places subject to direct sunlight or mercury lamps. Ozone can cause rubber parts to deteriorate, which can lead to degraded performance and functions, or to equipment stoppages. (Excludes items where measures against ozone have been taken.)
- Do not use any media other than shown on the specifications. Use of non-specified media could lead to functional shutdown after a short period, to sudden performance drops, or to shorter operating life.
- If mounting the solenoid valve inside a control panel, or if energizing it for long periods, provide heat radiation measures to ensure that temperatures surrounding the solenoid valve always remain within the specified temperature range. In addition, if energizing continuously over long periods, rising temperatures due to generation of heat in the coil can lead to a decline in solenoid valve performance and operating life, and have adverse effects on nearby equipment. As a result, when the solenoid valve is continuously energized over long periods of time, or when the solenoid valve is energized for longer periods than it is non-energized on any day, a good suggestion is to keep the solenoid valve in a normally open (NO) specification as one possible method of reducing the amount of time the valve is energized. For details, consult us.
- After wiring operations, always check to ensure that no wiring connection errors exist before turning ON the power.
- Do not collect the exhaust lines for air cylinders, etc. with pilot exhaust lines for solenoid valves into the same piping, etc. Interference in the exhaust could result in erratic operation.
- When using the valve in a manifold, be aware when operating an air cylinder or performing air blowing operations that back pressure could cause erratic operations of the cylinder or erroneous air delivery from the air blow port. Caution is particularly needed when using valves with 3-position exhaust center specification, when operating single acting cylinders, or when operating a cylinder and blowing air using the same manifold. If there are concerns in this area, take such countermeasures as using individual exhaust spacers or back pressure prevention valves.

CAUTION

- When mounting the product, leave room for adequate working space around it. Failure to ensure adequate working space will make it more difficult to conduct daily inspections or maintenance, which could eventually lead to system shutdown or damage to the product.
- For mounting or transport of heavy products, use a lift, supporting tool, or several people, to provide firm support, and proceed with due caution to ensure personal safety.
- Do not bring magnetic media, within 1 meter [3.28 ft.] of the product. There is the possibility that the data on the magnetic media will be destroyed due to the magnetism of the magnet.
- If leakage current is flowing in the control circuit, there is a possibility of the product performing an unintended operation. Take measures against current leaking in the control circuit, to ensure that the leakage current value does not exceed the allowed range in the product specifications.
- Do not block the product's breathing holes. Pressure changes occur due to changes in volume during operation. Blocking the breathing holes destroys the pressure balance, and could cause failure of the intentional operation, equipment damage, or personal injury.
- Do not use the solenoid valve in locations subject to large electrical

- currents or magnetic fields. It could result in erratic operation.
- Oily materials from the compressor (excluding the oil-free compressor) can cause drastic deterioration in product performance, and even a functional shutdown. Always install a mist filter before pneumatic equipment to remove the oily component.
- The properties of the lubrication oil can change when used in dry air where dew point temperatures is lower than -20°C [-4°F]. It could result in degraded performance or in functional shutdown.
- Do not use the product in locations that are subjected to direct sunlight (ultraviolet ray), to dust, salt, or iron powder, high temperature, high humidity or in media or ambient atmospheres that include organic solvents, phosphate ester type hydraulic oil, sulfur dioxide, chlorine gas, acids, etc. It could lead to an early shutdown of some functions or a sudden degradation of performance, and result in reduced operating life. For materials used, see Major Parts and Materials.
- Always carefully wash your hands after touching oil or grease used in the valves. If you smoke a cigarette while there is oil or grease remains on your hands, oil or grease transferred to the cigarette could catch fire and emit toxic gases.

ATTENTION

- When considering the possibility of using this product in situations or environments not specifically noted in the Catalog or Instruction Manual, or in applications where safety is an important requirement, such as in an airplane facility, combustion equipment, leisure equipment, safety equipment and other places where human life or assets may be greatly affected, take adequate safety precautions such as application with enough margins for ratings and performance or fail-safe measures. Be sure to consult us with such applications.
- Always check the Catalog and other reference materials for product wiring and plumbing setup.
- Install a muffler, etc. on the exhaust port. It is effective in reducing exhaust noise.
- When handling the product, wear protective gloves, safety glasses, safety shoes, etc. to keep safety.
- When the product can no longer be used or is no longer needed, dispose of it appropriately as industrial waste in accordance with the Waste Disposal and Public Cleaning Law, and other ordinances and regulations imposed by local government authorities. As incineration disposal of oil or grease used in the valves will generate corrosive, toxic hydrofluoric acid (HF), dispose of these compounds in an acid-resistant incinerator with toxic removal facilities. For large volumes, use a registered industrial waste disposer.
- Pneumatic equipment can exhibit degraded performance and function over its operating life. Always conduct daily inspections of the pneumatic equipment, and confirm that all requisite system functions are satisfied, to prevent accidents from happening.
- Air leaks from the valve are not zero. For application of requiring holding pressure (including vacuum) inside the pressure vessel, consider adequate margin of capacity and holding time in design of the system.
- When using a valve for air blowing, use an external pilot specification. With the internal pilot specification, air blowing can cause a pressure drop that could affect valve operations.
- For inquiries about the product, consult your nearest Koganei sales office, or Koganei overseas department. The address and telephone number is shown on the back cover of this catalog.

OTHERS

- Always observe the following items.
 1. When using this product in pneumatic systems, always use genuine KOGANEI parts or compatible parts (recommended parts).
When conducting maintenance and repairs, always use genuine KOGANEI parts or compatible parts (recommended parts). Always observe the required methods and procedure.
 2. Do not attempt inappropriate disassembly or assembly of the product relating to basic configurations, or its performance or functions.

Koganei cannot be responsible if these items are not properly observed.



General Precautions

Mounting

1. While any mounting direction is allowed, be sure to avoid strong shocks or vibrations applied directly to the body.
2. Avoid using in the locations and environment listed below, as it could result in malfunction of the valve. If use in such conditions is unavoidable, always provide a cover or other adequate protective measures.
 - Location directly exposed to water drops or oil drops
 - Environment where a valve body is subject to dew condensation
 - Location directly exposed to machining chips, dust, etc
3. In piping connection with valves, flush the tube completely (by blowing compressed air) before piping. Intrusion of machining chips or sealing tape, rust, etc., generated during plumbing could result in air leaks and other defective operations.
4. Never use the valve with the 4(A) and 2(B) ports vented to the atmosphere.
5. When mounting a valve inside a control panel, or when energizing time is long, make adequate consideration for ventilation and other heat dissipation measures.
6. When adding or subtracting units in the manifold, or replacing a fitting block, be sure to tighten to within the specified tightening torque range.

Media

1. Use air for the media. For the use of any other media, consult us.
2. Air used for the cylinder should be clean air that contains no deteriorated compressor oil, etc. Install an air filter (filtration of 40 μm or less) near the valve to remove collected liquid or dust. In addition, drain the air filter periodically.
3. When supply pressure is low, use piping for the 1(P) port with sufficient tube size.

Lubrication

Can be used without lubrication due to the factory lubricant (grease). When the pneumatic products require lubrication, use Turbine Oil Class 1 (ISO VG32) or the equivalent. In addition, cutting off oil feed while an operation is in progress could lead to malfunction due to the dissipation of the factory lubricant (grease). As a result, always keep the oil feed running continuously. However, use caution since excessive oil feed can also be a cause of malfunction. Avoid using spindle oil or machine oil.

Atmosphere

The product cannot be used when the media or ambient atmosphere contains any of the substances listed below. Organic solvents, phosphate ester type hydraulic oil, sulphur dioxide, chlorine gas, or acids, ester.

Wiring

After wiring, check that there is no error in the wiring connections.


Piping

Since the 1(P), 3(R2), and 5(R1) ports are on both ends of the manifold, piping direction can be selected depending on the application (in monoblock manifolds).

At shipping, plugs are temporarily screwed in ports at one end, but are not firmly tightened. Regardless of which end piping is connected, always remove the plugs, use sealing tape or apply other sealing agent, and securely tighten the plugs into the unused ports.

1. Sealing tape wrapping method

- ① Before piping, perform air blowing (flushing) or cleaning to eliminate any machining chips, cutting oil, or dust, etc., remaining inside the pipes.
- ② When screwing in piping or fittings, caution should be taken to avoid letting machining chips or sealing materials from entering into the valves. When using sealing tape, wrap it so that 1.5~2 screw threads remain.

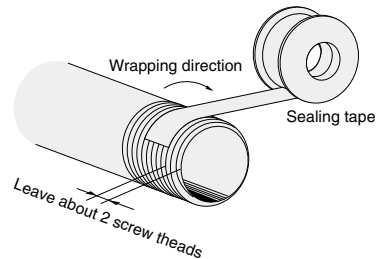

Prevention of erratic operation in the manifold type

When using a manifold-type valve to operate an air cylinder, or to perform air blowing or similar operations, erratic operation due to exhaust interference or malfunction due to insufficient flow rate could occur. When using the manifold type valves, be sure to take the following measures beforehand.

1. Erratic operation due to large exhaust flow rate

Cause: When a large-bore cylinder is operating, or multiple cylinders are operating at the same time, the exhaust air in the collective exhaust can flow backward through the exhaust ports of other solenoid valves. This could lead to an obstruction of the operations of other cylinders and may cause erratic operation in single acting cylinders or an Air Hand module due to inflow of air into them. The erratic operation is caused by insufficient manifold exhaust (large exhaust resistance).

Countermeasure: To reduce the exhaust resistance, for the base monoblock manifold, vent the exhaust ports at both ends. For the split manifold, attach piping blocks to both ends to exhaust from both sides. If still affected even after exhausting from both ends, consider splitting the manifold, or if using a split manifold, either install a port isolator to separate the exhaust, or use a back pressure prevention valve.

2. Malfunctions due to insufficient pressure or flow rate

Cause: When operating a large-bore cylinder, operating multiple cylinders at the same time, or using circuits to perform air blowing, etc., sudden consumption of air with the manifold type can result in insufficient flow rate to nearby cylinders, causing a reduction in speed or a shortage of thrust. In addition, in the pilot-type valve, this sudden consumption can lead to a pressure shortage for the pilot signals, and it causes erratic operations in the main stem.


Countermeasure: Because it causes insufficient air delivery to the manifold, supply air from both ends of the manifold, or from the piping block 1(P) port mounted on both sides. For air blowing, consider either dividing the air lines for independent use, or use of an external pilot valve.

5-port, 2-position

When set as a single solenoid or T0 type

F□T1□-A1
(De-energized)

When set as a double solenoid

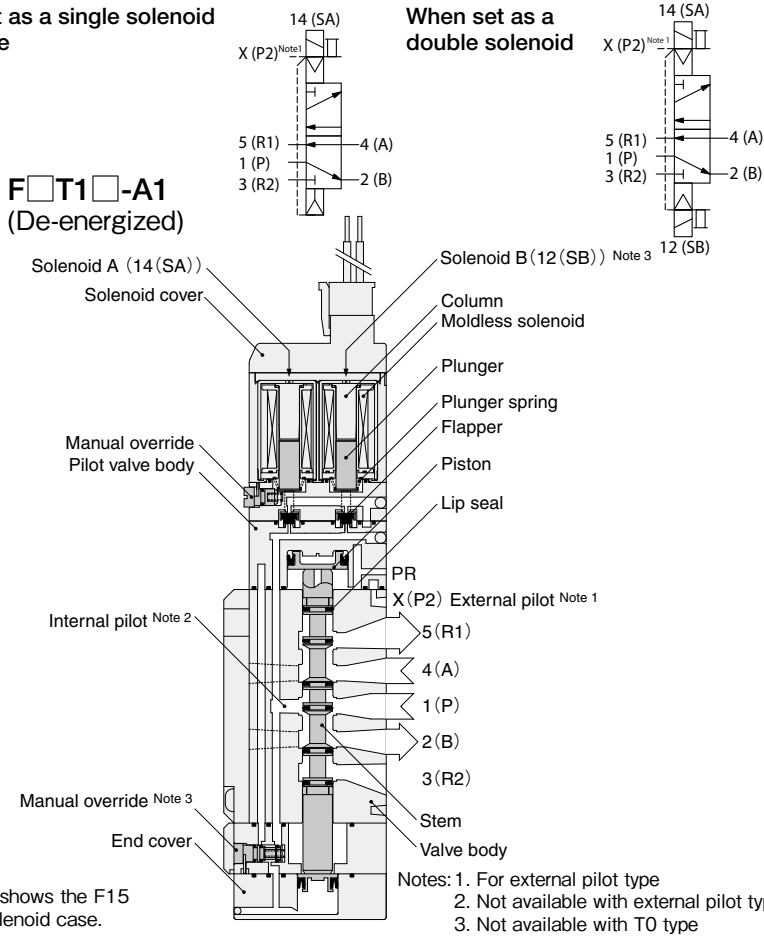

Notes: 1. For external pilot type
2. Not available with external pilot type
3. Not available with T0 type

Remark: When using a 5-port valve as a 3-port valve, see p.25.

Major Parts and Materials

Parts	Materials	
Body	Aluminum die-casting	
Stem	Aluminum alloy ^{Note}	
Lip seal	Synthetic rubber	
Flapper	Synthetic rubber	
Sub-base	Aluminum alloy (anodized)	
Plunger	Magnetic stainless steel	
Column	Aluminum alloy (anodized)	
End cover	Plastic	
Manifold	Body Monoblock	Aluminum alloy (anodized)
	Split type	Plastic
	Block-off plate	Mild steel (nickel plated)
	Seal	Synthetic rubber

Note: Some F10 and F15 Series models use plastic for the stem material.


5-port, 3-position

(Both 14 (SA) and 12 (SB) are de-energized)

F□T3□-A1

F□T4□-A1

F□T5□-A1

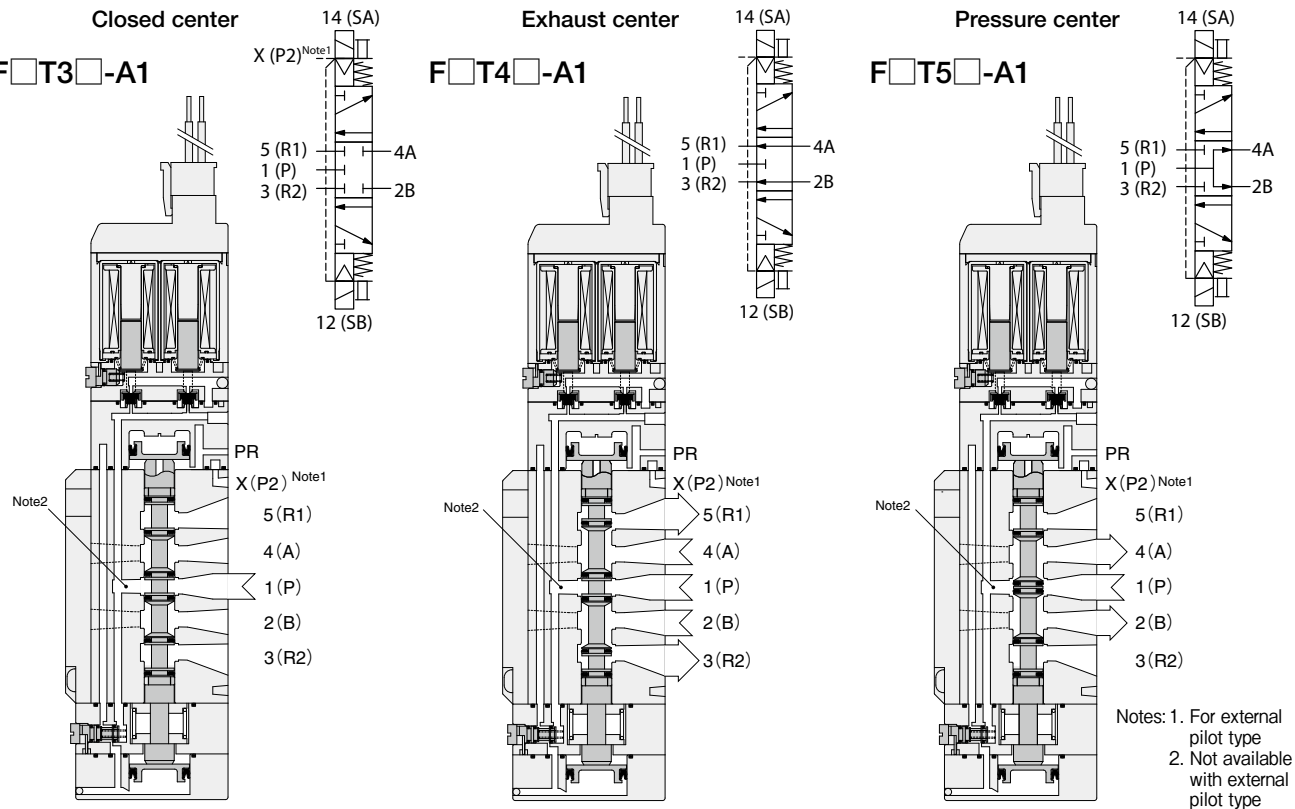

Notes: 1. For external pilot type
2. Not available with external pilot type

Tandem 3-port, 4-position


(Both 14 (SA) and 12 (SB) are de-energized)

Normally closed (NC) & normally closed (NC)


Normally open (NO) & normally open (NO)

Normally closed (NC) & normally open (NO)


F□TA-A1

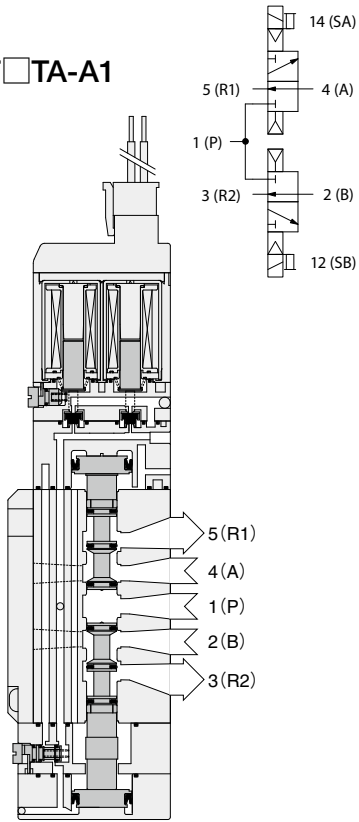

F□TB-A1

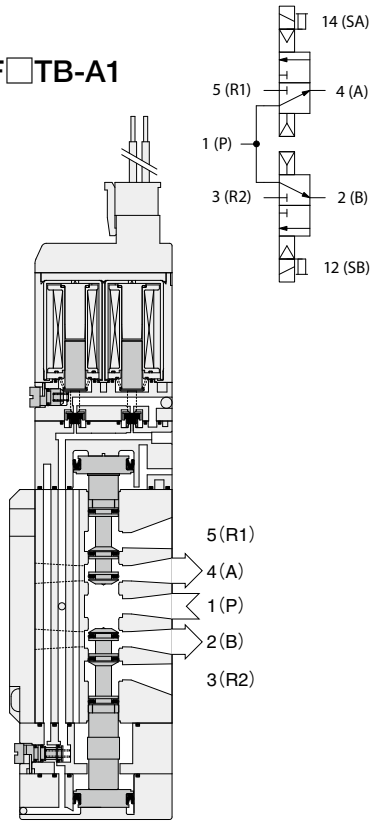

F□TC-A1

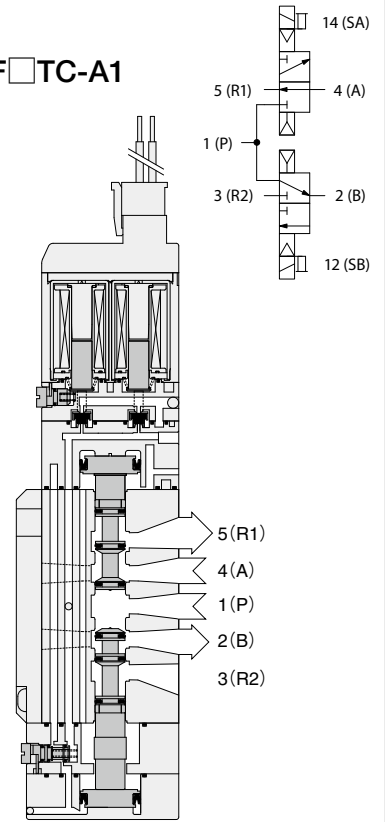



Solenoid


Single and double solenoid switching procedure

By switching the manual override, model F□T1 (2-position valve) can be used as either a single solenoid valve or a double solenoid valve (switching not possible with a 3-position valve and a tandem 3-port valve). Note that the F□T1 is set to the single solenoid specification at shipping.

Switching from a single solenoid valve to a double solenoid valve

1. As shown in Fig.1, insert the flatblade edge of a small screwdriver into the gap between the valve and the cover, and then peel it off and remove the cover.

Caution: As shown in Fig.1, make sure to insert a small screwdriver from the side of the valve cover. The cover claw may be damaged when the cover is removed from the direction of the valve stem. Never remove the cover for any reason other than valve function switching.



※ Illustration shows the F10 series.

Figure 1

2. As shown in Fig.2, use a small screwdriver, etc. to turn the manual override on the B side by 90 degrees in the counterclockwise direction, so that the manual override button's slit is horizontal, as shown on the right side of the figure. Then the unit can be used as a double solenoid valve. When using it as a double solenoid valve, the button is used as the manual override button for the B side.

Caution: When using it as a double solenoid valve, do not attach the cover that was removed in Fig. 1.

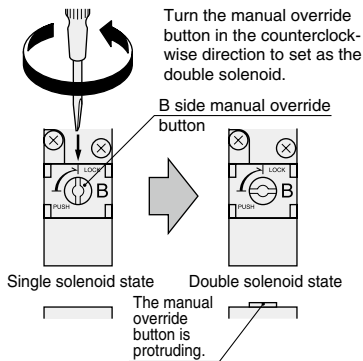


Figure 2

Switching from a double solenoid valve to a single solenoid valve

As shown in Fig.3, use a small screwdriver, etc. to push lightly against the manual override button, and then turn it by 90 degrees in the clockwise direction, so that the manual override button's slit is in the vertical direction, and then attach the cover.

Caution: The cover has directionality (F15 and F18 series only). When attaching, always align the detent on the back of the cover with the manual override button's slit, as shown in Fig.4.

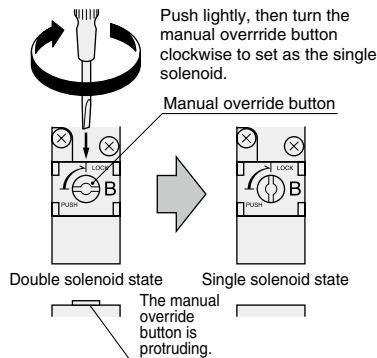


Figure 3

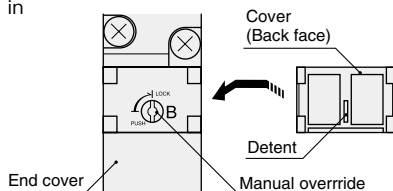


Figure 4

Note about the wiring for the above switching


See the "Wiring instructions" to the right.

Wiring instructions (When used as a single unit, non-plug-in type manifold)

1. Attaching and removing plug connector

Use fingers to insert the connector into the pin, push it in until the lever claw latches onto the protruded section of the connector housing, and complete the connection.

To remove the connector, squeeze the lever along with the connector, lift the lever claw up from the protruded section of the housing, and pull it out.

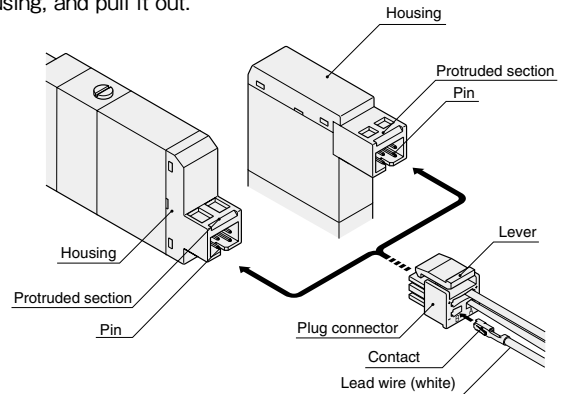

Cautions: 1. When removing the connector, confirm that the lever claw is positively disengaged from the protruded section before pulling out. The housing may be damaged if it is pulled out while engaged with the protruded section.

2. The plug connector lead wires for model F□T1 (2-position valve) are set to the single solenoid specification at shipping (for plug connector types).

When switching from a single solenoid to a double solenoid specification for use, disconnect the plug connector from the valve, check the hook directions on the lead wire (white) with the contacts, and then insert the lead wire into the plug connector's B side □ hole (see the illustration above). Use the same procedure to switch the manifold type single solenoid to a double solenoid specification.

3. When using the plug-in type manifold, caution should be exercised that even if the valve has been switched to a double solenoid, no power will be supplied to the B side solenoid unless the valve base wiring is set to the double wiring.


2. Attaching and removing plug connector and contact

● Attaching

Insert the contact with a lead wire into a plug connector □ hole until the contact hook latches on the connector and is secured to the plug connector. Confirm that the lead wire cannot be easily pulled out (see the diagram below).


● Removing

To remove it, insert a tool with a fine tip (such as a small screwdriver) into the rectangular hole on the side of the plug connector to push down on the hook, and then pull out the lead wire. When re-using the contacts, restore the hook back so that they spread outward.

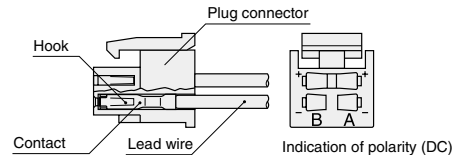


3. Common terminal and short bar

A short bar is attached to the plug connector to ensure that the solenoid A and B wiring are positive common. Do not remove the short bar.

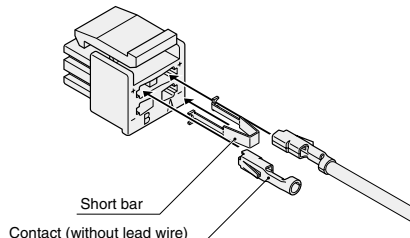

4. Crimping of lead wire and contact

To crimp lead wires into contacts, strip off 4 mm [0.16 in.] of the insulation from the end of the lead wire, insert it into the contact, and crimp it. Be sure to avoid catching the insulation on the exposed wire crimping section.

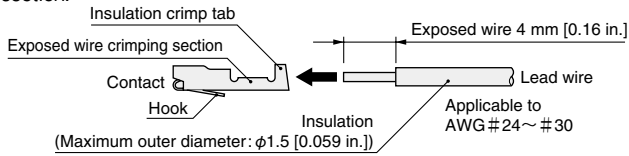

- Cautions:**
1. Do not pull hard on the lead wire.
 2. For crimping of lead wire and contact, always use a dedicated tool.
Contact: Model 706312-2MK Manufactured by Sumiko Tech, Inc.
Crimping tool: Model F1 (for 706312-2MK) Manufactured by Sumiko Tech, Inc.

5. Common connector assembly

Using a common connector assembly for solenoid valves for a manifold provides common wiring for all the solenoid valves and greatly reduces wiring work. The common connector assembly types are determined by looking at them from the lead wire side; the right end one is A type, the left end one is C type, and all the others are B type (see the illustration below).

● For positive common

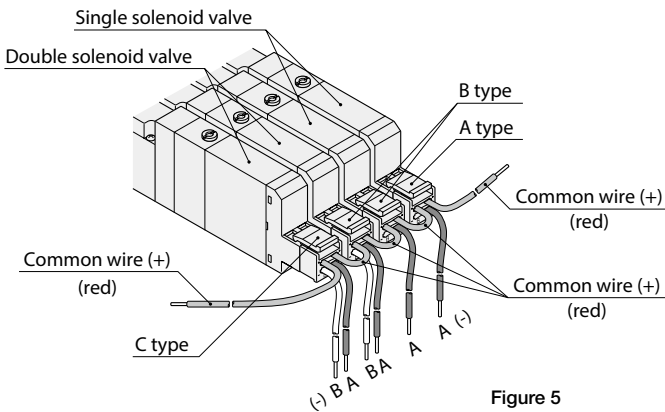


Figure 5

● For negative common

You can order the separately sold common connector assembly for use with negative common specification.

Note: Cannot be used with the conventional series (black coil).


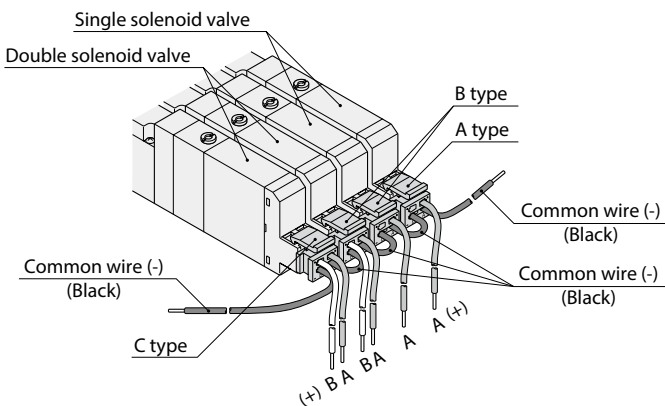


Figure 6


If ordering the common connector assembly, order from the common connector assemblies listed below.

● For positive common


A type Model: JAZ-PA□*



B type Model: JAZ-PB□*



C type Model: JAZ-PC□*



Note: White lead wire is not available for JAZ0-P□□.
* Lead wire length Blank: 300 mm [11.8 in.]
3: 3000 mm [118 in.]

● For negative common


A type Model: JAZ-MA□*



B type Model: JAZ-MB□*



C type Model: JAZ-MC□*



Single negative common plug connector unit

Model: JAZ-CM□*


* Lead wire length Blank: 300 mm [11.8 in.]
3: 3000 mm [118 in.]

6. Color identification for the positive common, negative common, single wiring, and double wiring on the easy assembly type manifold plug-in type

Color identification of specifications listed below is possible via a small window on the solenoid side of the valve base.

- Blue: Positive common single wiring
- Green: Positive common double wiring
- Pink: Negative common single wiring
- Gray: Negative common double wiring

7. Cabtyre cable

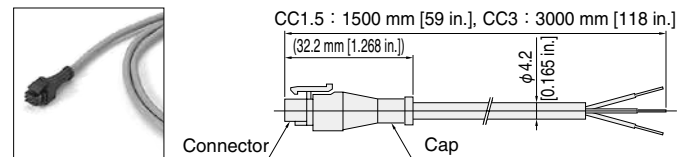

Caution: Exercise caution that this is not dust-proof and drip-proof specification.

Internal circuit


Voltage specification	Internal circuit
24VDC 12VDC	(Inside the connector) (Color of lead wire: Black) A (Color of lead wire: Red) +COM (Color of lead wire: White) B
Low-current type 24VDC	(Inside the connector) (Color of lead wire: Black) A (Color of lead wire: Red) +COM (Color of lead wire: White) B
100VAC 120VAC	(Inside the connector) (Color of lead wire: Black) A (Color of lead wire: Red) COM (Color of lead wire: White) B

- Cautions:**
1. Do not apply megger between the pins.
 2. Leakage current inside the circuit could result in failure of the solenoid valve to return, or in other erratic operation. Always use at less than the allowable leakage current shown in the solenoid specifications on p.56, 142, and 228. If circuit conditions etc. cause the leakage current to exceed the allowable leakage current, consult us.
 3. For the double solenoid specification, avoid energizing both solenoids at the same time (except for tandem 3-port valve).
 4. For the housing color, standard type is blue and low-current type is light blue.
 5. The low-current type will not operate if the power voltage is gradually increasing. Always apply a suitable voltage.
 6. For the T0 type, there is one solenoid.
 7. The AC 100 V type has a full - wave rectifier circuit. When SSR is used for solenoid valve control, pay adequate attention to SSR selection, as return problems may occur.

Operating principles for the low-current type


The low-current type uses a timer circuit, as shown on the previous page, that achieves power consumption savings by switching to a holding operations mode after a certain period of time to operate at about 1/4 of the starting power consumption.

● Power waveform

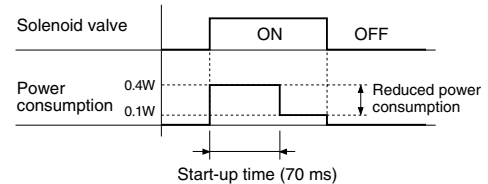

PC board manifold


When connecting a power line to the power supply terminal on the PC board manifold, care should be taken in regard to the following points when connecting.

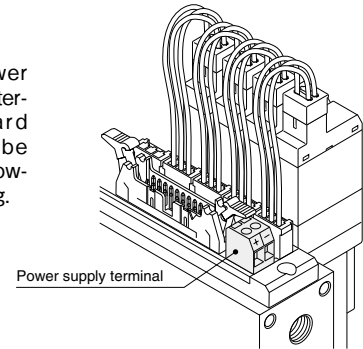

Terminal screw tightening torque: 0.4 N·m [3.5 in·lbf]
 Stripped wire length: 7 mm [0.28 in.]
 Connecting wire size: 0.13~2.5 mm² [0.00020~0.00388 in.²]
 AWG: No.26...14

When planning to use crimp-style terminals, use bar terminals.
 Recommended crimp-style terminals (bar terminals):
 Manufactured by Nichifu, Inc.
 Model BT1.25-9-1 (for 0.25~1.65 mm² [0.00039~0.00256 in.²])

Wiring of the terminal block



Care should be taken with the terminal screw tightening torque. Overtightening beyond the tightening torque could result in breakage.

Terminal screw tightening torque: Max. 49.0 N·cm [4.3 in·lbf].

Precautions for use of the double solenoid

When using models F□T1 or F□T2 (2-position valve) as double solenoid valves, caution should be exercised as energizing the A side solenoid or pushing the manual override button on the A side, while pushing the B side manual override button or in a locked state, or energizing the solenoid on the B side, will cause the valve to switch over the valve position. (At that time, the valve will operate in the same state as the single solenoid valve.)



Manual override

Manual override button (locking and non-locking dual use type)


To lock the manual override, use a small screwdriver to push down the manual override button all the way down and turn it clockwise 90 degrees. To release the manual override, turn the button 90 degrees counterclockwise, which will release the manual override lock by spring action and return it to its normal position. To operate the unit in the same way as the non-locking type, leave the manual override button unturned.

- Cautions:**
1. The F series valves are pilot type solenoid valves. As a result, the manual override cannot switch the main valve without air supplied from the 1(P) port (X(P2) port for external pilot type).
 2. Always release the lock of the manual overrides before commencing normal operation. Caution should be exercised to release the lock of the manual override on the B side that also works as the switching button between the single solenoid and double solenoid (excluding the 3-position valve and tandem 3-port valve). For details, see "Switching from a double solenoid valve to a single solenoid valve" on p.22.
 3. Do not attempt to operate the manual override button with a pin or other object having an extremely fine tip. It could damage the manual override button.
 4. Take care to avoid excessive turning of the manual override button, it could damage the override.
 5. When operating the solenoid valve's manual override button for maintenance etc. always confirm that the solenoid valve's override button has been restored to its normal position, and that the main valve is in the required switching position before restarting operations.

Manual override lever (locking and non-locking dual use type)

To lock the manual override lever, use fingers to push the lever all the way down and turn it clockwise 90 degrees. To release the manual override, turn the lever 90 degrees counterclockwise, which will release the manual override lock by spring action and return it to its normal position. To operate the unit in the same way as the non-locking type, leave the lever unturned.



Caution: Model F□T1 (2-position valve) has a manual override lever on the A side, and a manual override button with cover on the B side. Model F□T2 has a manual override lever on the A side only, and a manual override button on the B side. The 3-position valve has manual override lever on both the A and B sides.

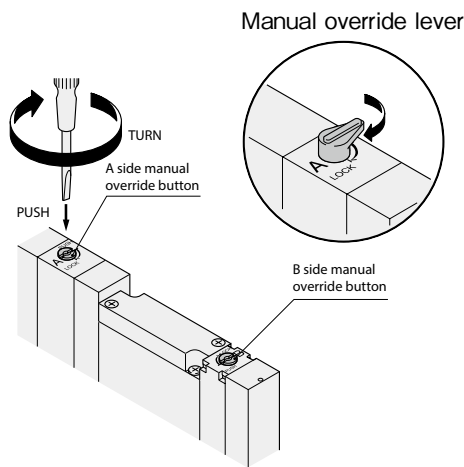

※ Illustration shows the F10 series.

Locking protruding type -83

Use a small screwdriver or the fingers to press down and rotate the manual override button by at least 45 degrees, to lock in place. Either rotation direction is acceptable. In the locked position, rotate further the manual override which will release the manual override lock by spring action and return it to its normal position. If the manual override is not rotated, the unit can be operated in the same way as the non-locking type.

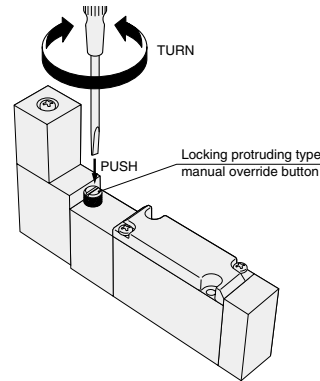


DIN connector

Wiring instructions

Remove the cover mounting screws, and lift the terminal cover off from the solenoid. Use a screwdriver, etc., to push strongly against the terminal body through the hole of the terminal cover's mounting screw, and remove the terminal body.

Slip a cable ground, washer, and cable gasket over a cable, insert the cable into the terminal cover's wiring port, and connect the lead wire to the terminal body (screwdriver blade width of about 3 mm [0.12 in]).

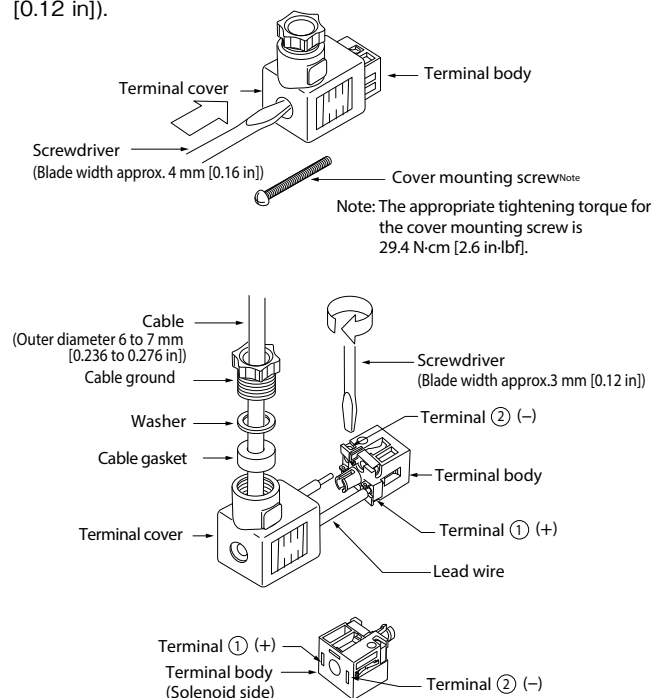

※For the DC24V solenoid with surge suppression, connect (+) to terminal ①, and (-) to terminal ②.

Handling Instructions and Precautions




3-port valves

While the F series is a 5-port valve (excluding tandem 3-port valve), it can be used as a normally closed (NC) or normally open (NO) 3-port valve by plugging one of either outlet port 4(A) or 2(B). In this case, leave the exhaust ports 3(R2) and 5(R1) open for use. It can also be used as a double solenoid type 3-port valve.

When using a single use fitting block or female thread block for 3-port

In the F10 and F15 series, a single use fitting block and female thread block for 3-port with one plugged port can be selected at the time of order. (Note: Not available for F18 series.)

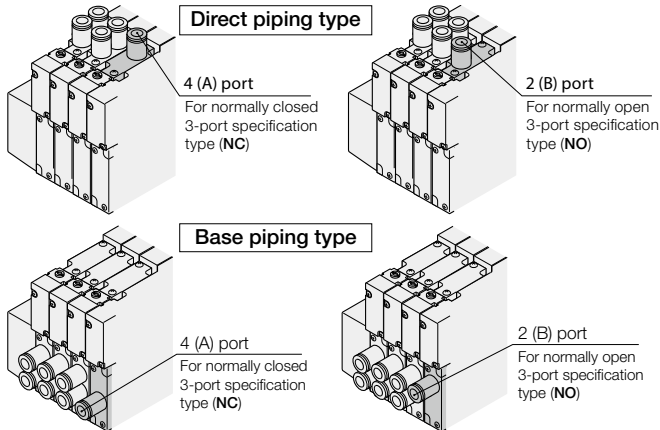


Fitting type	- ※※ A	- ※※ B
Switching type	Normally closed (NC)	Normally open (NO)
For single solenoid setting		
For double solenoid setting		

When using a plug

The F10, F15, and F18 series can be used as either a normally closed (NC) or normally open (NO) 3-port valve by plugging either outlet port of 4(A) or 2(B).

Plug position	When the 2(B) port is plugged	When the 4(A) port is plugged
Switching type	Normally closed (NC)	Normally open (NO)
For single solenoid setting		
For double solenoid setting		




Manifold

Attaching and removing valves

To remove the valve body from the sub-base or manifold, loosen the valve mounting screws (2 places), and lift it up in the direction of the arrow (see the illustration at right). To install it, reverse the above procedure. The recommended tightening torques for the valve mounting screws are as shown below.

※ Illustration shows the F10 series (split manifold).

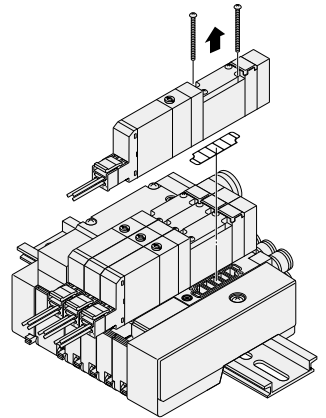

N·cm [in·lbf]

Series	Recommended tightening torque
F10	17.6 [1.6]
F15	49.0 [4.3]
F18	49.0 [4.3]


Precautions for using manifold

Observe the following precautions when using the split type, split type serial transmission type, easy assembly type and easy assembly type serial transmission type (except for the monoblock manifold and PC board manifold).

- When using the direct piping type manifold
Avoid using valves at an operating frequency exceeding 2 Hz, as such use can result in heat-related breakdowns.
- When using the base piping type manifold
When plugs have been attached on the 4(A) and/or 2(B) ports, avoid using valves at an operating frequency exceeding 2 Hz, as such use can result in heat-related breakdowns.

Stop valve usage procedure (F10, F15 series)

Mount a stop valve on a manifold to stop the air supply to valves on the individual station. For the operation procedure, use a small screwdriver or the hand to press down and rotate the stop valve manual knob clockwise 90 degrees to lock in place, shutting off the air supply. In the locked position, rotate the stop valve manual knob counterclockwise 90 degrees, and air pressure returns the stop valve manual knob to its original position, releasing the lock. Note that use of the stop valve reduces the flow rate volume by about 30%.

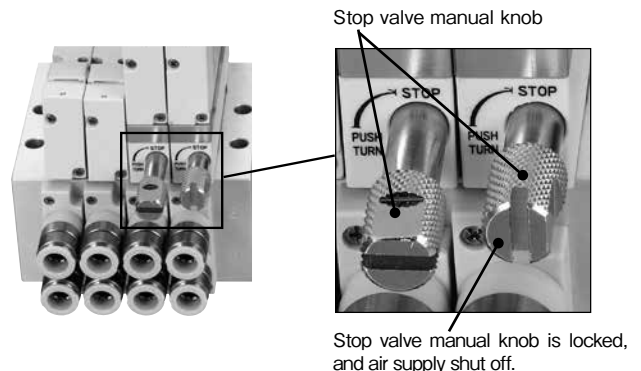


- Cautions:**
1. Do not disassemble the stop valve.
 2. When using a stop valve to remove the valve, be careful of residual pressure in the affected station.
 3. When using a stop valve to remove the valve, be aware that exhaust from other stations can be exhausted through the stop valve's exhaust hole. If this will cause a problem during use, when ordering the manifold, select the back pressure prevention valve (-E1).
 4. To use a stop valve in combination with a back pressure prevention valve, select the combination when ordering the manifold. The back pressure prevention valve (F1□Z-E1) in additional parts cannot be installed after purchase.
 5. Do not release the locked stop valve manual knob when valves have been removed by using the stop valve.

Port isolator


In the split manifold and the easy assembly type, installing port isolators to the 1(P), 3(R2) and 5(R1) ports between each station isolates the air path between stations equipped with port isolators and stations with smaller station numbers. However, a piping block must be placed on both ends.

- Port isolator for the 1 (P) port ————— Can supply two different pressures
 (Model: Split manifold F□Z-SP)
 Easy assembly type F□ZX-XSP)
 - Port isolators for the 3 (R2), 5 (R1) ports ————— Can isolate exhaust air (prevents exhaust interference)
 (Model: Split manifold F□Z-SR)
 Easy assembly type F□ZX-XSR)
 - Port isolators for the 1 (P), 3 (R2), 5 (R1) ports ————— Can supply two different pressures, and can isolate exhaust air (prevents exhaust interference)
 (Model: Split manifold F□Z-SA)
 Easy assembly type F□ZX-XSA)
- ※ □ denotes valve size.


Split manifold
 (F10, F15 series)

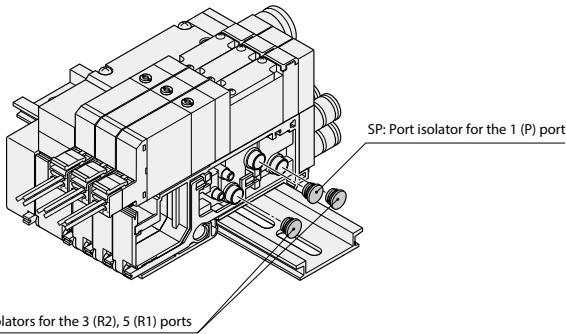

Split manifold
 (F18 series)

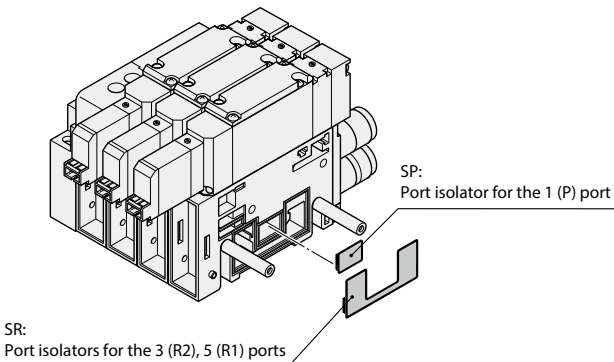

Easy assembly type
 (F10, F15 Series)

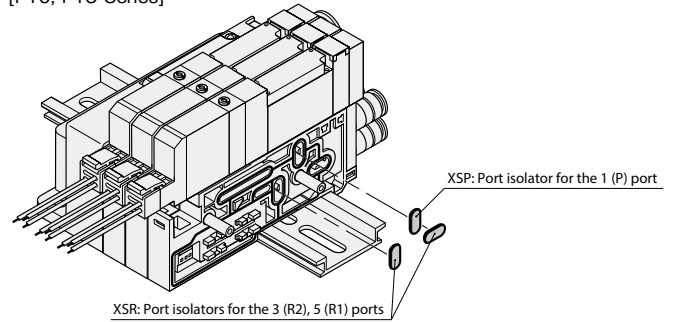

Caution: Installing port isolators requires the disassembly and re-assembly of manifolds. See the disassembly illustration, unit adding procedure, and cautions on p.30-37. However, since the F18 series serial transmission compatible manifold cannot be disassembled, port isolators cannot be installed on it after purchase.

Precautions for the use of individual air supply and exhaust spacers

By mounting an individual air supply or exhaust spacer on the manifold, the air supply or exhaust can be operated individually on the unit. It is also effective in preventing erratic operation due to back pressure. Caution should be exercised when spacers are used, as the effective area is reduced by about 30%. If mounting additional spacers to an existing unit, observe the following items:

● Spacer mounting procedure (F10 split manifold, F10 and F15 easy assembly type)

- Loosen the valve mounting screws where the individual air supply or exhaust spacer will be installed, and remove the valve.
- Install the gaskets and exhaust valve provided with the individual air supply or exhaust spacer, and use the mounting screws provided to secure the valve on the manifold (see Fig. 7).

Remark: When attaching fittings to the F10 spacer, use the recommended fittings shown below:
TSH4-M5M, TSH4-M5, TSH6-M5M, TS4-M50, TS4-M5M


● Spacer mounting procedure (F15 and F18 split manifold)

- Loosen the valve mounting screws where the individual air supply or exhaust spacer will be installed, and remove the valve.
- Open the cover of the manifold, and pull out the plug-in connector in the rear side direction (for the plug-in type) (see Fig. 8).
- Insert the plug-in connector firmly into the connector attaching section of the individual air supply or exhaust spacer, and then close the cover, while watching to ensure that the lead wires are not caught by the cover (for the plug-in type) (see Fig. 9).
- Attach the gasket and exhaust valve provided with the individual air supply or exhaust spacer, and use the mounting screws provided to mount the valve on the manifold.

Cautions: Locations where the spacers are mounted make the valve height higher by the height of the spacer (see the dimensions below).


● Muffler for the individual exhaust spacer

A muffler for the individual exhaust spacer is available. For dimensions, see p.129, 225, and 263.

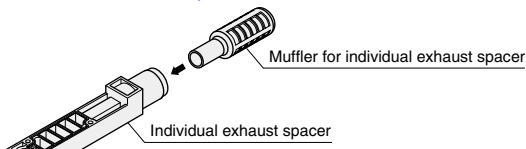


● Dimensions Unit: mm [in.]



F10Z-N□□ (For F10 series) Mass 7 g [0.25 oz.]
F10ZX-XN□□ (For F10 easy assembly type)



F15Z-N□□ (For F15 series) Mass 26 g [0.92 oz.]
F15ZX-XN□□ (For F15 easy assembly type)

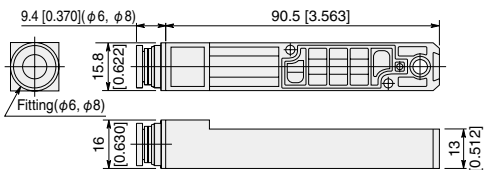

F18Z-N□□ (For F18 series) Mass 41 g [1.45 oz.]

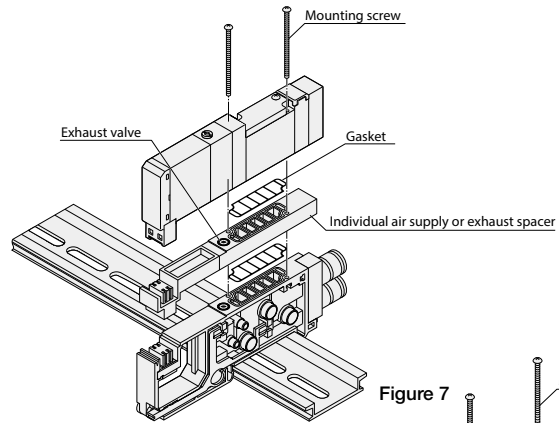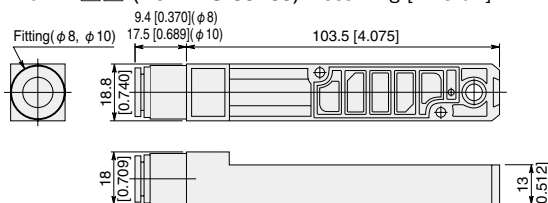

F10 series

(Illustration shows the split manifold plug-in type)

*The same applies for the F10 and F15 easy assembly type plug-in type.

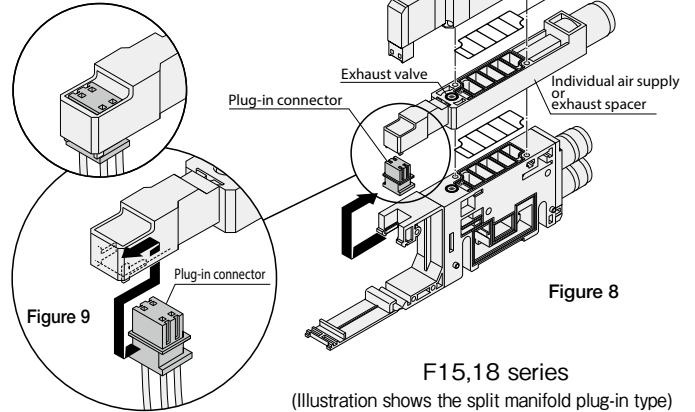



Figure 8

F15,18 series


(Illustration shows the split manifold plug-in type)

F10Z-P□□ (For F10 series) Mass 9 g [0.32 oz.]


F10ZX-XP□□ (For F10 easy assembly type)

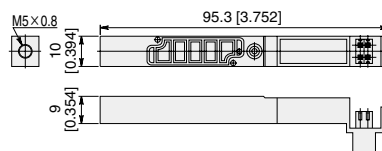


F15Z-P□□ (For F15 series) Mass 29 g [1.02 oz.]

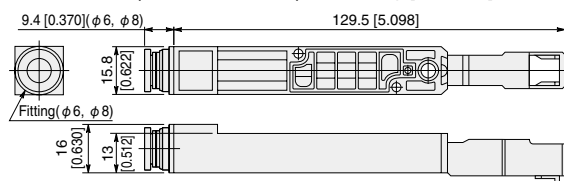

F15ZX-XP□□ (For F15 easy assembly type) Mass 32 g [1.129 oz.]

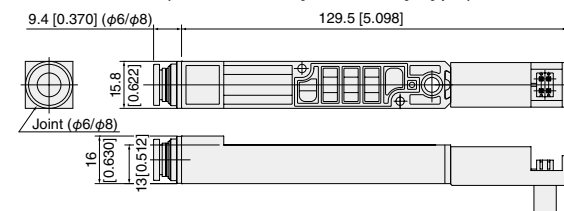


F18Z-P□□ (For F18 series) Mass 44 g [1.55 oz.]

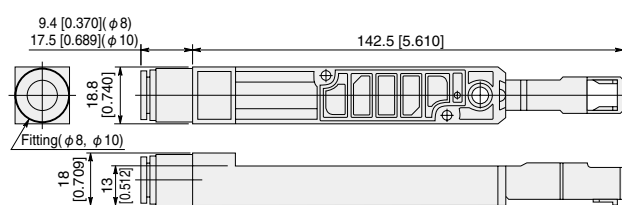


Precautions for use of the back pressure prevention valve (F10, F15 series)

A back pressure prevention valve can be mounted on the manifold to prevent erratic operation of the cylinder due to exhaust from other valves. It is particularly effective when using a single acting cylinder or when using an exhaust center valve. Note that when a back pressure prevention valve is used, the OUT-EXH flow rate volume is reduced by as much as 30%. In addition, since the back pressure prevention valve allows back pressure leaks, be careful to avoid letting the manifold exhaust port throttle the exhaust air. When mounting the back pressure prevention valve on an existing system, observe the following points.

- ① Loosen the valve screws mounting the back pressure prevention valve, and remove the valve.
- ② For a monoblock manifold, temporarily remove the gasket between the valve and manifold, insert the back pressure prevention valve into the exhaust port, attach the gasket back in place, and then mount the valve.

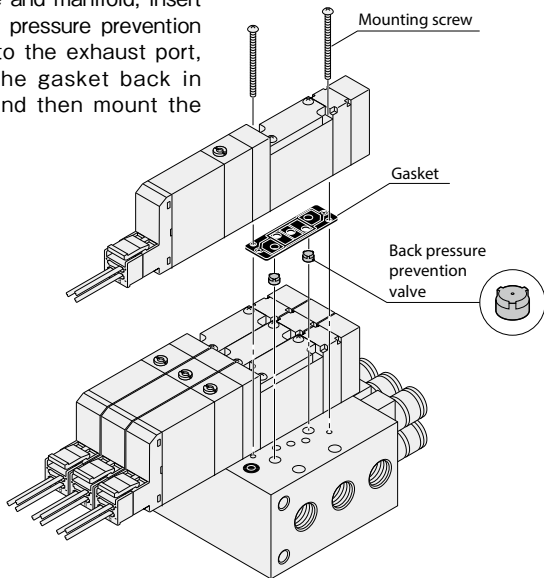

For a split type manifold, insert the back pressure prevention valve into the exhaust port, attach the dedicated gasket and plate provided, and then mount the valve.

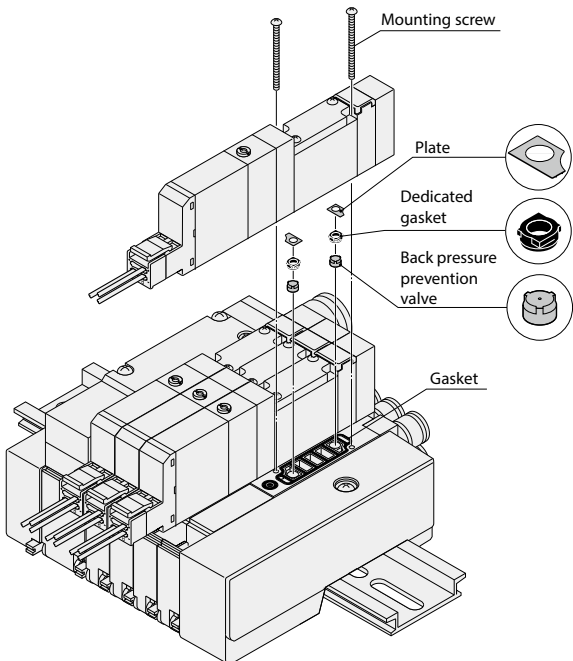


Mounting screw tightening torque: F10 series 17.6 N · cm [1.6 in·lbf]
F15 series 49.0 N · cm [4.3 in·lbf]

Changing the connector bracket direction (F10, F15 series)

● Split manifold

Remove the wiring block mounting screws, position the connector bracket as shown in the illustration, and rotate the connector 90 degrees so that it faces outward. The connector can be changed to either the top surface (vertical) wiring or side surface (horizontal) wiring positions.

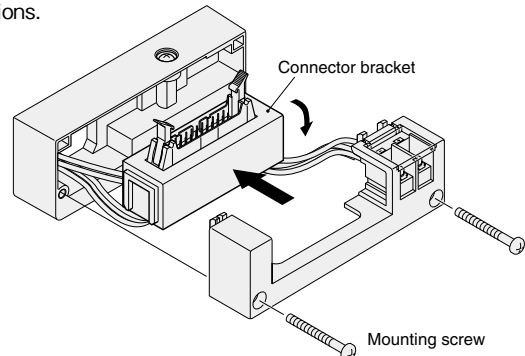


Mounting screw tightening torque: 49 N·cm [4.3 in·lbf]

● Easy assembly type

The direction can be changed by grasping the knobs on both ends of the connector and unlocking it (Illustration shows the flat cable type. The same applies for the D-sub connector.).

<Procedure> ① Grasp the knobs. ② Turn the connector in the direction of the arrow. ③ Confirm that the knobs have returned to their original position.

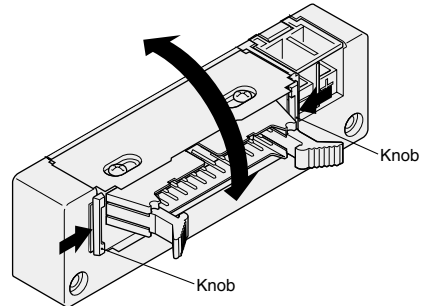

Securing the manifold in place

● Split manifold

When securing a DIN rail mounting type manifold to the installation surface, use the number of screws table below as a guide, depending on the installation direction and with or without vibration, to secure the DIN rail in place using screws. If not secured in place, be aware that there is a possibility of air leaks or other problems occurring.


Mounting condition	Number of screws			
	Horizontal mounting	2 screws or more		
Vertical mounting or vibration area	2 to 5 units	6 to 10 units	11 to 15 units	16 to 20 units
	2 screws or more	3 screws or more	4 screws or more	5 screws or more

● Easy assembly type

When securing a DIN rail mounting type manifold to the installation surface, use the number of screws table below as a guide, depending on the installation direction and with or without vibration, to secure the DIN rail in place using screws. If not secured in place, be aware that there is a possibility of air leaks or other problems occurring.

Take care when using the easy assembly type in a location subject to vibrations, as the load on the DIN fitting will be high. Or, use the direct mounting type.

Direct mounting screw tightening torque: 74 N · cm [6.5 in · lbf]



Fitting

Piping

<Valve base>

1. Procedure for switching between the base piping type and the direct piping type

Base piping and direct piping can be switched by replacing the plate with a fitting block or a female thread block (see Fig. 10).




Figure 10

※ Illustration shows the F10 series.


- Cautions:**
1. Firmly tighten the screws after completing a re-combination. Recommended tightening torques are shown below.
 2. Perform piping carefully in regards to the locations of each connection port (see Figs. 11, 12).
 3. Care should be taken not to lose the gaskets while changing plates.

Series	Recommended tightening torque N·cm [in·lbf]
F10	17.6 [1.6]
F15	49.0 [4.3]
F18	49.0 [4.3]

<Piping block>

● Direct piping type

For F10, F15 series



※ Diagram shows the F10 series.

For F18 series

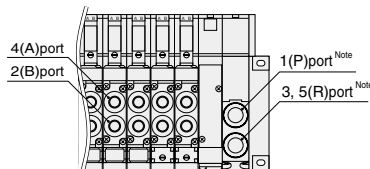


Figure 11 Note: Caution should be exercised that the positions of the 1(P) and 3, 5(R) ports are reversed from their positions in the F10 and F15 series.

● Base piping type

Port locations for F10, F15, F18 series are as shown in Fig. 12.




Figure 12

※ Diagram shows the F10 series.

Series	Recommended tightening torque N·cm [in·lbf]	
	Split manifold	Easy assembly type
F10	58.8 [5.2]	49.0 [4.3]
F15	58.8 [5.2]	58.8 [5.2]
F18	58.8 [5.2]	-

2. Attaching fittings to female thread blocks

When attaching fittings to female thread blocks, secure with the tightening torques shown below or less.

Screw size	Tightening torque N·cm [in·lbf]
Rc 1/8, NPT1/8	686 [60.7]
Rc 1/4, NPT1/4	882 [78.1]

※ For M5 and -10-32UNF, tighten at the recommended torques for the fittings used.

3. Attaching fittings to piping blocks [F18Z(G)-PM(P)]

To attach fittings to the female thread type piping block of the F18 series, remove the piping block portion (the triangular-shaped block portion), screw the fittings into the 1(P) and 3, 5(R) ports while holding the piping block by applying a wrench to its metal portion. The tightening torque for the mounting (two M3 screws) of the piping block after the fittings have been attached should be 58.8 N·cm [5.2 in·lbf].

Dual use fittings (With dual use fitting blocks)

The F series dual use fitting blocks employ dual use fittings for different tube sizes, which can connect tubes of 2 different outer diameters.

● Attaching and removing tubes

When connecting tubes, insert an appropriate size tube until it contacts the tube stopper, and then lightly pull it to check the connection. For tube removal, push the tube against the tube stopper, then for large tube sizes, push on the release ring and at the same time pull the tube out. For small tube sizes, push on the outer ring by pressing the release ring and simultaneously pull the tube out (see Fig. 13).

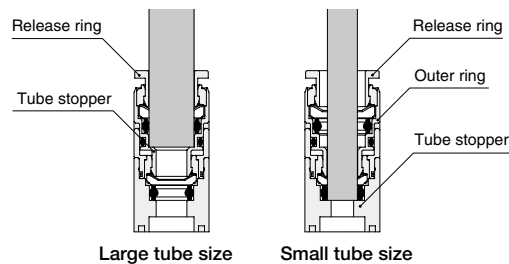


Figure 13

Usable tubes


Either a nylon or urethane tube can be used.

Use tubes with an outer diameter tolerance within ± 0.1 mm [0.004 in.] of the nominal diameter, and ensure the ovalness (difference between the large diameter and small diameter) is 0.2 mm [0.008 in.] or less. (Using a Koganei tube is recommended.)

- Cautions:**
1. Do not use extra-soft tubes since their pull-out strength is significantly reduced.
 2. Only use tubes without scratches on their outer surfaces. If a scratch occurs during repeated use, cut off the scratched portion.
 3. Do not bend the tube excessively near the fittings. The minimum bending radii for nylon tubes are shown in the table below.
 4. When attaching or removing tubes, always stop the air supply. In addition, always confirm that air has been completely exhausted from the manifold.

Tube size	Minimum bending radius mm [in.]
ϕ 4	20 [0.8]
ϕ 6	30 [1.2]
ϕ 8	50 [2.0]
ϕ 10	80 [3.1]

F10 and F15 Series Disassembly Diagram of Split Manifold Non-Plug-in Type

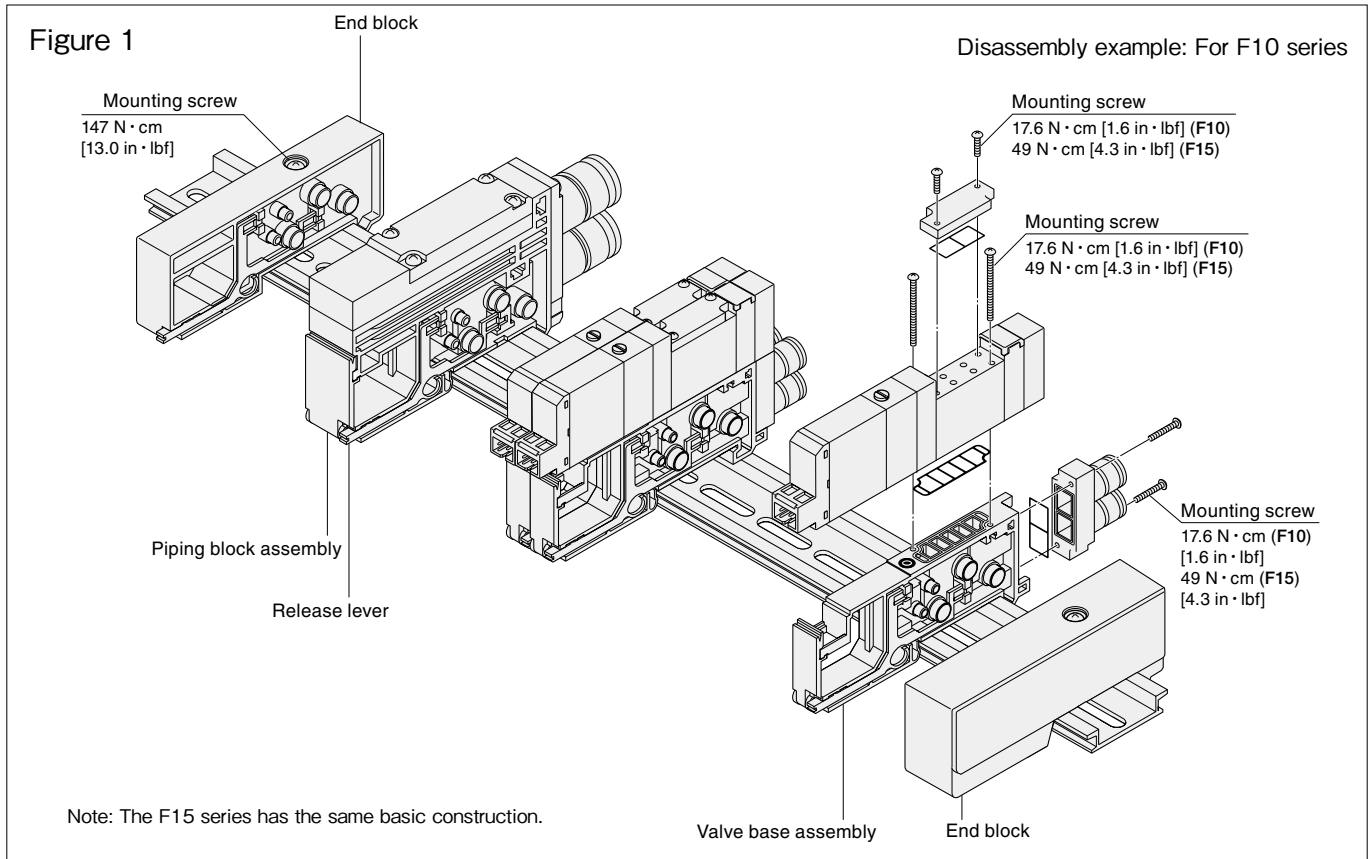

Manifold Unit Adding Procedure (F10 and F15 Series Non-Plug-in Type)

■ Adding a valve base unit


Use the valve base assembly for adding valve base units.

- ① Loosen the mounting screw on the end block until it can slide (see Fig. 1).
Note: For the F15 series, loosen the mounting screws on both the left and right end blocks (2 screws each).
- ② Press the release lever on the valve base assembly where the new unit is to be added, and disconnect the link between the bases.
- ③ Mount the valve base assembly to be added on the DIN rail as shown in Fig. 2.
- ④ Return the release lever of the valve base assembly disassembled in step ② to its normal position, as shown in Fig. 3. In addition, set the release lever for the valve assembly being added to the same position, then press the bases together until they connect and click into place.
- ⑤ Press the bases together from both sides to ensure that there is no gap between them, and then tighten the end block mounting screws, and install the units in place on the DIN rail (see Fig. 5).
Tightening torque: 147 N·cm [13.0 in·lbf]
Notes: 1. Always follow the steps shown in Fig. 4 when tightening the end block mounting screws for the F15 series.
2. Confirm that the DIN rail mounting hooks secure the DIN rail (see Fig. 5).


[Caution]

- Always cut off the power and air supply before working. In addition, always confirm that air has been completely exhausted from the manifold.
- Care should be exercised to prevent the gasket from becoming caught or lost.
- Before supplying air to the manifold, always confirm that the bases are connected, the end block mounting screws are tightened, etc. Supplying air when either of the end blocks is not secured to the DIN rail could result in air leaks or in separation of manifold bases.
- When there are a large number of valves simultaneously delivering air to the secondary side, or when there are a large number of valves overall, we recommend using 2 air supplies and exhausts (on each side).

Adding units to the piping block assembly should be performed in the same way as adding units of the valve base assembly.

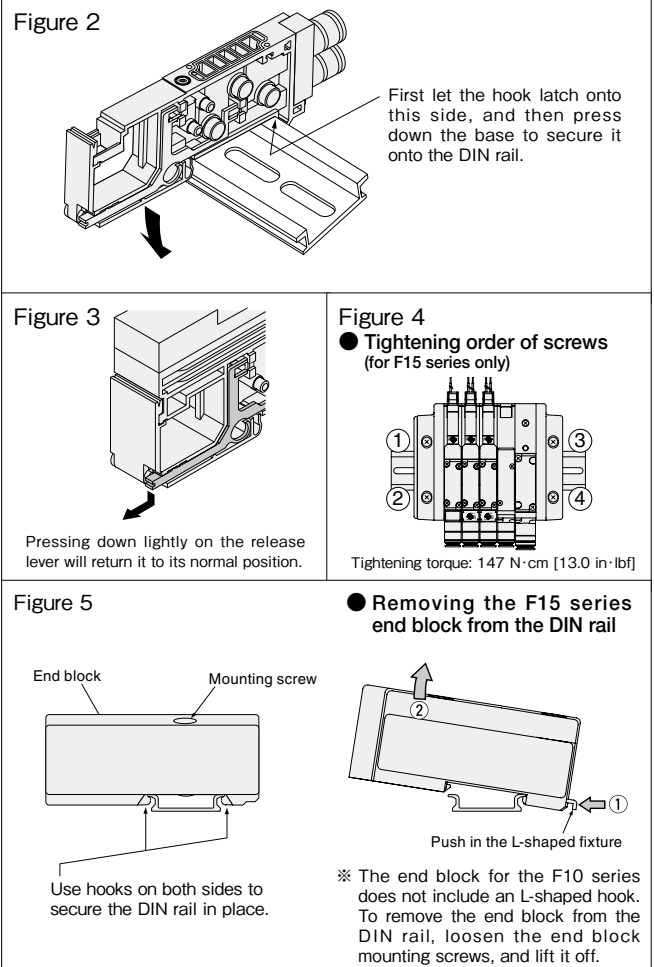

F18 Series Disassembly Diagram of Split Manifold Non-Plug-in Type

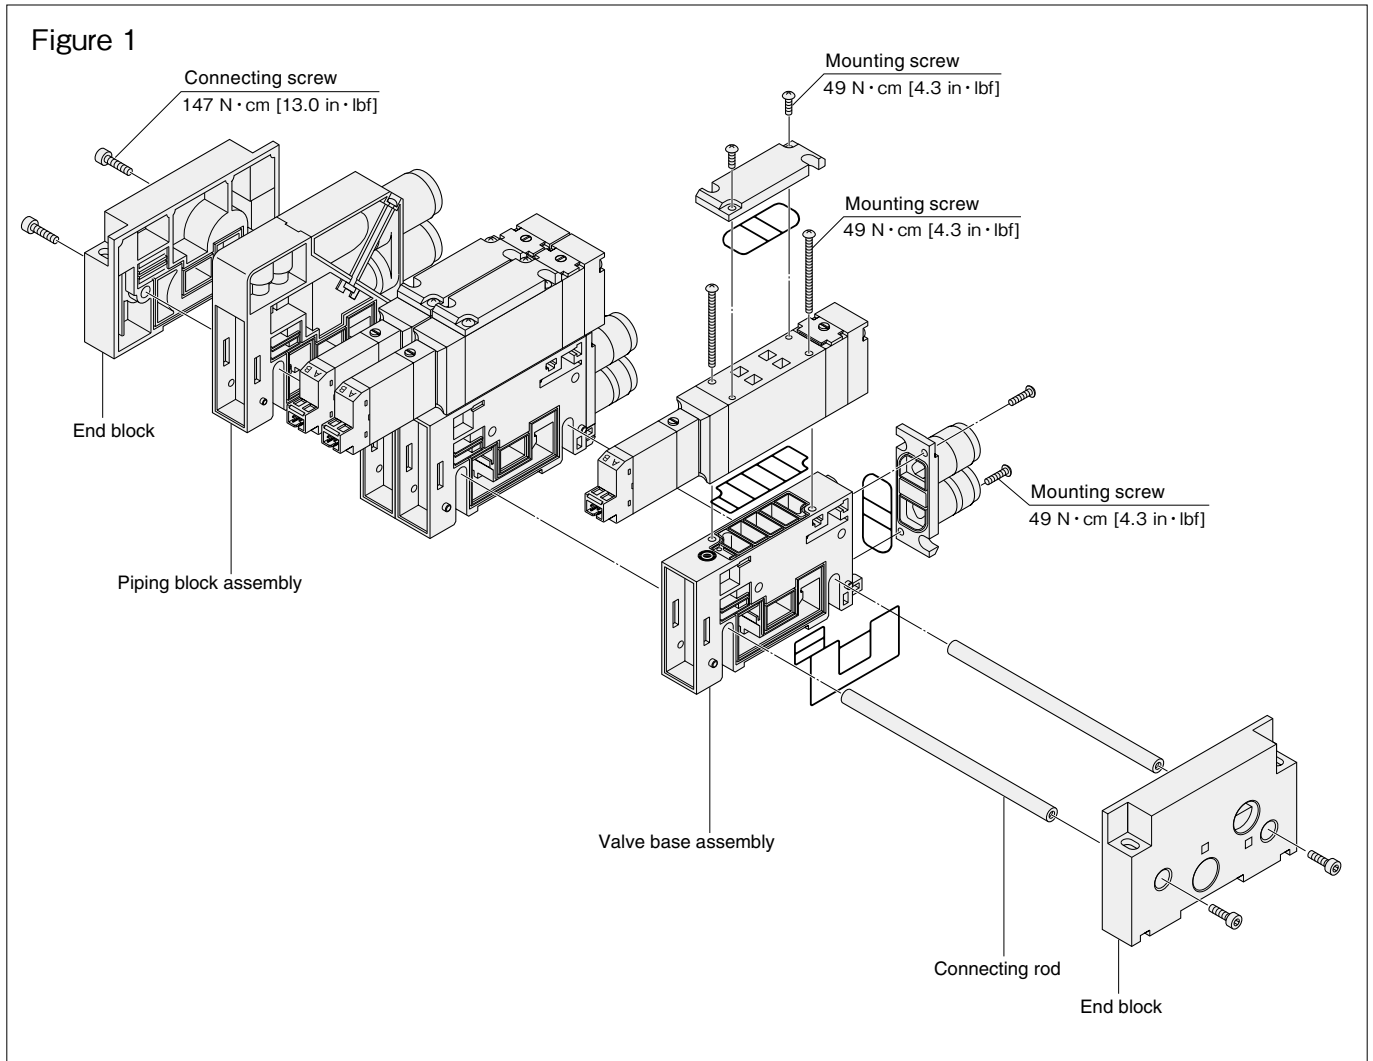

Manifold Unit Adding Procedure (F18 Series Non-Plug-in Type)

■ Adding a valve base unit

Use the valve base assembly and unit-adding connecting rod to add valve base units.


- ① Remove the connecting screws on the end block and separate the end block from the manifold (see Fig. 1).
- ② Install the connecting rods to be added, open up the spaces where the units are being added, position the gaskets onto the valve base assemblies being added, and fit the units on the connecting rods from above. At this time, securely mount the units so that no gap is left between the added valve base assemblies and the upper surface of the connecting rods.
- ③ Install gaskets onto the end blocks removed in step ①, and retighten the connecting screws. At this time, use a hexagon bar wrench to hold the connecting screws on the opposite side in place so as to prevent the screws from slipping while securing them into place. Tightening torque: 147 N · cm [13.0 in · lbf]

【Caution】

- Always cut off power and air supply before working. In addition, always confirm that air has been completely exhausted from the manifold.
- Care should be exercised to prevent the gasket from becoming caught or lost.
- Before supplying air to the manifold, always confirm that the bases are securely connected, the end block connecting screws on both sides are tightened, etc. Supplying air when either of the end blocks is not secured to the DIN rail could result in air leaks or in separation of manifold bases.
- When there are a large number of valves simultaneously delivering air to the secondary side, or when there are a large number of valves overall, we recommend using 2 air supplies and exhausts (on each side).

Adding units to the piping block assembly should be performed in the same way as adding units to the valve base assembly.

F10 and F15 Series Disassembly Diagram of Split Manifold Plug-in Type

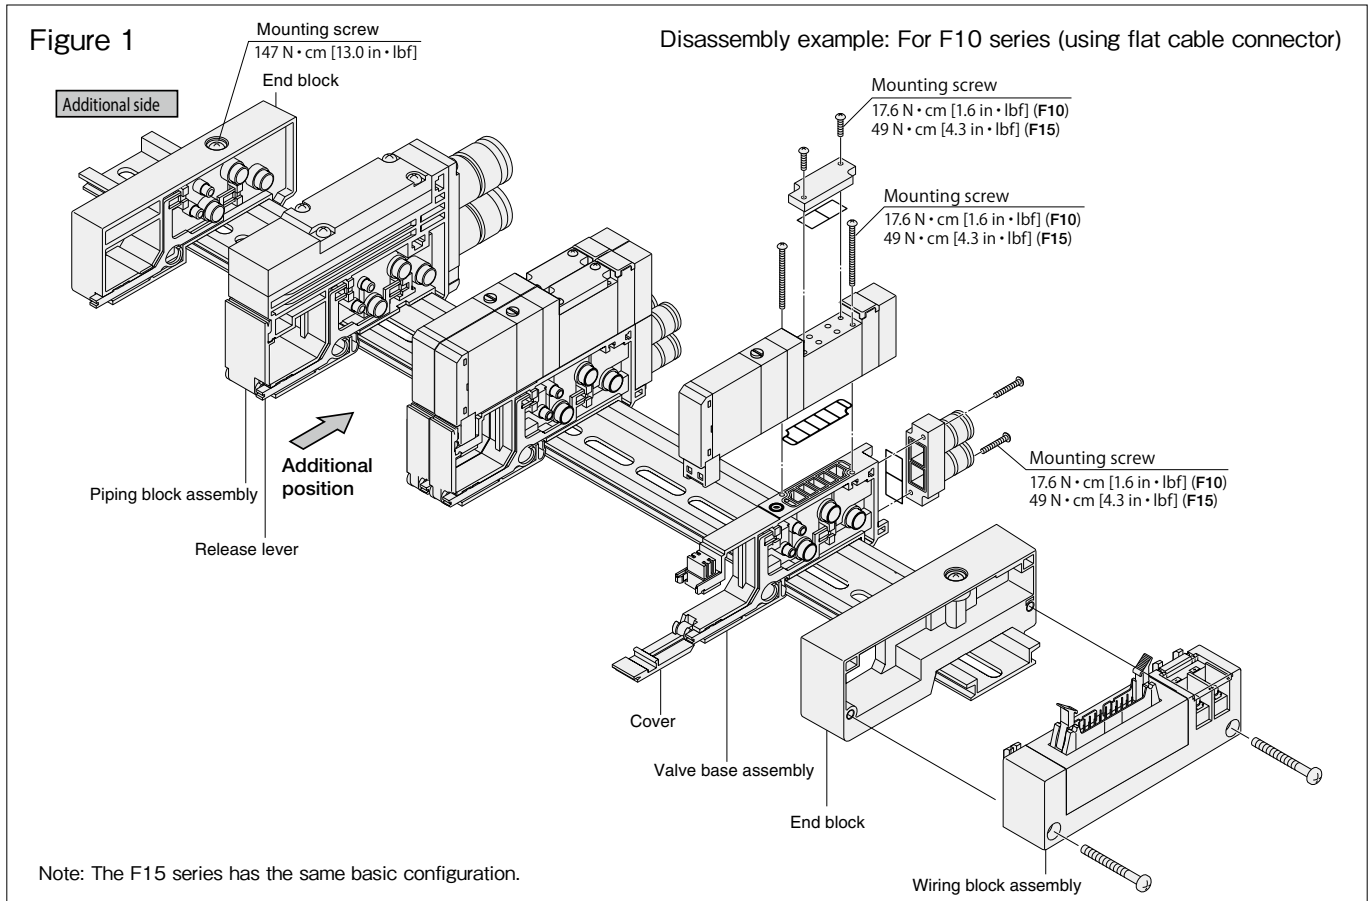

Manifold Unit Adding Procedure (F10 and F15 Series Plug-in Type)

■ Adding a valve base unit


Use the valve base assembly for adding valve base units.

- Loosen the mounting screw on the end block until it can slide (see Fig. 1).

Note: For the F15 series, loosen the mounting screws on both the left and right end blocks (2 screws each).

- Add units on the additional side (with the solenoid on top and its right) shown in Fig. 1. To split up at additional unit locations, push the piping base assembly's release lever, and release the connections between the bases.
- Mount the valve base assembly to be added on the DIN rail as shown in Fig. 2.
- Return the release lever of the piping block assembly disassembled in step ② to its normal position, as shown in Fig. 3. Set the release levers on the additional valve bases in the same position, and press all the bases together until they click into place, while watching to ensure that the lead wires are not caught by the cover.
- Press the bases together from both sides to ensure that there is no gap between them, and then tighten the end block mounting screws, and install the units in place on the DIN rail (see Fig. 5). Tightening torque: 147 N·cm [13.0 in·lbf]

Notes: 1. Always follow the steps shown in Fig. 4 when tightening the end block mounting screws for the F15 series.
2. Confirm that the DIN rail mounting hooks secure the DIN rail (see Fig. 5).

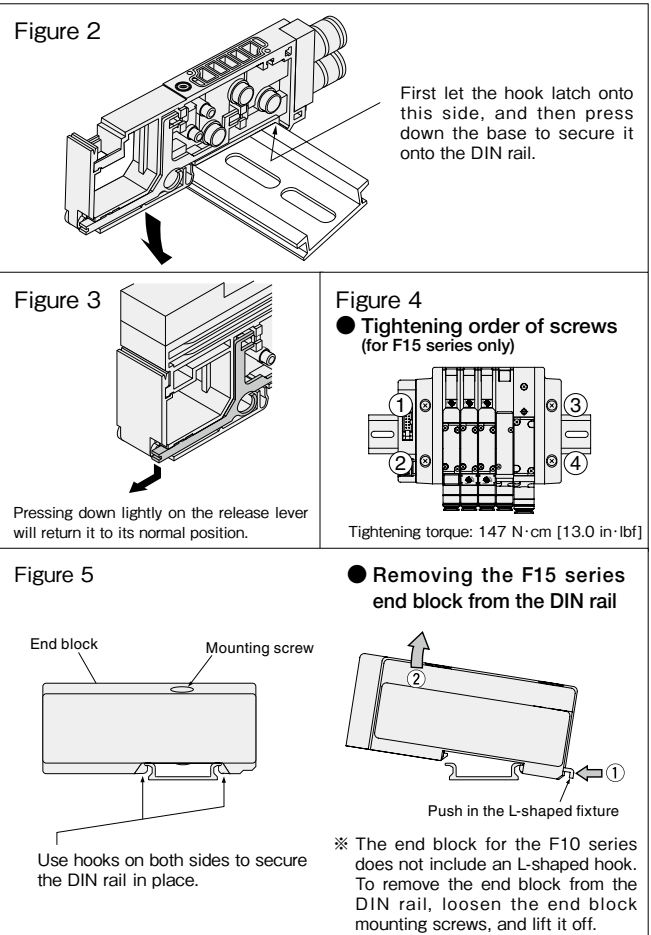

■ Wiring Procedure

- ① Use a flatblade screwdriver to open all of the covers (see Fig. 1). Loosen the mounting screws of the valve next to the valve base to be added, remove the valve, and remove the plug-in connector (see Fig. 6).
- ② The end terminal lead wire (short red wire) is inserted into the pin insert section (No.3) of the plug-in connector that was removed in step ① (see Fig. 7).
(When shipping, end terminal lead wire is inserted into the plug-in connector of the end unit valve.) Remove this end terminal lead wire, and insert it into the insert section (No.3) of the plug-in connector for the valve base assembly to be added. Next, insert the common wire (red) of this plug-in connector into the insert section (No.3) of the removed plug-in connector.

Note: When inserting the lead wire, confirm that the short bar of the plug-in connector's common wire insert section has been attached.

- ③ Install each of the wired plug-in connectors in step ② to the valve base, and mount the valve.
- ④ Remove the wiring block mounting screws and place the connector bracket in the position shown in Fig. 8, then connect the lead wire (white) of the added valve base after confirming the pin locations. (For details, see the "Detailed diagram of wiring block internal connections" on p.34, 35)
- ⑤ Return the connector bracket to its original position, tighten the wiring block mounting screws in place, and then install the cover while exercising caution that the lead wires are not trapped by the cover.

[Caution]

- Always cut off the power and air supply before working. In addition, always confirm that air has been completely exhausted from the manifold.
- When removing lead wires from the plug-in connector, use a tool with a fine tip (such as a small screwdriver) to press lightly on the contact hook from a hole on the side of the plug-in connector, and pull out the lead wire. When re-inserting the lead wire to the connector, spread the contact hooks so that they face outward, and then insert the lead wire into the plug-in connector. At this time, pull the lead wire lightly to confirm that it is securely inserted.
- Always connect the end terminal lead wires (see Fig. 7).
- Care should be exercised to prevent the gasket from becoming caught or lost.
- Before supplying air to the manifold, always confirm that the bases are connected, the end block mounting screws are tightened, etc. Supplying air when either of the end blocks is not securing the DIN rail could result in air leaks or in separation of manifold bases.
- Caution should be exercised as the number of valve units that can be added is limited in the manifold, by the wiring specifications and wiring connection types, etc. For details, see the "Table for maximum number of valve units by wiring specification," on p.66.
- When there are a large number of valves simultaneously delivering air to the secondary side, or when there are a large number of valves overall, we recommend using 2 air supplies and exhausts (on each side).

Adding units to the piping block assembly should be performed in the same way as adding units to the valve base assembly. In addition, when the wiring block and piping block are mounted side-by-side, always mount the wiring block on the outside of the piping block, for structural reasons.

Valve tightening torque N·cm [in·lbf]

Series	Torque
F10	17.6 [1.6]
F15	49.0 [4.3]

Figure 6






Figure 7

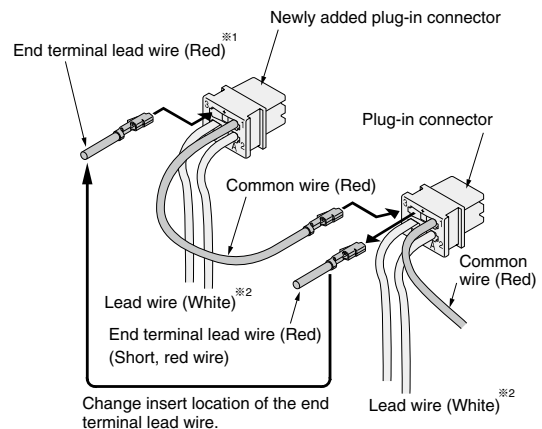

- ※ 1: Always insert end terminal lead wire.
- ※ 2: Shows when both A and B are used.


Figure 8

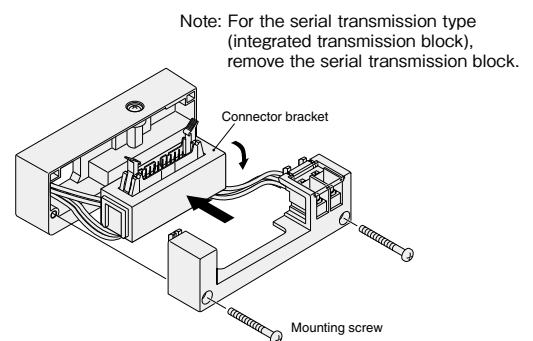

Mounting screw tightening torque: 49 N·cm [4.3 in·lbf]

See "F10, F15 Series Detailed Diagram of Wiring Block Internal Connections" on p.38, 39.

F18 Series Disassembly Diagram of Split Manifold Plug-in Type

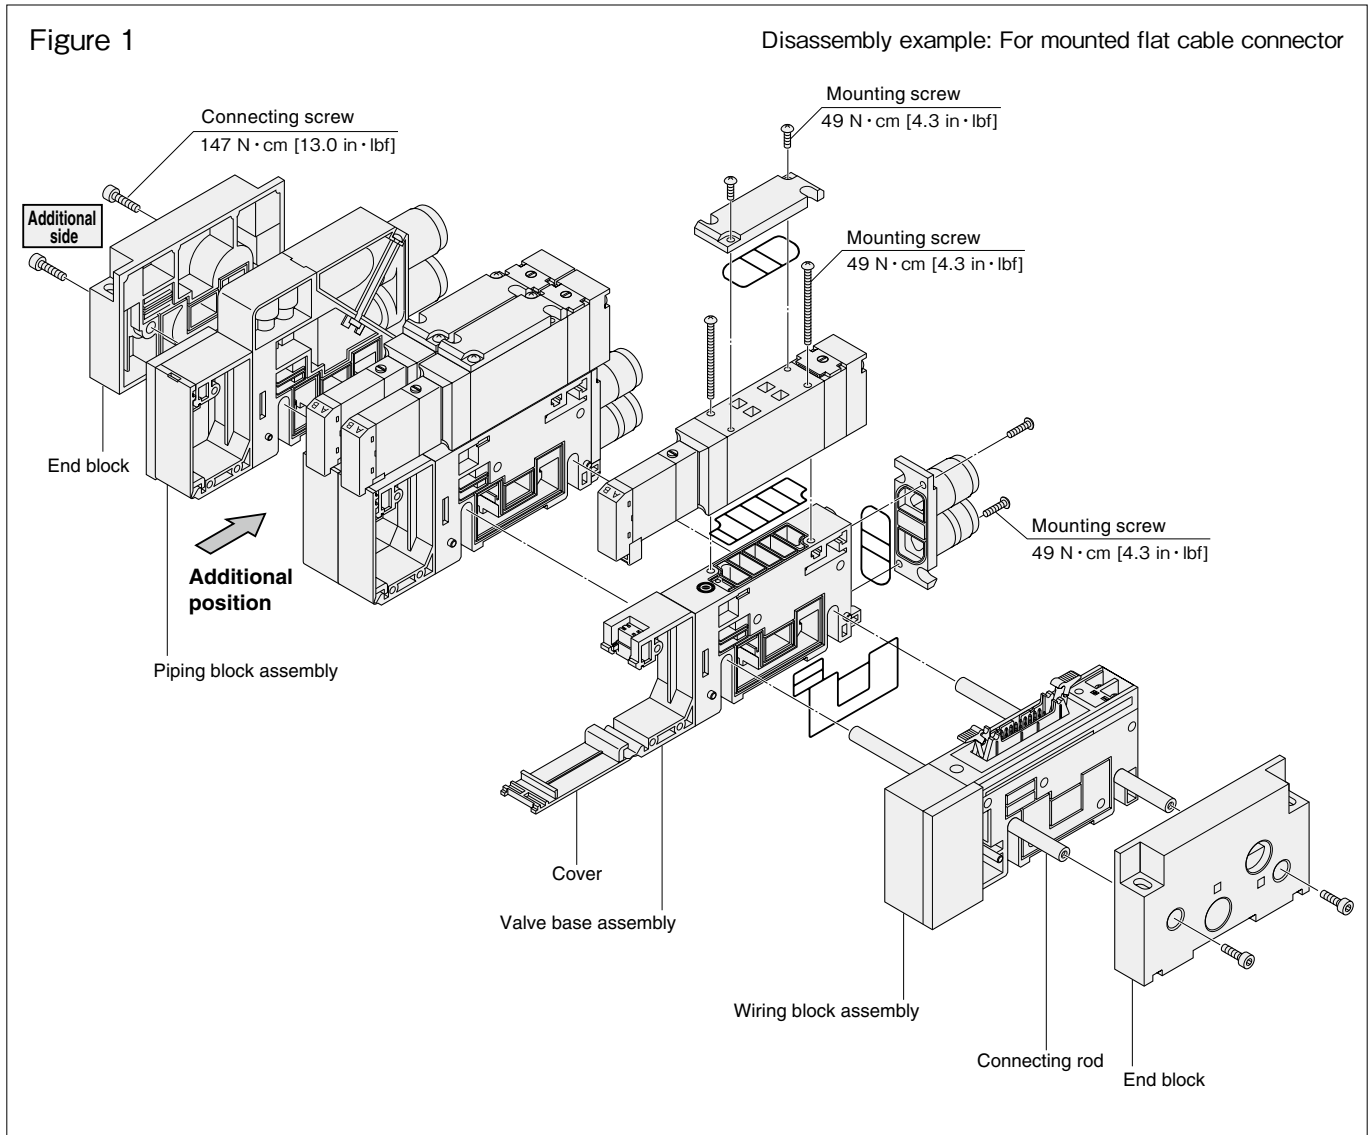

Manifold Unit Adding Procedure (F18 Series Plug-in Type)

■ Adding a valve base unit

Use the valve base assembly for adding valve base units.

- ① Remove the connecting screws on the additional side end block and separate the end block from the manifold (see Fig. 1).
- ② Install the connecting rods to be added, open up spaces where the units are being added, position the gaskets onto the valve base assemblies being added, and fit the units on the connecting rods from above. At this time, securely mount the units so that no gap is left between the added valve base assemblies and the upper surface of the connecting rods.
- ③ Install gaskets onto the end blocks removed in step ①, and retighten the connecting screws. At this time, use a hexagon bar wrench to hold the connecting screws on the opposite side in place so as to prevent the screws from slipping while securing them into place. Tightening torque: 147 N·cm [13.0 in·lbf]

■ Wiring Procedure

- ① Use a flatblade screwdriver to open all of the covers (see Fig. 1). Loosen the mounting screws of the valve next to the valve base to be added, remove the valve, and remove the plug-in connector (see Fig. 2).
- ② The end terminal lead wire (short red wire) is inserted into the pin insert section (No.3) of the removed plug-in connector that was removed in step ① (see Fig. 3).
(When shipping, end terminal lead wire is inserted into the plug-in connector of the end unit valve.) Remove this end terminal lead wire, and insert it into the insert section (No.3) of the plug-in connector for the valve base assembly to be added. Next, insert the common wire (red) of this plug-in connector into the insert section (No.3) of the removed plug-in connector.

Note: When inserting the lead wire, confirm that the short bar of the plug-in connector's common wire insert section has been attached.

- ③ Install each of the wired plug-in connectors in step ② to the valve base, and mount the valve.
- ④ Remove the wiring block mounting screws and place the connector bracket in the position shown in Fig. 4, then connect the lead wire (white) of the added valve base after confirming the pin locations (For details, see the "Detailed diagram of wiring block internal connections" on p.36, 37).
- ⑤ Return the connector bracket to its original position, tighten the wiring block mounting screws in place, and then install the cover while exercising caution that the lead wires are not trapped by the cover.

[Caution]

- Always cut off the power and air supply before working. In addition, always confirm that air has been completely exhausted from the manifold.
- When removing lead wires from the plug-in connector, use a tool with a fine tip (such as a small screwdriver) to press lightly on the contact hook from a hole on the side of the plug-in connector, and pull out the lead wire. When re-inserting the lead wire to the connector, spread the contact hooks so that they face outward, and then insert the lead wire into the plug-in connector. At this time, pull the lead wire lightly to confirm that it is securely inserted.
- Always connect the end terminal lead wire (see Fig. 3).
- Care should be exercised to prevent the gasket from becoming caught or lost.
- Before supplying air to the manifold, always confirm that the bases are connected, the end block connecting screws on both sides are tightened, etc.
Supplying air when either of the end blocks is not securing the DIN rail could result in air leaks or in separation of manifold bases.
- Caution should be exercised as the number of valve units that can be added is limited in the manifold, by the wiring specifications and wiring connection types, etc. For details, see the "Table for maximum number of valve units by wiring specification," on p.84.
- When there are a large number of valves simultaneously delivering air to the secondary side, or when there are a large number of valves overall, we recommend using 2 air supplies and exhausts (on each side).

Adding units to the piping block assembly should be performed in the same way as adding units to the valve base assembly. In addition, when the wiring block and piping block are mounted side-by-side, always mount the wiring block on the outside of the piping block, for structural reasons.

Valve tightening torque N·cm [in·lbf]

Series	torque
F18	49.0 [4.3]

Figure 2






Figure 3

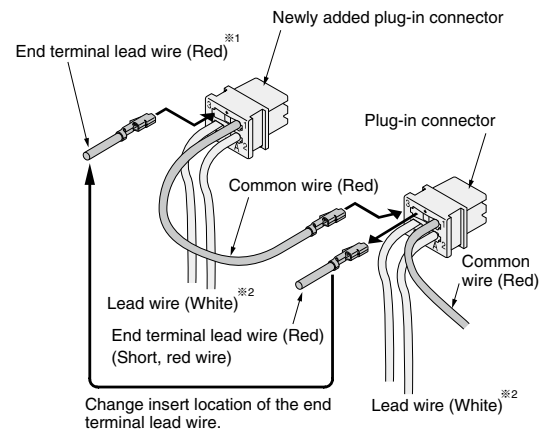


- ※ 1: Always insert end terminal lead wire.
- ※ 2: Shows when both A and B are used.

Figure 4



See "F18 Series Detailed Diagram of Wiring Block Internal Connections" on p.40.

F10 and F15 Series Disassembly Diagram of Easy Assembly Type Manifold Non-Plug-in Type

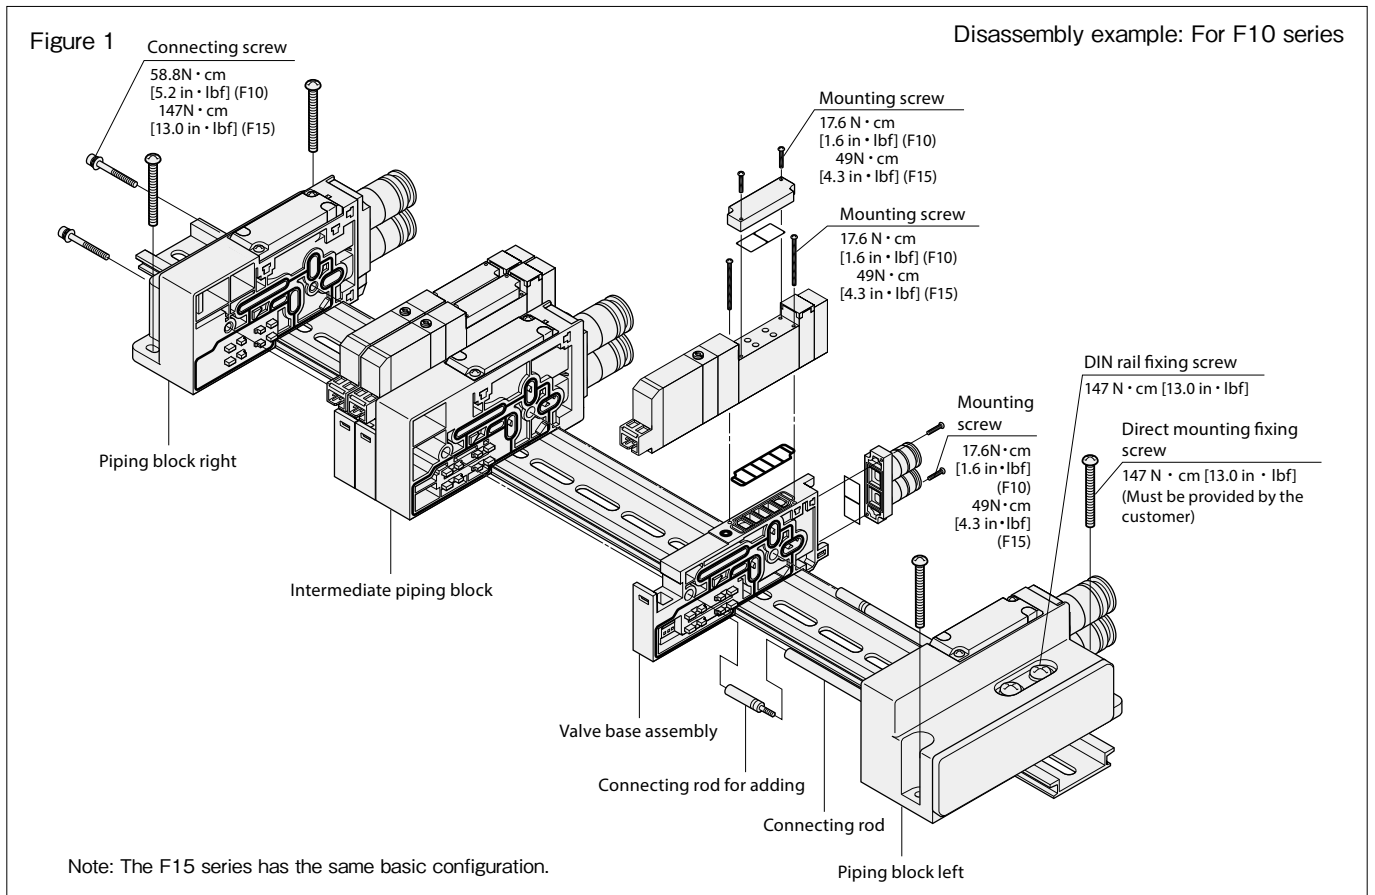

Manifold Unit Adding Procedure (F10 and F15 Series Easy Assembly Type)

■ Adding a valve base unit (use the same procedure for adding an intermediate piping block)
<When using a DIN rail>

- ① Loosen the DIN rail fixing screws (4 locations) on both sides of the piping block in advance, to a degree which enables the manifold to slide on the DIN rail. (see Fig.1)
- ② Loosen the connecting screws (two locations) on the right side of the piping block. (see Fig.2)
- ③ Divide the manifold in the location where the valve base unit will be added, and remove it from the connecting rod.
- ④ Install the connecting rod included with the valve base assembly to add to the connecting rod of the manifold.
- ⑤ Install the valve base assembly to add in the required location through the connecting rod, and enclose the valve base assembly on both sides.
- ⑥ Tighten the connecting screws (two locations) on the right side of the piping block.
Tightening torque: F10 58.8 N · cm [5.2 in · lbf] F15 147 N · cm [13.0 in · lbf]
- ⑦ Confirm that the hook of the DIN rail mounting bracket is securely caught, and tighten the DIN rail fixing screws (4 locations). (see Fig.4) Tightening torque: 147 N · cm [13.0 in · lbf]




Note: Always follow the steps shown in Fig.3 when tightening the DIN rail fixing screws.

<For direct mounting>


- ① Loosen the connecting screws (2 locations) on the right side of the piping block. (see Fig.2)
- ② Divide the manifold in the location where the valve base unit will be added, and remove it from the connecting rod.
- ③ Install the connecting rod included with the valve base assembly to add to the connecting rod of the manifold.
- ④ Install the valve base assembly to add in the required location through the connecting rod, and enclose the valve base assembly on both sides.
- ⑤ Tighten the connecting screws (two locations) on the right side of the piping block.
Tightening torque: F10 58.8 N · cm [5.2 in · lbf] F15 147 N · cm [13.0 in · lbf]
- ⑥ Tighten the fixing screws (provided by the customer).
Tightening torque: 74.5 N · cm [6.6 in · lbf] (for both the F10 and F15)

【Caution】

- Before supplying air to the manifold, always confirm that the tightening of the connecting screws. Insufficient tightening is dangerous because it may cause air leaks or accidents.

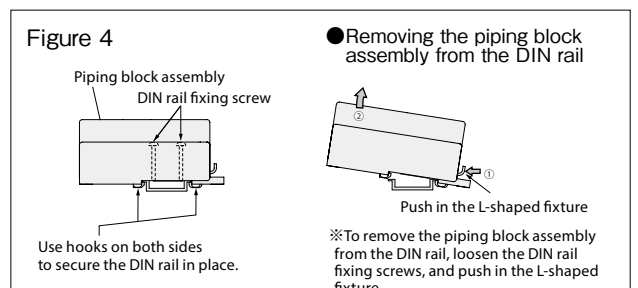

F10 and F15 Series Disassembly Diagram of Easy Assembly Type Manifold Plug-in Type

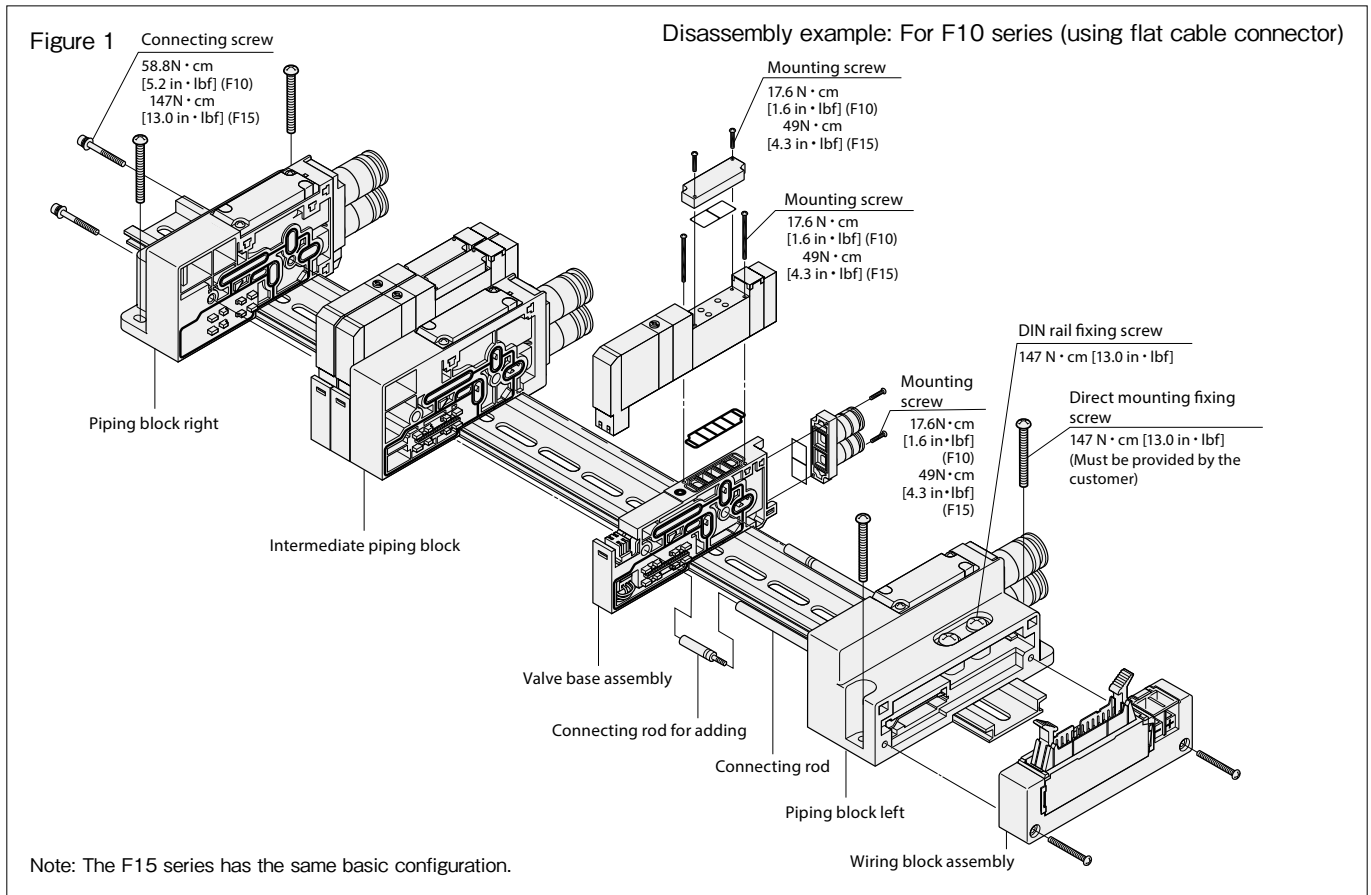

Manifold Unit Adding Procedure (F10 and F15 Series Easy Assembly Type)

■ Adding a valve base unit (use the same procedure for adding an intermediate piping block)

<When using a DIN rail>

- ① Loosen the DIN rail fixing screws (4 locations) on both sides of the piping block in advance, to a degree which enables the manifold to slide on the DIN rail. (see Fig.1)
- ② Loosen the connecting screws (two locations) on the right side of the piping block. (see Fig.2)
- ③ Divide the manifold in the location where the valve base unit will be added, and remove it from the connecting rod.
- ④ Install the connecting rod included with the valve base assembly to add to the connecting rod of the manifold.
- ⑤ Install the valve base assembly to add in the required location through the connecting rod, and enclose the valve base assembly on both sides.
- ⑥ Tighten the connecting screws (two locations) on the right side of the piping block.
 Tightening torque: F10 58.8 N · cm [5.2 in · lbf] F15 147 N · cm [13.0 in · lbf]
- ⑦ Confirm that the hook of the DIN rail mounting bracket is securely caught, and tighten the DIN rail fixing screws (4 locations). (see Fig.4) Tightening torque: 147 N · cm [13.0 in · lbf]

Note: Always follow the steps shown in Fig.3 when tightening the DIN rail fixing screws.




<For direct mounting>

- ① Loosen the connecting screws (2 locations) on the right side of the piping block. (see Fig.2)
- ② Divide the manifold in the location where the valve base unit will be added, and remove it from the connecting rod.
- ③ Install the connecting rod included with the valve base assembly to add to the connecting rod of the manifold.
- ④ Install the valve base assembly to add in the required location through the connecting rod, and enclose the valve base assembly on both sides.
- ⑤ Tighten the connecting screws (two locations) on the right side of the piping block.
 Tightening torque: F10 58.8 N · cm [5.2 in · lbf] F15 147 N · cm [13.0 in · lbf]
- ⑥ Always follow the steps shown in Fig.3 when tightening the fixing screws.




[Caution]

- Before supplying air to the manifold, always confirm that the tightening of the connecting screws. Insufficient tightening is dangerous because it may cause air leaks or accidents.
- When adding a valve base unit, be aware that the pin locations will change if it is not inserted in the final station.

The pin locations are the same for an intermediate piping block, regardless of the station.

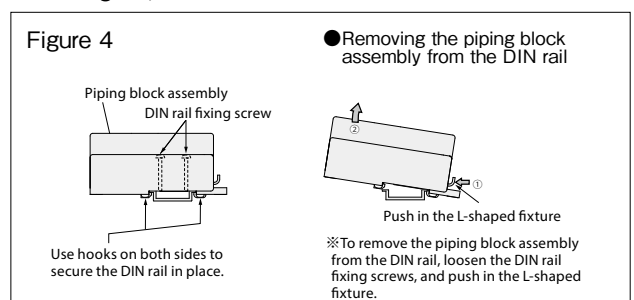

F10, F15 Series Detailed Diagram of Wiring Block Internal Connections (Split manifold/Monoblock wire-saving manifold)

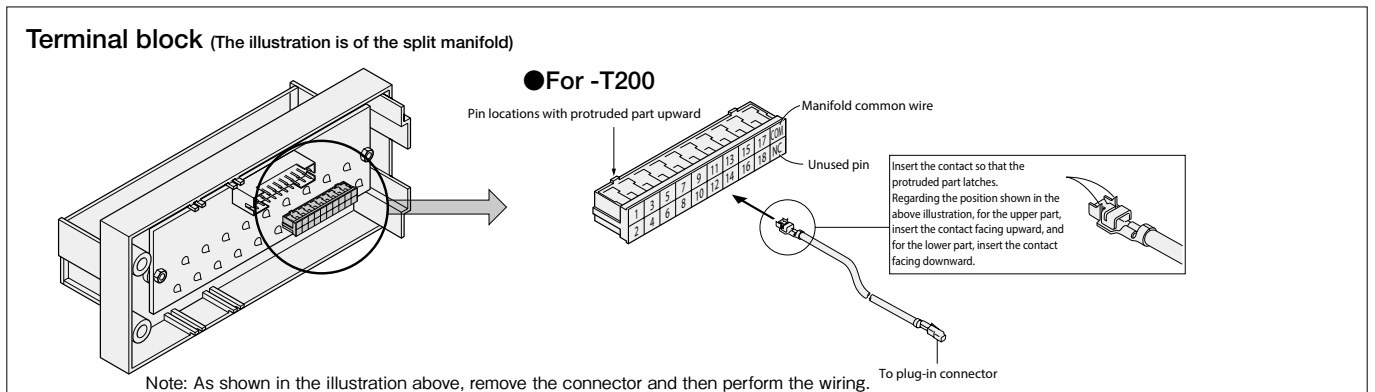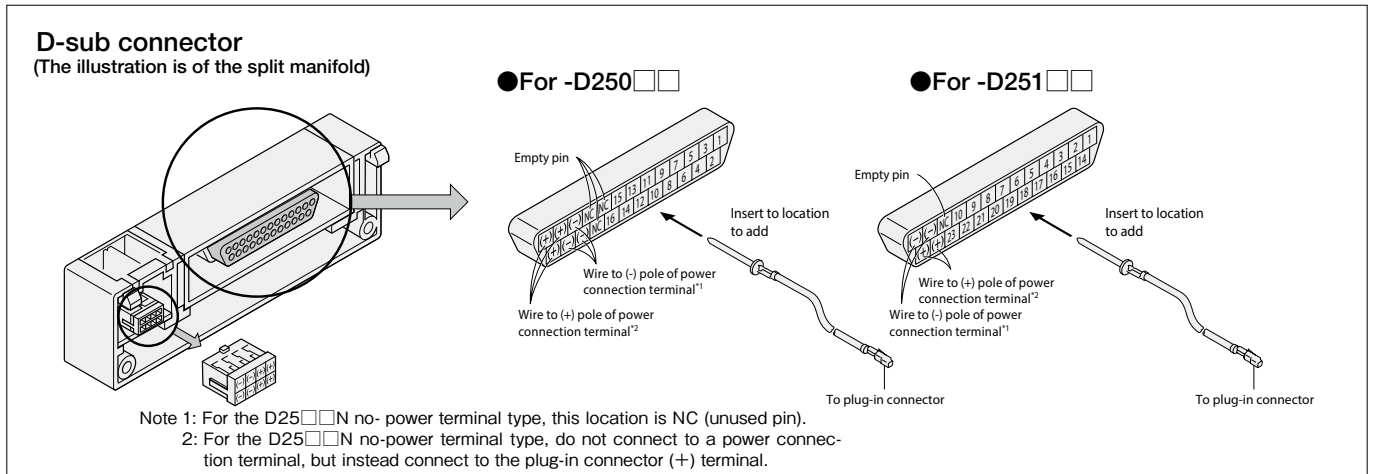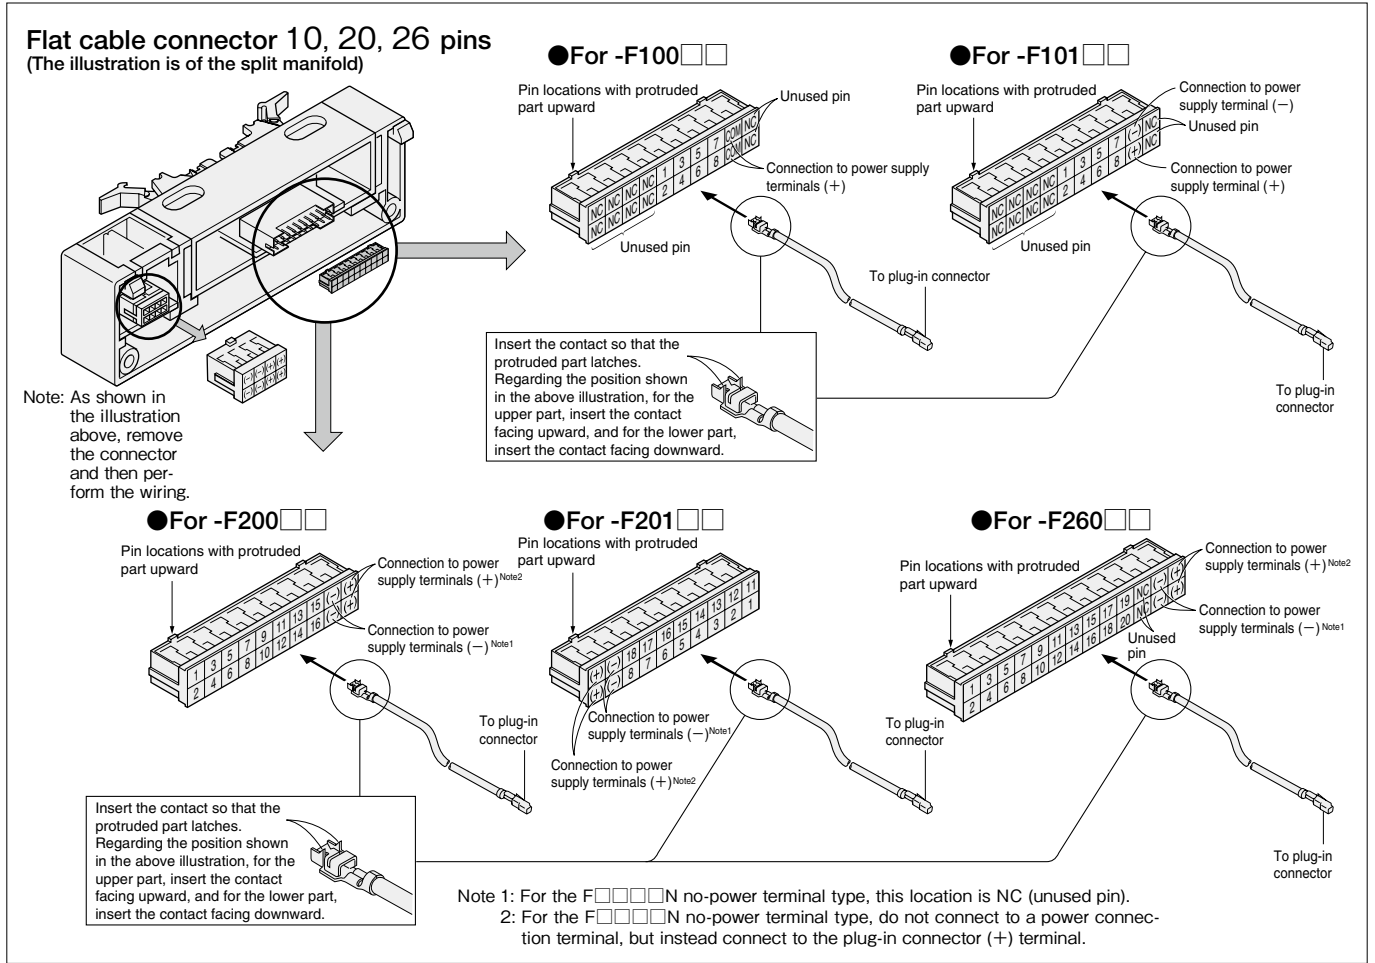


Remarks: The easy assembly type has internal wiring for each control point by default, so it is not necessary to add wiring.

Serial transmission block (The illustration is of the split manifold)




● For 16 outputs

● For 32 outputs

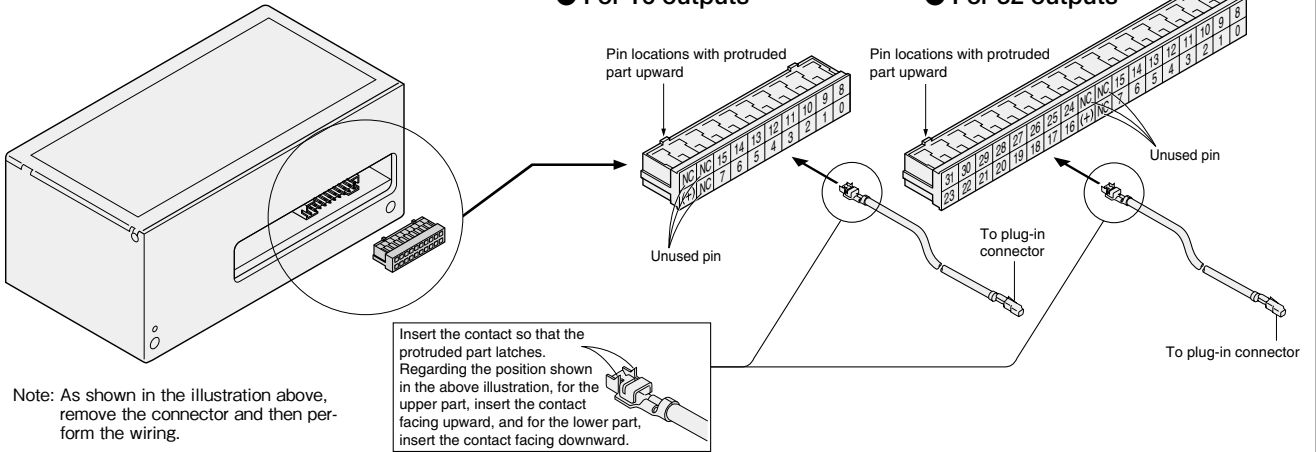

Remarks: The easy assembly type has internal wiring for each control point by default, so it is not necessary to add wiring.

F18 Series Detailed Diagram of Wiring Block Internal Connections

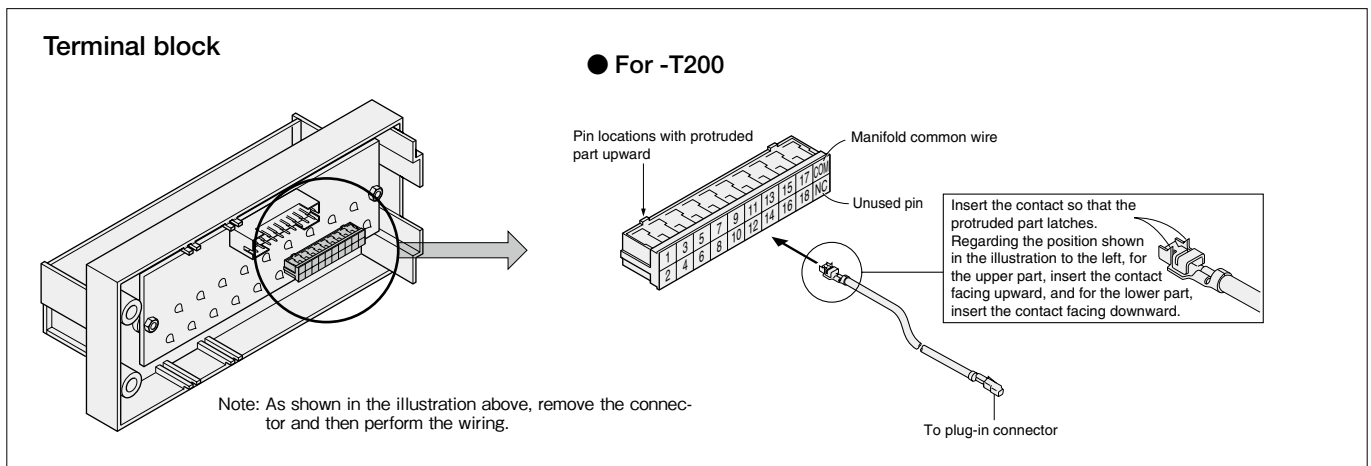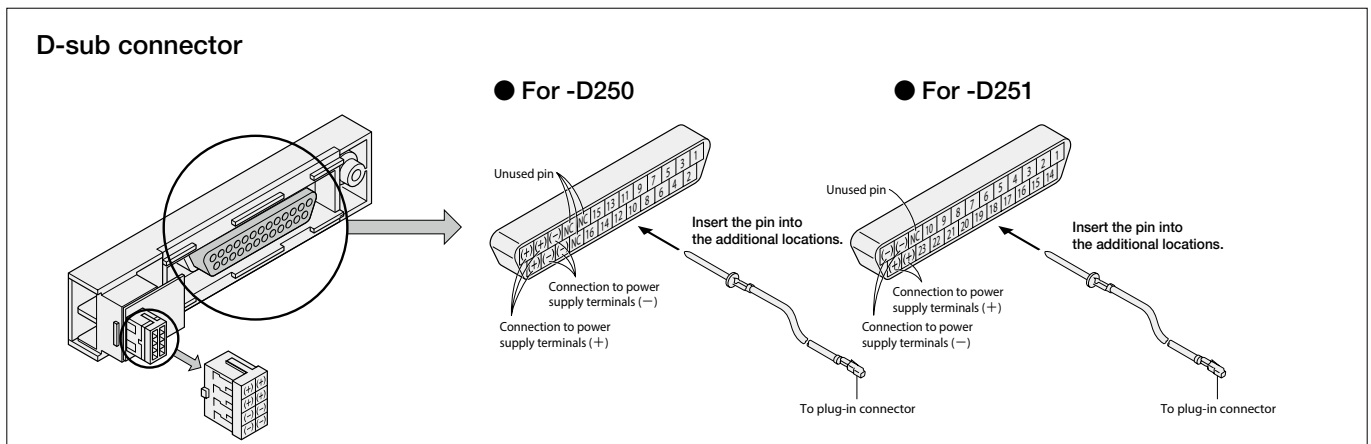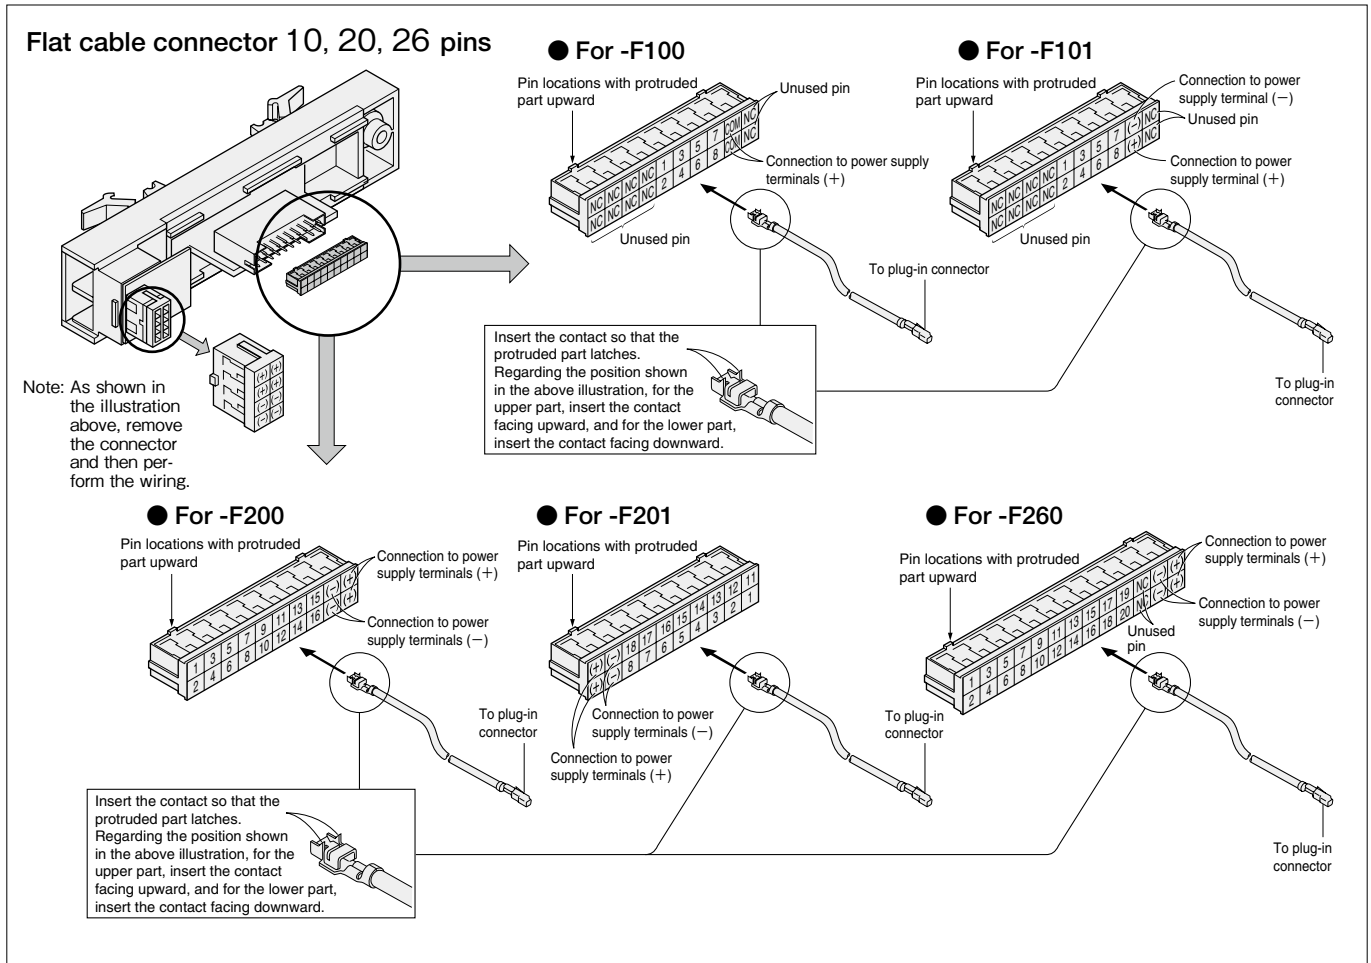


Product Configurations for the F Series Serial Transmission type

When ordering the serial transmission type, note that the product configurations vary between the F10 and F15 series, and the F18 series.

■ For F10 and F15 series

● **Models compatible with integrated transmission block**


- For CC-Link
- For DeviceNet
- For CompoNet
- For EtherCAT (the shape differs to that below)
- For EtherNet/IP (the shape differs to that below)

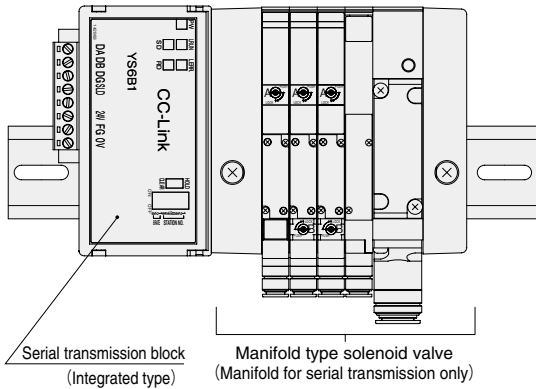

● **Models for stand-alone transmission block**

The manifold body and serial transmission block are connected with a flat cable.


- For Omron B7A Link Terminal

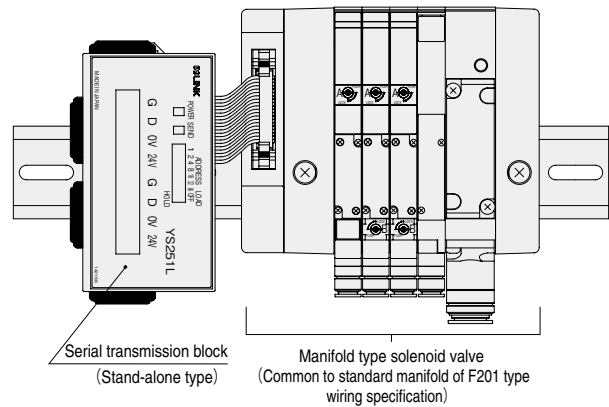

■ For F18 series

● **Models compatible with integrated transmission block**


- For Omron B7A Link Terminal
- For CC-Link
- For DeviceNet
- For EtherCAT (the shape differs to that below)
- For EtherNet/IP (the shape differs to that below)

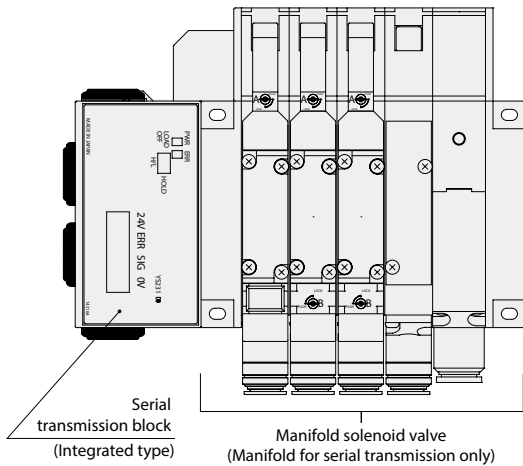

● **Models for stand-alone transmission block**

The manifold body and serial transmission block are connected with a flat cable.

- For CompoNet

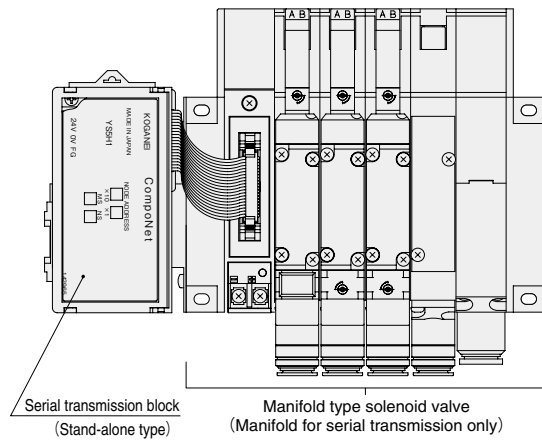

Specifications of Serial Transmission Type

General Specifications

Voltage	24VDC ±10%
Operating temperature range	5~50° C [41~122° F]
Vibration resistance	49.0 m/s ² [5G]
Shock resistance	98.1 m/s ² [10G]


● For details about specifications, see each user's manual (see below).

Serial Transmission Block, Terminal Block (LED) Part Names

● For OMRON B7A Link Terminal

Transmission block specification: -31 (standard type),
-32 (high-speed type)
(F10, F15 and F18 split manifold/Easy assembly type)

Output selecting switch in faulty operation



LED indicator

Indicator	Description
PWR	•Lights up when power is turned on
ERR	•Lights up during faulty transmission

Remarks

● Connection method: 1 to 1

(Transmission block spec.)	Standard type (-31)	High-speed type (-32)
Transmission delay time	Max. 31 ms	Max. 5 ms
Transmission distance	Max. 500 m [1640 ft]	Max. 100 m [328 ft]

※ For details of B7A Link Terminal, see the OMRON catalog, user's manual, etc.

● Number of outputs per block

Maximum of 16 solenoids

● Error output specifications

Output type: NPN open collector

Rated load voltage: 24VDC

Output current: Sink current MAX. 40 mA


● Related materials: User's manual, document No. BK-HV038

● For CC-Link




Transmission block specification: -B1 (16 outputs)
(F10 and F15 split manifold/Easy assembly type)

Dip switches for various settings

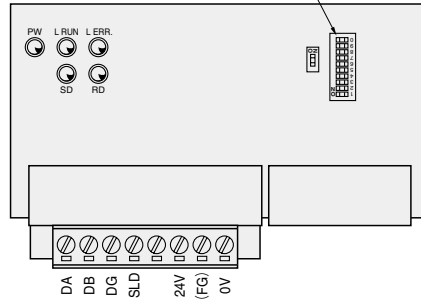

(F18 split manifold)

Transmission speed setting switch
Station number setting switches

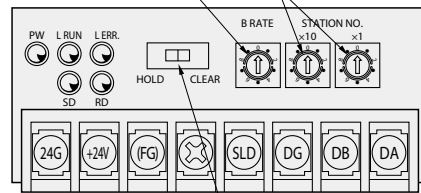

HOLD/CLEAR switch

LED indicator

Indicator	Description
PW	•Lights up when power is turned on
L RUN	•Lights up when normal data is received from master station
SD	•Lights up during sending data
RD	•Lights up during receiving data
L ERR.	•Lights up during transmission errors, and shuts off when time is over Lights up due to station number setting error or transmission speed setting error

Remarks

※ Conforms to CC-Link.

● Number of outputs per block

16 solenoids (transmission block specification: -B1)

※ Since the block occupies 1 station, if remote I/O stations are entirely composed of the blocks, a maximum of 64 units can be connected to 1 master station.


● Related materials: User's manual, document No. BK-HV041

Serial Transmission Block, Terminal Block (LED) Part Names

● For CC-Link



Transmission block specification: -B3 (32 outputs)
(F10 and F15 split manifold/Easy assembly type)

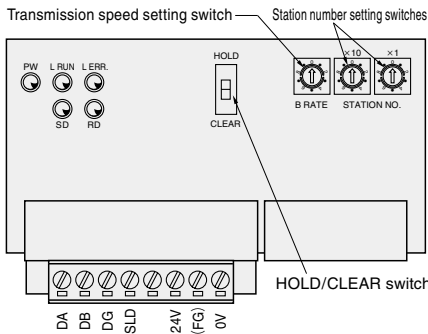

LED indicator


Indicator	Description
PW	•Lights up when power is turned on
L RUN	•Lights up when normal data is received from master station
SD	•Lights up during sending data
RD	•Lights up during receiving data
L ERR.	•Lights up during transmission errors, and shuts off when time is over Lights up due to station number setting error or transmission speed setting error

Remarks

- ※ Conforms to CC-Link.
- **Number of outputs per block**
32 solenoids (transmission block specification: -B3)
- ※ Since the block occupies 1 station, if remote I/O stations are entirely composed of the blocks, a maximum of 64 units can be connected to 1 master station.
- **Related materials:** User's manual, document No.BK-HV041

● For DeviceNet

Transmission block specification: -D1 (16 outputs), -D3 (32 outputs)
(F10, F15 and F18 split manifold/Easy assembly type)

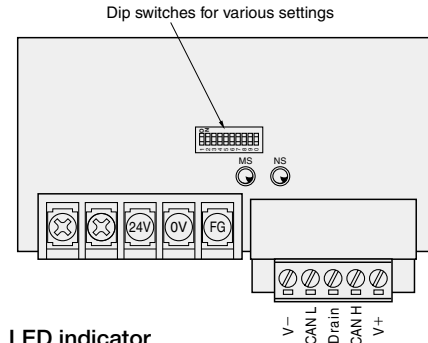

LED indicator


Indicator	State	Color	Description
MS	Lights up	Green	• Normal state
	Flashing		• No setting state
	Lights up	Red	• Serious breakdown
	Flashing		• Minor breakdown
	Shuts off		• No power supply
NS	Lights up	Green	• Communication connection completed
	Flashing		• No communication connection
	Lights up	Red	• Serious communication fault
	Flashing		• Minor communication fault
	Shuts off		• No power supply

Remarks

- ※ Conforms to DeviceNet.
- **Number of outputs per block**
A maximum of 16 solenoids: -D1
A maximum of 32 solenoids: -D3
- **Related materials:** User's manual, document BK-HV042

● For CompoNet

Transmission block specification: -H1 (16 outputs)
(F10, F15 and F18 split manifold/Easy assembly type)

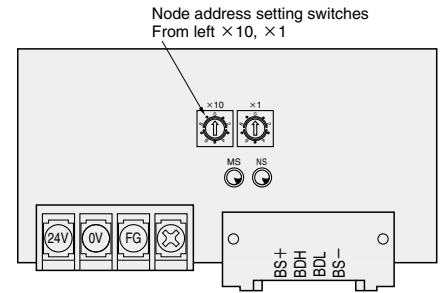

LED indicator


Indicator	State	Color	Description
MS	Lights up	Green	• Normal state
	Lights up	Red	• Serious breakdown
	Flashing	Red	• Minor breakdown
	Shuts off	—	• Power OFF/In preparation
NS	Lights up	Green	• Online/Access state
	Flashing	Green	• Online/No-access state
	Lights up	Red	• Serious communication fault
	Flashing	Red	• Minor communication fault
	Shuts off	—	• Power OFF/In preparation

Remarks

- ※ Conforms to CompoNet.
- **Number of outputs per block**
16 solenoids (transmission block specification: -H1)
- **Related materials:** User's manual, document No.BK-HV043
- ※ The communication connector is sold by Omron Corporation. Direct your inquiries to Omron.

● EtherCAT Compliant

Transmission block specifications: -K1 (16 outputs), -K3 (32 outputs)
(F10, F15 and F18 split manifold/Easy assembly type)

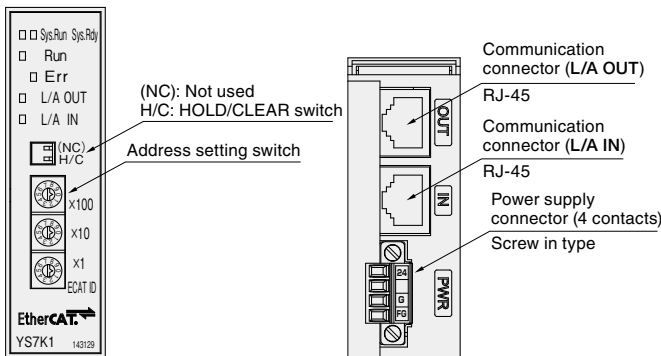

LED indicator

Indicator	State	Color	Description
Sys.Run/ Sys.Rdy	Lit/Not lit	Green/yellow	• Transmission block operation normal
	Flashing/flashing	Green/yellow	• Transmission block initialization
	Not lit/lit or flashing	Green/yellow	• Transmission block error
	Not lit/Not lit	Green/yellow	• Transmission block power OFF
Run	Off	Green	• INIT
	Flashing (blinking)	Green	• PRE-OPERATIONAL
	Flashing (single flash)	Green	• SAFE-OPERATIONAL
Err	Lighted	Green	• OPERATIONAL
	Off	Red	• No error
	Flashing (blinking)	Red	• Invalid setting
	Flashing (single flash)	Red	• Unrequested change in status
L/A OUT L/A IN	Flashing (double flash)	Red	• Communication disconnect
	Lighted	Green	• Normal communication
	Flashing	Green	• EtherCAT frame sending/receiving
	Off	Green	• Not connected

EtherCAT® is a registered trademark for patented technology licensed from Beckhoff Automation GmbH of Germany.

Remarks

- ※ Conforms to EtherCAT.
- **Number of outputs per block**
A maximum of 16 solenoids: -K1
A maximum of 32 solenoids: -K3
- We recommend category 5 (100BASE-TX) or higher twisted paired cables (CAT 5e STP) for the communications cables.
- You can download the ESI (EtherCAT Slave Information) file from our web site.
- **Related materials:** User's manual, document No.BK-HV044


■ For specifications and handling details, see the above-listed user's manuals (Document No. BK-HV038 - BK-HV045).

Serial Transmission Block, Terminal Block (LED) Part Names

●EtherNet/IP Compliant



Transmission block specifications: -M1 (16 outputs), -M3 (32 outputs)
 (F10, F15 and F18 split manifold/Easy assembly type)

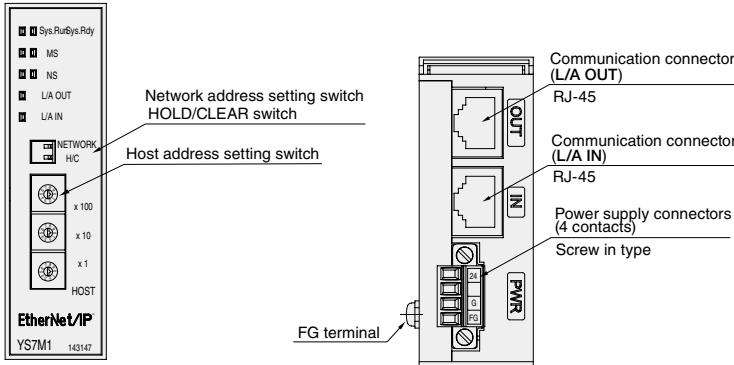

LED indicator

Indicator	LED state	Description
Sys.Run/Sys.Rdy	<input type="checkbox"/> Not lit/Not lit	Transmission block power off
	<input checked="" type="checkbox"/> Lit green/Not lit	Transmission block operation normal
MS	<input type="checkbox"/> Not lit	Transmission block power off
	<input checked="" type="checkbox"/> Flashing green	Setting IP address
	<input checked="" type="checkbox"/> Lit green	During normal operation
	<input checked="" type="checkbox"/> Flashing red	Recoverable error
NS	<input checked="" type="checkbox"/> Lit red	Unrecoverable error
	<input type="checkbox"/> Not lit	Transmission block power off
	<input checked="" type="checkbox"/> Flashing green	Normal communication being performed but connection not established
	<input checked="" type="checkbox"/> Lit green	Normal communication being performed and connection established
L/A	<input checked="" type="checkbox"/> Flashing red	Connection timeout
	<input checked="" type="checkbox"/> Lit red	Duplicate IP address detected
L/A	<input type="checkbox"/> Not lit	No connection
	<input checked="" type="checkbox"/> Lit green	Normal communication

EtherNet/IPTM is a trademark of ODVA.

Remarks

- ※Complies with EtherNet/IP.
- Number of outputs per block
 A maximum of 16 solenoids: -M1
 A maximum of 32 solenoids: -M3
- We recommend category 5 (100BASE-TX) or higher twisted paired cables (CAT 5e STP) for the communications cables.
- You can download the EDS (Electronic Data Sheet) file from our web site.
- Related materials: User's manual, document No. BK-HV045.

■For specifications and handling details, see the above-listed user's manuals (Document No. BK-HV038 - BK-HV045).



PC Board Manifold Pin Locations by Wiring Specification (Top View)

Flat cable connector (20-pin)

● -F200 (Maximum number of control pins: 16)

● -F201 (Maximum number of control pins: 16)

● Various dedicated cable assemblies are available. See p. 103, 104 for details.

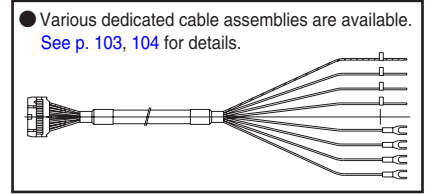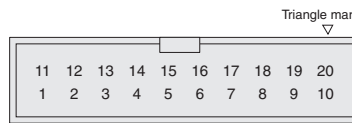

1 ~ 16 : Control pins
 17, 18 : (-) pins (Short-circuited inside)
 19, 20 : (+) pins (Short-circuited inside)


1 ~ 8 : Control pins
 11 ~ 18 : Control pins
 9, 19 : (-) pins (Short-circuited inside)
 10, 20 : (+) pins (Short-circuited inside)
 Caution : Connector pin numbers are assigned for the sake of convenience.
 Use the ▽ mark as the reference.

Remark: Socket and strain relief for flat cable are included at shipping.

※ For the relationship between the pin No. (terminal No.) and the corresponding solenoid, see p.46.

Detailed Diagram of Wiring System

● Positive common

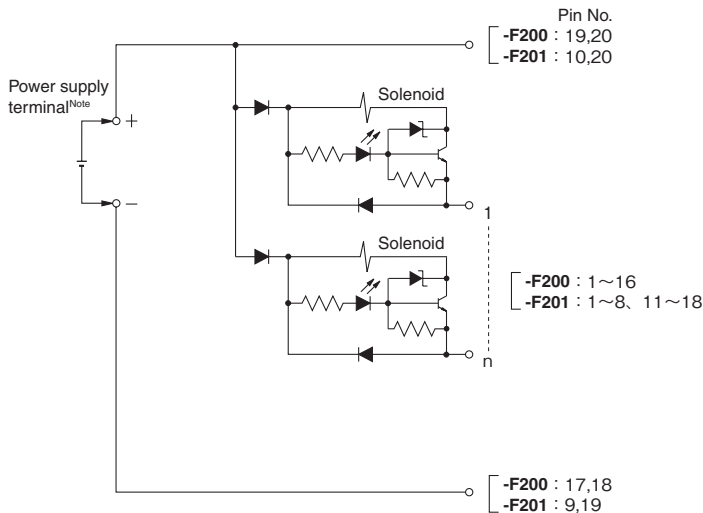

Note: For connecting a power line to the PC board manifold power terminal, see the "PC Board Manifold" precautions on p.23.



Remark: The internal circuit is of the standard type. For details of the low-current type, see p.23.

Pin No. and Corresponding Solenoid (For PC Board Manifold A Type and F Type)



The examples below show the relationship between the PC board manifold pin No. and the corresponding solenoid.
All the mounting examples show cases of the maximum number of control pins used.

Flat cable connector (20-pin)

● In the case of wiring specification **-F200** (Maximum number of control pins: 16)

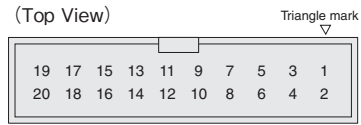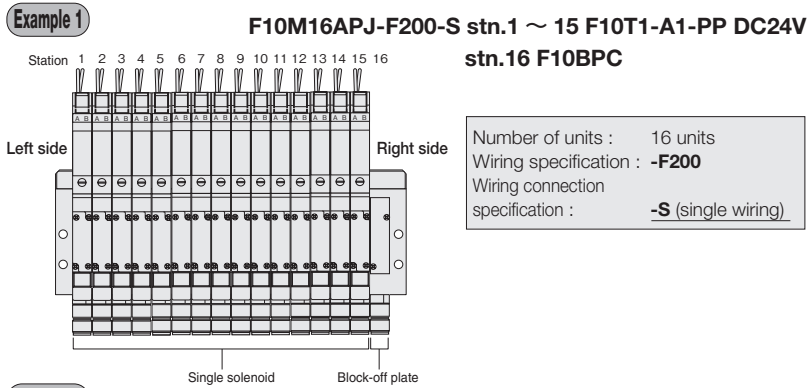



Pin No.	19	17	15	13	11	9	7	5	3	1
Valve No.	+	-	15A	13A	11A	9A	7A	5A	3A	1A
Pin No.	20	18	16	14	12	10	8	6	4	2
Valve No.	+	-	16A	14A	12A	10A	8A	6A	4A	2A

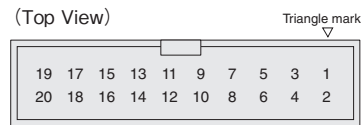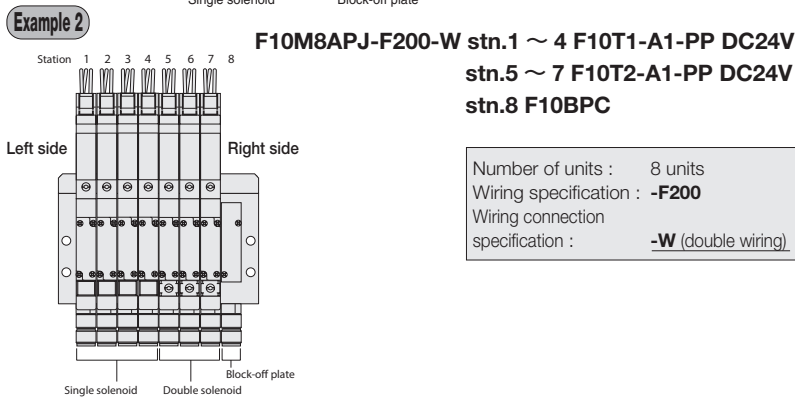



Pin No.	19	17	15	13	11	9	7	5	3	1
Valve No.	+	-	8A	7A	6A	5A	4A	3A	2A	1A
Pin No.	20	18	16	14	12	10	8	6	4	2
Valve No.	+	-	8B	7B	6B	5B	4B	3B	2B	1B

Flat cable connector (20-pin)

● In the case of wiring specification **-F201** (Maximum number of control pins: 16)

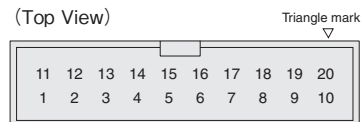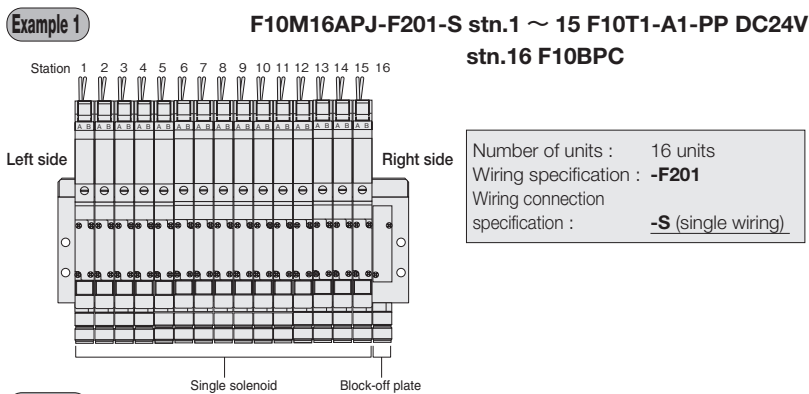

Pin No.	11	12	13	14	15	16	17	18	19	20
Valve No.	9A	10A	11A	12A	13A	14A	15A	16A	-	+
Pin No.	1	2	3	4	5	6	7	8	9	10
Valve No.	1A	2A	3A	4A	5A	6A	7A	8A	-	+

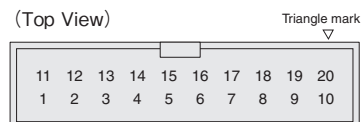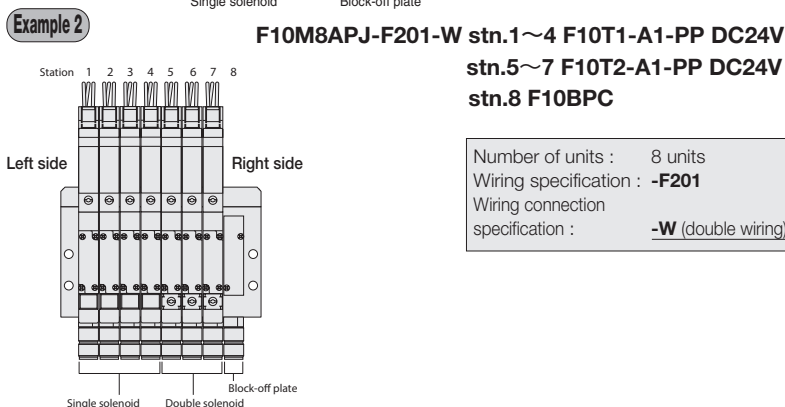

Pin No.	11	12	13	14	15	16	17	18	19	20
Valve No.	5A	5B	6A	6B	7A	7B	8A	8B	-	+
Pin No.	1	2	3	4	5	6	7	8	9	10
Valve No.	1A	1B	2A	2B	3A	3B	4A	4B	-	+


Caution: Connector pin numbers are assigned for the sake of convenience.
Use the ▽ mark as the reference.

Notes: 1. The valve No.1A, 1B, 2A, 2B... numerals show the stn. numbers in order, while the letters A and B show the A and B sides of the solenoid.
2. The stn. numbers are counted from the left, 1, 2..., with the solenoid on top and the valve in front.

Pin (Terminal) Locations by Wiring Specification (Top View) (For Monoblock Manifold A Type and F Type Wire-Saving Type, Split Manifold Plug-in Type, Easy Assembly Type Manifold Plug-in Type)

Flat cable connector (10-pin)

●-F100□□ (Maximum number of control pins: 8)




1~8 : Control pins
9, 10: Common pins (short-circuited within the wiring block)

●-F101□□ (Maximum number of control pins: 8)




1~8 : Control pins
9 : (-) pin ^{Note}
10 : (+) pin
Note: For no-power terminal type, set to NC (unused pin).

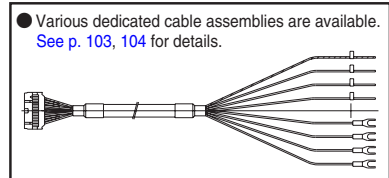


Flat cable connector (20-pin)

●-F200□□ (Maximum number of control pins: 16)

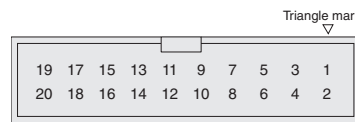

1~16 : Control pins
17, 18 : (-) pins (short-circuited within the wiring block)^{Note}
19, 20 : (+) pins (short-circuited within the wiring block)
Note: For no-power terminal type, set to NC (unused pin).

●-F201□□ (Maximum number of control pins: 16)



1~8 : Control pins
11~18 : Control pins
9, 19 : (-) pins (short-circuited within the wiring block)^{Note}
10, 20 : (+) pins (short-circuited within the wiring block)
Note: For no-power terminal type, set to NC (unused pin).
Caution : Connector pin numbers are assigned for the sake of convenience.
Use the ▽ mark as the reference.

Flat cable connector (26-pin)

●-F260□□ (Maximum number of control pins: 20)



1~20 : Control pins
23, 24 : (-) pins (short-circuited within the wiring block)^{Note}
25, 26 : (+) pins (short-circuited within the wiring block)
Note: For no-power terminal type, set to NC (unused pin).

D-sub connector (25-pin)

●-D250□□ (Maximum number of control pins: 16)



1~16 : Control pins
20, 21, 22 : (-) pins (short-circuited within the wiring block)^{Note}
23, 24, 25 : (+) pins (short-circuited within the wiring block)
Note: For no-power terminal type, set to NC (unused pin).

Caution: The above pin numbers are assigned based on the solenoid valve wiring sequence for the sake of convenience.
They differ from the pin locations and pin numbers (marking) prescribed (JIS-X5101) for the Data Circuit-terminating Equipment (DCE).

●-D251□□ Pin locations based on JIS (Maximum number of control pins: 20)



1~10, 14~23 : Control pins
12, 13 : (-) pins (short-circuited within the wiring block)^{Note}
24, 25 : (+) pins (short-circuited within the wiring block)
Note: For no-power terminal type, set to NC (unused pin).

Terminal block type (19 terminals, M3 screws)

●-T200 (Maximum number of control pins: 18)



1~18 : Control terminals
COM : Common terminal


Caution: Apply the tightening torque for the terminal screw (M3) to 49.0 N·cm [4.3 in·lbf] or less.

※ For the relationship between the pin No.(terminal No.) and the corresponding solenoid, see p. 52-56.

F10 and F15 Series Detailed Diagram of Wiring System


Flat cable connector and D-sub connector (12VDC and 24VDC)

● Positive common

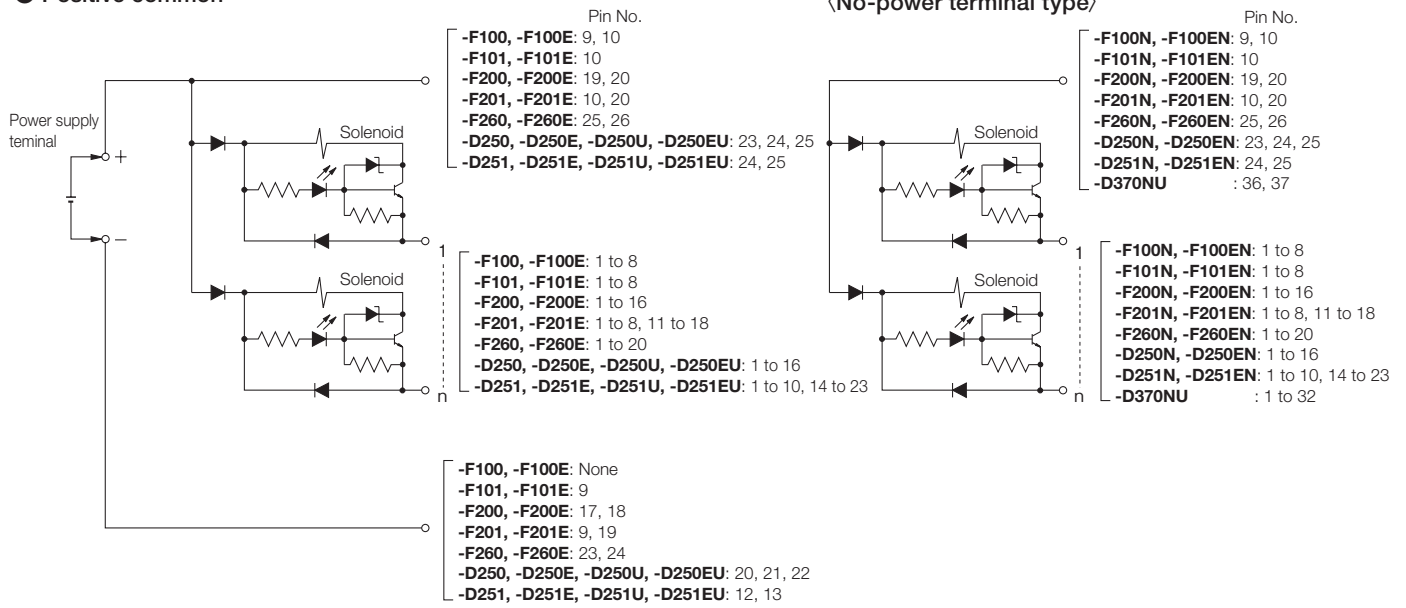

Remark: The internal circuit is of the standard type. For details of the low-current type, see p23.


● Negative common (-129W)

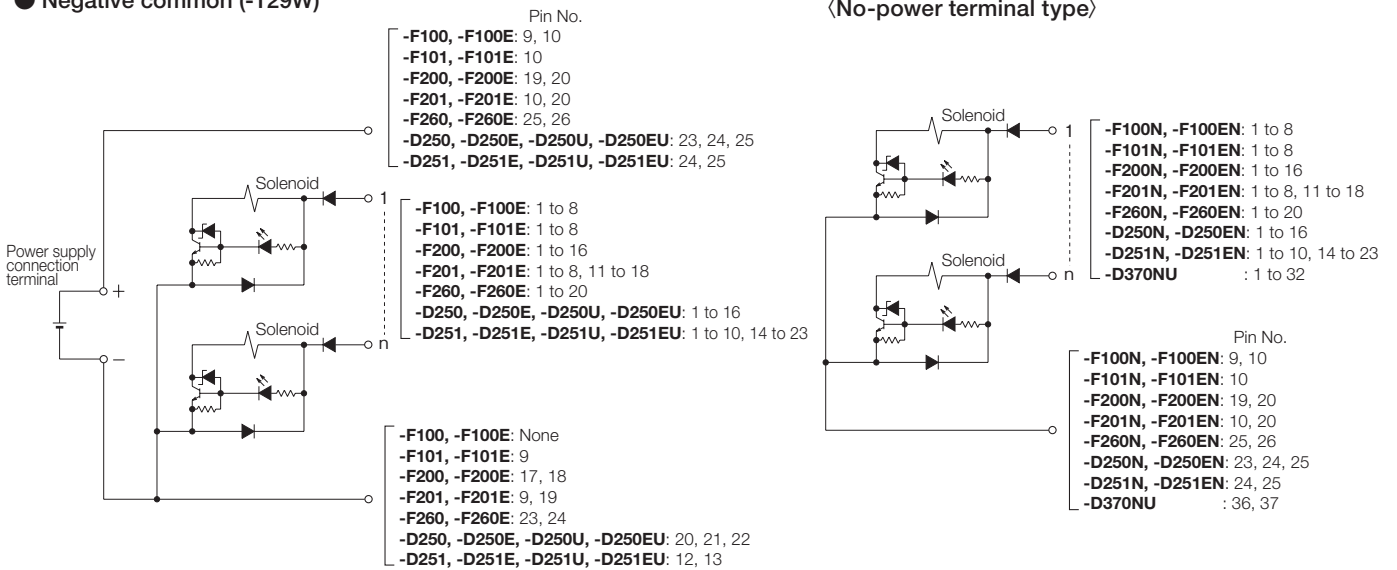

Remark: The internal circuit is of the standard type. For details of the low-current type, see p23.


F10, F15 Series Detailed Diagram of Wiring System

D-sub connector (For 100VAC and 120VAC specification)

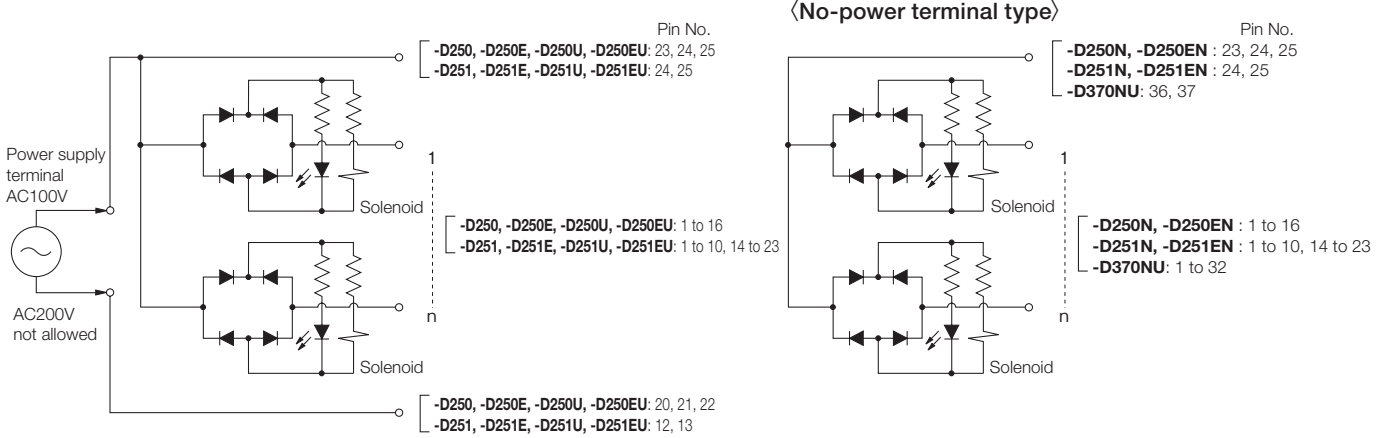


Terminal block (For 12VDC and 24VDC specifications)


● Positive common

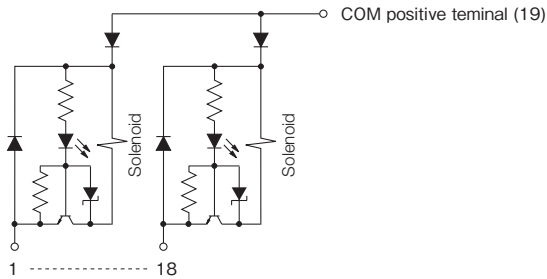

● Negative common (-129W)

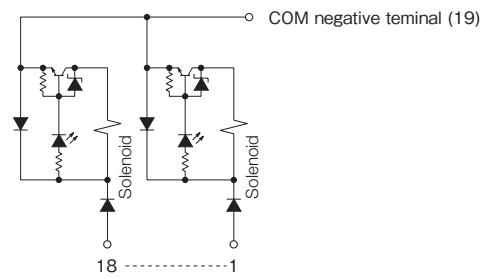

Terminal block (For 100VAC and 120VAC specification)

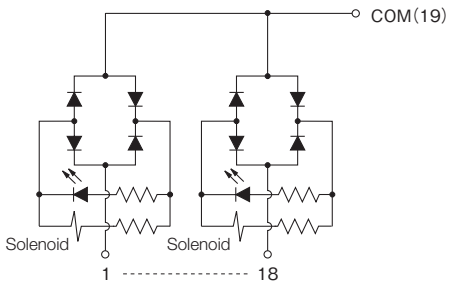


Remark: The internal circuit is of the standard type. For details of the low-current type, see p.23.




F18 Series Detailed Diagram of Wiring System

Flat cable connector and D-sub connector (12VDC and 24VDC)



● Positive common

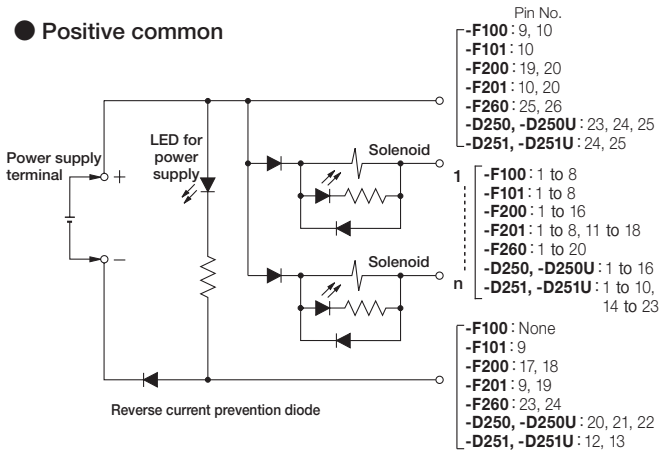

● Negative common (-129W)

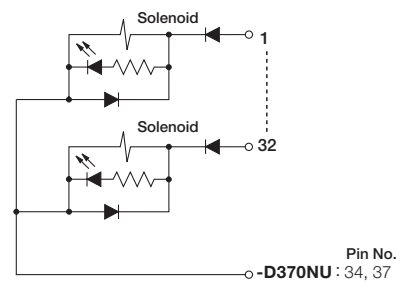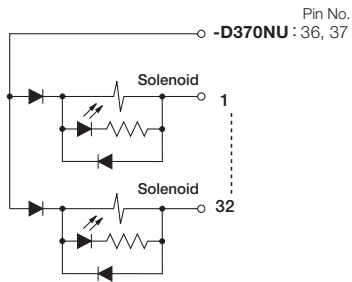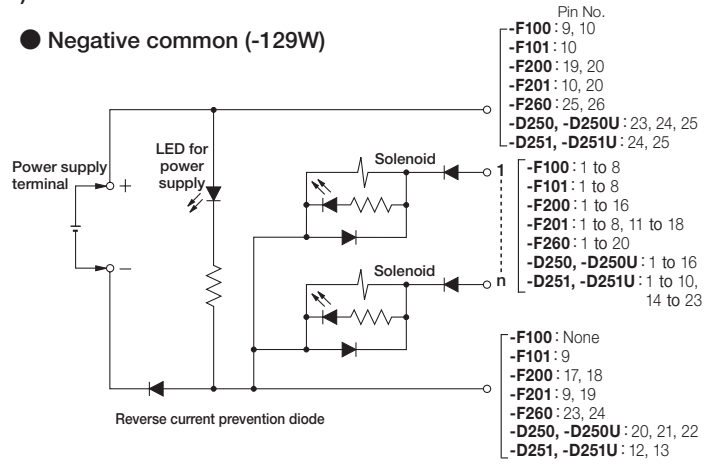


D-sub connector (For 100VAC and 120VAC specification)

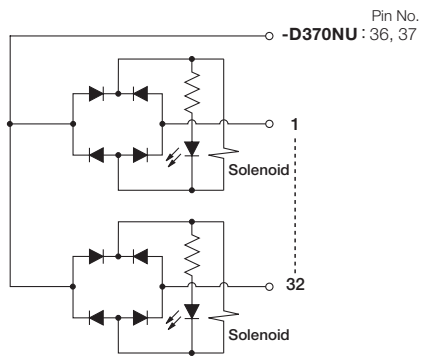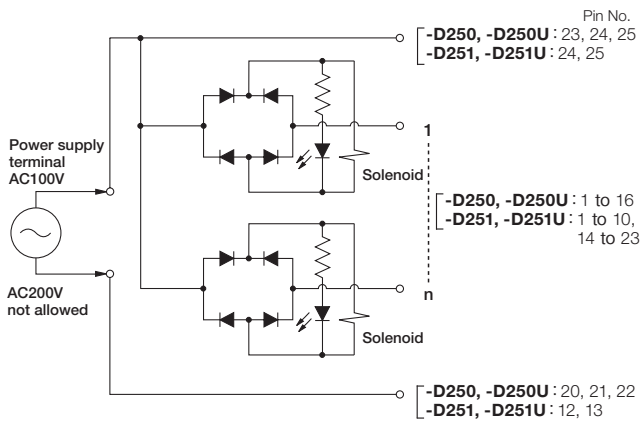


F18 Series Detailed Diagram of Wiring System

Terminal block (For 12VDC and 24VDC specifications)


● Positive common

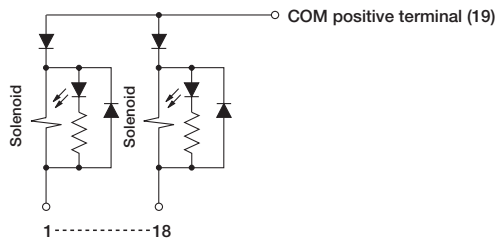

● Negative common (-129W)

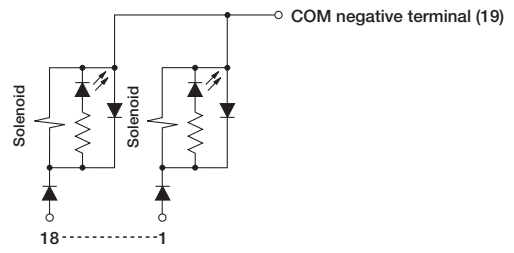

Terminal block (For 100VAC and 120VAC specification)

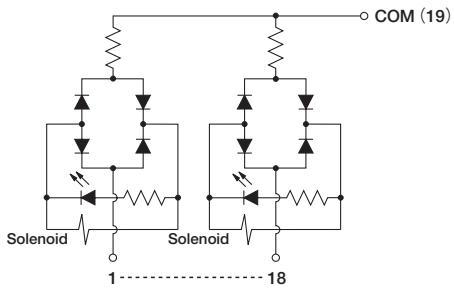


Pin No. (Terminal No.) and Corresponding Solenoid

(For Monoblock Manifold A Type and F Type Wire-Saving Type, Split Manifold Plug-in Type, Easy Assembly Type Manifold)


The examples below show the relationship between the split manifold pin No. (terminal No.) and the corresponding solenoid. This is the same for monoblock manifold A type wire-saving type, monoblock manifold F type wire-saving type and easy assembly type manifold. All the mounting examples show cases of the maximum number of control pins used.

Flat cable connector (10-pin)


● In the case of wiring specification **-F100**□□ (Maximum number of control pins: 8)

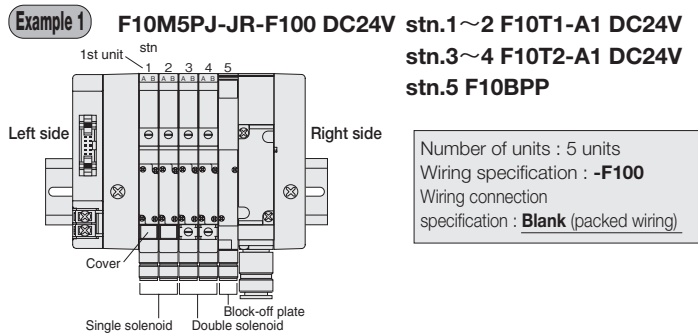


(Top View) Triangle mark



Pin No.	9	7	5	3	1
Valve No.	+	5A	4A	3A	1A
Pin No.	10	8	6	4	2
Valve No.	+	5B	4B	3B	2A

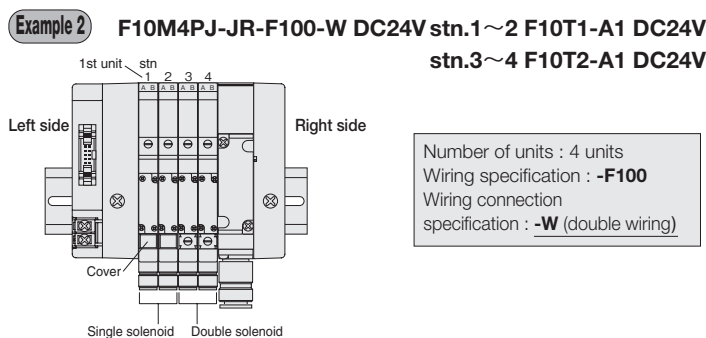


(Top View) Triangle mark




Pin No.	9	7	5	3	1
Valve No.	+	4A	3A	2A	1A
Pin No.	10	8	6	4	2
Valve No.	+	4B	3B	2B	1B

Flat cable connector (10-pin)

● In the case of wiring specification **-F101**□□ (Maximum number of control pins: 8)

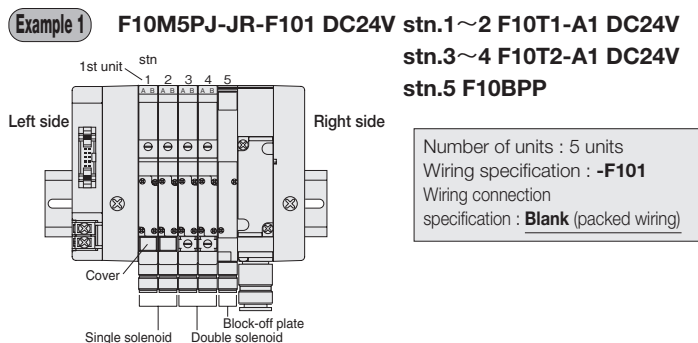


(Top View) Triangle mark




Pin No.	9	7	5	3	1
Valve No.	-	5A	4A	3A	1A
Pin No.	10	8	6	4	2
Valve No.	+	5B	4B	3B	2A

Note: For the no-power terminal type, set pin No.9 to NC (unused pin).

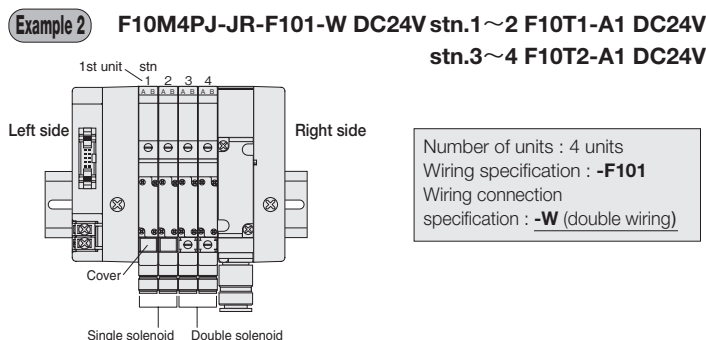

(Top View) Triangle mark



Pin No.	9	7	5	3	1
Valve No.	-	4A	3A	2A	1A
Pin No.	10	8	6	4	2
Valve No.	+	4B	3B	2B	1B

Note: For the no-power terminal type, set pin No.9 to NC (unused pin).



- Notes:
1. The valve No. 1A, 1B, 2A, 2B... numerals show the stn. numbers in order, while the letters A and B show the A and B sides of the solenoid.
 2. The stn. numbers are counted from the left, 1, 2... with the solenoid on top and the valve in front.
 3. When selecting wiring connection specification **-W**, all wiring becomes double wiring, regardless of valve specifications.
 4. Caution should be exercised that the block-off plate is always double wiring (allocated 2 control pins to 1 unit), regardless of the wiring connection specifications.
 5. Connector pin numbers are assigned for the sake of convenience. Use the ▽ mark as the reference.

The examples below show the relationship between the split manifold pin No. (terminal No.) and the corresponding solenoid. This is the same for monoblock manifold A type wire-saving type, monoblock manifold F type wire-saving type and easy assembly manifold. All the mounting examples show cases of the maximum number of control pins used.

Flat cable connector (20-pin)

● In the case of wiring specification **-F200**□□ (Maximum number of control pins: 16)



Example 1

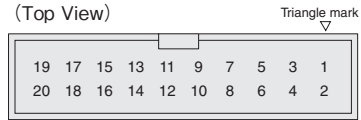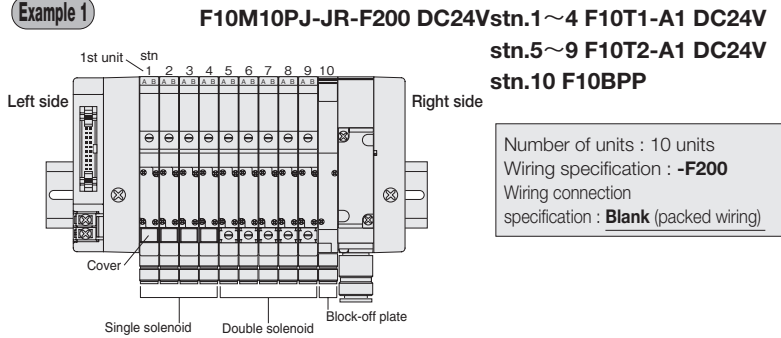

Pin No.	19	17	15	13	11	9	7	5	3	1
Valve No.	+	-	10A	9A	8A	7A	6A	5A	3A	1A
Pin No.	20	18	16	14	12	10	8	6	4	2
Valve No.	+	-	10B	9B	8B	7B	6B	5B	4A	2A

Note: For the no-power terminal type, set pins No.17 and 18 to NC (unused pins).

Example 2

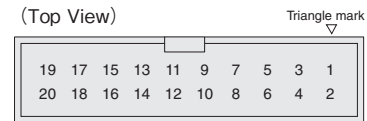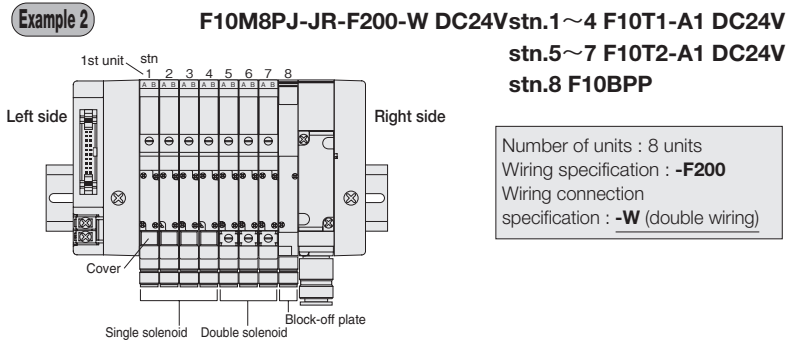



Pin No.	19	17	15	13	11	9	7	5	3	1
Valve No.	+	-	8A	7A	6A	5A	4A	3A	2A	1A
Pin No.	20	18	16	14	12	10	8	6	4	2
Valve No.	+	-	8B	7B	6B	5B	4B	3B	2B	1B

Note: For the no-power terminal type, set pins No.17 and 18 to NC (unused pins).

Flat cable connector (20-pin)

● In the case of wiring specification **-F201**□□ (Maximum number of control pins: 16)



Example 1

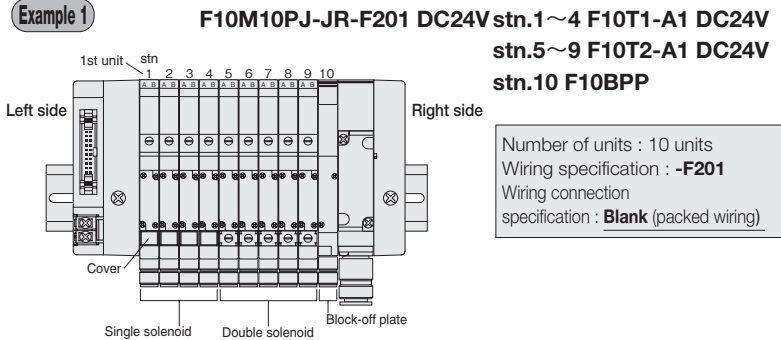

Pin No.	11	12	13	14	15	16	17	18	19	20
Valve No.	7A	7B	8A	8B	9A	9B	10A	10B	-	+
Pin No.	1	2	3	4	5	6	7	8	9	10
Valve No.	1A	2A	3A	4A	5A	5B	6A	6B	-	+

Note: For the no-power terminal type, set pins No.9 and 19 to NC (unused pins).

Example 2

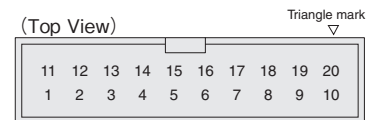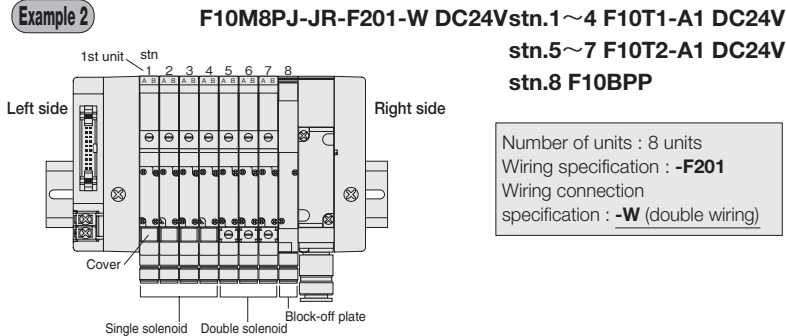

Pin No.	11	12	13	14	15	16	17	18	19	20
Valve No.	5A	5B	6A	6B	7A	7B	8A	8B	-	+
Pin No.	1	2	3	4	5	6	7	8	9	10
Valve No.	1A	1B	2A	2B	3A	3B	4A	4B	-	+

Note: For the no-power terminal type, set pins No.9 and 19 to NC (unused pins).

Caution: Connector pin numbers are assigned for the sake of convenience. Use the ▼ mark as the reference.



- Notes:
1. The valve No.1A, 1B, 2A, 2B... numerals show the stn. numbers in order, while the letters A and B show the A and B sides of the solenoid.
 2. The stn. numbers are counted from the left, 1, 2..., with the solenoid on top and the valve in front.
 3. When selecting wiring connection specification **-W**, all wiring becomes double wiring, regardless of valve specifications.
 4. Caution should be exercised that the block-off plate is always double wiring (allocated 2 control pins to 1 unit), regardless of the wiring connection specifications.
 5. Connector pin numbers are assigned for the sake of convenience. Use the ▼ mark as the reference.

Pin No. (Terminal No.) and Corresponding Solenoid (For Monoblock Manifold A Type and F Type, Wire-Saving Type,) Split Manifold Plug-in Type, Easy Assembly Type Manifold

The examples below show the relationship between the split manifold pin No. (terminal No.) and the corresponding solenoid. This is the same for monoblock manifold A type wire-saving type, monoblock manifold F type wire-saving type and easy assembly type manifold. All the mounting examples show cases of the maximum number of control pins used.



Flat cable connector (26-pin)

● In the case of wiring specification **-F260** (Maximum number of control pins: 20)

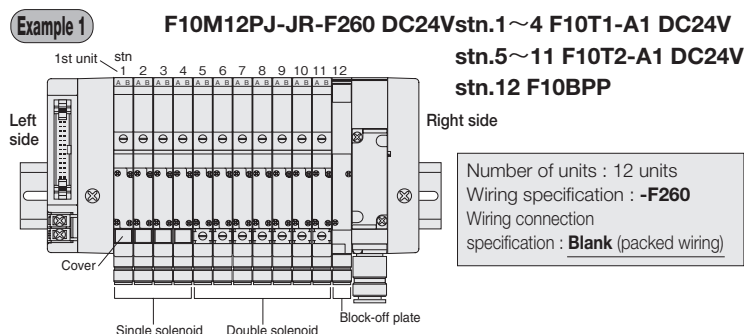

Pin No.	25	23	21	19	17	15	13	11	9	7	5	3	1
Valve No.	+	-		12A	11A	10A	9A	8A	7A	6A	5A	3A	1A
Pin No.	26	24	22	20	18	16	14	12	10	8	6	4	2
Valve No.	+	-		12B	11B	10B	9B	8B	7B	6B	5B	4A	2A

Note: For the no-power terminal type, set pins No.23 and 24 to NC (unused pins).

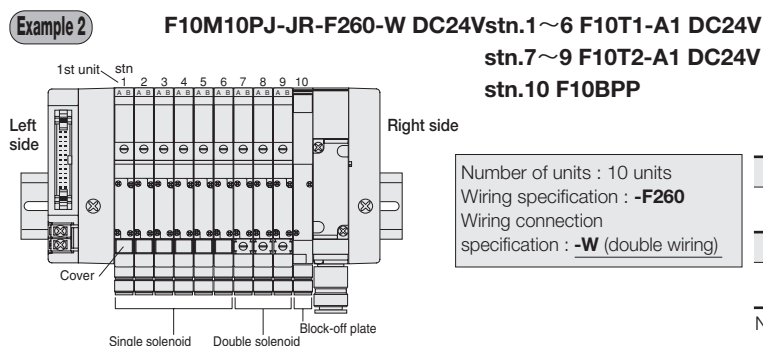

Pin No.	25	23	21	19	17	15	13	11	9	7	5	3	1
Valve No.	+	-		10A	9A	8A	7A	6A	5A	4A	3A	2A	1A
Pin No.	26	24	22	20	18	16	14	12	10	8	6	4	2
Valve No.	+	-		10B	9B	8B	7B	6B	5B	4B	3B	2B	1B

Note: For the no-power terminal type, set pins No.23 and 24 to NC (unused pins).

- Notes:
1. The valve No.1A, 1B, 2A, 2B... numerals show the stn. numbers in order, while the letters A and B show the A and B sides of the solenoid.
 2. The stn. numbers are counted from the left, 1, 2..., with the solenoid on top and the valve in front.
 3. When selecting wiring connection specification **-W**, all wiring becomes double wiring, regardless of valve specifications.
 4. Caution should be exercised that the block-off plate is always double wiring (allocated 2 control pins to 1 unit), regardless of the wiring connection specifications.
 5. Connector pin numbers are assigned for the sake of convenience. Use the ▽ mark as the reference.


The examples below show the relationship between the split manifold pin No. (terminal No.) and the corresponding solenoid. This is the same for monoblock manifold A type wire-saving type, monoblock manifold F type wire-saving type and easy assembly type manifold. All the mounting examples show cases of the maximum number of control pins used.

D-sub connector (25-pin)


● In the case of wiring specification **-D250**□□
(Maximum number of control pins: 16)

Caution: The connector pin numbers are assigned based on the solenoid valve wiring sequence for the sake of convenience. They differ from the pin locations and pin numbers (marking) prescribed (JIS-X5101) for the Data Circuit-terminating Equipment (DCE).

Example 1 **F10M10PJ-JR-D250 DC24V** stn.1~4 **F10T1-A1 DC24V**
stn.5~9 **F10T2-A1 DC24V**
stn.10 **F10BPP**

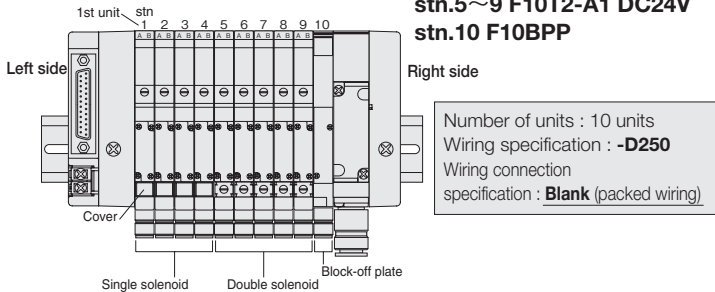


(Top View)

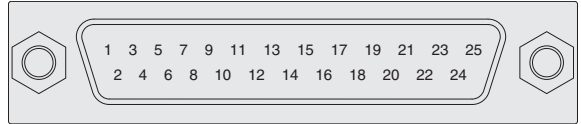

Pin No.	1	3	5	7	9	11	13	15	17	19	21	23	25
Valve No.	1A	3A	5A	6A	7A	8A	9A	10A			-	+	+
Pin No.	2	4	6	8	10	12	14	16	18	20	22	24	
Valve No.	2A	4A	5B	6B	7B	8B	9B	10B			-	-	+

Note: For the no-power terminal type, set pins No.20, 21, and 22 to NC (unused pins).

Example 2 **F10M8PJ-JR-D250-W DC24V** stn.1~4 **F10T1-A1 DC24V**
stn.5~7 **F10T2-A1 DC24V**
stn.8 **F10BPP**

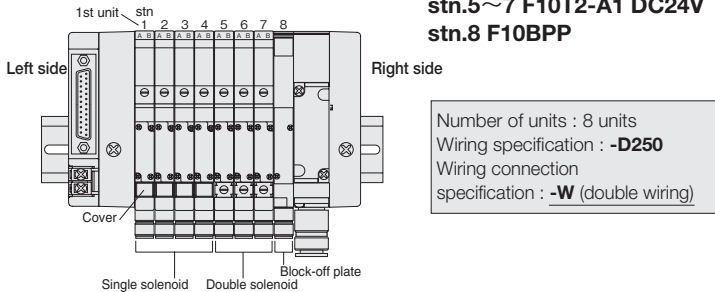

(Top View)




Pin No.	1	3	5	7	9	11	13	15	17	19	21	23	25
Valve No.	1A	2A	3A	4A	5A	6A	7A	8A			-	+	+
Pin No.	2	4	6	8	10	12	14	16	18	20	22	24	
Valve No.	1B	2B	3B	4B	5B	6B	7B	8B			-	-	+

Note: For the no-power terminal type, set pins No.20, 21, and 22 to NC (unused pins).

D-sub connector (25-pin)

● In the case of wiring specification **-D251**□□
Pin locations based on JIS (Maximum number of control pins: 20)

Example 1 **F10M12PJ-JR-D251 DC24V** stn.1~4 **F10T1-A1 DC24V**
stn.5~11 **F10T2-A1 DC24V**
stn.12 **F10BPP**

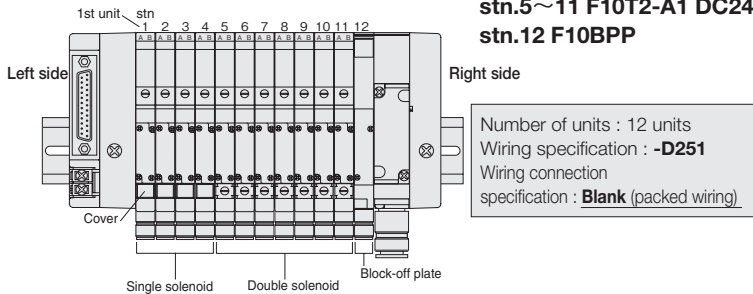


(Top View)



Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13
Valve No.	1A	2A	3A	4A	5A	5B	6A	6B	7A	7B		-	-
Pin No.	14	15	16	17	18	19	20	21	22	23	24	25	
Valve No.	8A	8B	9A	9B	10A	10B	11A	11B	12A	12B	+	+	

Note: For the no-power terminal type, set pins No.12 and 13 to NC (unused pins).

Example 2 **F10M10PJ-JR-D251-W DC24V** stn.1~6 **F10T1-A1 DC24V**
stn.7~9 **F10T2-A1 DC24V**
stn.10 **F10BPP**

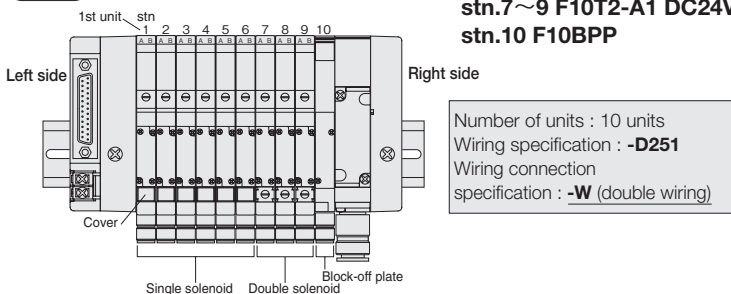

(Top View)



Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13
Valve No.	1A	1B	2A	2B	3A	3B	4A	4B	5A	5B		-	-
Pin No.	14	15	16	17	18	19	20	21	22	23	24	25	
Valve No.	6A	6B	7A	7B	8A	8B	9A	9B	10A	10B	+	+	

Note: For the no-power terminal type, set pins No.12 and 13 to NC (unused pins).

- Notes:
1. The valve No.1A, 1B, 2A, 2B... numerals show the stn. numbers in order, while the letters A and B show the A and B sides of the solenoid.
 2. The stn. numbers are counted from the left, 1, 2..., with the solenoid on top and the valve in front.
 3. When selecting wiring connection specification **-W**, all wiring becomes double wiring, regardless of valve specifications.
 4. Caution should be exercised that the block-off plate is always double wiring (allocated 2 control pins to 1 unit), regardless of the wiring connection specifications.

Pin No. (Terminal No.) and Corresponding Solenoid (For Split Manifold, Easy Assembly Type Manifold Plug-in Type)


The examples below show the relationship between the split manifold terminal No., the easy assembly type manifold terminal No. and the corresponding solenoid.

All the mounting examples show cases of the maximum number of control pins used.

Terminal block type (19 terminals, M3 screws)

● In the case of wiring specification **-T200** (Maximum number of control pins: 18)

Example 1

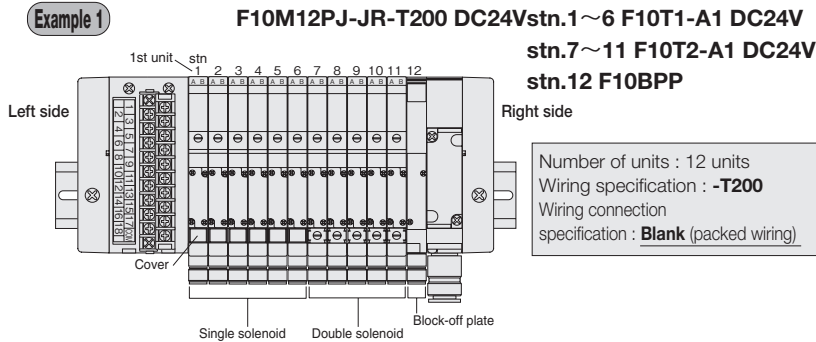


(Top View)

1	3	5	7	9	11	13	15	17	COM
2	4	6	8	10	12	14	16	18	

Terminal No.	1	3	5	7	9	11	13	15	17	COM
Valve No.	1A	3A	5A	7A	8A	9A	10A	11A	12A	+
Terminal No.	2	4	6	8	10	12	14	16	18	
Valve No.	2A	4A	6A	7B	8B	9B	10B	11B	12B	

Example 2

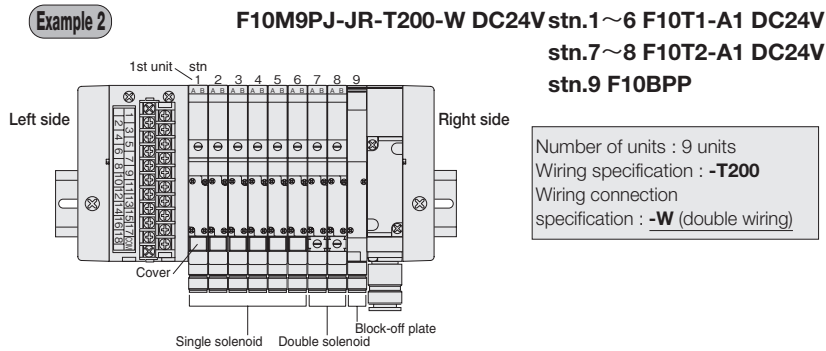

(Top View)

1	3	5	7	9	11	13	15	17	COM
2	4	6	8	10	12	14	16	18	

Terminal No.	1	3	5	7	9	11	13	15	17	COM
Valve No.	1A	2A	3A	4A	5A	6A	7A	8A	9A	+
Terminal No.	2	4	6	8	10	12	14	16	18	
Valve No.	1B	2B	3B	4B	5B	6B	7B	8B	9B	

- Notes: 1. The valve No. 1A, 1B, 2A, 2B... numerals show the stn. numbers in order, while the letters A and B show the A and B sides of the solenoid.
 2. The stn. numbers are counted from the left, 1, 2..., with the solenoid on top and the valve in front.
 3. When selecting wiring connection specification **-W**, all wiring becomes double wiring, regardless of valve specifications.
 4. Caution should be exercised that the block-off plate is always double wiring (allocated 2 control terminals to 1 unit), regardless of the wiring connection specifications.

F Series Cable Assembly by Wiring Specification

A dedicated cable assembly is provided for each wiring specification.

Order codes

FMA - - -

Cable length: 0.5 - 20 m [1.6-65.6 ft.] (enter at 0.5 m pitch)
 ※Cable used UL STYLE NO.20266 150V 80°C [176°F] AWG28 (7/0.127 [strands/mm])

Terminal processing


Types of dedicated cables

100W : -F100□□dedicated cable assembly
101W : -F101□□dedicated cable assembly
200W : -F200□□dedicated cable assembly
201W : -F201□□dedicated cable assembly
260W : -F260□□dedicated cable assembly
250W : -D250□□dedicated cable assembly
251W : -D251□□dedicated cable assembly

Blank: Loose wire [with dedicated label/No.]
Y: Y terminal (M3.5) [with marker tube/No.]

Note: Perform wiring operations correctly, while checking each pin location, connector No., label No., and marker tube No., etc.


●-F100□□dedicated cable assembly FMA-100W-□-□

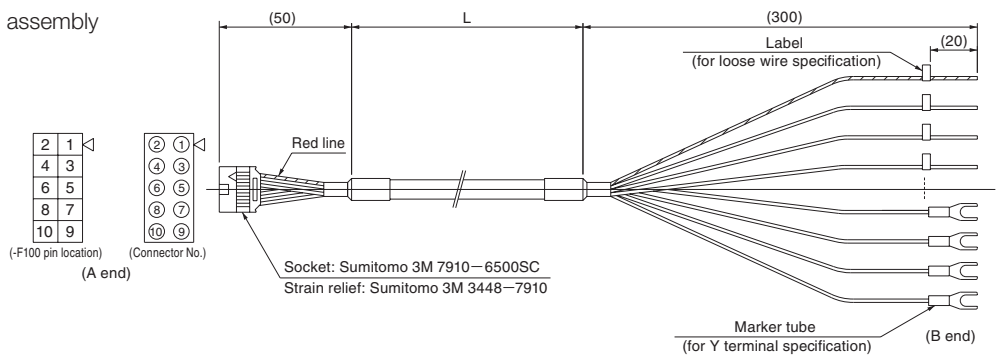

A end	-F100 pin location	1	2	3	4	5	6	7	8	9	10
	Connector No.	①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩
B end	Label, marker tube No.	1	2	3	4	5	6	7	8	COM	COM

●-F101□□dedicated cable assembly FMA-101W-□-□


Note: When wiring specification is the **-F101□N** (no power terminal) type, the -F101 pin location No.9 on the manifold side is set to NC (unused pin).

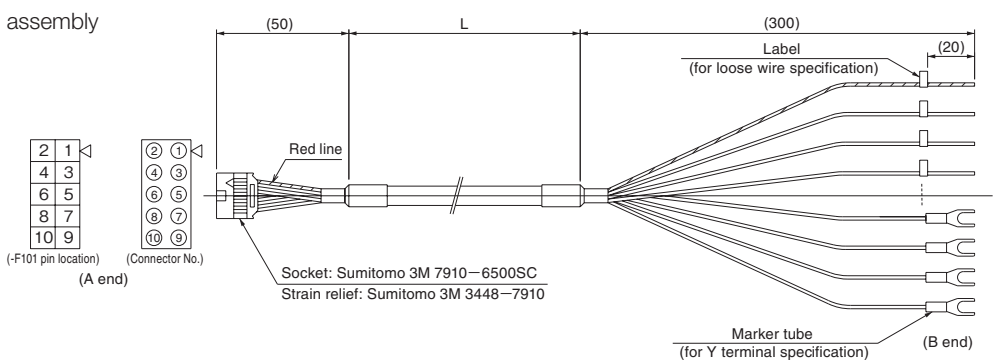

A end	-F101 pin location	1	2	3	4	5	6	7	8	9	10
	Connector No.	①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩
B end	Label, marker tube No.	1	2	3	4	5	6	7	8	-	+

●-F200□□dedicated cable assembly FMA-200W-□-□

Note: When wiring specification is the **-F200□N** (no power terminal) type, the -F200 pin location No.17 and 18 on the manifold side are set to NC (unused pins).

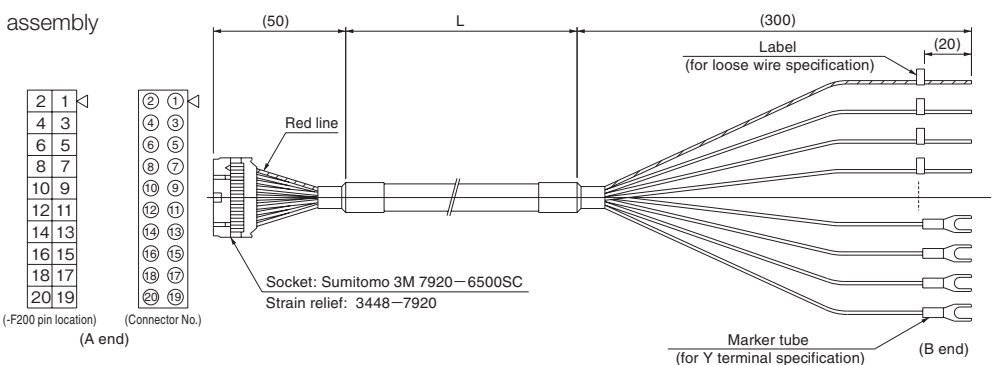



A end	-F200 pin location	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	Connector No.	①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪	⑫	⑬	⑭	⑮	⑯	⑰	⑱	⑲	⑲
B end	Label, marker tube No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	-	-	+	+

F Series Cable Assembly by Wiring Specification

●-F201□□dedicated cable assembly

FMA-201W- □ - □

- Notes: 1. Be aware the pin location No. and connector No. are not the same.
 2. When wiring specification is the **-F201□N** (no power terminal) type, the **-F201** pin location No.9 and 19 on the manifold side are set to NC (unused pins).

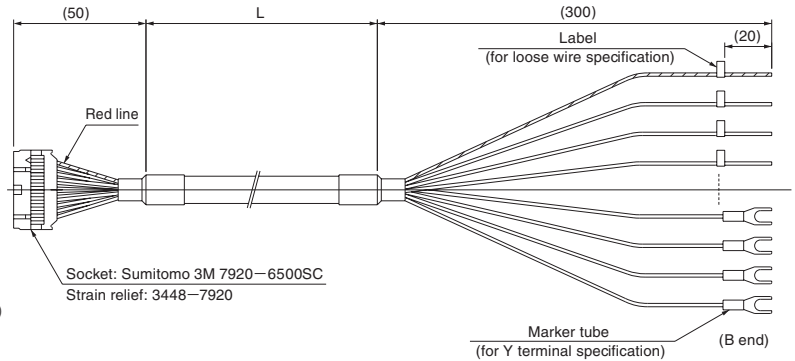



A end	-F201 pin location	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	Connector No.	20	18	16	14	12	10	8	6	4	2	19	17	15	13	11	9	7	5	3	1
B end	Label, marker tube No.	1	2	3	4	5	6	7	8	-	+	9	10	11	12	13	14	15	16	-	+

●-F260□□dedicated cable assembly

FMA-260W- □ - □

- Note: When wiring specification is the **-F260□N** (no power terminal) type, the **-F260** pin location No.23 and 24 on the manifold side are set to NC (unused pins).

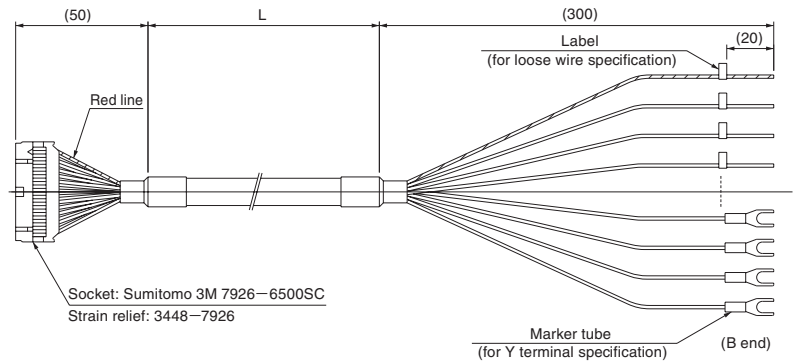



A end	-F260 pin location	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
	Connector No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
B end	Label, marker tube No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	/	/	-	-	+	+

●-D250□□dedicated cable assembly

FMA-250W- □ - □

- Notes: 1. Be aware the pin location No. and connector No. are not the same.
 2. When wiring specification is the **-D250□N** (no power terminal) type, the **-D250** pin location No.20, 21 and 22 on the manifold side are set to NC (unused pins).

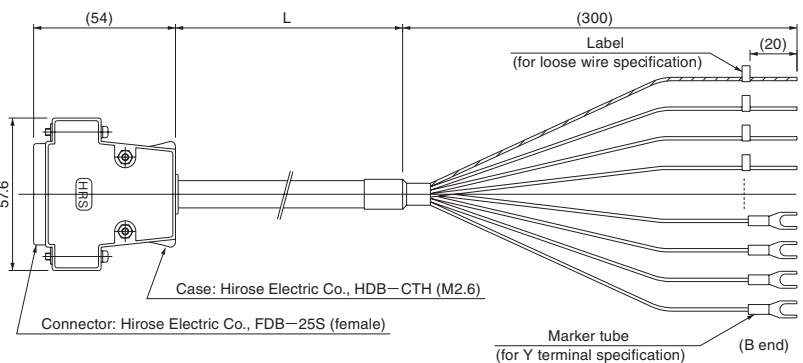



A end	-D250 pin location	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
	Connector No.	1	14	2	15	3	16	4	17	5	18	6	19	7	20	8	21	9	22	10	23	11	24	12	25	13
B end	Label, marker tube No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	/	/	/	-	-	-	+	+	+

●-D251□□dedicated cable assembly

FMA-251W- □ - □

- Note: When wiring specification is the **-D251□N** (no power terminal) type, the **-D251** pin location No.12 and 13 on the manifold side are set to NC (unused pins).

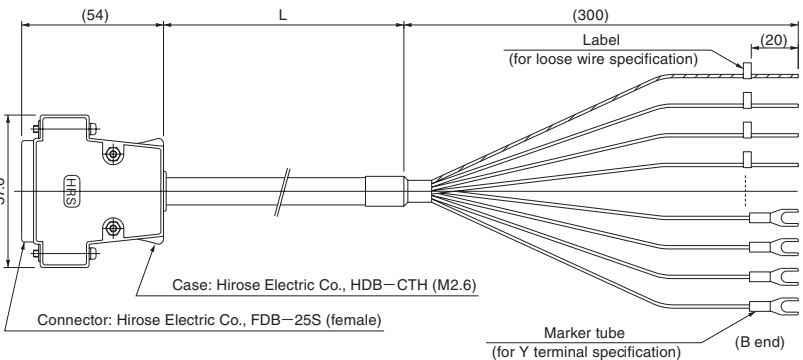

A end	-D251 pin location	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
	Connector No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
B end	Label, marker tube No.	1	2	3	4	5	6	7	8	9	10	/	/	11	12	13	14	15	16	17	18	19	20	+	+	

SOLENOID VALVES


F10 SERIES

Contents

Specifications	60
----------------	----

ORDER CODES	Single Valve Unit	66
	Monoblock Manifold A Type (Base Piping Type)	69
	Monoblock Manifold F Type (Direct Piping Type)	72
	Monoblock Manifold A Type, Wire-saving Type (Base Piping Type)	76
	Monoblock Manifold F Type, Wire-saving Type (Direct Piping Type)	78
	PC Board Manifold A Type (Base Piping Type)	80
	PC Board Manifold F Type (Direct Piping Type)	84
	Split Manifold Non-plug-in Type	86
	Split Manifold Plug-in Type	92
	Split Manifold Serial Transmission Type	96
	Easy Assembly Type Manifold Non-plug-in Type	100
Easy Assembly Type Manifold Plug-in Type	106	
Easy Assembly Type Manifold Serial Transmission Type	112	

DIMENSIONS	Single Valve Unit	118
	Monoblock Manifold	121
	Monoblock Manifold, Wire-saving Type	123
	PC Board Manifold	125
	Split Manifold Non-plug-in Type	126
	Split Manifold Plug-in Type	128
	Split Manifold Serial Transmission Type	137
	Easy Assembly Type Manifold Non-plug-in Type	144
	Easy Assembly Type Manifold Plug-in Type	146
	Easy Assembly Type Manifold Serial Transmission Type	151

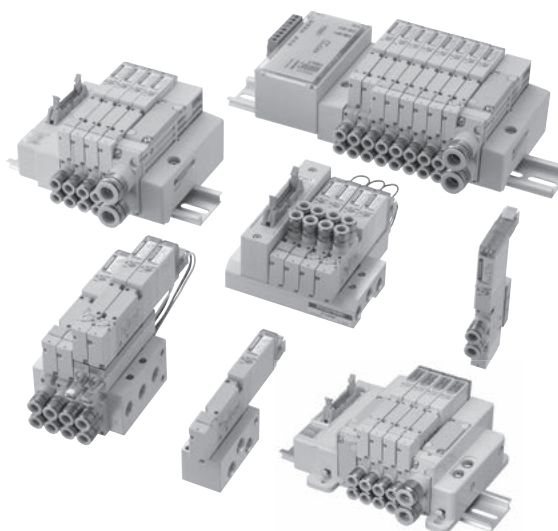

F10 SERIES

F10 SERIES Specifications

Specifications

Basic Models and Valve Functions

Item	Basic model	F10□T0	F10□T1 F10□T2	F10□T3 F10□T4 F10□T5	F10□TA F10□TB F10□TC
	Number of positions	2 positions			3 positions
Number of ports	5				Tandem 3-port
Valve function	Single solenoid only	Both single and double solenoid use		Closed center, Exhaust center, Pressure center	NC/NC, NO/NO, NC/NO

Remark: For the optional specifications and order codes, see p.66.

Specifications

Item	Basic model	F10□T0 F10□T1 F10□T2	F10□T3 F10□T4 F10□T5	F10□TA F10□TB F10□TC	F10□T0G F10□T1G F10□T2G	F10□T3G F10□T4G F10□T5G	F10□T0V F10□T1V F10□T2V	F10□T3V
	Media	Air						
Operation type	Internal pilot type				External pilot type (for positive pressure)		External pilot type (for vacuum)	
Flow rate characteristics	Sonic conductance C dm ³ /(s · bar) ^{Note1}	0.97	0.93	0.75	0.97	0.93	0.97	0.93
	Effective area ^{Note2} mm ² (Cv)	4.8 [0.27]	4.6 [0.25]	3.7 [0.21]	4.8 [0.27]	4.6 [0.25]	4.8 [0.27]	4.6 [0.25]
Port size ^{Note3}	M5×0.8, 10-32UNF, dual use fitting for φ4 and φ6, Rc1/8, NPT1/8							
Lubrication	Not required							
Operating pressure range	Main valve	0.2~0.7 MPa [29~102 psi.]			0~0.7 MPa [0~102 psi.] ^{Note4}		-100 kPa~0.15 MPa [-29.53 in.Hg~22 psi.]	
	External pilot	—			0.2~0.7 MPa [29~102 psi.] ^{Note4}		0.2~0.7 MPa [29~102 psi.]	
Proof pressure	MPa [psi.]		1.05 [152]					
Response time ^{Note5} ms	12VDC, 24VDC	15/15(20) or below	15/20 (25) or below	15/20 (25) or below	15/15 (20) or below	15/20 (25) or below	15/15 (20) or below	15/20 (25) or below
	100VAC	15/15 or below	15/20 or below	—	15/15 or below	15/20 or below	15/15 or below	15/20 or below
Maximum operating frequency	Hz		5					
Minimum time to energize for self holding ^{Note6} ms	50		—		50		50	
Operating temperature range (atmosphere and media) °C [°F]	5~50 [41~122]							
Shock resistance	m/s ² [G]		294.2 [30]					
Mounting direction	Any							

Notes: 1. For details, see the flow rate characteristics on p.61.

2. The effective area is a calculated value, and not a measured value.

3. For details, see the port size on p.61.

4. When the main valve pressure is 0.2~0.7 MPa [29~102 psi.], set the external pilot pressure to the main valve pressure or higher, and 0.7 MPa [102 psi.] or less.

Notes: 5. Values when air pressure is 0.5 MPa [73 psi.]. For switching phase timing in the AC specification, add a maximum of 5 ms to the response time. The values for 2-position valves are those when used as a single solenoid, and the values for 3-position valves are those when switching from the neutral position of closed center. Values in parentheses () are for low-current type.

6. When used as a double solenoid valve. Excludes **TO**.

Remark: Specification values are based on Koganei test standards.

Solenoid Specifications

Item	Rated voltage	12VDC	24VDC (Standard type)	24VDC (Low-current type)	100VAC	120VAC	
	Voltage range	V	10.8~13.2 (12±10%)	21.6~26.4 (24±10%)	21.6~26.4 (24±10%)	90~110 (100±10%)	108~132 (120±10%)
Rated frequency	Hz	—	—	—	50 60	50 60	
Standard	Current (when rated voltage is applied) mA (r.m.s)	33	17	—	8	8.3	
	Power consumption W	0.4	0.4	—	0.8 VA	1 VA	
Low-current type	Current (when rated voltage is applied)	Starting mA	—	17	—	—	
		Holding mA	—	—	4.2	—	—
	Power consumption	Starting W	—	—	0.4	—	—
		Holding W	—	—	0.1	—	—
Starting time (standard)	ms	—	—	70	—	—	
Allowable leakage current	mA	2.0	1.0	1.0	1.0	1.0	
Type of insulation	Type B						
Insulation resistance ^{Note1} MΩ	Over 100						
Color of LED indicator ^{Note2}	14(SA) : Red, 12(SB) : Green						
Surge suppression (as standard)	Surge absorption transistor		Flywheel diode		Bridge diode		


Notes: 1. Value at 500VDC megger.

2. The color of the **TO** indicator is red only.


Remark: Specification values are based on Koganei test standards.

Cylinder Operating Speed

How to obtain cylinder speed




Maximum operating speed

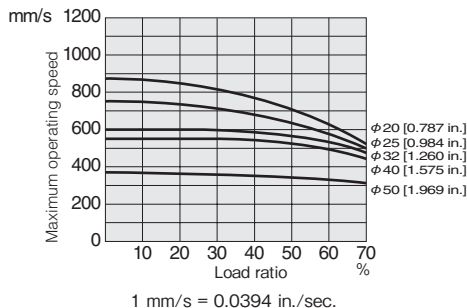


Measuring conditions

- Air pressure : 0.5 MPa [73 psi.]
- Piping (outer diameter × inner diameter × length) : φ6 × φ4 × 1000 mm [39 in.]
- Fitting : Quick fitting TS6-01
- Load ratio = $\frac{\text{Load}}{\text{Cylinder theoretical thrust}}$ (%)
- Cylinder stroke : 150 mm [5.91 in.]




Delay time

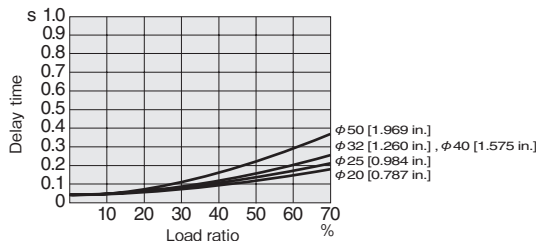

Note: Delay time may vary according to the cylinder stroke.

Flow Rate



1 MPa = 145 psi., 1 l/min = 0.0353 ft³/min.

How to read the graph

When the supply pressure is 0.5 MPa [73 psi.] and flow rate is 240R/min [8.47 ft³/min.] (ANR), the valve outlet pressure becomes 0.4 MPa [58 psi.].

Port Size

Description/Piping specification		PR	X (P2)	4 (A), 2 (B)	1 (P), 3 (R2), 5 (R1), 3, 5 (R)
Single unit	With sub-base	M5×0.8, 10-32UNF	M5×0.8, 10-32UNF	Rc1/8, NPT1/8	Rc1/8, NPT1/8
	With female thread block	—	—	M5×0.8, 10-32UNF	M5×0.8, 10-32UNF
	With dual use fitting block	—	—	Dual use fitting for φ4 and φ6	M5×0.8, 10-32UNF
	With single use fitting block	—	—	φ4 or φ6	M5×0.8, 10-32UNF
Manifold	Monoblock type with female thread block, and PC board type with female thread block	M5×0.8, 10-32UNF	M5×0.8, 10-32UNF	M5×0.8, 10-32UNF	Rc1/8, NPT1/8
	Monoblock type with fitting block, and PC board type with fitting block	M5×0.8, 10-32UNF	M5×0.8, 10-32UNF	Dual use fitting for φ4 and φ6	Rc1/8, NPT1/8
	Monoblock type with single use fitting block, and PC board type with single use fitting block	M5×0.8, 10-32UNF	M5×0.8, 10-32UNF	φ4 or φ6	Rc1/8, NPT1/8
	Split type with female thread block, and serial transmission type with female thread block	—	M5×0.8, 10-32UNF	M5×0.8, 10-32UNF	Rc1/4, NPT1/4
	Split type with fitting block, and serial transmission type with fitting block	—	M5×0.8, 10-32UNF	Dual use fitting for φ4 and φ6	Dual use fitting for φ8 and φ10
	Split type with single use fitting block, and serial transmission type with single use fitting block	—	M5×0.8, 10-32UNF	φ4 or φ6	Single use fitting for φ8 or φ10
	Easy assembly type with female thread block, and serial transmission type with female thread block	—	M5×0.8, 10-32UNF	M5×0.8, 10-32UNF	Rc1/8, NPT1/8
	Easy assembly type with fitting block, and serial transmission type with fitting block	—	M5×0.8, 10-32UNF	Dual use fitting for φ4 and φ6	Dual use fitting for φ6 and φ8
Easy assembly type with single use fitting block, and serial transmission type with single use fitting block	—	M5×0.8, 10-32UNF	φ4 or φ6	Single use fitting for φ6 or φ8	

Flow Rate Characteristics

● When used as a single unit

Basic model	1 (P)→2 (B)/1 (P)→4 (A)		2 (B)→3 (R2)/4 (A)→5 (R1)	
	Sonic conductance C dm ³ /(s·bar)	Critical pressure ratio b	Sonic conductance C dm ³ /(s·bar)	Critical pressure ratio b
F10□T0-A2	0.85	0.14	0.85	0.26
F10□T1-A2				
F10□T2-A2				
F10□T3-A2	0.82	0.13	0.82	0.29
F10□T4-A2				
F10□T5-A2				
F10□TA-A2	0.68	0.30	0.69	0.30
F10□TB-A2				
F10□TC-A2				
F10□T0-F3	0.73	0.29	0.58	0.47
F10□T1-F3				
F10□T2-F3				
F10□T3-F3	0.69	0.26	0.57	0.46
F10□T4-F3				
F10□T5-F3				
F10□TA-F3	0.61	0.28	0.54	0.44
F10□TB-F3				
F10□TC-F3				
F10□T0-F4	0.54	0.39	0.53	0.37
F10□T1-F4				
F10□T2-F4				
F10□T3-F4	0.53	0.43	0.51	0.34
F10□T4-F4				
F10□T5-F4				
F10□TA-F4	0.50	0.32	0.50	0.30
F10□TB-F4				
F10□TC-F4				

Basic model	1 (P)→2 (B)/1 (P)→4 (A)		2 (B)→3 (R2)/4 (A)→5 (R1)	
	Sonic conductance C dm ³ /(s·bar)	Critical pressure ratio b	Sonic conductance C dm ³ /(s·bar)	Critical pressure ratio b
F10□T0-F5	0.57	0.39	0.54	0.38
F10□T1-F5				
F10□T2-F5				
F10□T3-F5	0.57	0.41	0.54	0.40
F10□T4-F5				
F10□T5-F5				
F10□TA-F5	0.53	0.33	0.51	0.31
F10□TB-F5				
F10□TC-F5				
F10□T0-F6	0.64	0.47	0.56	0.42
F10□T1-F6				
F10□T2-F6				
F10□T3-F6	0.61	0.42	0.56	0.40
F10□T4-F6				
F10□T5-F6				
F10□TA-F6	0.57	0.34	0.52	0.40
F10□TB-F6				
F10□TC-F6				

Note: For -F4, value assumes TS6-M5M is mounted on the piping port.

● When mounted on a manifold

Manifold model	Valve type	Monoblock manifold F type F10M□F (FP)		Monoblock manifold A type F10M□A (AP)		Split manifold F10M□N (P) (S)		Easy assembly type manifold F10M□XN (P) (S)	
		1 (P)→2 (B)/1 (P)→4 (A) 2 (B)→3 (R2)/4 (A)→5 (R1)		1 (P)→2 (B)/1 (P)→4 (A) 2 (B)→3 (R2)/4 (A)→5 (R1)		1 (P)→2 (B)/1 (P)→4 (A) 2 (B)→3 (R2)/4 (A)→5 (R1)		1 (P)→2 (B)/1 (P)→4 (A) 2 (B)→3 (R2)/4 (A)→5 (R1)	
		Sonic conductance C	dm ³ /(s·bar)	Sonic conductance C	dm ³ /(s·bar)	Sonic conductance C	dm ³ /(s·bar)	Sonic conductance C	dm ³ /(s·bar)
F10□T0□	Outlet port dual use fitting for φ4 and φ6 ※These are the cases of φ6.	0.84	0.82	0.75	0.76	0.97	0.93	1.06	1.00
F10□T1□									
F10□T2□									
F10□T3□									
F10□T4□									
F10□T5□									
F10□TA□	Output port φ4 fitting	0.70	0.70	0.64	0.66	0.75	0.73	0.82	0.84
F10□TB□									
F10□TC□									
F10□T0□									
F10□T1□									
F10□T2□									
F10□T3□	Output port φ6 fitting	0.66	0.72	0.63	0.69	0.72	0.79	0.84	0.79
F10□T4□									
F10□T5□									
F10□TA□									
F10□TB□									
F10□TC□									
F10□T0□	Output port φ6 fitting	0.72	0.81	0.67	0.73	0.80	0.83	0.88	0.86
F10□T1□									
F10□T2□									
F10□T3□									
F10□T4□									
F10□T5□									
F10□TA□	Output port φ6 fitting	0.71	0.73	0.66	0.69	0.78	0.80	0.84	0.85
F10□TB□									
F10□TC□									
F10□T0□	Output port φ6 fitting	0.64	0.66	0.58	0.63	0.68	0.69	0.72	0.75
F10□T1□									
F10□T2□									

Notes: 1. When the individual air supply spacer or the individual air exhaust spacer, the back pressure prevention valve, or the stop valve is used, sonic conductance decreases by about 30%.

2. For the flow rate characteristics of other outlet ports, consult us.

Remark: Specification values are based on Koganei test standards.

Mass

Single Valve Unit Mass

g [oz.]

F10□T□□	F10□T□□-A1	F10□T□□-A2	F10□T□□-FJ	F10□T□□-FJ5	F10□T□□-FJ6
Outlet portion None	Outlet portion With plate	Outlet portion With plate	Outlet portion With dual use fitting block	Outlet portion With φ 4 fitting block	Outlet portion With φ 6 fitting block
Inlet portion None	Inlet portion None	Inlet portion With A type sub-base	Inlet portion None	Inlet portion None	Inlet portion None
44 [1.55]	47 [1.66]	116 [4.09]	55 [1.94]	57 [2.01]	60 [2.12]

g [oz.]

F10□T□□-FM	F10□T□□-F3	F10□T□□-F4	F10□T□□-F5	F10□T□□-F6
Outlet portion With female thread block	Outlet portion With dual use fitting block	Outlet portion With female thread block	Outlet portion With φ 4 fitting block	Outlet portion With φ 6 fitting block
Inlet portion None	Inlet portion With female thread block	Inlet portion With female thread block	Inlet portion With female thread block	Inlet portion With female thread block
51 [1.80]	62 [2.19]	58 [2.05]	64 [2.26]	67 [2.36]

Basic Type F10□T0 is 10 g [0.35 oz.] less than the mass shown above.

Monoblock Manifold Mass (single valve unit included)

g [oz.]

Monoblock manifold	Mass calculation of each unit					
	4(A), 2(B) ports outlet specifications					
	Female thread block	Dual use fitting block	φ 4 fitting block	φ 6 fitting block		
A type	(97×n)+79 [(3.42×n)+2.79]	(101×n)+79 [(3.56×n)+2.79]	(103×n)+79 [(3.63×n)+2.79]	(106×n)+79 [(3.74×n)+2.79]		
F type	(71×n)+57 [(2.50×n)+2.01]	(75×n)+57 [(2.65×n)+2.01]	(77×n)+57 [(2.72×n)+2.01]	(80×n)+57 [(2.82×n)+2.01]		

g [oz.]

Monoblock manifold	Additional mass (wire-saving type)					
	Wiring specification					
	-F100N, -F101N	-F200N, -F201N, -F260N	-D250N, -D251N			
A type	164+4n [5.78+0.14n]	166+4n [5.86+0.14n]	170+4n [6.00+0.14n]			
F type	112+4n [3.95+0.14n]	114+4n [4.02+0.14n]	118+4n [4.16+0.14n]			

Calculation example : F10M8AM

stn.1~stn.8 F10T1-A1-PS DC24V

(97×8)+79 = 855 g [30.16 oz.]

When mounting the block-off plate, subtract 50 g [1.76 oz.] per unit from the above calculation result.

When mounting the F10□T0 specification valve, subtract 10 g [0.35 oz.] per unit from the above calculation result.

PC Board Manifold Mass (single valve unit included)

g [oz.]

PC board manifold	Mass calculation of each unit					
	4(A), 2(B) ports outlet specifications					Circuit board and connector portion
	Female thread block	Dual use fitting block	φ 4 fitting block	φ 6 fitting block		
A type	(97×n)+79 [(3.42×n)+2.79]	(101×n)+79 [(3.56×n)+2.79]	(103×n)+79 [(3.63×n)+2.79]	(106×n)+79 [(3.74×n)+2.79]		(2×n)+29 [(0.07×n)+1.02]
F type	(76×n)+83 [(2.68×n)+2.93]	(80×n)+83 [(2.82×n)+2.93]	(82×n)+83 [(2.89×n)+2.93]	(85×n)+83 [(3.00×n)+2.93]		

Calculation example : F10M8APM-F201-W

stn.1~stn.8 F10T1-A1-PP DC24V

(97×8)+79+(2×8)+29=900 g [31.75 oz.]

When mounting the block-off plate, subtract 50 g [1.76 oz.] per unit from the above calculation result.

When mounting the F10□T0 specification valve, subtract 10 g [0.35 oz.] per unit from the above calculation result.

Optional Parts Mass

Stop valve (-STP): 29 g [0.23 oz.]

Mass

Mass of Split Manifold and Serial Transmission Type

Because the valve and manifold have the same output specifications, their mass is the same. The mass can only be changed by choosing a different type of inlet/outlet block.

Mass of Split Manifold Non-Plug-in Type (single valve unit included)

g [oz.]

Non-plug-in type	Mass calculation of each unit			
	4(A), 2(B) ports outlet specifications			
	Female thread block	Dual use fitting block	φ 4 fitting block	φ 6 fitting block
	$(75 \times n) + 120$ [(2.65 × n) + 4.23]	$(79 \times n) + 120$ [(2.79 × n) + 4.23]	$(81 \times n) + 120$ [(2.86 × n) + 4.23]	$(84 \times n) + 120$ [(2.96 × n) + 4.23]
g [oz.]				
Additional mass				
Piping block specification				
Female thread block	Dual use fitting block	φ 8 fitting block	φ 10 fitting block	
111 [3.92]	125 [4.41]	149 [5.26]	159 [5.61]	

Calculation example : **F10M8N-MR**

stn.1~stn.8 **F10T1-A1-PS DC24V**

$(75 \times 8) + 120 + 111 = 831$ g [29.31 oz.]

When mounting the block-off plate, subtract 50 g [1.76 oz.] per unit from the above calculation result.

When mounting the **F10□T0** specification valve, subtract 10 g [0.35 oz.] per unit from the above calculation result.

Mass of Split Manifold Plug-in Type/Serial Transmission Type (single valve unit included)

g [oz.]

Plug-in type Serial transmission compatible manifold	Mass calculation of each unit			
	4(A), 2(B) ports outlet specifications			
	Female thread block	Dual use fitting block	φ 4 fitting block	φ 6 fitting block
	$(79 \times n) + 120$ [(2.79 × n) + 4.23]	$(83 \times n) + 120$ [(2.93 × n) + 4.23]	$(85 \times n) + 120$ [(3.00 × n) + 4.23]	$(88 \times n) + 120$ [(3.10 × n) + 4.23]
g [oz.]				
Additional mass				
Piping block specification				
Female thread block	Dual use fitting block	φ 8 fitting block	φ 10 fitting block	
111 [3.92]	125 [4.41]	149 [5.26]	159 [5.61]	
g [oz.]				
Additional mass				
Wiring block specification				
-F100□□, -F101□□	-F200□□, -F201□□, -F260□□	-D250□□, -D251□□	-T200	
32 [1.13]	34 [1.20]	39 [1.38]	110 [3.88]	
g [oz.]				
Additional mass				
Serial transmission block specification				
Stand-alone type	Integrated type	Integrated type (For EtherCAT)	Integrated type (For EtherNet/IP)	
231 [8.15]	138 [4.87]	100 [3.53]	110 [3.88]	

Calculation example : **F10M8PM-MR-F201 DC24V**

stn.1~stn.8 **F10T1-A1 DC24V**

$(79 \times 8) + 120 + 111 + 34 = 897$ g [31.64 oz.]

When mounting the block-off plate, subtract 50 g [1.76 oz.] per unit from the above calculation result.

When mounting the **F10□T0** specification valve, subtract 10 g [0.35 oz.] per unit from the above calculation result.

Mass of Easy Assembly Type Manifold and Serial Transmission Type Manifold

Mass of Easy Assembly Type Manifold Non-Plug-in Type (single valve unit included)

g [oz.]

Mounting type	Mass calculation of each unit			
	Outlet port specifications			
	Female thread block	Dual use fitting block	φ4 fitting block	φ6 fitting block
No code	$(83 \times n) + 229 [(2.93 \times n) + 8.078]$	$(87 \times n) + 229 [(3.069 \times n) + 8.078]$	$(89 \times n) + 229 [(3.139 \times n) + 8.078]$	$(92 \times n) + 229 [(3.245 \times n) + 8.078]$
-DN	$(83 \times n) + 290 [(2.93 \times n) + 10.229]$	$(87 \times n) + 290 [(3.069 \times n) + 10.229]$	$(89 \times n) + 290 [(3.139 \times n) + 10.229]$	$(92 \times n) + 290 [(3.245 \times n) + 10.229]$
-DR	$(85 \times n) + 308 [(3.00 \times n) + 10.864]$	$(89 \times n) + 308 [(3.139 \times n) + 10.864]$	$(91 \times n) + 308 [(3.210 \times n) + 10.864]$	$(94 \times n) + 308 [(3.316 \times n) + 10.864]$

g [oz.]

Fitting specifications	Additional mass			
	Intake/exhaust outlet			
	Female thread block	Dual use fitting block	φ6 fitting block	φ8 fitting block
J□ M□	22 [0.776]	32 [1.129]	43 [1.517]	48 [1.693]
J□D MD□	26 [0.917]	46 [1.623]	68 [2.399]	78 [2.751]
J□T MT□	33 [1.164]	63 [2.222]	96 [3.386]	111 [3.92]

Calculation example: **F10M8XNJ-JR-DR DC24V**

stn.1 ~ 8 **F10T1-A1-PS DC24V**

$$(89 \times 8) + 308 + 32 = 1052 \text{ g [37.11 oz.]}$$

When mounting the block-off plate, subtract 50 g [1.76 oz.] per unit from the above calculation result.

When mounting the **F10□TO** specification valve, subtract 10 g [0.35 oz.] per unit from the above calculation result.

Mass of Easy Assembly Type Manifold Plug-in Type/Serial Transmission Type Manifold (single valve unit included)

g [oz.]

Mounting type	Mass calculation of each unit			
	Outlet port specifications			
	Female thread block	Dual use fitting block	φ4 fitting block	φ6 fitting block
No code	$(86 \times n) + 227 [(3.034 \times n) + 8.007]$	$(90 \times n) + 227 [(3.175 \times n) + 8.007]$	$(92 \times n) + 227 [(3.245 \times n) + 8.007]$	$(95 \times n) + 227 [(3.351 \times n) + 8.007]$
-DN	$(86 \times n) + 288 [(3.034 \times n) + 10.159]$	$(90 \times n) + 288 [(3.175 \times n) + 10.159]$	$(92 \times n) + 288 [(3.245 \times n) + 10.159]$	$(95 \times n) + 288 [(3.351 \times n) + 10.159]$
-DR	$(88 \times n) + 310 [(3.104 \times n) + 10.935]$	$(92 \times n) + 310 [(3.245 \times n) + 10.935]$	$(94 \times n) + 310 [(3.316 \times n) + 10.935]$	$(97 \times n) + 310 [(3.422 \times n) + 10.935]$

g [oz.]

Fitting specifications	Additional mass			
	Intake/exhaust outlet			
	Female thread block	Dual use fitting block	φ6 fitting block	φ8 fitting block
J□ M□	22 [0.776]	32 [1.129]	43 [1.517]	48 [1.693]
J□D MD□	26 [0.917]	46 [1.623]	68 [2.399]	78 [2.751]
J□T MT□	31 [1.093]	61 [2.152]	94 [3.316]	109 [3.845]

g [oz.]

Additional mass			
Wiring block specifications			
-F100□□, -F101□□	-F200□□, -F201□□, -F260□□	-D250□□, -D251□□	-T200
36 [1.270]	38 [1.340]	43 [1.517]	116 [4.092]

g [oz.]

Additional mass		
Serial transmission block specifications (Monoblock)		
For CC-Link, DeviceNet, and CompoNet	For EtherCAT	For EtherNet/IP
138 [4.87]	100 [3.53]	110 [3.88]

Calculation example: **F10M8XPJ-JR-F201-DR DC24V**

stn.1 ~ 8 **F10T1-A1 DC24V**

$$(98 \times 8) + 310 + 32 + 38 = 1116 \text{ g [39.37 oz.]}$$

When mounting the block-off plate, subtract 50 g [1.76 oz.] per unit from the above calculation result.

When mounting the **F10□TO** specification valve, subtract 10 g [0.35 oz.] per unit from the above calculation result.

F10 Series Single Valve Unit Order Codes

Valve size




F10

10 mm [0.394 in.] width
Standard type


F10L

10 mm [0.394 in.] width
Low-current type

Valve outlet type




-A2 inlet/outlet port
F10: Rc1/8
-A2H inlet/outlet port
F10: NPT1/8




Outlet port fitting
F10: $\phi 4$, $\phi 6$




Outlet port fitting
F10: $\phi 4$



Outlet port fitting
F10: $\phi 6$




-FM outlet port
F10: M5 \times 0.8
-FMH outlet port
F10: 10-32UNF




Outlet port fitting
F10: $\phi 4$, $\phi 6$




Outlet port fitting
F10: $\phi 4$




-F4 inlet/outlet port
F10: M5 \times 0.8
-F4H inlet/outlet port
F10: 10-32UNF




Outlet port fitting
F10: $\phi 4$




Outlet port fitting
F10: $\phi 6$




Outlet port fitting
F10: $\phi 4$




Outlet port fitting
F10: $\phi 4$




-F4A inlet/outlet port
F10: M5 \times 0.8
-F4AH inlet/outlet port
F10: 10-32UNF




Outlet port fitting
F10: $\phi 6$




Outlet port fitting
F10: $\phi 6$




-FMA outlet port
F10: M5 \times 0.8
-FMAH outlet port
F10: 10-32UNF



-FMB outlet port
F10: M5 \times 0.8
-FMBH outlet port
F10: 10-32UNF





-F4A inlet/outlet port
F10: M5 \times 0.8
-F4AH inlet/outlet port
F10: 10-32UNF




Outlet port fitting
F10: $\phi 6$


3-port normally open (NO)^{Note5}
With outlet port female thread block
With inlet port female thread block^{Note6}
-F4B
-F4BH




Outlet port fitting
F10: $\phi 4$




Outlet port fitting
F10: $\phi 4$



Outlet port fitting
F10: $\phi 4$




Outlet port fitting
F10: $\phi 6$




Outlet port fitting
F10: $\phi 6$

Wiring specification


L type plug connector
Without connector




S type plug connector
Without connector



S type plug connector
Lead wire 300 mm [11.8 in.]




L type plug connector
Lead wire 300 mm [11.8 in.]



S type plug connector
Lead wire 3000 mm [118 in.]




L type plug connector
Lead wire 3000 mm [118 in.]



DIN connector type
with indicator^{Note12}



DIN connector type
without connector^{Note12}



Valve specification

- T0** : 2-position, for single solenoid only
- T1** : 2-position single solenoid specification (for both single and double solenoid use)
- T2** : 2-position double solenoid specification (for both single and double solenoid use)
- T3** : 3-position closed center
- T4** : 3-position exhaust center^{Note3}
- T5** : 3-position pressure center^{Note3}
- TA** : Tandem 3-port (NC and NC)^{Note4}
- TB** : Tandem 3-port (NO and NO)^{Note4}
- TC** : Tandem 3-port (NC and NO)^{Note4}

Operation type

Blank

Internal pilot type

G

External pilot type^{Note}
(for positive pressure)


V

External pilot type^{Note}
(for vacuum)^{*}
^{*} This is a vacuum valve.

Note: When using as a single unit, select **-A2** (A type with sub-base) for the valve outlet type. Without a sub-base, piping for the external pilot is not possible.


Manual override

Manual override button



No protrusion with DIN connector

Manual override lever^{Note1}



Protruding locking type^{Note11}



Valve size	Valve specification	Operation type	IP Specifications	Manual override	Valve outlet type	UL compatible type	Wiring specification	Voltage
F10	T0 T1 T2 T3	Blank	Blank	Blank	Blank ^{Note2} -A1 ^{Note2} -A2 -A2H -FJ ^{Note2,3} -FJ5 ^{Note2,3} -FJ6 ^{Note2,3}	-FM ^{Note2,3} -FMH ^{Note2,3} -F3 -F4 -F4A ^{Note4} -F4AH ^{Note4} -F5 -F6	Blank -PN -PS -PL -PS3 -PL3 -39L ^{Note12} -39N ^{Note12}	DC24V DC12V ^{Note7} AC100V ^{Note8, 13} AC120V ^{Note8} AC240V ^{Note8, 13}
F10L	T4 ^{Note3} T5 ^{Note3} TA ^{Note4} TB ^{Note4} TC ^{Note4}	G V	-P ^{Note9, Note10}	-R ^{Note1} -83 ^{Note11}	-F5A ^{Note2,3} -F5B ^{Note2,3} -F6A ^{Note4} -F6B ^{Note4}	Blank: - -UR: UL certified product		

- Notes: 1. When the valve specification is **T1** or **T2**, the manual override lever is placed only on the A side.
2. Two manifold mounting screws are included.
3. Not available in the vacuum valves.
4. Not available in external pilot type and vacuum valves.
5. Only for valve specification **T0**, **T1**, and **T2**.
6. Thread size for the inlet port female thread block is **F10**: M5 \times 0.8.
7. Not available in low-current type.
8. Not available in low-current type and tandem 3-port valves.

9. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.
10. UR is unsupported.
- 11 Only for wiring specification **-39** □ .
- 12 Only for F15 series and not available for valve specification **T1**, **TA**, **TB**, and **TC**. In addition, the valve is used only as a double solenoid for **T2**.
- 13 Not available with DIN connectors.

Remark: Negative common specifications are also available as made to order products (add **-129W** to the end of order code). For details, consult us.

● For internal pilot

F10Z -

Valve size
10: 10 mm
[0.394 in.] width

Parts content

- 21** : Mounting bracket (mounting bracket, 2 mounting screws)
- 25** : Sub-base Rc1/8 (sub-base body, gasket, exhaust valve)^{Note1}
- P** : Plate (plate, gasket, 2 mounting screws)
- J** : Dual use fitting block (fitting block, gasket, 2 mounting screws)
- J5** : Single use fitting block **F10**: $\phi 4$
- J6** : Single use fitting block **F10**: $\phi 6$
- J5A** : Single use fitting block for 3-port **F10**: $\phi 4$ ^{Note3}
- J6A** : Single use fitting block for 3-port **F10**: $\phi 6$ ^{Note3}
- M** : Female thread block **F10**: M5 × 0.8 (female thread block, gasket, 2 mounting screws)
- MH** : Female thread block **F10**: 10-32UNF (female thread block, gasket, 2 mounting screws)
- MA** : Female thread block for 3-port **F10**: M5 × 0.8 (female thread block, gasket, 2 mounting screws)^{Note3}
- MAH** : Female thread block for 3-port **F10**: 10-32UNF (female thread block, gasket, 2 mounting screws)^{Note3}
- MP** : P port female thread block **F10**: M5 × 0.8 (P port female thread block, gasket)^{Note1}
- MPH** : P port female thread block **F10**: 10-32UNF (P port female thread block, gasket)^{Note1}
- MPP** : IP dedicated P port female thread block (P port female thread block, gasket)
- GS1** : Gasket (gasket, exhaust valve)^{Note2}

- Notes: 1. Valve mounting screws are not included.
2. Caution should be exercised as this gasket is different from the **GS2** gasket for the split-type manifolds.
3. Common to both normally closed (NC) and normally open (NO) types. Select the mounting direction by application requirements.

● For external pilot

F10Z -

Valve size
10: 10 mm
[0.394 in.] width

Parts content

- P** : Plate (plate, gasket, 2 mounting screws)
- J** : Dual use fitting block (fitting block, gasket, 2 mounting screws)
- J5** : Single use fitting block **F10**: $\phi 4$
- J6** : Single use fitting block **F10**: $\phi 6$
- J5A** : Single use fitting block for 3-port **F10**: $\phi 4$ ^{Note1}
- J6A** : Single use fitting block for 3-port **F10**: $\phi 6$ ^{Note1}
- M** : Female thread block **F10**: M5 × 0.8 (female thread block, gasket, 2 mounting screws)
- MH** : Female thread block **F10**: 10-32UNF (female thread block, gasket, 2 mounting screws)
- MA** : Female thread block for 3-port **F10**: M5 × 0.8 (female thread block, gasket, 2 mounting screws)^{Note1}
- MAH** : Female thread block for 3-port **F10**: 10-32UNF (female thread block, gasket, 2 mounting screws)^{Note1}
- GS1** : Gasket (gasket, exhaust valve)^{Note2}

- Notes: 1. Common to both normally closed (NC) and normally open (NO) types. Select the mounting direction by application requirements.
2. Caution should be exercised as this gasket is different from the **GS2** gasket for the split type manifolds.

Sub-base for external pilot

F10ZG - 25

Valve size
10: 10 mm [0.394 in.] width
Sub-base Rc1/8

F10ZG - 25H

Valve size
10: 10 mm [0.394 in.] width
Sub-base NPT1/8

Connector-related order codes

JAZ -

Valve specification
For T1, T2, T3, T4, T5, TA, TB, TC

Connector specification

- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, white, for total of 3 lead wires)
- CP3** : Connector, lead wire length 3000 mm [118 in.] (black, red, white, for total of 3 lead wires)
- CPN**: Connector without lead wire (1 short bar and 3 contacts included)

UL compatible type ^{Note1}
Blank: -
UR : UL certified product

JAZO -

Valve specification
For T0

Connector specification

- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, for total of 2 lead wires)
- CP3** : Connector, lead wire length 3000 mm [118 in.] (black, red, for total of 2 lead wires)
- CPN**: Connector without lead wire (1 short bar, 2 contacts included)

UL compatible type ^{Note1}
Blank: -
UR : UL certified product


Remarks: A connector for negative common is also available. See p. 22 for details.
Notes: 1. The lead wire thickness is 24AWG when Blank or 22AWG when UR is specified.

FZ -

Valve specification
For T1, T2, T3, T4, T5, TA, TB, TC

Connector specification
CC1.5: Cabtyre cable length 1500 mm [59 in.]^{*}
CC3 : Cabtyre cable length 3000 mm [118 in.]^{*}

^{*} For details, see p. 22.

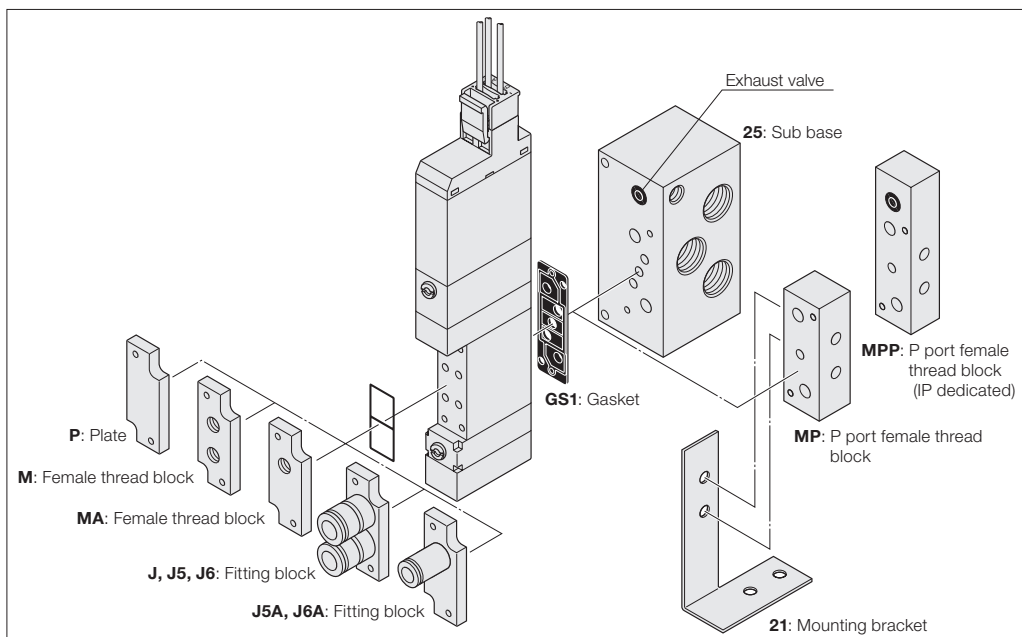

Connector-related order codes

JAZ - P - (for double use only)

Valve specification
For **T2, T3, T4, T5, TA, TB,** or **TC**

Connector specification

CP : Connector, lead wire length 300 mm [11.8 in.] (black, red, white, for total of 3 lead wires)
CP3: Connector, lead wire length 3000 mm [118 in.] (black, red, white, for total of 3 lead wires)
PA : Positive common A type, lead wire length 300 mm [11.8 in.]*
PA3 : Positive common A type, lead wire length 3000 mm [118 in.]*
PB : Positive common B type, lead wire length 300 mm [11.8 in.]*
PB3 : Positive common B type, lead wire length 3000 mm [118 in.]*
PC : Positive common C type, lead wire length 300 mm [11.8 in.]*
PC3: Positive common C type, lead wire length 3000 mm [118 in.]*
 ※A common connector assembly.

JAZ0 - P - (for single use only)

Valve specification
For **T0/T1**

Connector specification

CP : Connector, lead wire length 300 mm [11.8 in.] (black, red, for total of 2 lead wires)
CP3: Connector, lead wire length 3000 mm [118 in.] (black, red, for total of 2 lead wires)
PA : Positive common A type, lead wire length 300 mm [11.8 in.]*
PA3 : Positive common A type, lead wire length 3000 mm [118 in.]*
PB : Positive common B type, lead wire length 300 mm [11.8 in.]*
PB3 : Positive common B type, lead wire length 3000 mm [118 in.]*
PC : Positive common C type, lead wire length 300 mm [11.8 in.]*
PC3: Positive common C type, lead wire length 3000 mm [118 in.]*
 ※A common connector assembly.

- Notes:
1. When the valve specification is **T1**, select the **JAZ0-P-** single dedicated type.
 2. When switching between the single and double type (**T1/T2**), purchase and use a dedicated connector for single or double use (the number of seal holes in the lead wire differs for the single and double type).
 3. There is no white lead wire for the **JAZ0-P-** .
 4. It is necessary to disassemble the connector to add a common connector assembly. Contact your nearest KOGANEI sales office.
 5. For information on use in locations/atmospheres subject to substances other than water, such as organic solvents, cutting oil, or reagents, contact your nearest KOGANEI sales office.
 6. For information on replacing the waterproof seal, contact your nearest KOGANEI sales office.

F10 Series Monoblock Manifold A Type (Base Piping Type) Order Codes

F10 ORDER CODES

Valve size

F10M 10 mm [0.394 in.] width

Operation type

Blank Internal pilot type^{Note4}

G External pilot type^{Note5} (for positive pressure)

V External pilot type^{Note5} (for vacuum) *
* : This is a vacuum valve.

Note: Cannot be mounted together with a positive pressure valve.

Wiring specification^{Note11}

L type plug connector Without connector

S type plug connector Without connector

S type plug connector Lead wire 300 mm [11.8 in.]

L type plug connector Lead wire 300 mm [11.8 in.]

S type plug connector Lead wire 300 mm [11.8 in.]

L type plug connector Lead wire 3000 mm [118 in.]

S type plug connector Lead wire 3000 mm [118 in.]

L type plug connector Lead wire 3000 mm [118 in.]

DIN connector type with indicator^{Note16}

DIN connector type without connector^{Note12}

Individual air supply and exhaust spacer, stop valve

Blank : No spacer and no stop valve
-NPM : Individual air supply spacer (with M5 female thread for F10)
-NRM : Individual exhaust spacer (with M5 female thread for F10)
-STP : With stop valve^{Note4}
 For details, see p. 26.

Manifold outlet specification

With dual use fitting blocks (base piping type)

With selectable fittings (base piping type)

With female thread blocks (base piping type)

Manual override

Manual override button

No protrusion with DIN connector

Manual override lever^{Note2}

Protruding locking type

Manifold fitting specification

5-port specification

-J5 With single use fitting block (base piping type) F10: φ 4

-J6 With single use fitting block (base piping type) F10: φ 6

-M With female thread block (base piping type) F10: M5 × 0.8

-MH With female thread block^{Note14} (base piping type) F10: 10-32UNF

3-port specification

-J5A With single use fitting block, normally closed (NC) (base piping type) F10: φ 4

-J5B With single use fitting block, normally open (NO) (base piping type) F10: φ 4

-J6A With single use fitting block, normally closed (NC) (base piping type) F10: φ 6

-J6B With single use fitting block, normally open (NO) (base piping type) F10: φ 6

-MA With female thread block, normally closed (NC) (base piping type) F10: M5 × 0.8

-MAH With female thread block, normally closed (NC)^{Note18} (base piping type) F10: 10-32UNF

-MB With female thread block, normally open (NO)^{Note17} (base piping type) F10: M5 × 0.8

-MBH With female thread block, normally open (NO)^{Note18} (base piping type) F10: 10-32UNF

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Valve specification

T0 : 2-position, for single solenoid only
T1 : 2-position, single solenoid specification
T2 : 2-position, double solenoid specification
T3 : 3-position, closed center
T4 : 3-position, exhaust center^{Note6}
T5 : 3-position, pressure center^{Note6}
TA : Tandem 3-port (NC and NO)^{Note7}
TB : Tandem 3-port (NO and NO)^{Note7}
TC : Tandem 3-port (NC and NO)^{Note7}

Valve size

F10 Standard type

F10L Low-current type

Valve outlet type

With plate^{Note3} (base piping type)

Pilot specification

Blank Internal pilot manifold

G External pilot manifold

Valve size	Valve units	Manifold type	Manifold output specification	Pilot specification	Station	Valve size	Valve specification	Operation type	IP specification	Manual override	Valve outlet type	Wiring specification	Manifold fitting specification	Back pressure prevention valve	Individual air supply and exhaust spacer, stop valve	Voltage
------------	-------------	---------------	-------------------------------	---------------------	---------	------------	---------------------	----------------	------------------	-----------------	-------------------	----------------------	--------------------------------	--------------------------------	--	---------

Manifold model				Mounting valve model													
F10M	2	A (※Rc)	J M	Blank G	strn. 1 : strn. 1 Note1	F10	T0 T1 T2 T3 T4 T5	TA ^{Note7} TB ^{Note7} TC ^{Note7}	Blank ^{Note4}	Blank	Blank	-A1 ^{Note3}	Blank -PN -PS -PL -PS3 -PL3	Blank -NPM ^{Note19} -NRM ^{Note19} -STP ^{Note4}	DC24V DC12V ^{Note9} AC100V ^{Note14} AC120V ^{Note14}		
						F10L	F10	BP (for block-off plate)									
	20	A (※Rc) AH (※NPT)	L	Blank G	strn. 1 : strn. 1 Note1	F10	T0 T1 T2 T3 T4 T5	TA ^{Note7} TB ^{Note7} TC ^{Note7}	Blank ^{Note4}	Blank	-R ^{Note2}	-83 ^{Note11}	-A1 ^{Note3}	Blank -PN -PS -PL -PS3 -PL3	-J5 ^{Note17} -J6 ^{Note17} -M ^{Note17} -MA ^{Note17} -MH ^{Note18} -MAH ^{Note18} -J5A ^{Note17} -J6A ^{Note17} -J6B ^{Note17} -MA ^{Note17} -MAH ^{Note18} -MB ^{Note17} -MBH ^{Note18}	Blank -E1 ^{Note8} Blank -NPM ^{Note19} -NRM ^{Note19} -STP ^{Note4}	DC24V DC12V ^{Note9} AC100V ^{Note14,19} AC120V ^{Note14} AC240V ^{Note14,15}
						F10L	F10	BP (for block-off plate)									

Notes: 1. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
 2. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
 3. Always enter -A1.
 4. Cannot be mounted on the external pilot manifold.
 5. Cannot be mounted on the internal pilot manifold.
 6. Not available in the vacuum valves.
 7. Not available in external pilot type and vacuum valves.
 8. Not available with the individual exhaust spacer and vacuum valve.
 9. Not available in low-current type.
 10. Not available in the low current type and tandem 3-port valves.
 11. The -P (including when Blank) and -CP wiring specifications cannot be mixed.
 12. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.
 13. 3 port type is only supported by the T0, T1, and T2 valve type.
 14. Not available in low-current type and tandem 3-port valves.
 15. Only for wiring specification -39□.
 16. Not available for valve specification T1, TA, TB, and TC. In addition, the valve is used only as a double solenoid for T2.
 17. Can be selected only when the manifold type is A.
 18. Can be selected only when the manifold type is AH.
 19. Not available with DIN connectors (-39□).
 Remark: Negative common specifications are also available as made to order products (add -129W to the ends of the valve and manifold model order codes). For details, consult us.

F10 Series Monoblock Manifold A Type Additional Parts Order Codes

Gasket (gasket and exhaust valve)

F10Z - GS1

Valve size
10: 10 mm [0.394 in.] width

Block-off plate (block-off plate and 2 mounting screws)

F10BP

Valve size
10: 10 mm [0.394 in.] width

Connector-related order codes

JAZ □ - □


※ For details, see p. 22.

Valve specification

Blank: For T1, T2, T3, T4, T5, TA, TB, TC
0: For T0

Connector specification

- CP : Connector, lead wire length 300 mm [11.8 in.]
- CP3 : Connector, lead wire length 3000 mm [118 in.]
- CPN : Connector without lead wire (short bar and contacts included)
- PA : Positive common A type, lead wire length 300 mm [11.8 in.]
- PA3 : Positive common A type, lead wire length 3000 mm [118 in.]
- PB : Positive common B type, lead wire length 300 mm [11.8 in.]
- PB3 : Positive common B type, lead wire length 3000 mm [118 in.]
- PC : Positive common C type, lead wire length 300 mm [11.8 in.]
- PC3 : Positive common C type, lead wire length 3000 mm [118 in.]

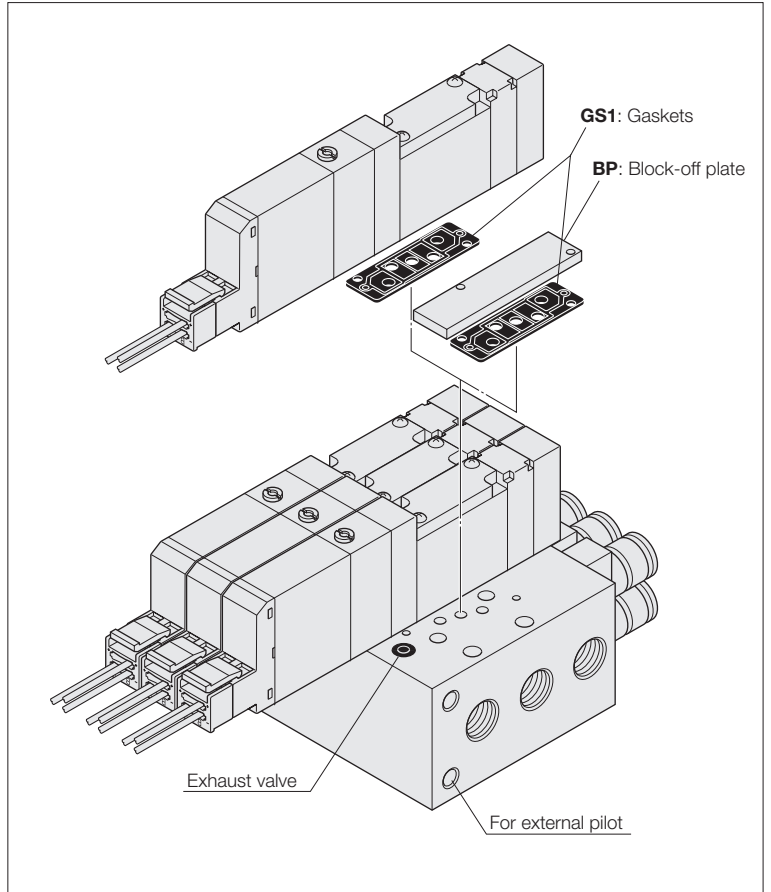

FZ - □


Valve specification
For T1, T2, T3, T4, T5, TA, TB, TC

Connector specification


- CC1.5 : Cabtyre cable length 1500 mm [59 in.]
- CC3 : Cabtyre cable length 3000 mm [118 in.]

Common connector assembly


A type: JAZ-PA□※



B type: JAZ-PB□※



C type: JAZ-PC□※



※ Lead wire length Blank: 300 mm [11.8 in.] Note: White lead wire is not available for JAZ0-P□□.
3: 3000 mm [118 in.]

Remark: Connector for negative common type also available. For details, see p.22.

Back pressure prevention valve (for monoblock type, 2 pieces)

F10Z - E1

Valve size
10: 10 mm [0.394 in.] width

Individual air supply and exhaust spacer (Spacer for non-plug-in type, gasket, exhaust valve, and 2 mounting screws)

F10Z - □

Valve size
10: 10 mm [0.394 in.] width

Specification

- NPM: Individual air supply spacer (with M5 female thread for F10)
- NRM: Individual exhaust spacer (with M5 female thread for F10)

※ For details, see p. 27.
※ Not available with DIN connectors (-39□).

Manifold Order Code Example

(6 units of F10 Series)

F10M6AL

- stn.1 ~ 2 F10T0-A1-PS-J5 DC24V
- stn.3 ~ 5 F10T2-A1-PS-J6 DC24V
- stn.6 F10BP-J6

Note: This order code example has no relationship to the illustration at upper right.

Muffler

KM - J□

Fitting size

- 6: Outer diameter $\phi 6$ (for individual exhaust spacer)
 - 8: Outer diameter $\phi 8$ (for individual exhaust spacer)
- (Sales unit: Set of 10 mufflers)

Precautions for Order Codes

Manifold outlet specification

Select from among "dual use fitting blocks", "with female thread blocks" or "with selectable fittings." For repair or replacement, purchase the single valve unit additional parts, F□Z-J (dual use fitting block), F□Z-J□ (single use fitting block), or F□Z-M□ (female thread block), on p. 67.

Orders for valves only

Place orders from "Single Valve Unit Order Codes" on p. 66. Note, however, that the only available valve outlet type is A1. In addition, for common terminal wiring connections, order the common connector assemblies listed above separately.

Connector-related order codes

JAZ - P - (for double use only)

Valve specification
For **T2, T3, T4, T5, TA, TB,** or **TC**

Connector specification

- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, white, for total of 3 lead wires)
 - CP3**: Connector, lead wire length 3000 mm [118 in.] (black, red, white, for total of 3 lead wires)
 - PA** : Positive common A type, lead wire length 300 mm [11.8 in.]*
 - PA3**: Positive common A type, lead wire length 3000 mm [118 in.]*
 - PB** : Positive common B type, lead wire length 300 mm [11.8 in.]*
 - PB3**: Positive common B type, lead wire length 3000 mm [118 in.]*
 - PC** : Positive common C type, lead wire length 300 mm [11.8 in.]*
 - PC3**: Positive common C type, lead wire length 3000 mm [118 in.]*
- ※A common connector assembly.

JAZ0 - P - (for single use only)

Valve specification
For **T0/T1**

Connector specification

- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, for total of 2 lead wires)
 - CP3**: Connector, lead wire length 3000 mm [118 in.] (black, red, for total of 2 lead wires)
 - PA** : Positive common A type, lead wire length 300 mm [11.8 in.]*
 - PA3**: Positive common A type, lead wire length 3000 mm [118 in.]*
 - PB** : Positive common B type, lead wire length 300 mm [11.8 in.]*
 - PB3**: Positive common B type, lead wire length 3000 mm [118 in.]*
 - PC** : Positive common C type, lead wire length 300 mm [11.8 in.] *
 - PC3**: Positive common C type, lead wire length 3000 mm [118 in.]*
- ※A common connector assembly.

- Notes:
1. When the valve specification is **T1**, select the **JAZ0-P-** single dedicated type.
 2. When switching between the single and double type (**T1/T2**), purchase and use a dedicated connector for single or double use (the number of seal holes in the lead wire differs for the single and double type).
 3. There is no white lead wire for the **JAZ0-P-** .
 4. It is necessary to disassemble the connector to add a common connector assembly. Contact your nearest KOGANEI sales office.
 5. For information on use in locations/atmospheres subject to substances other than water, such as organic solvents, cutting oil, or reagents, contact your nearest KOGANEI sales office.
 6. For information on replacing the waterproof seal, contact your nearest KOGANEI sales office.

F10 Series Monoblock Manifold F Type (Direct Piping Type) Order Codes

Valve size

F10M


10 mm [0.394 in.] width

Valve specification

- T0** : 2-position, for single solenoid only
- T1** : 2-position, single solenoid specification
- T2** : 2-position, double solenoid specification
- T3** : 3-position, closed center
- T4** : 3-position, exhaust center
- T5** : 3-position, pressure center
- TA** : Tandem 3-port (NC and NC)
- TB** : Tandem 3-port (NO and NO)
- TC** : Tandem 3-port (NC and NO)


Manual override

Manual override button




No protrusion with DIN connector

Manual override lever^{Note2}



Protruding locking type^{Note9}



Valve size

- F10** Standard type
- F10L** Low-current type

Valve outlet type

5-port specification

- FJ** With dual use fitting block (direct piping type) F10: φ 4, φ 6
- FJ5** With single use fitting block (direct piping type) F10: φ 4
- FJ6** With single use fitting block (direct piping type) F10: φ 6
- FM** With female thread block (direct piping type) F10: M5 × 0.8
- FMH** With female thread block^{Note12} (direct piping type) F10: 10-32UNF

3-port specification

- FJ5A** With single use fitting block, normally closed (NC) (direct piping type) F10: φ 4
- FJ5B** With single use fitting block, normally open (NO) (direct piping type) F10: φ 4
- FJ6A** With single use fitting block, normally closed (NC) (direct piping type) F10: φ 6
- FJ6B** With single use fitting block, normally open (NO) (direct piping type) F10: φ 6
- FMA** With female thread block, normally closed (NC) (direct piping type) F10: M5 × 0.8
- FMAH** With female thread block, normally closed (NC)^{Note9} (direct piping type) F10: 10-32UNF
- FMB** With female thread block, normally open (NO)^{Note8} (direct piping type) F10: M5 × 0.8
- FMBH** With female thread block, normally open (NO)^{Note9} (direct piping type) F10: 10-32UNF

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Wiring specification^{Note6}


L type plug connector Without connector



S type plug connector Lead wire 3000 mm [118 in.]




Pre-wired positive common terminal S type plug connector Lead wire 3000 mm [118 in.]




S type plug connector Without connector



L type plug connector Lead wire 3000 mm [118 in.]




Pre-wired positive common terminal L type plug connector Lead wire 3000 mm [118 in.]



S type plug connector Lead wire 300 mm [11.8 in.]



Pre-wired positive common terminal S type plug connector Lead wire 300 mm [11.8 in.]




DIN connector type with indicator^{Note10}




L type plug connector Lead wire 300 mm [11.8 in.]



Pre-wired positive common terminal L type plug connector Lead wire 300 mm [11.8 in.]



DIN connector type without connector^{Note10}



Individual air supply and exhaust spacer, stop valve

- Blank** : No spacer and no stop valve
- NPM** : Individual air supply spacer (with M5 female thread for F10)
- NRM** : Individual exhaust spacer (with M5 female thread for F10)
- STP** : With stop valve

For details, see p. 26.

Back pressure prevention valve

- Blank** No back pressure prevention valve
- E1** With back pressure prevention valve^{Note3}

Valve size	Valve units	Manifold type	Station	Valve size	Valve specification	IP specification	Manual override	Valve outlet type	Wiring specification	Back pressure prevention valve	Individual air supply and exhaust spacer, stop valve	Voltage		
Manifold model														
Mounting valve model														
F10M	2 : 20	F (※RC) FH (※NPT)	stn. 1 : stn. □ Note1	F10 F10L	T0 TA T1 TB T2 TC T3 T4 T5	Blank -P ^{Note7}	Blank -R ^{Note2} -83 ^{Note9}	-FJ ^{Note11} -FJ5 ^{Note11} -FJ6 ^{Note11} -FM ^{Note11} -FMH ^{Note12} -FJ5A ^{Note11} -FJ5B ^{Note11}	-FJ6A ^{Note11} -FJ6B ^{Note11} -FMA ^{Note11} -FMAH ^{Note9} -FMB ^{Note8} -FMBH ^{Note12}	Blank -PN -PS -PL -PS3 -PL3	-CPS -CPL -CPS3 -CPL3 -39L ^{Note10} -39N ^{Note10}	Blank -E1 ^{Note3}	Blank -NPM -NRM -STP	DC24V DC12V ^{Note4} AC100V ^{Note5, 13} AC120V ^{Note5} AC240V ^{Note5, 9}
BP (for block-off plate)														
Blank -STP														

- Notes: 1. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(E) ports side in front.
 2. When the valve specification is T1 or T2, the manual override lever is placed only on the A side. This is not available with -39□.
 3. Not available with the individual exhaust spacer.
 4. Not available in low-current type.
 5. Not available in low-current type and tandem 3-port valves.
 6. The -P□ (including when Blank) and -CP□ wiring specifications cannot be mixed.
 7. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.

8. 3 port type is only supported by the T0, T1, and T2 valve type.
 9. Only for wiring specification -39□.
 10. Not available for valve specification T1, TA, TB, and TC. In addition, the valve is used only as a double solenoid for T2.
 11. Can be selected only when the manifold type is F.
 12. Can be selected only when the manifold type is FH.
 13. Not available with DIN connectors (-39□).
 Remarks: 1. The external pilot type valve cannot be mounted on the F type manifold.
 2. Negative common specifications are also available as made to order products (add -129W to the ends of the valve and manifold model order codes). For details, consult us.

Gasket (gasket and exhaust valve)

F10Z - GS1

Valve size
10: 10 mm [0.394 in.] width

Block-off plate (block-off plate and 2 mounting screws)

F10BP

Valve size
10: 10 mm [0.394 in.] width

Connector-related order codes

JAZ -

※ For details, see p. 22.

Valve specification

Blank: For T1, T2, T3, T4, T5, TA, TB, TC
0: For T0

Connector specification

- CP** : Connector, lead wire length 300 mm [11.8 in.]
- CP3** : Connector, lead wire length 3000 mm [118 in.]
- CPN** : Connector without lead wire (short bar, contacts included)
- PA** : Positive common A type, lead wire length 300 mm [11.8 in.] *
- PA3** : Positive common A type, lead wire length 3000 mm [118 in.] *
- PB** : Positive common B type, lead wire length 300 mm [11.8 in.] *
- PB3** : Positive common B type, lead wire length 3000 mm [118 in.] *
- PC** : Positive common C type, lead wire length 300 mm [11.8 in.] *
- PC3** : Positive common C type, lead wire length 3000 mm [118 in.] *

FZ -


Valve specification
For T1, T2, T3, T4, T5, TA, TB, TC

Connector specification


- CC1.5** : Cabtyre cable length 1500 mm [59 in.] *
- CC3** : Cabtyre cable length 3000 mm [118 in.] *

Common connector assembly


A type: JAZ-PA *



B type: JAZ-PB *




C type: JAZ-PC *



※ Lead wire length **Blank**: 300 mm [11.8 in.] Note: White lead wire is not available for JAZ0-P .
3: 3000 mm [118 in.]

Remark: Connector for negative common type also available. For details, see p. 22.

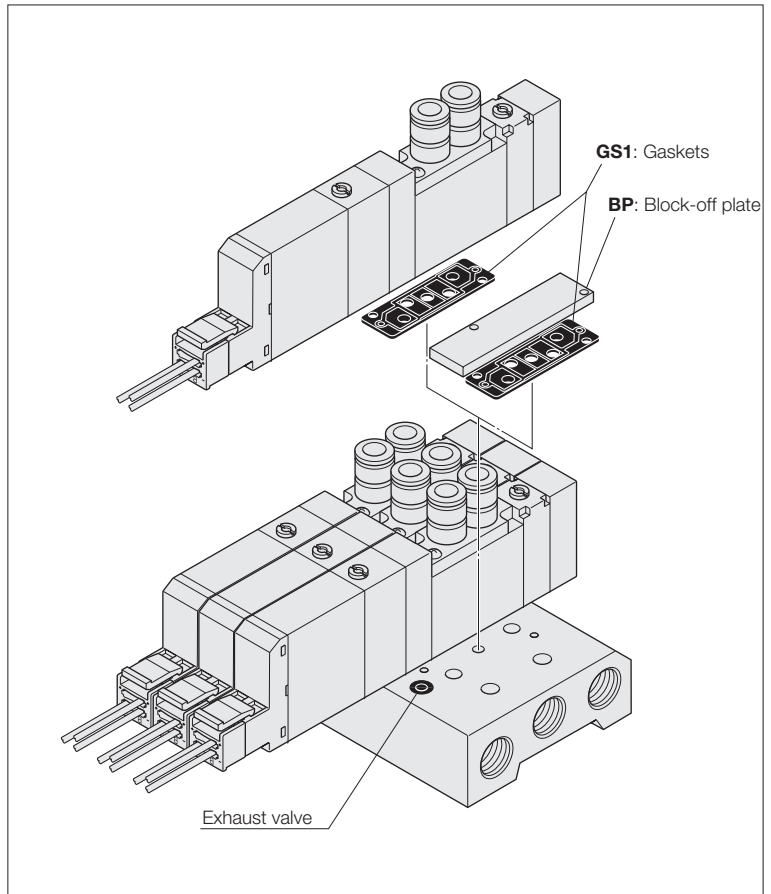

Back pressure prevention valve (for monoblock type, 2 pieces)

F10Z - E1

Valve size
10: 10 mm [0.394 in.] width

Individual air supply and exhaust spacer

(Spacer for non-plug-in type, gasket, exhaust valve, and 2 mounting screws)

F10Z -

Valve size
10: 10 mm [0.394 in.] width

Specification

- NPM**: Individual air supply spacer (with M5 female thread for F10)
- NRM**: Individual exhaust spacer (with M5 female thread for F10)

※ For details, see p. 27.
※ Not available with DIN connectors (-39).

Manifold Order Code Example

(4 units of F10 Series)

F10M4F

- stn.1 ~ 2 F10T0-FJ5-PS DC24V
- stn.3 F10T2-FJ6-PS DC24V
- stn.4 F10BP

Note: This order code example has no relationship to the illustration at upper right.

Muffler

KM - J

Fitting size

- 6**: Outer diameter $\phi 6$ (for individual exhaust spacer)
 - 8**: Outer diameter $\phi 8$ (for individual exhaust spacer)
- (Sales unit: Set of 10 mufflers)

Precautions for Order Codes

Orders for valves only

Place orders from "Single Valve Unit Order Codes" on p. 66.

Select from valve outlet types -FJ, -FJ5, -FJ6, -FM, -FJ5A, -FJ5B, -FJ6A, -FJ6B, -FMA, or -FMB. In addition, for common terminal wiring connections, order the common connector assemblies listed above separately.

Connector-related order codes

JAZ - P - (for double use only)

Valve specification
For **T2, T3, T4, T5, TA, TB,** or **TC**

Connector specification

- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, white, for total of 3 lead wires)
 - CP3**: Connector, lead wire length 3000 mm [118 in.] (black, red, white, for total of 3 lead wires)
 - PA** : Positive common A type, lead wire length 300 mm [11.8 in.]*
 - PA3**: Positive common A type, lead wire length 3000 mm [118 in.]*
 - PB** : Positive common B type, lead wire length 300 mm [11.8 in.]*
 - PB3**: Positive common B type, lead wire length 3000 mm [118 in.]*
 - PC** : Positive common C type, lead wire length 300 mm [11.8 in.]*
 - PC3**: Positive common C type, lead wire length 3000 mm [118 in.]*
- ※A common connector assembly.

JAZ0 - P - (for single use only)

Valve specification
For **T0/T1**

Connector specification

- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, for total of 2 lead wires)
 - CP3**: Connector, lead wire length 3000 mm [118 in.] (black, red, for total of 2 lead wires)
 - PA** : Positive common A type, lead wire length 300 mm [11.8 in.]*
 - PA3**: Positive common A type, lead wire length 3000 mm [118 in.]*
 - PB** : Positive common B type, lead wire length 300 mm [11.8 in.]*
 - PB3**: Positive common B type, lead wire length 3000 mm [118 in.]*
 - PC** : Positive common C type, lead wire length 300 mm [11.8 in.] *
 - PC3**: Positive common C type, lead wire length 3000 mm [118 in.]*
- ※A common connector assembly.

- Notes:
1. When the valve specification is **T1**, select the **JAZ0-P-** single dedicated type.
 2. When switching between the single and double type (**T1/T2**), purchase and use a dedicated connector for single or double use (the number of seal holes in the lead wire differs for the single and double type).
 3. There is no white lead wire for the **JAZ0-P-** .
 4. It is necessary to disassemble the connector to add a common connector assembly. Contact your nearest KOGANEI sales office.
 5. For information on use in locations/atmospheres subject to substances other than water, such as organic solvents, cutting oil, or reagents, contact your nearest KOGANEI sales office.
 6. For information on replacing the waterproof seal, contact your nearest KOGANEI sales office.

F10 Series Monoblock Manifold A Type, Wire-Saving Type (Base Piping Type) Order Codes

Valve size

F10M 10 mm [0.394 in.] width

Operation type

Blank
Internal pilot type^{Note5}

G
External pilot type^{Note6}
(for positive pressure)

V
External pilot type^{Note6}
(for vacuum) *
*: This is a vacuum valve.

Note: Cannot be mounted together with a positive pressure valve.

Manual override

Manual override button

Blank

Manual override lever^{Note3}

-R

Valve outlet type

With plate^{Note4}
(base piping type)

-A1

Individual air supply and exhaust spacer, stop valve

Blank: No spacer and no stop valve
-NPM: Individual air supply spacer
(with M5 female thread for F10)
-NRM: Individual exhaust spacer
(with M5 female thread for F10)
-STP: With stop valve^{Note5}
 For details, see p. 26.

Manifold outlet specification

With dual use fitting blocks
(base piping type)

J

Outlet port fitting
F10: φ 4, φ 6

With selectable fittings
(base piping type)

L

Outlet port should be selected in accordance with the manifold fitting specification.

With female thread blocks
(base piping type)

M

Outlet port female thread
F10: M5 × 0.8

Valve specification

T0: 2-position, for single solenoid only
T1: 2-position, single solenoid specification
T2: 2-position, double solenoid specification
T3: 3-position, closed center
T4: 3-position, exhaust center^{Note6}
T5: 3-position, pressure center^{Note6}
TA: Tandem 3-port (NC and NO)^{Note9}
TB: Tandem 3-port (NO and NO)^{Note9}
TC: Tandem 3-port (NC and NO)^{Note9}

Wiring specifications (wiring block)

(no power supply terminal only)

Flat cable connector (with socket and strain relief)

-F

D-sub connector

-D25

-F100N: 10-pin
-F101N: 10-pin
-F200N: 20-pin
-F201N: 20-pin
-F260N: 26-pin
 For details, see p. 47.

(M2.6 mounting screws)
-D250N: 25-pin^{Note14}
-D251N: 25-pin^{Note14}

(4-40UNC mounting screws)
-D250NU: 25-pin^{Note15}
-D251NU: 25-pin^{Note15}
 For details, see p. 47.

Wiring connection specification

Blank
Packed wiring: Wired to match the specifications of the mounted valve.

-W
Double wiring: Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

Wiring connection specification

Blank
Internal pilot manifold

G
External pilot manifold

Manifold fitting specification

5-port specification

-J5 With single use fitting block (base piping type) F10: φ 4

-J6 With single use fitting block (base piping type) F10: φ 6

-M With female thread block (base piping type) F10: M5 × 0.8

-MH With female Thread block^{Note15} (base piping type) F10: 10-32UNF

3-port specification

-J5A With single use fitting block, normally closed (NC) (base piping type) F10: φ 4

-J5B With single use fitting block, normally open (NO) (base piping type) F10: φ 4

-J6A With single use fitting block, normally closed (NC) (base piping type) F10: φ 6

-J6B With single use fitting block, normally open (NO) (base piping type) F10: φ 6

-MA With female thread block, normally closed (NC) (base piping type) F10: M5 × 0.8

-MAH With female thread block, normally closed (NC)^{Note15} (base piping type) F10: 10-32UNF

-MB With female thread block, normally open (NO)^{Note14} (base piping type) F10: M5 × 0.8

-MBH With female thread block, normally open (NO)^{Note15} (base piping type) F10: 10-32UNF

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Back pressure prevention valve

Blank No back pressure prevention valve

-E1 With back pressure prevention valve^{Note10}

Valve size

Valve units

Manifold type

Manifold outlet specification

Pilot specification

Wiring specifications

Wiring connection specification

Station

Valve size

Valve specification

Operation type

Manual override

Valve outlet type

Wiring specification

Manifold fitting specification

Back pressure prevention valve

Individual air supply and exhaust spacer, stop valve

Voltage

Manifold model				Mounting valve model													
Valve size	Valve units	Manifold type	Manifold outlet specification	Pilot specification	Wiring specifications	Wiring connection specification	Station	Valve size	Valve specification	Operation type	Manual override	Valve outlet type	Wiring specification	Manifold fitting specification	Back pressure prevention valve	Individual air supply and exhaust spacer, stop valve	Voltage
F10M	2 ⋮ □ ^{Note1}	A (※Rc)	J M	Blank G	-F100N -F101N -F200N -F201N -F260N -D250N -D251N	Blank -W	strn. 1 ⋮ strn. □ ^{Note2}	F10 F10L	T0 T1 T2 T3 T4 ^{Note8} T5 ^{Note8}	TA ^{Note9} TB ^{Note9} TC ^{Note9}	Blank ^{Note5} G ^{Note6} V ^{Note6}	Blank -R ^{Note3}	-A1 Note4	-PN Note4	Blank -E1 ^{Note10}	Blank -NPM -NRM -STP ^{Note5}	DC24V DC12V ^{Note11} AC100V ^{Note12} AC120V ^{Note12}
									BP (for block-off plate) ^{Note7}								
F10M	2 ⋮ □ ^{Note1}	A (※Rc) AH (※NPT)	L	Blank G	-F100N -F101N -F200N -F201N -F260N -D250N ^{Note14} -D251N ^{Note14} -D250NU ^{Note15} -D251NU ^{Note15}	Blank -W	strn. 1 ⋮ strn. □ ^{Note2}	F10 F10L	T0 T1 T2 T3 T4 ^{Note8} T5 ^{Note8}	TA ^{Note9} TB ^{Note9} TC ^{Note9}	Blank ^{Note5} G ^{Note6} V ^{Note6}	Blank -R ^{Note3}	-A1 Note4	-PN Note4	Blank -E1 ^{Note10}	Blank -NPM -NRM -STP ^{Note5}	DC24V DC12V ^{Note11} AC100V ^{Note12} AC120V ^{Note12}
									BP (for block-off plate) ^{Note7}								

Notes: 1. For the maximum number of units, see the table for maximum number of valve units by wiring specification, on p. 77.
 2. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
 3. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
 4. Always enter -A1 and -PN.
 5. Cannot be mounted on the external pilot manifold.
 6. Cannot be mounted on the internal pilot manifold.
 7. Caution should be exercised that the block-off plate wiring is always double wiring (allocated 2 control pins at 1 strn.), regardless of the wiring connection specification. For single wiring, see p. 77.
 8. Not available in the vacuum valves.
 9. Not available in external pilot type and vacuum valves.
 10. Not available with the individual exhaust spacer and vacuum valve.
 11. Not available in low-current type.
 12. Not available in low-current type and tandem 3-port valves. In addition, only available when the wiring specification is a D-sub connector.
 13. 3 port type is only supported by the T0, T1, and T2 valve type.
 14. Can be selected only when the manifold type is A.
 15. Can be selected only when the manifold type is AH.

Gasket (gasket and exhaust valve)

F10Z - GS1

Valve size
10: 10 mm [0.394 in.] width

Block-off plate (block-off plate and 2 mounting screws)

F10BP

Valve size
10: 10 mm [0.394 in.] width

Back pressure prevention valve
(for monoblock type, 2 pieces)

F10Z - E1

Valve size
10: 10 mm [0.394 in.] width


Individual air supply and exhaust spacer (Spacer for non-plug-in type, gasket, exhaust valve, and 2 mounting screws)

F10Z -

Valve size
10: 10 mm [0.394 in.] width

Specification
NPM: Individual air supply spacer (with M5 female thread for F10)
NRM: Individual exhaust spacer (with M5 female thread for F10)

※ For details, see p. 27.

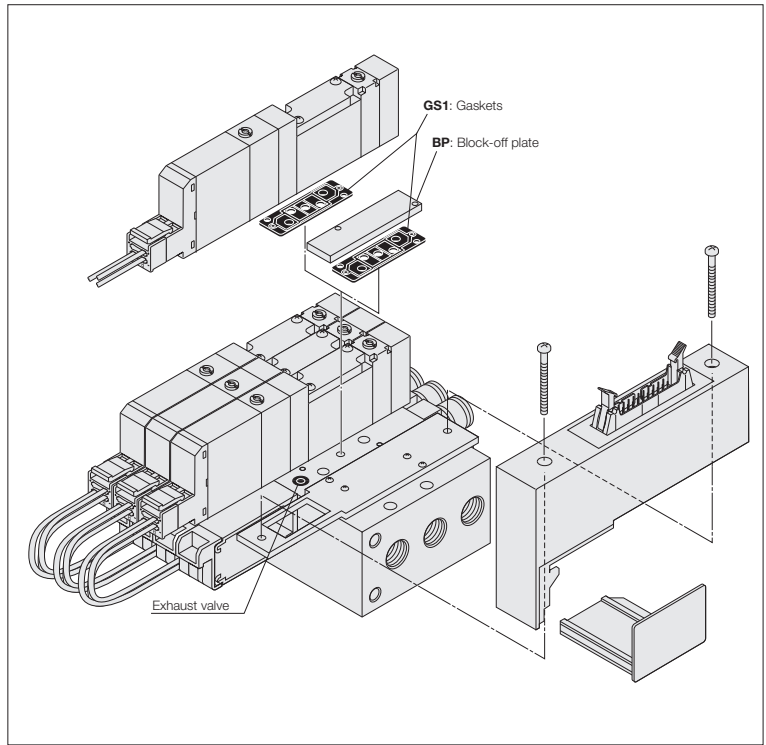

Muffler

KM - J

Fitting size
6: Outer diameter ϕ 6 (for individual exhaust spacer)
8: Outer diameter ϕ 8 (for individual exhaust spacer)
(Sales unit: Set of 10 mufflers)

Manifold Order Code Example

(6 units of F10 Series)

F10M6AL-F201N

stn.1 ~ 2 F10T0-A1-PN-J5 DC24V
stn.3 ~ 5 F10T2-A1-PN-J6 DC24V
stn.6 F10BP-J6

Note: This order code example has no relationship to the illustration at upper right.

Table for maximum number of valve units by wiring specification

Wiring specification	Max. outputs	Maximum number of units	
		Wiring connection specification	
		Packed wiring (Blank)	Double wiring (-W)
F100N Flat cable (10P)	8	Varies depending on the number of mounted single solenoids, double solenoids, and block-off plates. The number of controlled solenoids should be designated as the maximum number of outputs or less.	4 units
F101N Flat cable (10P)	8		4 units
F200N Flat cable (20P)	16		8 units
F201N Flat cable (20P)	16		8 units
F260N Flat cable (26P)	20		10 units
D250ND-sub connector (25P)	16		8 units
D251ND-sub connector (25P)	20	10 units	

Precautions for Order Codes

- **Manifold outlet specification**
Select from among "dual use fitting blocks", "with female thread blocks" or "with selectable fittings." For repair or replacement, purchase the single valve unit additional parts, **F** **Z-J** (single use fitting block), or **F** **Z-M** (female thread block), on p. 67.
- **Orders for valves only**
Place orders from "Single Valve Unit Order Codes" on p. 66. Note, however, that the only available valve outlet type is **A1**.
- **Wiring connection specification**
Blank (packed wiring): Wired to match the specifications of the mounted valve.
-W (double wiring): Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

Caution

Caution should be exercised that the block-off plate wiring is always double wiring (allocated 2 control pins at 1 stn.), regardless of the wiring connection specification. The block-off plate wiring can be made as wiring for a single solenoid. Add **-1W** to the end of the block-off plate order code in the case. For details, consult us.

F10 ORDER CODES

F10 Series Monoblock Manifold F Type, Wire-Saving Type (Direct Piping Type) Order Codes


Valve size


F10M
10 mm [0.394 in.] width

Valve specification

T0: 2-position, for single solenoid only
T1: 2-position, single solenoid specification
T2: 2-position, double solenoid specification
T3: 3-position, closed center
T4: 3-position, exhaust center
T5: 3-position, pressure center
TA: Tandem 3-port (NC and NC)
TB: Tandem 3-port (NO and NO)
TC: Tandem 3-port (NC and NO)

Manual override

Manual override button

Blank

Manual override lever Note3

-R

Valve outlet type

5-port specification


-FJ With dual use fitting block (direct piping type) F10: φ 4, φ 6
-FJ5 With single use fitting block (direct piping type) F10: φ 4
-FJ6 With single use fitting block (direct piping type) F10: φ 6
-FM With female thread block (direct piping type) F10: M5 × 0.8
-FMH With female thread block Note10 (direct piping type) F10: 10-32UNF

3-port specification


-FJ5A With single use fitting block, normally closed (NC) (direct piping type) F10: φ 4
-FJ5B With single use fitting block, normally open (NO) (direct piping type) F10: φ 4
-FJ6A With single use fitting block, normally closed (NC) (direct piping type) F10: φ 6
-FJ6B With single use fitting block, normally open (NO) (direct piping type) F10: φ 6
-FMA With female thread block, normally closed (NC) (direct piping type) F10: M5 × 0.8
-FMAH With female thread block, normally closed (NC) Note11 (direct piping type) F10: 10-32UNF
-FMB With female thread block, normally open (NO) (direct piping type) F10: M5 × 0.8
-FMBH With female thread block, normally open (NO) Note11 (direct piping type) F10: 10-32UNF

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Wiring specification (wiring block)
(no power supply terminal only)

Flat cable connector (with socket and strain relief)

-F□

F100N: 10-pin
F101N: 10-pin
F200N: 20-pin
F201N: 20-pin
F260N: 26-pin
 For details, see p. 47.

D-sub connector

-D25□

(M2.6 mounting screws)
-D250N: 25-pin
-D251N: 25-pin
 (4-40UNC mounting screws)
-D250NU: 25-pin
-D251NU: 25-pin
 For details, see p. 47.

Wiring connection specification

Blank
Packed wiring: Wired to match the specifications of the mounted valve.

-W
Double wiring: Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

Valve size

F10 Standard type
F10L Low-current type

Individual air supply and exhaust spacer, stop valve

Blank: No spacer and no stop valve
-NPM: Individual air supply spacer (with M5 female thread for F10)
-NRM: Individual exhaust spacer (with M5 female thread for F10)
-STP: With stop valve
 For details, see p. 26.

Back pressure prevention valve

Blank No back pressure prevention valve
-E1 With back pressure prevention valve Note6

Wiring specification

-PN
 S type plug connector Note4

Valve size

Valve units

Manifold type

Wiring specification

Wiring connection specification

Station

Valve size

Valve specification

Manual override

Valve outlet type

Wiring specification

Back pressure prevention valve

Individual air supply and exhaust spacer, stop valve

Voltage

Manifold model

Mounting valve model

- Notes: 1. For the maximum number of units, see the table for maximum number of valve units by wiring specification, on p. 79.
 2. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
 3. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
 4. Always enter -PN.
 5. Caution should be exercised that the block-off plate wiring is always double wiring (allocated 2 control pins at 1 stn.), regardless of the wiring connection specification. For single wiring, see p. 79.

6. Not available with the individual exhaust spacer.
 7. Not available in low-current type.
 8. Not available in low-current type and tandem 3-port valves. In addition, only available when the wiring specification is a D-sub connector.
 9. 3 port type is only supported by the T0, T1, and T2 valve type.
 10. Can be selected only when the manifold type is F.
 11. Can be selected only when the manifold type is FH.

Remark: The external pilot type valve cannot be mounted on the F type manifold.

Gasket (gasket and exhaust valve)

F10Z - GS1

Valve size
10: 10 mm [0.394 in.] width

Block-off plate (block-off plate and 2 mounting screws)

F10BP

Valve size
10: 10 mm [0.394 in.] width

Back pressure prevention valve
(for monoblock type, 2 pieces)

F10Z - E1

Valve size
10: 10 mm [0.394 in.] width

Individual air supply and exhaust spacer (Spacer for non-plug-in type, gasket, exhaust valve, and 2 mounting screws)

F10Z -

Valve size
10: 10 mm [0.394 in.] width


Specification
NPM: Individual air supply spacer (with M5 female thread for F10)
NRM: Individual exhaust spacer (with M5 female thread for F10)

※ For details, see p. 27.

Muffler

KM - J

Fitting size
6: Outer diameter ϕ 6 (for individual exhaust spacer)
8: Outer diameter ϕ 8 (for individual exhaust spacer)
(Sales unit: Set of 10 mufflers)

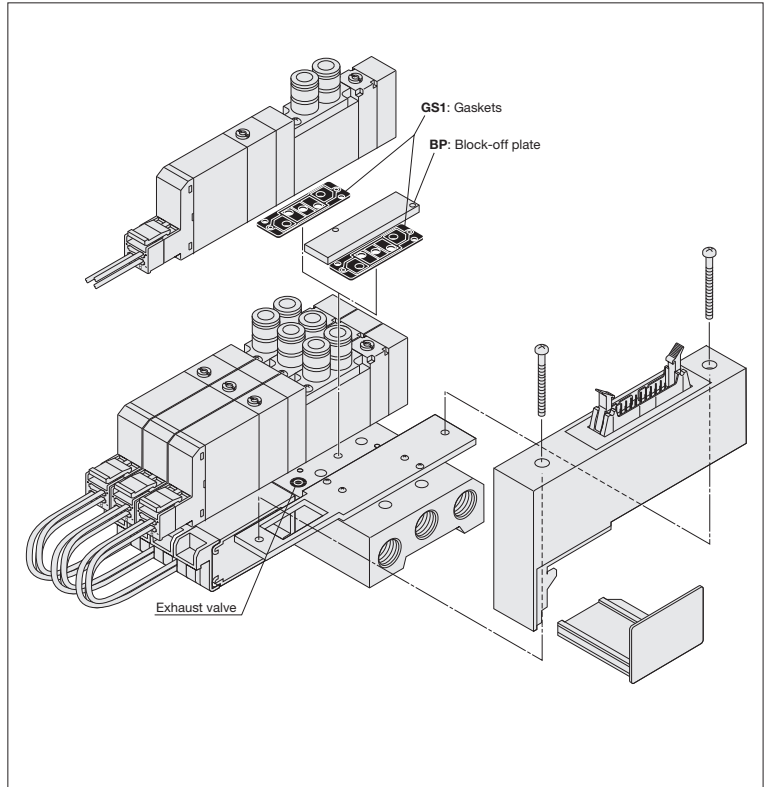

F10 ORDER CODES

Manifold Order Code Example

(4 units of F10 Series)

F10M4F-F201

stn.1~2 F10T0-FJ5-PN DC24V
stn.3 F10T2-FJ6-PN DC24V
stn.4 F10BP

Note: This order code example has no relationship to the illustration at upper right.

■ Table for maximum number of valve units by wiring specification

Wiring specification		Maximum number of units	
		Packed wiring (Blank)	Double wiring (-W)
F100N Flat cable (10P)	8	Varies depending on the number of mounted single solenoids, double solenoids, and block-off plates. The number of controlled solenoids should be designated as the maximum number of outputs or less.	4 units
F101N Flat cable (10P)	8		4 units
F200N Flat cable (20P)	16		8 units
F201N Flat cable (20P)	16		8 units
F260N Flat cable (26P)	20		10 units
D250N D-sub connector (25P)	16		8 units
D251ND-sub connector (25P)	20	10 units	


Precautions for Order Codes

- **Orders for valves only**
Place orders from "Single Valve Unit Order Codes" on p. 66.
Select from valve outlet types -FJ, -FJ5, -FJ6, -FM□, -FJ5A, -FJ5B, -FJ6A, -FJ6B, -FMA□, or -FMB□.
- **Wiring connection specification**
Blank (packed wiring): Wired to match the specifications of the mounted valve.
-W (double wiring): Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

Caution


Caution should be exercised that the block-off plate wiring is always double wiring (allocated 2 control pins at 1 stn.), regardless of the wiring connection specification. The block-off plate wiring can be made as wiring for a single solenoid. Add **-1W** to the end of the block-off plate order code in the case. For details, consult us.

F10 Series PC Board Manifold A Type (Base Piping Type) Order Codes

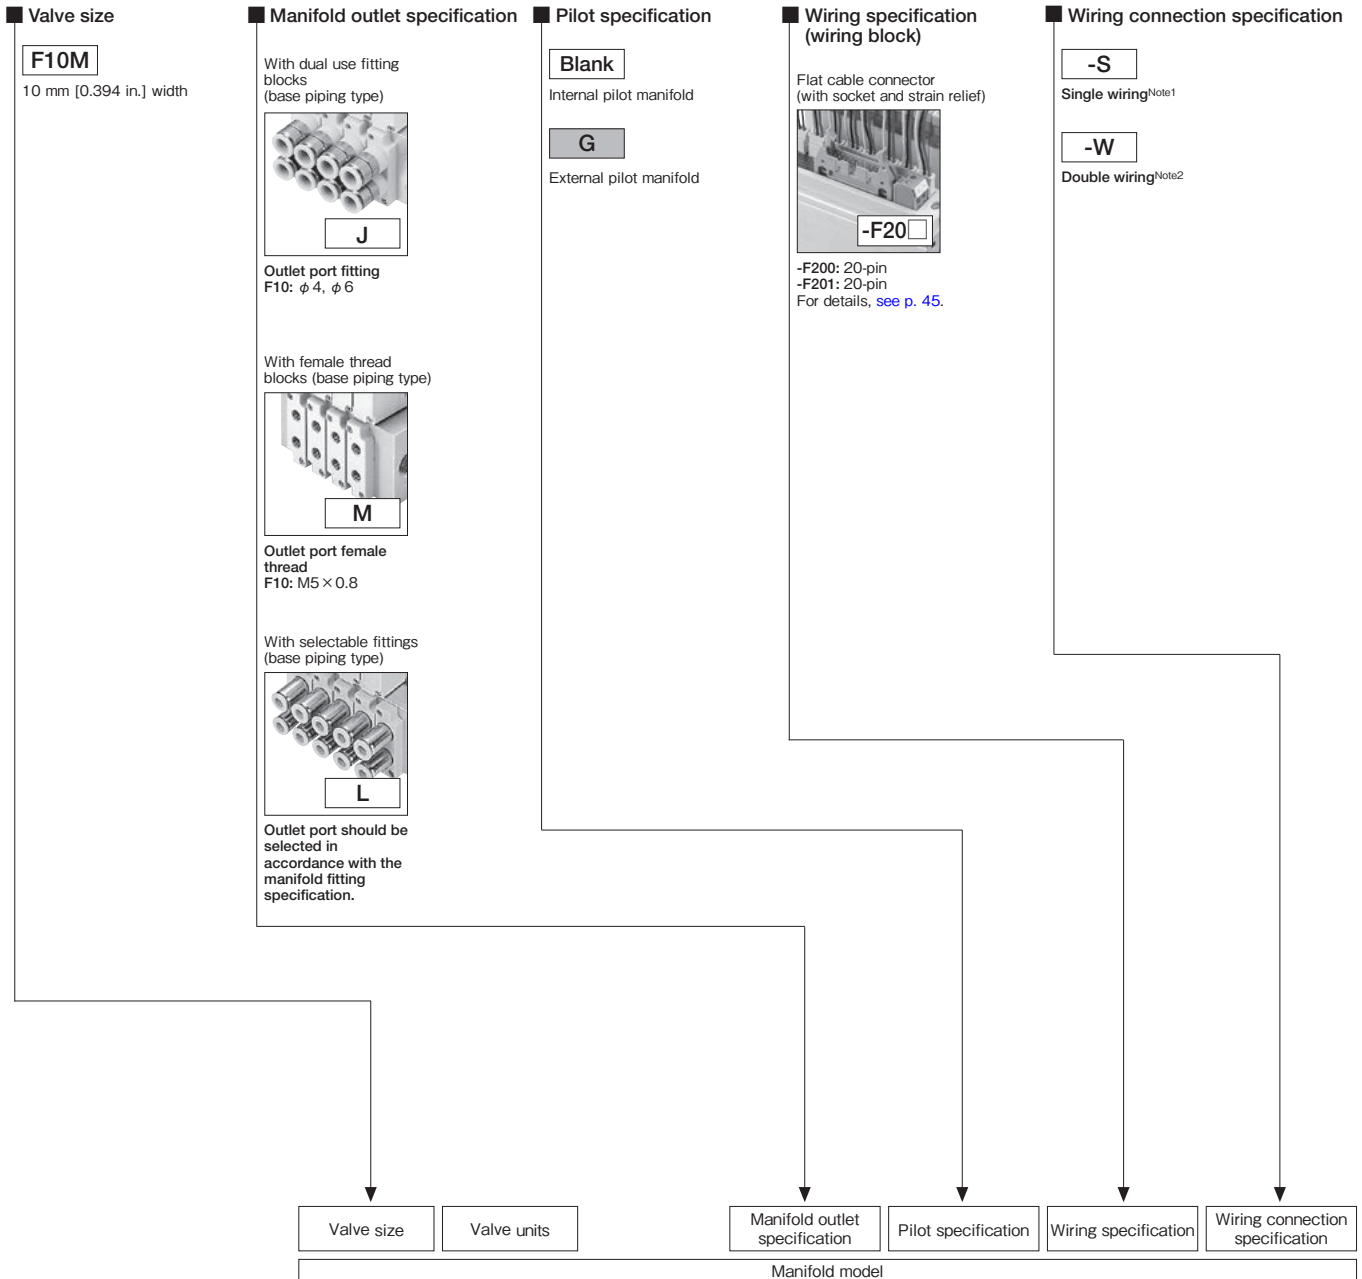

		Manifold model					
	Valve size	Valve units	Manifold outlet specification	Pilot specification	Wiring specification	Wiring connection specification	
Single wiring type ^{Note1}	F10M	6 8 10 12 14 16 Note3	AP	J	Blank	-F200	-S
				M	G	-F201	-S
Double wiring type ^{Note2}	F10M	6 8 Note3	AP	L	Blank	-F200	-S
				J	G	-F201	-S
	F10M	6 8 Note3	AP	J	Blank	-F200	-W
				M	G	-F201	-W
	F10M	6 8 Note3	AP	L	Blank	-F200	-W
				J	G	-F201	-W

Notes: 1. Wiring is for the single solenoid only. Note that this is not the same as packed wiring. The mounting valves are limited to single solenoid only (T0, T1 specifications). Therefore, even if the T1 specification valve is switched over to a double solenoid, no power will be applied to the B side solenoid.
 2. Wiring is always for the double solenoid, regardless of the specifications of the mounted valves.
 3. In terms of wiring connection specifications, the number of units for single wiring is 6-16 (even numbers only) and for double wiring is 6 or 8.

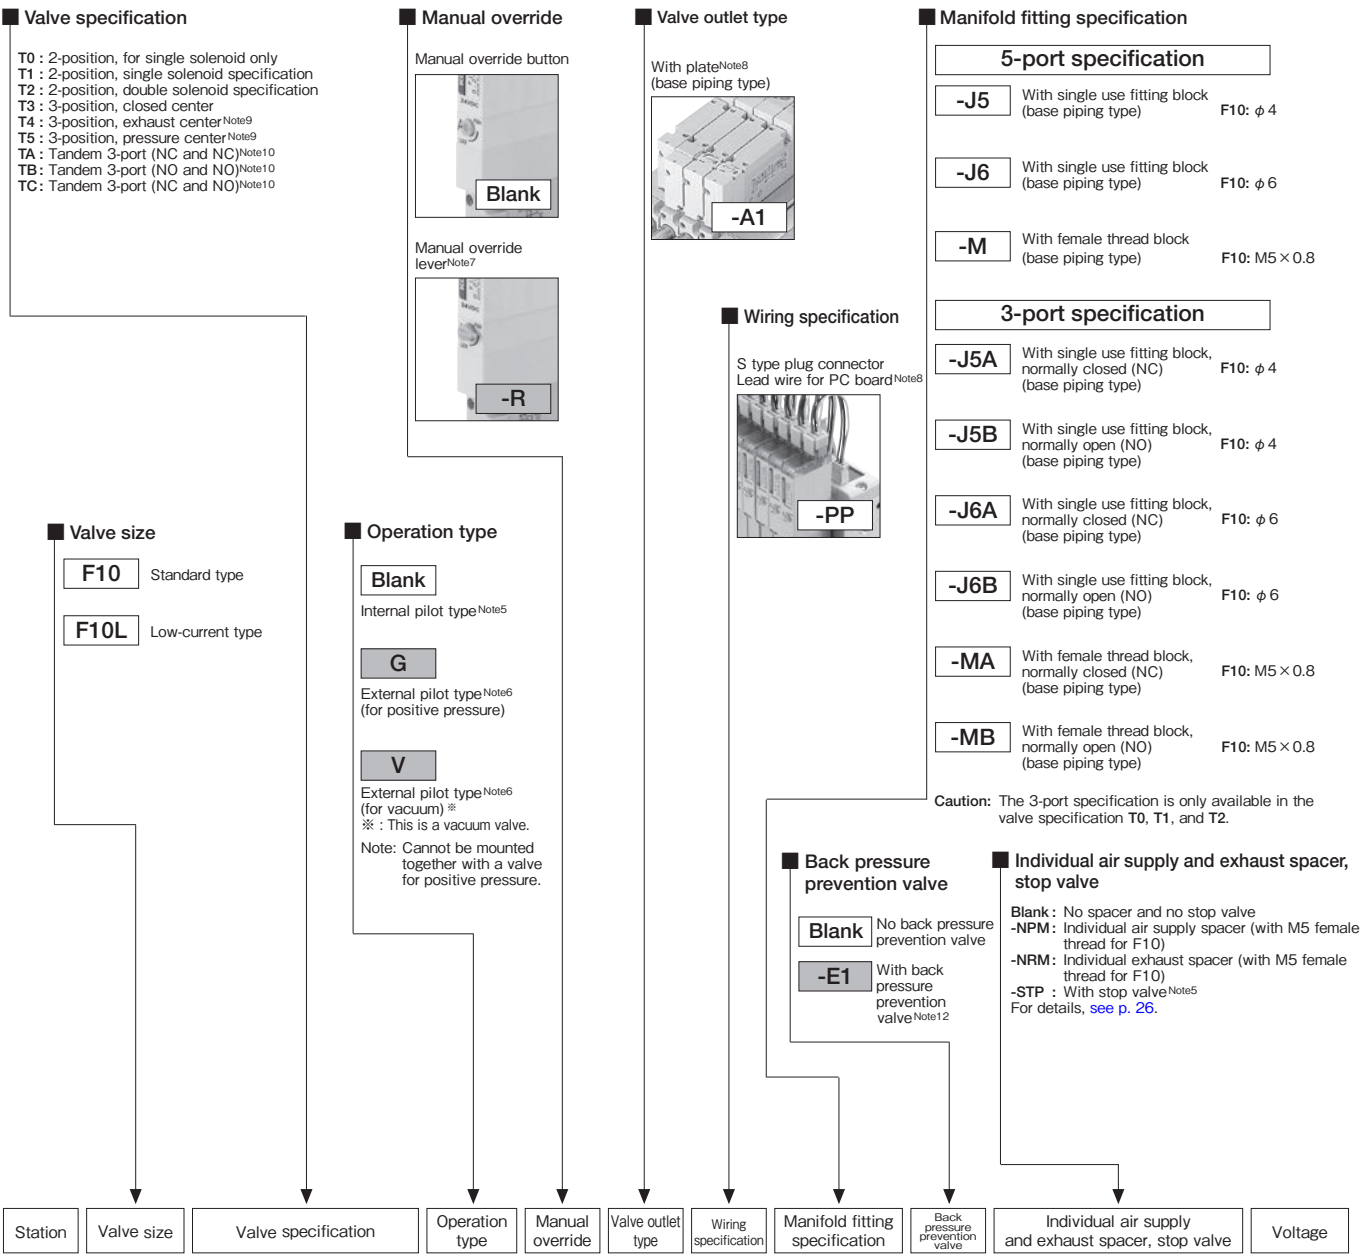

Mounting valve model										
Station	Valve size	Valve specification	Operation type	Manual override	Valve outlet type	Wiring specification	Manifold fitting specification	Back pressure prevention valve	Individual air supply and exhaust spacer, stop valve	Voltage
stn. 1 : stn. □ Note4	F10 F10L	T0 T1 Note1	Blank ^{Note5} G ^{Note6} V ^{Note6}	Blank -R ^{Note7}	-A1 Note8	-PP Note8		Blank -E1 ^{Note12}	Blank -NPM -NRM -STP ^{Note5}	DC24V DC12V ^{Note13}
	F10	BPC (for block-off plate)						Blank -STP ^{Note5}		
stn. 1 : stn. □ Note4	F10 F10L	T0 T1 Note1	Blank ^{Note5} G ^{Note6} V ^{Note6}	Blank -R ^{Note7}	-A1 Note8	-PP Note8	-J5 -J6A -J6 -J6B -M -MA -J5A -MA -J5B -MB Note14	Blank -E1 ^{Note12}	Blank -NPM -NRM -STP ^{Note5}	DC24V DC12V ^{Note13}
	F10	BPC (for block-off plate)						Blank -STP ^{Note5}		
stn. 1 : stn. □ Note4	F10 F10L	T0 T3 TA ^{Note10} T1 T4 ^{Note9} TB ^{Note10} T2 T5 ^{Note9} TC ^{Note10}	Blank ^{Note5} G ^{Note6} V ^{Note6}	Blank -R ^{Note7}	-A1 Note8	-PP Note8 Note11		Blank -E1 ^{Note12}	Blank -NPM -NRM -STP ^{Note5}	DC24V DC12V ^{Note13}
	F10	BPC (for block-off plate)						Blank -STP ^{Note5}		
stn. 1 : stn. □ Note4	F10 F10L	T0 T3 TA ^{Note10} T1 T4 ^{Note9} TB ^{Note10} T2 T5 ^{Note9} TC ^{Note10}	Blank ^{Note5} G ^{Note6} V ^{Note6}	Blank -R ^{Note7}	-A1 Note8	-PP Note8 Note11	-J5 -J6A -J6 -J6B -M -MA -J5A -MA -J5B -MB Note14	Blank -E1 ^{Note12}	Blank -NPM -NRM -STP ^{Note5}	DC24V DC12V ^{Note13}
	F10	BPC (for block-off plate)						Blank -STP ^{Note5}		

Notes: 4. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
 5. Cannot be mounted on the external pilot manifold.
 6. Cannot be mounted on the internal pilot manifold.
 7. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
 8. Always enter -A1 and -PP.
 9. Not available in the vacuum valves.
 10. Not available in external pilot type and vacuum valves.
 11. The lead wire on the solenoid B side (white) is not available in valve specification T0.
 12. Not available with the individual exhaust spacer and vacuum valve.
 13. Not available in low-current type.
 14. The 3-port specification is only available in the valve specification T0, T1, and T2.

Gasket (gasket and exhaust valve)

F10Z - GS1

Valve size
10: 10 mm [0.394 in.] width

Block-off plate

(block-off plate, 2 mounting screws, and housing)

F10BPC

Valve size
10: 10 mm [0.394 in.] width

Connector-related order codes


JAZ - P10

Valve specification

Blank: For T1, T2, T3, T4, T5, TA, TB, TC
0: For T0


Connector specification
P10: For F10 series

Connector lead wire for PC board manifold

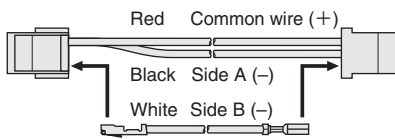

(Insert when using as a double solenoid)^{Note}

Note: White lead wire is not available for JAZ0-P.

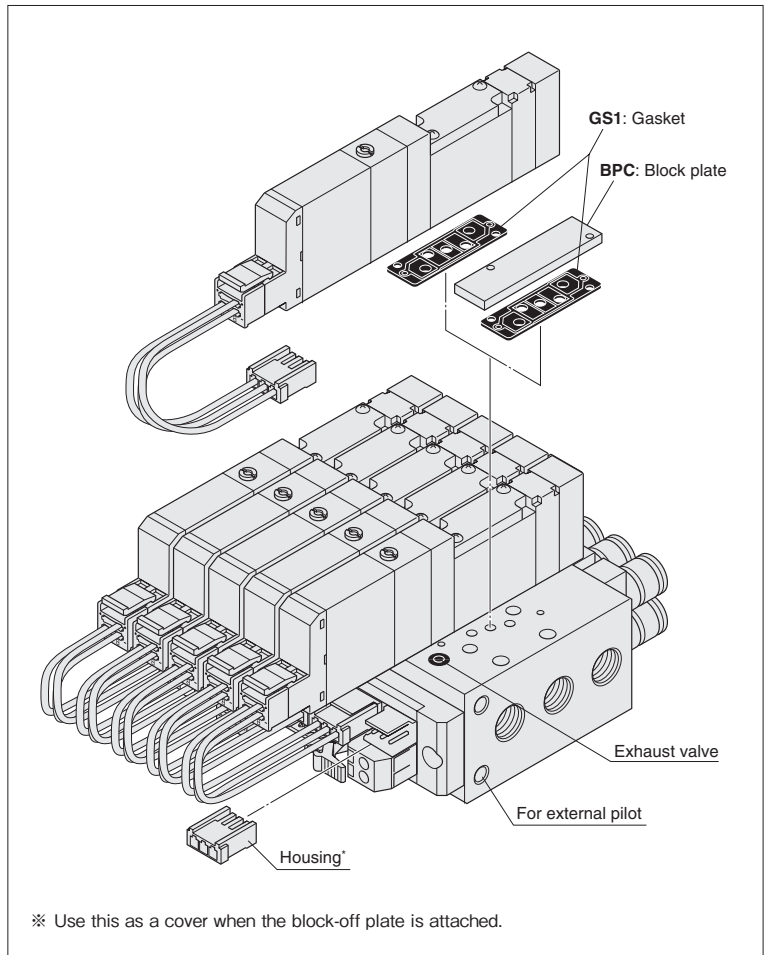

Back pressure prevention valve

(for monoblock type, 2 pieces)

F10Z - E1

Valve size
10: 10 mm [0.394 in.] width

Individual air supply and exhaust spacer (Spacer for non-plug-in type, gasket, exhaust valve, and 2 mounting screws)

F10Z -

Valve size
10: 10 mm [0.394 in.] width

Specification

NPM: Individual air supply spacer (with M5 female thread for F10)
NRM: Individual exhaust spacer (with M5 female thread for F10)

※ For details, see p. 27.

Manifold Order Code Example

(8 units of F10 Series)

F10M8APL-F201-W

stn.1~4 F10T0-A1-PP-J5 DC24V
stn.5~7 F10T2-A1-PP-J6 DC24V
stn.8 F10BPC-J6

Note: This order code example has no relationship to the illustration at upper right.

Muffler

KM - J

Fitting size

6: Outer diameter ϕ 6 (for individual exhaust spacer)

8: Outer diameter ϕ 8 (for individual exhaust spacer)

(Sales unit: Set of 10 mufflers)

Precautions for Order Codes

● Orders for valves only

Enter the code Valve size Valve specification Pilot specification Manual override - Valve outlet type - PP Voltage to order.

● Wiring connection specification

-S (single wiring): Wiring for single solenoid only.

-W (double wiring): Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.


When the lead wire for the PC board is not required, enter -PN.

F10 Series PC Board Manifold F Type (Direct Piping Type) Order Codes

Valve size

F10M
10 mm [0.394 in.] width

Wiring specification (wiring block)
Flat cable connector (with socket and strain relief)



-F20

-F200: 20-pin
-F201: 20-pin
For details, see p. 45.

Wiring connection specification

-S Single wiring^{Note1}

-W Double wiring^{Note2}


Valve size

F10 Standard type

F10L Low-current type


Manual override

Manual override button



Blank

Manual override lever^{Note5}



-R

Valve outlet type

5-port specification

-FJ With dual use fitting block (direct piping type) F10: φ 4, φ 6


-FJ5 With single use fitting block (direct piping type) F10: φ 4

-FJ6 With single use fitting block (direct piping type) F10: φ 6

-FM With female thread block (direct piping type) F10: M5 × 0.8

Wiring specification

S type plug connector
Lead wire for PC board



-PP

Individual air supply and exhaust spacer, stop valve

Blank: No spacer and no stop valve

-NPM: Individual air supply spacer (with M5 female thread for F10)

-NRM: Individual exhaust spacer (with M5 female thread for F10)

-STP: With stop valve
For details, see p. 26.

Back pressure prevention valve

Blank: No back pressure prevention valve

-E1: With back pressure prevention valve^{Note8}

Valve specification

T0 : 2-position, for single solenoid only
T1 : 2-position, single solenoid specification
T2 : 2-position, double solenoid specification
T3 : 3-position, closed center
T4 : 3-position, exhaust center
T5 : 3-position, pressure center
TA : Tandem 3-port (NC and NC)
TB : Tandem 3-port (NO and NO)
TC : Tandem 3-port (NC and NO)

Valve size

Valve units

Wiring specification

Wiring connection specification

Station

Valve size

Valve specification

Manual override

Valve outlet type

Wiring specification

Back pressure prevention valve

Individual air supply and exhaust spacer, stop valve

Voltage

Manifold model

Mounting valve model

Single wiring type ^{Note1}	6 8 10 12 14 16 <small>Note3</small>	FP	-F200 -F201	-S	stn. 1 : stn. <input type="checkbox"/> <small>Note4</small>	F10 F10L	T0 T1 <small>Note1</small>	Blank -R ^{Note5}	<small>Note10</small> -FJ -FJ5B -FJ5 -FJ6A -FJ6 -FJ6B -FM -FMA -FJ5A -FMB	-PP <small>Note6</small>	Blank -E1 ^{Note8}	Blank -NPM -NRM -STP	DC24V DC12V ^{Note9}
Double wiring type ^{Note2}	6 8 <small>Note3</small>	FP	-F200 -F201	-W	stn. 1 : stn. <input type="checkbox"/> <small>Note4</small>	F10 F10L	T0 T3 TA T1 T4 TB T2 T5 TC	Blank -R ^{Note5}	<small>Note10</small> -FJ -FJ5B -FJ5 -FJ6A -FJ6 -FJ6B -FM -FMA -FJ5A -FMB	-PP <small>Note6 Note7</small>	Blank -E1 ^{Note8}	Blank -NPM -NRM -STP	DC24V DC12V ^{Note9}

Notes: 1. Wiring is for the single solenoid only. Note that this is not the same as packed wiring. The mounting valves are limited to single solenoid only (T0, T1 specifications). Therefore, even if the T1 specification valve is switched over to a double solenoid, no power will be applied to the B side solenoid.

2. Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

3. In terms of wiring connection specifications, the number of units for single wiring is 6-16 (even numbers only) and for double wiring is 6 or 8.

4. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.

5. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.

6. Always enter -PP.

7. The lead wire on the solenoid B side (white) is not available in valve specification T0.

8. Not available with the individual exhaust spacer.

9. Not available in low-current type.

10. The 3-port specifications are only available in the valve specification T0, T1, and T2.

Gasket (gasket and exhaust valve)

F10Z - GS1

Valve size
10: 10 mm [0.394 in.] width

Block-off plate (block-off plate, 2 mounting screws, and housing)

F10BPC


Valve size
10: 10 mm [0.394 in.] width

Connector-related order code


JAZ □ - P10

Valve specification
Blank: For T1, T2, T3, T4, T5, TA, TB, TC
0: For T0

Connector specification
P10: For F10 series
Connector lead wire for PC board manifold

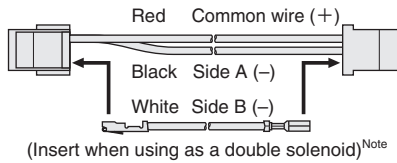

Note: White lead wire is not available for JAZ0-P□.

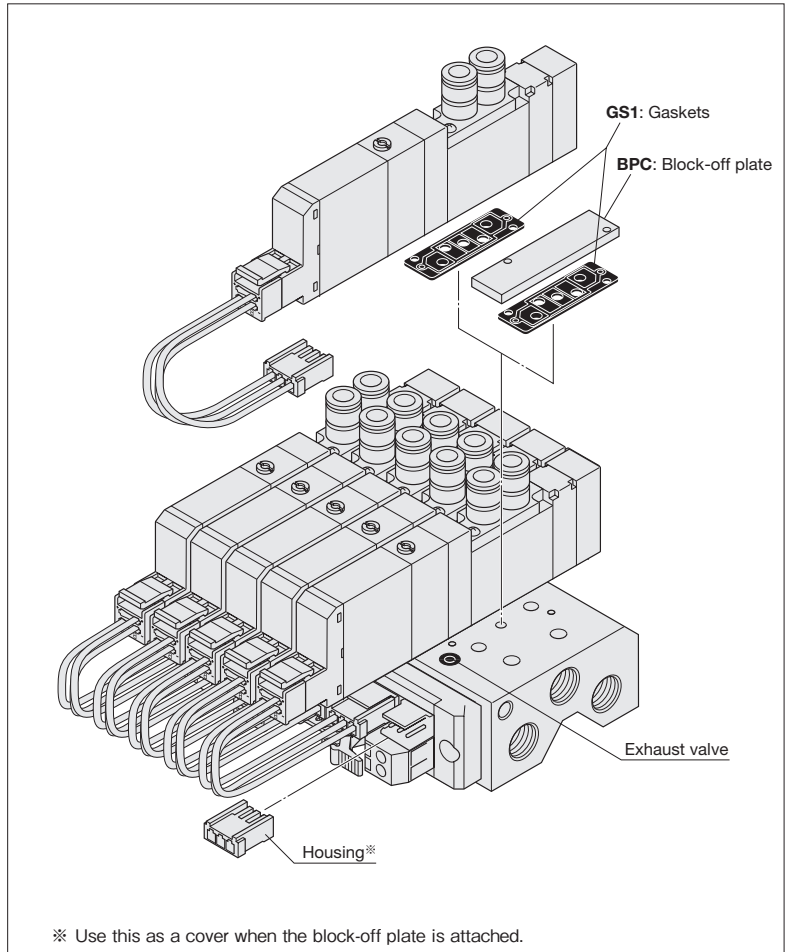

Back pressure prevention valve (for monoblock type, 2 pieces)

F10Z - E1

Valve size
10: 10 mm [0.394 in.] width

Individual air supply and exhaust spacer (Spacer for non-plug-in type, gasket, exhaust valve, and 2 mounting screws)

F10Z - □

Valve size
10: 10 mm [0.394 in.] width

Specification
NPM: Individual air supply spacer (with M5 female thread for F10)
NRM: Individual exhaust spacer (with M5 female thread for F10)

** For details, see p. 27.

Manifold Order Code Example

(8 units of F10 Series)

F10M8FP-F201-W

- stn.1~4 F10T0-FJ5-PP DC24V
- stn.5~7 F10T2-FJ6-PP DC24V
- stn.8 F10BPC

Note: This order code example has no relationship to the illustration at upper right.

Muffler

KM - J □

Fitting size
6: Outer diameter φ6 (for individual exhaust spacer)
8: Outer diameter φ8 (for individual exhaust spacer)
(Sales unit: Set of 10 mufflers)

Precautions for Order Codes

● Orders for valves only



Enter the code [Valve size] [Valve specification] [Manual override] - [Valve outlet type] - PP [Voltage] to order.

● Wiring connection specification

-S (single wiring): Wiring for single solenoid only.
-W (double wiring): Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

When the lead wire for the PC board is not required, enter -PN.

F10 Series Split Manifold Non-Plug-in Type Order Codes

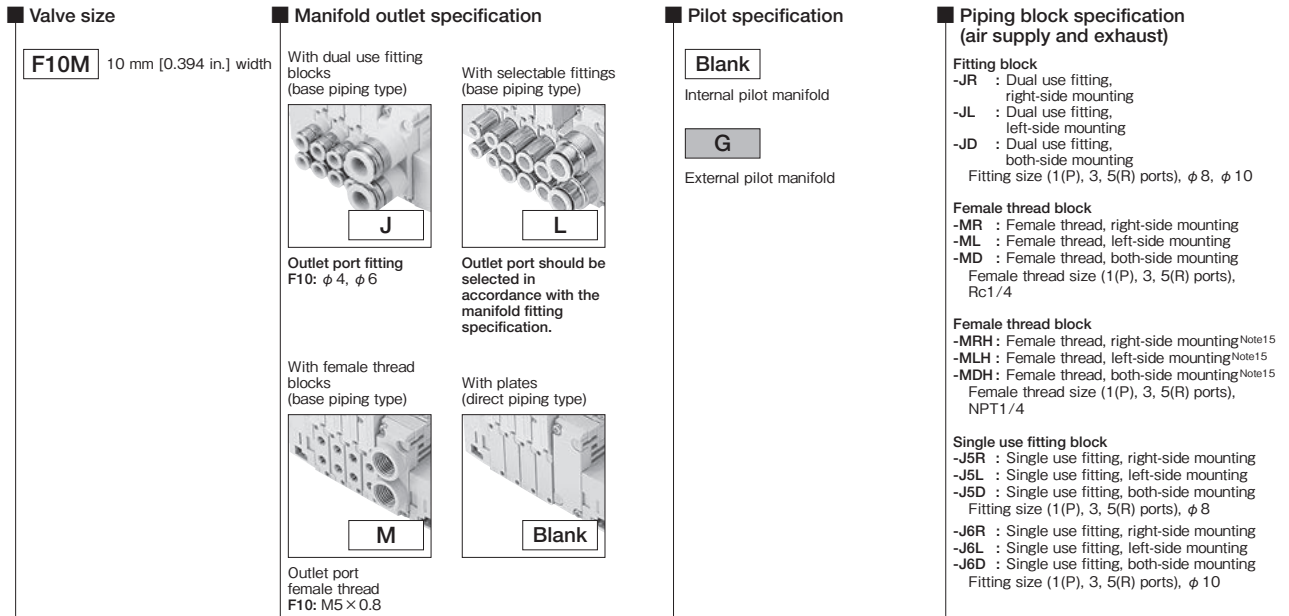

Valve size	Valve units	Manifold type	Manifold outlet specification	Pilot specification	Piping block specification
Manifold model					

Base piping type	F10M	2 ⋮ 20	N (※Rc)	J M	Blank G	-JR -JL -JD -MR -ML -MD	-J5R -J6R -J5L -J6L -J5D -J6D
Base piping type selectable fitting			N (※Rc)	L	Blank G	-JR ^{Note14} -JL ^{Note14} -JD ^{Note14} -MR ^{Note14} -ML ^{Note14} -MD ^{Note14} -MRH ^{Note15} -MLH ^{Note15}	-MDH ^{Note15} -J5R ^{Note14} -J6R ^{Note14} -J5L ^{Note14} -J6L ^{Note14} -J5D ^{Note14} -J6D ^{Note14}
Direct piping type			NH (※NPT)	Blank	Blank G	-JR ^{Note14} -JL ^{Note14} -JD ^{Note14} -MR ^{Note14} -ML ^{Note14} -MD ^{Note14} -MRH ^{Note15} -MLH ^{Note15}	-MDH ^{Note15} -J5R ^{Note14} -J6R ^{Note14} -J5L ^{Note14} -J6L ^{Note14} -J5D ^{Note14} -J6D ^{Note14}

Remark: Negative common specifications are also available as made to order products (add -129W to the ends of the valve and manifold model order codes). For details, consult us.

Valve specification

- T0 : 2-position, for single solenoid only
- T1 : 2-position, single solenoid specification
- T2 : 2-position, double solenoid specification
- T3 : 3-position, closed center
- T4 : 3-position, exhaust center
- T5 : 3-position, pressure center
- TA : Tandem 3-port (NC and NO)^{Note7}
- TB : Tandem 3-port (NO and NO)^{Note7}
- TC : Tandem 3-port (NC and NO)^{Note7}

Operation type

Blank

Internal pilot type^{Note5}


G

External pilot type^{Note6}
(for positive pressure)

※ No vacuum valve can be mounted.

Manual override

Manual override button



Blank

Manual override lever^{Note2}



-R

Valve outlet type

-A1 With plate^{Note3}
(base piping type)

5-port specification

-FJ With dual use fitting block^{Note14} F10: φ 4, φ 6
(direct piping type)

-FJ5 With single use fitting block^{Note14}
(direct piping type) F10: φ 4

-FJ6 With single use fitting block^{Note14}
(direct piping type) F10: φ 6

-FM With female thread block^{Note14}
(direct piping type) F10: M5 × 0.8

-FMH With female thread block^{Note15}
(direct piping type) F10: 10-32UNF

3-port specification

-FJ5A With single use fitting block, normally closed (NC)^{Note14} F10: φ 4
(direct piping type)

-FJ5B With single use fitting block, normally open (NO)^{Note14} F10: φ 4
(direct piping type)

-FJ6A With single use fitting block, normally closed (NC)^{Note14} F10: φ 6
(direct piping type)

-FJ6B With single use fitting block, normally open (NO)^{Note14} F10: φ 6
(direct piping type)

-FMA With female thread block, normally closed (NC)^{Note14} F10: M5 × 0.8
(direct piping type)

-FMAH With female thread block, normally closed (NC)^{Note15} F10: 10-32UNF
(direct piping type)

-FMB With female thread block, normally open (NO)^{Note14} F10: M5 × 0.8
(direct piping type)

-FMBH With female thread block, normally open (NO)^{Note15} F10: 10-32UNF
(direct piping type)

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.


Wiring specification ^{Note11}

S type plug connector
Without connector



-PN

S type plug connector
Lead wire 3000 mm [11.8 in.]



-PS

S type plug connector
Lead wire 3000 mm [118 in.]




-PS3

Pre-wired positive common terminal

S type plug connector

Lead wire 300 mm [11.8 in.]



-CPS

Pre-wired positive common terminal

S type plug connector

Lead wire 3000 mm [118 in.]



-CPS3

Manifold fitting specification

5-port specification

-J5 With single use fitting block (base piping type) F10: φ 4

-J6 With single use fitting block (base piping type) F10: φ 6

-M With female thread block (base piping type) F10: M5 × 0.8

3-port specification

-J5A With single use fitting block, normally closed (NC) F10: φ 4
(base piping type)

-J5B With single use fitting block, normally open (NO) F10: φ 4
(base piping type)

-J6A With single use fitting block, normally closed (NC) F10: φ 6
(base piping type)

-J6B With single use fitting block, normally open (NO) F10: φ 6
(base piping type)

-MA With female thread block, normally closed (NC) F10: M5 × 0.8
(base piping type)

-MAH With female thread block, normally closed (NC)^{Note15} F10: 10-32UNF
(base piping type)

-MB With female thread block, normally open (NO)^{Note14} F10: M5 × 0.8
(base piping type)

-MBH With female thread block, normally open (NO)^{Note15} F10: 10-32UNF
(base piping type)

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Port isolator

- Blank : No port isolator
- SP : For 1(P) port^{Note4}
- SR : For 3(R2), 5(R1) ports^{Note4}
- SA : For 1(P), 3(R2), and 5(R1) ports^{Note4}

Back pressure prevention valve

- Blank : No back pressure prevention valve
- E2** : With back pressure prevention valve^{Note8}

Individual air supply and exhaust spacer

- Blank : No spacer
 - NPM : Individual air supply spacer (with M5 female thread for F10)
 - NRM : Individual exhaust spacer (with M5 female thread for F10)
- For details, see p. 26.

Station	Valve size	Valve specifications	Operation type	IP Specifications	Manual override	Valve outlet type	Wiring specification	Manifold fitting specification	Back pressure prevention valve	Individual air supply and exhaust spacer	Port isolator	Voltage
---------	------------	----------------------	----------------	-------------------	-----------------	-------------------	----------------------	--------------------------------	--------------------------------	--	---------------	---------

Mounting valve model

stn. 1 ⋮ stn. □ <small>Note1</small>	F10	T0 TA ^{Note7} T1 TB ^{Note7} T2 TC ^{Note7} T3 T4 T5	Blank ^{Note5} G ^{Note6}	Blank -p ^{Note12}	Blank -R ^{Note2}	-A1 ^{Note3}	-PN -PS ^{Note11} -PS3 -CPS -CPS3	Blank	Blank -E2 ^{Note8}	Blank -NPM -NRM	Blank -SP ^{Note4} -SR ^{Note4} -SA ^{Note4}	DC24V DC12V ^{Note9} AC100V ^{Note10} AC120V ^{Note10}		
	F10L		BPN (for block-off plate)											
stn. 1 ⋮ stn. □ <small>Note1</small>	F10	T0 TA ^{Note7} T1 TB ^{Note7} T2 TC ^{Note7} T3 T4 T5	Blank ^{Note5} G ^{Note6}	Blank -p ^{Note12}	Blank -R ^{Note2}	-A1 ^{Note3}	-PN -PS ^{Note11} -PS3 -CPS -CPS3	-J5 ^{Note14} -J6 ^{Note14} -M ^{Note14} -MH ^{Note14} -J5A ^{Note14} -J5B ^{Note14}	-J6A ^{Note14} -J6B ^{Note14} -MA ^{Note14} -MAH ^{Note15} -MB ^{Note14} -MBH ^{Note15}	Blank	Blank -E2 ^{Note8}	Blank -NPM -NRM	Blank -SP ^{Note4} -SR ^{Note4} -SA ^{Note4}	DC24V DC12V ^{Note9} AC100V ^{Note10} AC120V ^{Note10}
	F10L		BPN (for block-off plate)											
stn. 1 ⋮ stn. □ <small>Note1</small>	F10	T0 TA ^{Note7} T1 TB ^{Note7} T2 TC ^{Note7} T3 T4 T5	Blank ^{Note5} G ^{Note6}	Blank -p ^{Note12}	Blank -R ^{Note2}	-FJ ^{Note14} -FJ5 ^{Note14} -FJ6 ^{Note14} -FMA ^{Note14} -FMAH ^{Note15} -FMB ^{Note14} -FMBH ^{Note15} -FJ5A ^{Note14} -FJ5B ^{Note14}	-FJ6A ^{Note14} -FJ6B ^{Note14} -FMA ^{Note14} -FMAH ^{Note15} -FMB ^{Note14} -FMBH ^{Note15}	-PN -PS ^{Note11} -PS3 -CPS -CPS3	Blank	Blank -E2 ^{Note8}	Blank -NPM -NRM	Blank -SP ^{Note4} -SR ^{Note4} -SA ^{Note4}	DC24V DC12V ^{Note9} AC100V ^{Note10} AC120V ^{Note10}	
	F10L		BPN (for block-off plate)											

Notes: 1. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
 2. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
 3. When selecting J, M, or L (base piping type) for the manifold outlet specification, always enter -A1 (with plate) for the valve outlet type.
 4. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for -SA, or 1 each port isolator for -SP and -SR for a total of 2 locations. When shipping, the designated port isolators are mounted between the designated station and the station to its immediate left (the next smaller stn. No.).
 5. Cannot be mounted on the external pilot manifold.
 6. Cannot be mounted on the internal pilot manifold.
 7. Not available in external pilot type.
 8. Not available with the individual exhaust spacer.
 9. Not available in low-current type.
 10. Not available in low-current type and tandem 3-port valves.
 11. Wiring specifications of -P □ and -CP □ cannot be mounted together.
 12. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.
 13. The 3-port specifications are only available in the valve specification T0, T1, and T2.
 14. Can be selected only when the manifold type is N.
 15. Can be selected only when the manifold type is NH.

Parts for manifold

F10Z -

Valve size
10: 10 mm [0.394 in.]
width

Parts content
GS2 : Gasket (gasket and exhaust valve)
SP : Port isolator (for 1(P) port)
SR : Port isolator (for 3(R2), 5(R1) ports)
SA : Port isolator (for 1(P), 3(R2), 5(R1) ports)

Block-off plate (block-off plate, 2 mounting screws, and plug)

F10BP N

Valve size
10: 10 mm [0.394 in.]
width

For non-plug-in type

Connector-related order codes ※ For details, see p. 19.

JAZ -

Valve specification

Blank: For T1, T2, T3, T4, T5, TA, TB, TC
0: For T0

Connector specification

CP : Connector, lead wire length 300 mm
CP3 : Connector, lead wire length 3000 mm
CPN : Connector without lead wire (short bar, contacts included)
PA : Positive common A type, lead wire length 300 mm ※
PA3 : Positive common A type, lead wire length 3000 mm ※
PB : Positive common B type, lead wire length 300 mm ※
PB3 : Positive common B type, lead wire length 3000 mm ※
PC : Positive common C type, lead wire length 300 mm ※
PC3 : Positive common C type, lead wire length 3000 mm ※

300 mm = 11.8 in.
1500 mm = 59 in.
3000 mm = 118 in.

FZ -

Valve specification


For T1, T2, T3, T4, T5, TA, TB, TC

Connector specification


CC1.5 : Cabtyre cable, length 1500 mm ※
CC3 : Cabtyre cable, length 3000 mm ※

Common connector assembly


A Type: JAZ-PA ※



B Type: JAZ-PB ※



C Type: JAZ-PC ※



※ Lead wire length Blank: 300 mm [11.8 in.] Note: White lead wire is not available with JAZO-P .
3: 3000 mm [118 in.]

Remark: Connector for negative common type also available. For details, see p. 22.

Valve base assembly (valve base and gasket)

F10Z -

Valve size
10: 10 mm [0.394 in.]
width

Piping specification

VJ : Dual use fitting valve base
VJ5 : Single use fitting valve base F10: φ4
VJ6 : Single use fitting valve base F10: φ6
VJ5A : 3-port specification normally closed, single use fitting valve base F10: φ4
VJ5B : 3-port specification normally open, single use fitting valve base F10: φ4
VJ6A : 3-port specification normally closed, single use fitting valve base F10: φ6
VJ6B : 3-port specification normally open, single use fitting valve base F10: φ6
VM : Female thread valve base
VMA : 3-port specification normally closed, female thread valve base
VMB : 3-port specification normally open, female thread valve base
VMH : Female thread valve base F10: 10-32UNF
VMAH : 3-port specification normally closed, female thread valve base F10: 10-32UNF
VMBH : 3-port specification normally open, female thread valve base F10: 10-32UNF
VP : Valve base plate

Pilot specification
Blank : Internal pilot
G : External pilot

Piping block assembly

F10Z -

Valve size
10: 10 mm [0.394 in.]
width

Piping specification

PJ : Dual use fitting piping block
PJ5 : Single use fitting piping block φ8
PJ6 : Single use fitting piping block φ10
PM : Female thread piping block

Pilot specification
Blank : Internal pilot
G : External pilot

End blocks (one set of left and right)

F10Z - E

Valve size
10: 10 mm [0.394 in.]
width

Pilot specification

Blank : Internal pilot
G : External pilot

Back pressure prevention valve (2 pieces for split type, with dedicated gasket)

F10Z - E2

Valve size
10: 10 mm [0.394 in.] width

Individual air supply and exhaust spacer (Spacer for non-plug-in type, gasket, exhaust valve, and 2 mounting screws)

F10Z -

Valve size
10: 10 mm [0.394 in.]
width

Specification

NPM : Individual air supply spacer (with M5 female thread for F10)
NRM : Individual exhaust spacer (with M5 female thread for F10)

※ For details, see p. 27.

Muffler

KM - J

Fitting size

6: Outer diameter φ6 (for individual exhaust spacer)
8: Outer diameter φ8 (for individual exhaust spacer)
10: Outer diameter φ10


(Sales unit: Set of 10 mufflers)

DIN rail

DIN - (Unit: 1)

Rail length

125: 125mm [4.921 in.]
: (25 mm [0.984 in.] pitch)
525: 525mm [20.669 in.]

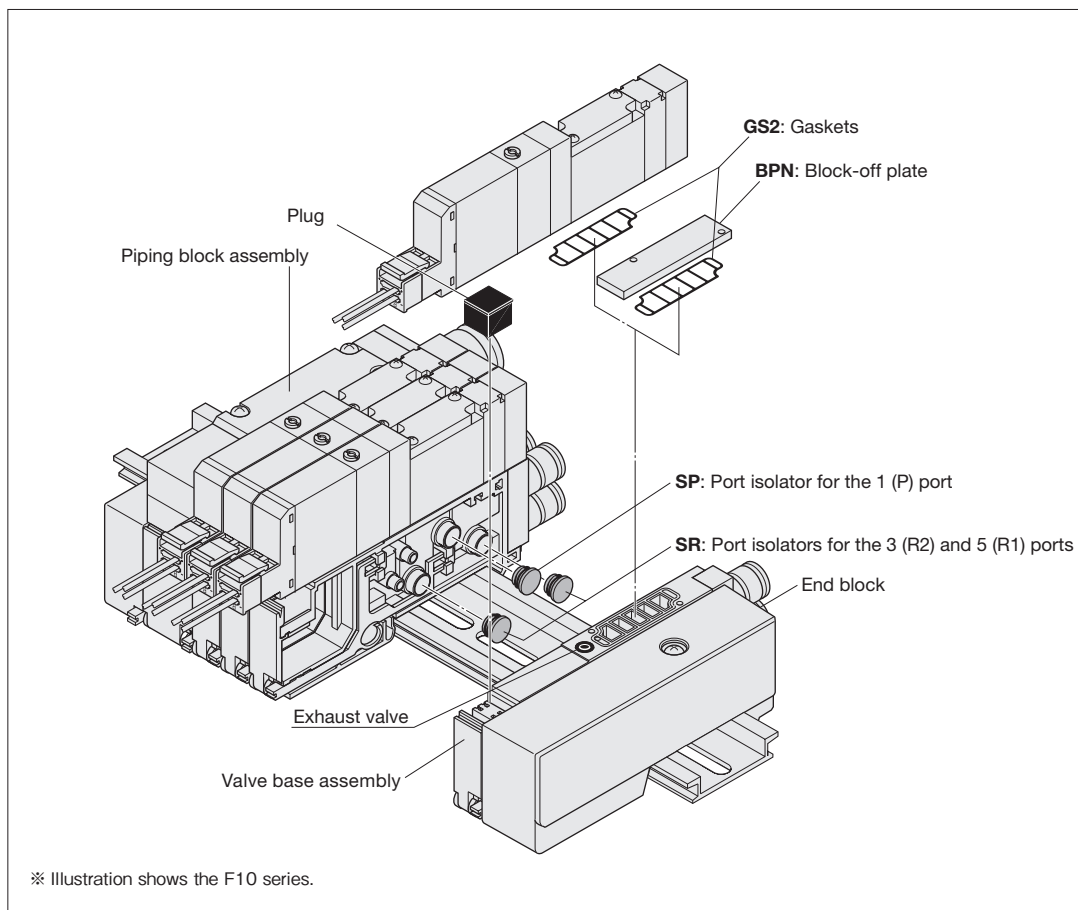

Manifold Order Code Example

(4 units of F10 Series)

F10M4NL-J5R

stn.1~2 F10T0-A1-PS-J5 DC24V
 stn.3 F10T2-A1-PS-J6 DC24V
 stn.4 F10BPN-J6

Note: This order code example has no relationship to the illustration above.

Precautions for Order Codes

● Orders for valves only

Place orders from "Single Valve Unit Order Codes" on p. 66.

However, Blank, A2, F3, F4, F5, F6, F4A, F4B, F5A, F5B, F6A, and F6B cannot be selected for the valve outlet type. And for the wiring specification, Blank, PL, and PL3 cannot be selected. In addition, for common terminal wiring connections, separately order the common connector assemblies listed on the previous page.

Connector-related order codes

JAZ - P - (for double use only)

Valve

specification

For **T2, T3, T4, T5, TA, TB,** or **TC**

Connector specification

CP : Connector, lead wire length 300 mm [11.8 in.] (black, red, white, for total of 3 lead wires)

CP3: Connector, lead wire length 3000 mm [118 in.] (black, red, white, for total of 3 lead wires)

PA : Positive common A type, lead wire length 300 mm [11.8 in.]*

PA3 : Positive common A type, lead wire length 3000 mm [118 in.]*

PB : Positive common B type, lead wire length 300 mm [11.8 in.]*

PB3: Positive common B type, lead wire length 3000 mm [118 in.]*

PC : Positive common C type, lead wire length 300 mm [11.8 in.]*

PC3: Positive common C type, lead wire length 3000 mm [118 in.]*

※A common connector assembly.

JAZ0 - P - (for single use only)

Valve

specification

For **T0/T1**

Connector specification

CP : Connector, lead wire length 300 mm [11.8 in.] (black, red, for total of 2 lead wires)

CP3: Connector, lead wire length 3000 mm [118 in.] (black, red, for total of 2 lead wires)

PA : Positive common A type, lead wire length 300 mm [11.8 in.]*

PA3 : Positive common A type, lead wire length 3000 mm [118 in.]*

PB : Positive common B type, lead wire length 300 mm [11.8 in.]*

PB3: Positive common B type, lead wire length 3000 mm [118 in.]*

PC : Positive common C type, lead wire length 300 mm [11.8 in.]*


PC3: Positive common C type, lead wire length 3000 mm [118 in.]*

※A common connector assembly.


- Notes:
1. When the valve specification is **T1**, select the **JAZ0-P-** single dedicated type.
 2. When switching between the single and double type (**T1/T2**), purchase and use a dedicated connector for single or double use (the number of seal holes in the lead wire differs for the single and double type).
 3. There is no white lead wire for the **JAZ0-P-** .
 4. It is necessary to disassemble the connector to add a common connector assembly. Contact your nearest KOGANEI sales office.
 5. For information on use in locations/atmospheres subject to substances other than water, such as organic solvents, cutting oil, or reagents, contact your nearest KOGANEI sales office.
 6. For information on replacing the waterproof seal, contact your nearest KOGANEI sales office.

F10 Series Split Manifold Plug-in Type Order Codes


Manifold outlet specification




Outlet port fitting
F10: φ 4, φ 6



Outlet port should be selected in accordance with the manifold fitting specification.



Outlet port female thread
F10: M5×0.8



Blank

Valve size

F10M 10 mm [0.394 in.] width

Pilot specification

Blank

Internal pilot manifold

G

External pilot manifold

Piping block specification (air supply and exhaust)

Fitting block

- JR : Dual use fitting, right-side mounting^{Note15}
 - JL : Dual use fitting, left-side mounting^{Note15}
 - JD : Dual use fitting, both-side mounting^{Note15}
- Fitting size (1(P), 3, 5(R) ports), φ 8, φ 10

Female thread block

- MR : Female thread, right-side mounting^{Note15}
 - ML : Female thread, left-side mounting^{Note15}
 - MD : Female thread, both-side mounting^{Note15}
- Female thread size (1(P), 3, 5(R) ports), Rc1/4

Female thread block


- MRH : Female thread, right-side mounting^{Note16}
 - MLH : Female thread, left-side mounting^{Note16}
 - MDH : Female thread, both-side mounting^{Note16}
- Female thread size (1(P), 3, 5(R) ports), NPT1/4

Single size fitting block

- J5R : Single use fitting, right-side mounting^{Note15}
 - J5L : Single use fitting, left-side mounting^{Note15}
 - J5D : Single use fitting, both-side mounting^{Note15}
 - J6R : Single use fitting, right-side mounting^{Note15}
 - J6L : Single use fitting, left-side mounting^{Note15}
 - J6D : Single use fitting, both-side mounting^{Note15}
- Fitting size (1(P), 3, 5(R) ports), φ 8
- Fitting size (1(P), 3, 5(R) ports), φ 10


Wiring specification (wiring block)

Flat cable connector (with socket and strain relief)



<Connector top surface wiring>


- F100 : 10-pin
 - F100N : 10-pin without power terminal
 - F101 : 10-pin
 - F101N : 10-pin without power terminal
 - F200 : 20-pin
 - F200N : 20-pin without power terminal
 - F201 : 20-pin
 - F201N : 20-pin without power terminal
 - F260 : 26-pin
 - F260N : 26-pin without power terminal
- For details, see p. 47.



<Connector side surface wiring>

- F100E : 10-pin
- F100EN : 10-pin without power terminal
- F101E : 10-pin
- F101EN : 10-pin without power terminal
- F200E : 20-pin
- F200EN : 20-pin without power terminal
- F201E : 20-pin
- F201EN : 20-pin without power terminal
- F260E : 26-pin
- F260EN : 26-pin without power terminal

D-sub connector



<Connector top surface wiring>


- (M2.6 mounting screws)
- D250 : 25-pin^{Note14}
 - D250N : 25-pin without power terminal^{Note14}
 - D251 : 25-pin^{Note14}
 - D251N : 25-pin without power terminal^{Note14}
- (4-40 UNC mounting screws)
- D250U : 25-pin^{Note15}
 - D251U : 25-pin^{Note15}
 - D370NU : 37-pin without power terminal^{Note15}



<Connector side surface wiring>

- (M2.6 mounting screws)
- D250E : 25-pin^{Note14}
 - D250EN : 25-pin without power terminal^{Note14}
 - D251E : 25-pin^{Note14}
 - D251EN : 25-pin without power terminal^{Note14}
- (4-40 UNC mounting screws)
- D250EU : 25-pin^{Note15}
 - D251EU : 25-pin^{Note15}

Terminal block (19 terminals, M3 screws)



Also can provide the terminal block with cover,^{Note4}

For details, see p. 47.

Wiring connection specification

Blank

Packed wiring:
Wiring is made in accordance with the mounted valve specifications.

-W

Double wiring:
Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.


Wiring position (wiring block)

Blank : Left-side mounting
-R : Right-side mounting

Valve size

F10 Standard type

F10L Low-current type



Base piping type	Manifold type	Manifold outlet specification	Pilot specification	Piping block specification										Wiring specification		Wiring connection specification	Wiring position	Voltage																					
				-JR	-JL	-JD	-MR	-ML	-MD	-J5R	-J5L	-J5D	-J6R	-J6L	-J6D				-F100	-F101	-F101N	-F200	-F201	-F200N	-F201N	-F260	-F260N	-D250	-D251	-D251N	-D250E	-D251E	-D251EN	-D250EN	-D251EN	-T200			
Base piping type selectable fitting	P (※Rc)	J	Blank	-JR	-JL	-JD	-MR	-ML	-MD	-J5R	-J5L	-J5D	-J6R	-J6L	-J6D	-F100	-F101	-F101N	-F200	-F201	-F200N	-F201N	-F260	-F260N	-D250	-D251	-D251N	-D250E	-D251E	-D251EN	-D250EN	-D251EN	-T200	Blank	Blank	DC24V	DC12V ^{Note2}	AC100V ^{Note3}	AC120V ^{Note3}
				-JR ^{Note15}	-JL ^{Note15}	-JD ^{Note15}	-MR ^{Note15}	-ML ^{Note15}	-MD ^{Note15}	-J5R ^{Note15}	-J5L ^{Note15}	-J5D ^{Note15}	-J6R ^{Note15}	-J6L ^{Note15}	-J6D ^{Note15}	-F100	-F101	-F101N	-F200	-F201	-F200N	-F201N	-F260	-F260N	-D250	-D251	-D251N	-D250E	-D251E	-D251EN	-D250EN	-D251EN	-T200	Blank	Blank	DC24V	DC12V ^{Note2}	AC100V ^{Note3}	AC120V ^{Note3}
Direct piping type	PH (※NPT)	Blank	Blank	-JR	-JL	-JD	-MR	-ML	-MD	-J5R	-J5L	-J5D	-J6R	-J6L	-J6D	-F100	-F101	-F101N	-F200	-F201	-F200N	-F201N	-F260	-F260N	-D250	-D251	-D251N	-D250E	-D251E	-D251EN	-D250EN	-D251EN	-T200	Blank	Blank	DC24V	DC12V ^{Note2}	AC100V ^{Note3}	AC120V ^{Note3}
				-JR ^{Note15}	-JL ^{Note15}	-JD ^{Note15}	-MR ^{Note15}	-ML ^{Note15}	-MD ^{Note15}	-J5R ^{Note15}	-J5L ^{Note15}	-J5D ^{Note15}	-J6R ^{Note15}	-J6L ^{Note15}	-J6D ^{Note15}	-F100	-F101	-F101N	-F200	-F201	-F200N	-F201N	-F260	-F260N	-D250	-D251	-D251N	-D250E	-D251E	-D251EN	-D250EN	-D251EN	-T200	Blank	Blank	DC24V	DC12V ^{Note2}	AC100V ^{Note3}	AC120V ^{Note3}

Notes: 1. For the maximum number of units, see the table for maximum number of valve units by wiring specification, on p. 94.
 2. Not available in low-current type.
 3. AC100V, AC120V is available only for the -D250□, -D251□, -D370NU (D-sub connector) and -T200 (terminal block) wiring specifications. In addition, not available in low-current type and tandem 3-port valves.
 4. The terminal block with cover is also available as a made to order product (add -139W to the end of the manifold model order code). For details, consult us.
 5. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
 6. When selecting J, M, or L (base piping type) for the manifold outlet specification, always enter -A1 (with plate) for the valve outlet type.
 7. Caution should be exercised that the block-off plate wiring is always double wiring (allocated 2 control pins at 1 stn.), regardless of the wiring connection specification. For wiring for a single solenoid, see p. 71.

Remark: Negative common specifications are also available as made to order products (add -129W to the ends of the valve and manifold model order codes). For details, consult us.

Valve specification

T0 : 2-position, for single solenoid only
 T1 : 2-position, single solenoid specification
 T2 : 2-position, double solenoid specification
 T3 : 3-position, closed center
 T4 : 3-position, exhaust center
 T5 : 3-position, pressure center
 TA : Tandem 3-port (NC and NC)^{Note12}
 TB : Tandem 3-port (NO and NO)^{Note12}
 TC : Tandem 3-port (NC and NO)^{Note12}

Operation type

Blank

Internal pilot type^{Note10}

G


External pilot type^{Note11}

(for positive pressure)

※ No vacuum valve can be mounted.


Manual override

Manual override button



Blank

Manual override lever^{Note8}



-R

Valve outlet type

-A1 With plate^{Note6}
(base piping type)

5-port specification

-FJ With dual use fitting block^{Note14}
(direct piping type) F10: φ 4, φ 6

-FJ5 With single use fitting block^{Note14}
(direct piping type) F10: φ 4

-FJ6 With single use fitting block^{Note14}
(direct piping type) F10: φ 6

-FM With female thread block^{Note14}
(direct piping type) F10: M5 × 0.8

-FMH With female thread block^{Note15}
(direct piping type) F10: 10-32UNF

3-port specification

-FJ5A With single use fitting block, normally
closed (NC)^{Note15} F10: φ 4
(direct piping type)

-FJ5B With single use fitting block, normally
open (NO)^{Note15} F10: φ 4
(direct piping type)

-FJ6A With single use fitting block, normally
closed (NC)^{Note15} F10: φ 6
(direct piping type)

-FJ6B With single use fitting block, normally
open (NO)^{Note15} F10: φ 6
(direct piping type)

-FMA With female thread block, normally
closed (NC)^{Note15} F10: M5 × 0.8
(direct piping type)

-FMAH With female thread block, normally
closed (NC)^{Note16} F10: 10-32UNF
(direct piping type)

-FMB With female thread block, normally
open (NO)^{Note15} F10: M5 × 0.8
(direct piping type)

-FMBH With female thread block, normally
open (NO)^{Note15} F10: 10-32UNF
(direct piping type)

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Manifold fitting specification

5-port specification

-J5 With single use fitting block (base piping type) F10: φ 4

-J6 With single use fitting block (base piping type) F10: φ 6

-M With female thread block (base piping type) F10: M5 × 0.8

3-port specification

-J5A With single use fitting block, normally closed (NC) (base piping type) F10: φ 4

-J5B With single use fitting block, normally open (NO) (base piping type) F10: φ 4

-J6A With single use fitting block, normally closed (NC) (base piping type) F10: φ 6

-J6B With single use fitting block, normally open (NO) (base piping type) F10: φ 6

-MA With female thread block, normally closed (NC) (base piping type) F10: M5 × 0.8

-MAH With female thread block, normally closed (NC)^{Note16} (base piping type) F10: 10-32UNF

-MB With female thread block, normally open (NO)^{Note15} (base piping type) F10: M5 × 0.8

-MBH With female thread block, normally open (NO)^{Note16} (base piping type) F10: 10-32UNF

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Back pressure prevention valve

Blank

No back pressure prevention valve

-E2

With back pressure prevention valve^{Note13}

Port isolator

Blank : No port isolator
 -SP : For 1(P) port^{Note9}
 -SR : For 3(R2), 5(R1) ports^{Note9}
 -SA : For 1(P), 3(R2), and 5(R1) ports^{Note9}

Individual air supply and exhaust spacer


Blank : No spacer
 -PPM : Individual air supply spacer (with M5 female thread for F10)
 -PRM : Individual exhaust spacer (with M5 female thread for F10)
 For details, see p. 27.

Station	Valve size	Valve specification	Operation type	Manual override	Valve outlet type	Manifold fitting specification	Back pressure prevention valve	Individual air supply and exhaust spacer	Port isolator	Voltage
---------	------------	---------------------	----------------	-----------------	-------------------	--------------------------------	--------------------------------	--	---------------	---------


Mounting valve model										
strn. 1 · · · strn. □ Note5	F10	T0 T3 TA ^{Note12} T1 T4 TB ^{Note12} T2 T5 TC ^{Note12}	Blank ^{Note10} G ^{Note11}	Blank -R ^{Note8}	-A1 ^{Note6}		Blank -E2 ^{Note13}	Blank -PPM -PRM	Blank -SP ^{Note9} -SR ^{Note9} -SA ^{Note9}	DC24V DC12V ^{Note2} AC100V ^{Note3} AC120V ^{Note3}
	F10L									BPP (for block-off plate) ^{Note7}
strn. 1 · · · strn. □ Note5	F10	T0 T3 TA ^{Note12} T1 T4 TB ^{Note12} T2 T5 TC ^{Note12}	Blank ^{Note10} G ^{Note11}	Blank -R ^{Note8}	-A1 ^{Note6}	-J5 ^{Note15} -J6A ^{Note15} -J6 ^{Note15} -J6B ^{Note15} -M ^{Note15} -MA ^{Note15} -MH ^{Note16} -MAH ^{Note16} -J5A ^{Note15} -MB ^{Note15} -J5B ^{Note15} -MBH ^{Note16}	Blank -E2 ^{Note13}	Blank -PPM -PRM	Blank -SP ^{Note9} -SR ^{Note9} -SA ^{Note9}	DC24V DC12V ^{Note2} AC100V ^{Note3} AC120V ^{Note3}
	F10L									BPP (for block-off plate) ^{Note7}
strn. 1 · · · strn. □ Note5	F10	T0 T3 TA ^{Note12} T1 T4 TB ^{Note12} T2 T5 TC ^{Note12}	Blank ^{Note10} G ^{Note11}	Blank -R ^{Note8}	-A1 ^{Note6}	-FJ ^{Note15} -FJ6A ^{Note15} -FJ5 ^{Note15} -FJ6B ^{Note15} -FJ6 ^{Note15} -FMA ^{Note15} -FM ^{Note15} -FMAH ^{Note16} -FMH ^{Note16} -FMB ^{Note15} -FJ5A ^{Note15} -FMBH ^{Note16} -FJ5B ^{Note15}	Blank -E2 ^{Note13}	Blank -PPM -PRM	Blank -SP ^{Note9} -SR ^{Note9} -SA ^{Note9}	DC24V DC12V ^{Note2} AC100V ^{Note3} AC120V ^{Note3}
	F10L									BPP (for block-off plate) ^{Note7}

- Notes: 8. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
 9. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for -SA, or 1 each port isolator for -SP and -SR for a total of 2 locations. When shipping, the designated port isolators are mounted between the designated station and the station to its immediate left (the next smaller strn. No.).
 10. Cannot be mounted on the external pilot manifold.
 11. Cannot be mounted on the internal pilot manifold.
 12. Not available in external pilot type.
 13. Not available with the individual exhaust spacer.
 14. The 3-port specifications are only available in the valve specification T0, T1, and T2.
 15. Can be selected only when the manifold type is P.
 16. Can be selected only when the manifold type is PH.


Parts for manifold

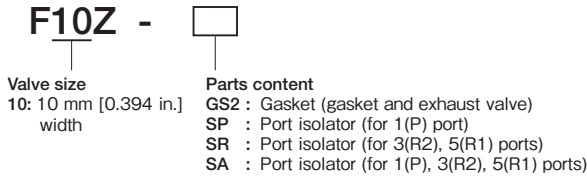


Wiring block assembly (one set)

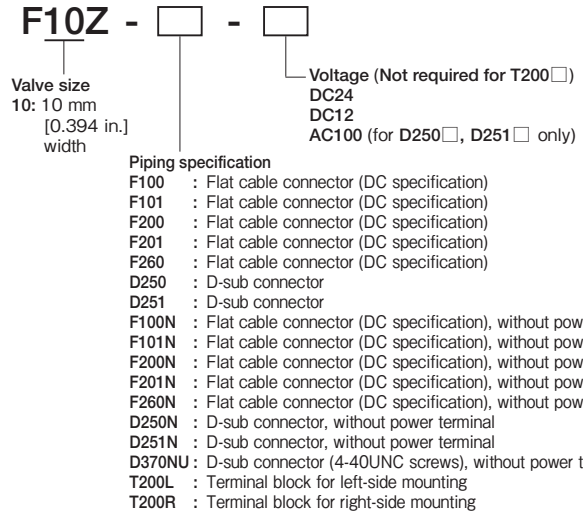


Block-off plate (block-off plate, 2 mounting screws, and plug)




Valve base assembly (valve base, gasket, lead wire, and plug-in connector)

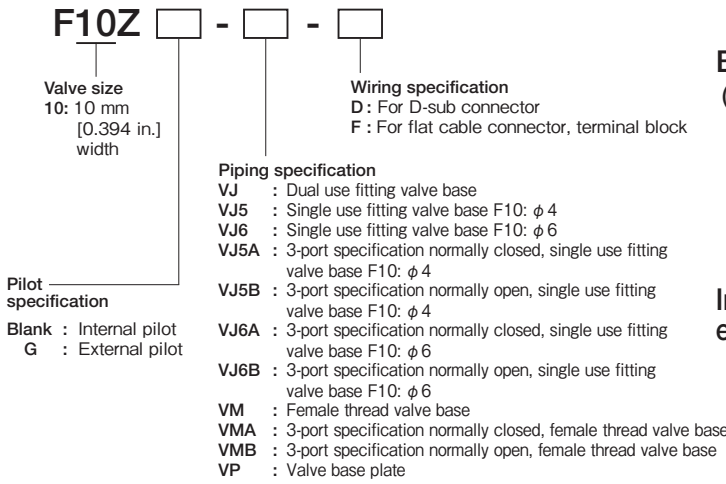


Back pressure prevention valve
(2 pieces for split type, with dedicated gasket)



Individual air supply and exhaust spacer
(Spacer for plug-in type, gasket, exhaust valve, and 2 mounting screws)

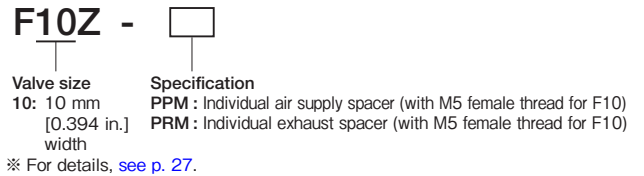

Piping block assembly

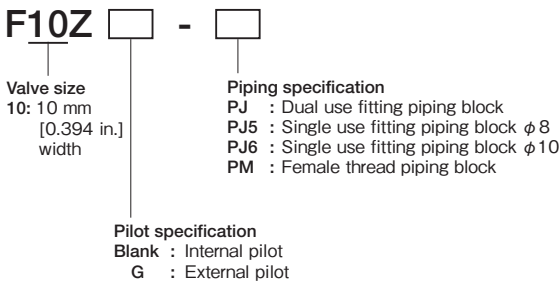

End blocks (one set of left and right)

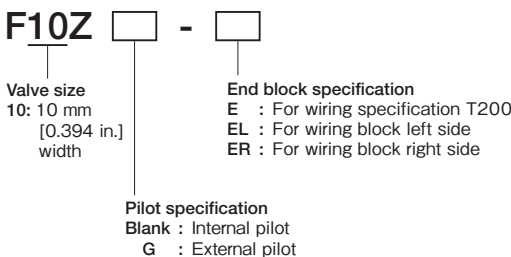


Table for maximum number of valve units by wiring specification

		Maximum number of units	
		Wiring connection specification	
Wiring specification	Max. outputs	Packed wiring (Blank)	Double wiring (-W)
F100 <input type="checkbox"/> Flat cable (10P)	8	Varies depending on the number of mounted single solenoids, double solenoids, and block-off plates. The number of controlled solenoids should be designated as the maximum number of outputs or less. D370NU is a maximum of 20 units.	4 units
F101 <input type="checkbox"/> Flat cable (10P)	8		4 units
F200 <input type="checkbox"/> Flat cable (20P)	16		8 units
F201 <input type="checkbox"/> Flat cable (20P)	16		8 units
F260 <input type="checkbox"/> Flat cable (26P)	20		10 units
D250 <input type="checkbox"/> D-sub connector (25P)	16		8 units
D251 <input type="checkbox"/> D-sub connector (25P)	20		10 units
D370NU D-sub connector(37P)	32		16 units
T200 Terminal block (19 terminals)	18		9 units

Muffler

KM - J

Fitting size

- 6: Outer diameter $\phi 6$ (for individual exhaust spacer)
- 8: Outer diameter $\phi 8$ (for individual exhaust spacer)
- 10: Outer diameter $\phi 10$


(Sales unit: Set of 10 mufflers)

DIN rail

DIN - (Unit:1)

Rail length

- 125: 125mm [4.921 in.]
- : (25 mm [0.984 in.] pitch)
- 525: 525mm [20.669 in.]

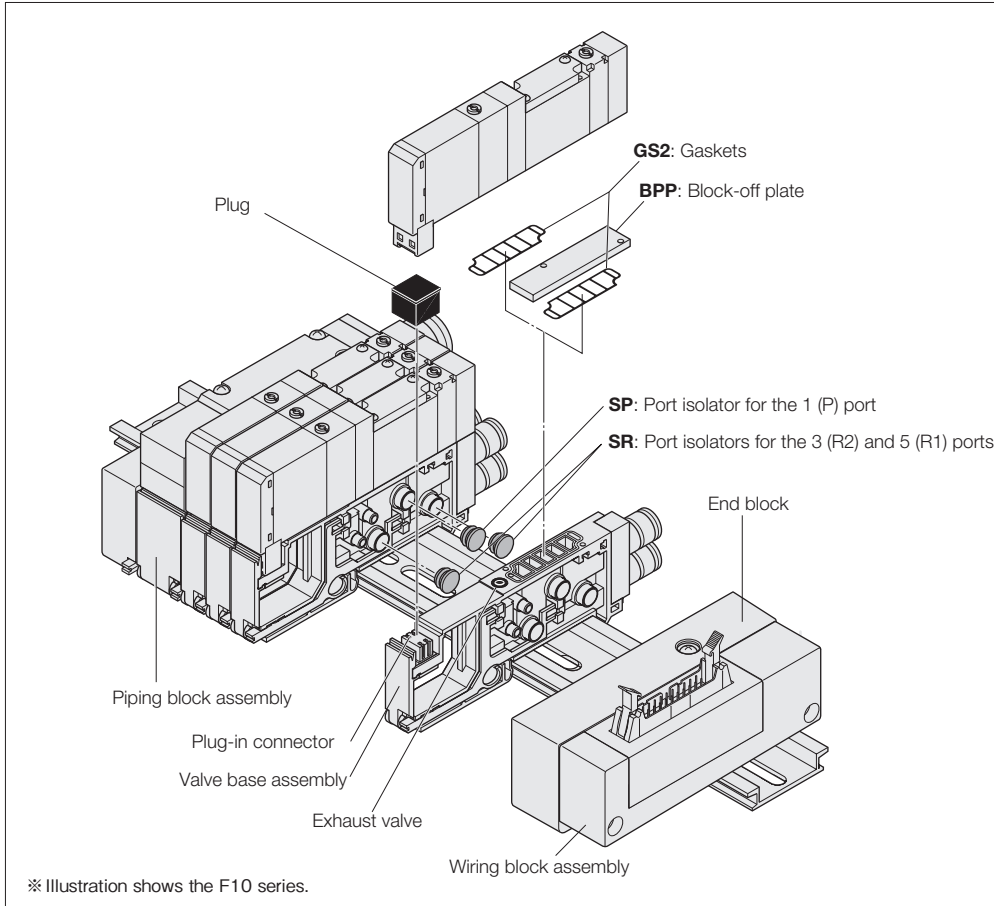

Manifold Order Code Example

(12 units of F10 Series)

F10M12PL-J5R-F201 DC24V

stn.1~8 F10T0-A1-J5 DC24V

stn.9~11 F10T2-A1-J6 DC24V

stn.12 F10BPP-J6

Note: This order code example has no relationship to the illustration above.

Precautions for Order Codes

● Orders for valves only

Place orders from "Single Valve Unit Order Codes" on p. 66.

However, **Blank**, **A2**, **F3**, **F4**, **F5**, **F6**, **F4A**, **F4B**, **F5A**, **F5B**, **F6A**, and **F6B** cannot be selected for the valve outlet type. For the wiring specification, **Blank** is the only selection.

● Wiring connection specification

Blank (packed wiring): Wiring is made in accordance with the mounted valve specifications.

-W (double wiring): Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.


Caution

Caution should be exercised that the block-off plate wiring is always double wiring (allocated 2 control pins at 1 stn.), regardless of the wiring connection specification. The block-off plate wiring can be made as wiring for a single solenoid. Add **-1W** to the end of the block-off plate order code in the case. For details, consult us.

F10 Series Split Manifold Serial Transmission Type Order Codes

Manifold outlet specification


With dual use fitting blocks (base piping type)



J

Outlet port fitting
F10: φ4, φ6


With selectable fittings (base piping type)



L

Outlet port should be selected in accordance with the manifold fitting specification.


With female thread blocks (base piping type)



M

Outlet port female thread
F10: M5×0.8

With plates (direct piping type)



Blank

Valve size

F10M

10 mm [0.394 in.] width

Pilot specification

Blank

Internal pilot manifold

G

External pilot manifold

Piping block specification (air supply and exhaust)

Fitting block

- JR : Dual use fitting, right-side mounting^{Note13}
 - JL : Dual use fitting, left-side mounting^{Note13}
 - JD : Dual use fitting, both-side mounting^{Note13}
- Fitting size (1(P), 3, 5(R) ports), φ8, φ10

Female thread block

- MR : Female thread, right-side mounting^{Note13}
 - ML : Female thread, left-side mounting^{Note13}
 - MD : Female thread, both-side mounting^{Note13}
- Female thread size (1(P), 3, 5(R) ports), Rc1/4

Female thread block



- MRH : Female thread, right-side mounting^{Note14}
 - MLH : Female thread, left-side mounting^{Note14}
 - MDH : Female thread, both-side mounting^{Note14}
- Female thread size (1(P), 3, 5(R) ports), NPT1/4

Single use fitting block

- J5R : Single use fitting, right-side mounting^{Note13}
 - J5L : Single use fitting, left-side mounting^{Note13}
 - J5D : Single use fitting, both-side mounting^{Note13}
- Fitting size (1(P), 3, 5(R) ports), φ8
- J6R : Single use fitting, right-side mounting^{Note13}
 - J6L : Single use fitting, left-side mounting^{Note13}
 - J6D : Single use fitting, both-side mounting^{Note13}
- Fitting size (1(P), 3, 5(R) ports), φ10

Transmission block specification

※ These are the serial transmission block specifications compatible with each system.



● Block on the right photo is the case of B7A Link Terminal.
For details, see p. 41-44.

Integrated type

- B1 : For CC-Link (16 outputs)^{Note2}
- B3 : For CC-Link (32 outputs)^{Note2}
- D3 : For DeviceNet (32 outputs)
- H1 : For CompoNet (16 outputs)
- K1 : For EtherCAT (16 outputs)
- K3 : For EtherCAT (32 outputs)
- M1 : For EtherNet/IP (16 outputs)^{Note2}
- M3 : For EtherNet/IP (32 outputs)^{Note2}

Stand-alone type

- 31 : For OMRON B7A Link Terminal (standard)
- 32 : For OMRON B7A Link Terminal (high speed)

Wiring connection specification

Blank

Packed wiring: Wiring is made in accordance with the mounted valve specifications.

-W

Double wiring: Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

Wiring position (transmission block)

Blank : Left-side mounting
-R : Right-side mounting

Valve size

F10

Standard type

F10L

Low-current type

Valve size	Valve units	Manifold type	Manifold outlet specification	Pilot specification	Piping block specification	Transmission block specification	Wiring connection specification	Wiring position
Manifold model								

Base piping type	F10M	2 ⋮ □ ^{Note1}	S (※Rc)	J M	Blank G	-JR -JL -JD -MR -ML -MD	-J5R -J6R -J5L -J6L -J5D -J6D	-31 -32 -B1 ^{Note2} -B3 ^{Note2}	-D1 -D3 -H1 -K1	-K3 -M1 ^{Note2} -M3 ^{Note2}	Blank -W	Blank -R
			S (※Rc)	L	Blank G	-JR ^{Note13} -JL ^{Note13} -JD ^{Note13} -MR ^{Note13} -ML ^{Note13} -MD ^{Note13} -MRH ^{Note14} -MLH ^{Note14}	-J5R ^{Note13} -J6R ^{Note13} -J5L ^{Note13} -J6L ^{Note13} -J5D ^{Note13} -J6D ^{Note13}	-31 -32 -B1 ^{Note2} -B3 ^{Note2}	-D1 -D3 -H1 -K1	-K3 -M1 ^{Note2} -M3 ^{Note2}	Blank -W	Blank -R
			SH (※NPT)	Blank	Blank G	-JR ^{Note13} -JL ^{Note13} -JD ^{Note13} -MR ^{Note13} -ML ^{Note13} -MD ^{Note13} -MRH ^{Note14} -MLH ^{Note14}	-J5R ^{Note13} -J6R ^{Note13} -J5L ^{Note13} -J6L ^{Note13} -J5D ^{Note13} -J6D ^{Note13}	-31 -32 -B1 ^{Note2} -B3 ^{Note2}	-D1 -D3 -H1 -K1	-K3 -M1 ^{Note2} -M3 ^{Note2}	Blank -W	Blank -R

Notes: 1. To determine the maximum number of units, see the table for maximum number of valve units by transmission block specification, on p. 98.
 2. Complies with the CE marking regulation.
 3. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
 4. When selecting J, M, or L (base piping type) for the manifold outlet specifications, always enter -A1 (with plate) for the valve outlet type.
 5. Caution should be exercised that the block-off plate wiring is always double wiring (allocated 2 control pins at 1 strn.), regardless of the wiring connection specification. The block-off plate wiring can be made as wiring for a single solenoid. Add -1W to the end of the block-off plate order code in the case.
 6. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.

Valve specification


T0 : 2-position, for single solenoid only
 T1 : 2-position, single solenoid specification
 T2 : 2-position, double solenoid specification
 T3 : 3-position, closed center
 T4 : 3-position, exhaust center
 T5 : 3-position, pressure center
 TA : Tandem 3-port (NC and NC)^{Note10}
 TB : Tandem 3-port (NO and NO)^{Note10}
 TC : Tandem 3-port (NC and NO)^{Note10}

Operation type

Blank
 Internal pilot type^{Note8}

G
 External pilot type^{Note9}
 (for positive pressure)
 ※ No vacuum valve can be mounted.

Manual override

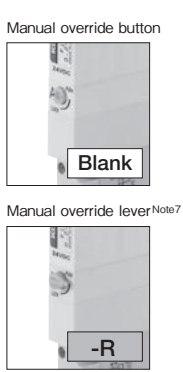

Valve outlet type

-A1 With plate^{Note4}
 (base piping type)

5-port specification

-FJ With dual use fitting block^{Note13} F10: φ 4, φ 6
 (direct piping type)

-FJ5 With single use fitting block^{Note13} F10: φ 4
 (direct piping type)

-FJ6 With single use fitting block^{Note13} F10: φ 6
 (direct piping type)

-FM With female thread block^{Note13} F10: M5 × 0.8
 (direct piping type)

-FMH With female thread block^{Note14} F10: 10-32UNF
 (direct piping type)

3-port specification

-FJ5A With single use fitting block, normally closed (NC)^{Note13} F10: φ 4
 (direct piping type)

-FJ5B With single use fitting block, normally open (NO)^{Note13} F10: φ 4
 (direct piping type)

-FJ6A With single use fitting block, normally closed (NC)^{Note13} F10: φ 6
 (direct piping type)

-FJ6B With single use fitting block, normally open (NO)^{Note13} F10: φ 6
 (direct piping type)

-FMA With female thread block, normally closed (NC)^{Note13} F10: M5 × 0.8
 (direct piping type)

-FMAH With female thread block, normally closed (NC)^{Note14} F10: 10-32UNF
 (direct piping type)

-FMB With female thread block, normally open (NO)^{Note13} F10: M5 × 0.8
 (direct piping type)

-FMBH With female thread block, normally open (NO)^{Note14} F10: 10-32UNF
 (direct piping type)

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Manifold fitting specification

5-port specification

-J5 With single use fitting block (base piping type) F10: φ 4

-J6 With single use fitting block (base piping type) F10: φ 6

-M With female thread block (base piping type) F10: M5 × 0.8

3-port specification

-J5A With single use fitting block, normally closed (NC) (base piping type) F10: φ 4

-J5B With single use fitting block, normally open (NO) (base piping type) F10: φ 4

-J6A With single use fitting block, normally closed (NC) (base piping type) F10: φ 6

-J6B With single use fitting block, normally open (NO) (base piping type) F10: φ 6

-MA With female thread block, normally closed (NC) (base piping type) F10: M5 × 0.8

-MAH With female thread block, normally closed (NC)^{Note14} (base piping type) F10: 10-32UNF

-MB With female thread block, normally open (NO)^{Note13} (base piping type) F10: M5 × 0.8

-MBH With female thread block, normally open (NO)^{Note14} (base piping type) F10: 10-32UNF

Port isolator

Blank : No port isolator
 -SP : For 1(P) port^{Note7}
 -SR : For 3(R2), 5(R1) ports^{Note7}
 -SA : For 1(P), 3(R2), and 5(R1) ports^{Note7}

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Back pressure prevention valve

Blank
 No back pressure prevention valve

-E2
 With back pressure prevention valve^{Note11}

Individual air supply and exhaust spacer


Blank : No spacer
 -PPM : Individual air supply spacer (with M5 female thread for F10)
 -PRM : Individual exhaust spacer (with M5 female thread for F10)
 For details, see p. 27.

Station	Valve size	Valve specification	Operation type	Manual override	Valve outlet type	Manifold fitting specification	Back pressure prevention valve	Individual air supply and exhaust spacer	Port isolator	Voltage
---------	------------	---------------------	----------------	-----------------	-------------------	--------------------------------	--------------------------------	--	---------------	---------

Mounting valve model										
stn. 1 ⋮ stn. □ Note3	F10 F10L	T0 T3 TA ^{Note10} T1 T4 TB ^{Note10} T2 T5 TC ^{Note10}	Blank ^{Note8} G ^{Note9}	Blank -R ^{Note6}	-A1 ^{Note4}		Blank -E2 ^{Note11}	Blank -PPM -PRM	Blank -SP ^{Note7} -SR ^{Note7} -SA ^{Note7}	DC24V
BPP (for block-off plate) ^{Note4}										
stn. 1 ⋮ stn. □ Note3	F10 F10L	T0 T3 TA ^{Note10} T1 T4 TB ^{Note10} T2 T5 TC ^{Note10}	Blank ^{Note8} G ^{Note9}	Blank -R ^{Note6}	-A1 ^{Note4}	-J5 ^{Note13} -J6A ^{Note13} -J6 ^{Note13} -J6B ^{Note13} -M ^{Note13} -MA ^{Note13} -MH ^{Note12} -MAH ^{Note14} -J5A ^{Note13} -MB ^{Note13} -J5B ^{Note13} -MBH ^{Note14}	Blank -E2 ^{Note11}	Blank -PPM -PRM	Blank -SP ^{Note7} -SR ^{Note7} -SA ^{Note7}	DC24V
BPP (for block-off plate) ^{Note4}										
stn. 1 ⋮ stn. □ Note3	F10 F10L	T0 T3 TA ^{Note10} T1 T4 TB ^{Note10} T2 T5 TC ^{Note10}	Blank ^{Note8} G ^{Note9}	Blank -R ^{Note6}	-FJ ^{Note13} -FJ6A ^{Note13} -FJ5 ^{Note13} -FJ6B ^{Note13} -FJ6 ^{Note13} -FMA ^{Note13} -FM ^{Note13} -FMAH ^{Note14} -FMH ^{Note14} -FMB ^{Note13} -FJ5A ^{Note13} -FMBH ^{Note12} -FJ5B ^{Note13}		Blank -E2 ^{Note11}	Blank -PPM -PRM	Blank -SP ^{Note7} -SR ^{Note7} -SA ^{Note7}	DC24V
BPP (for block-off plate) ^{Note5}										

Notes: 7. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for -SA, or 1 each port isolator for -SP and -SR for a total of 2 locations. When shipping, the designated port isolators are mounted between the designated station and the station to its immediate left (the next smaller stn. No.).
 8. Cannot be mounted on the external pilot manifold.
 9. Cannot be mounted on the internal pilot manifold.
 10. Not available in external pilot type.
 11. Not available with the individual exhaust spacer.
 12. The 3-port specifications are only available in the valve specification T0, T1, and T2.
 13. Can be selected only when the manifold type is S.
 14. Can be selected only when the manifold type is SH.

Parts for manifold

F10Z - 

Valve size
10: 10 mm [0.394 in.] width

Parts content
GS2 : Gasket (gasket and exhaust valve)
SP : Port isolator (for 1(P) port)
SR : Port isolator (for 3(R2), 5(R1) ports)
SA : Port isolator (for 1(P), 3(R2), 5(R1) ports)



Block-off plate (block-off plate, 2 mounting screws, and plug)

F10BPP

Valve size
10: 10 mm [0.394 in.] width

Valve base assembly

(valve base, gasket, lead wire, and plug-in connector)

F10Z  -  - **F**

Valve size
10: 10 mm [0.394 in.] width

Piping specification
VJ : Dual use fitting valve base
VJ5 : Single use fitting valve base F10: φ 4
VJ6 : Single use fitting valve base F10: φ 6
VJ5A : 3-port specification normally closed, single use fitting valve base F10: φ 4
VJ5B : 3-port specification normally open, single use fitting valve base F10: φ 4
VJ6A : 3-port specification normally closed, single use fitting valve base F10: φ 6
VJ6B : 3-port specification normally open, single use fitting valve base F10: φ 6
VM : Female thread valve base
VMA : 3-port specification normally closed, female thread valve base
VMB : 3-port specification normally open, female thread valve base
VP : Valve base plate

Pilot specification
Blank : Internal pilot
G : External pilot

Piping block assembly

F10Z  - 

Valve size
10: 10 mm [0.394 in.] width

Piping specification
PJ : Dual use fitting piping block
PJ5 : Single use fitting piping block φ 8
PJ6 : Single use fitting piping block φ 10
PM : Female thread piping block Rc1/4

Pilot specification
Blank : Internal pilot
G : External pilot

End blocks (one set of left and right)

F10Z  - 

Valve size
10: 10 mm [0.394 in.] width

End block specification
EL : For left side
ER : For right side

Pilot specification
Blank : Internal pilot
G : External pilot

Wiring block assembly ※

F10Z - **F201N** - **DC24**

Valve size
10: 10 mm [0.394 in.] width

※ Use this when the transmission block specification is -31, or -32.

Back pressure prevention valve

(2 units for split type, with dedicated gasket)

F10Z - **E2**

Valve size
10: 10 mm [0.394 in.] width

Individual air supply and exhaust spacer (Spacer for plug-in type, gasket, exhaust valve, and 2 mounting screws)

F10Z - 

Valve size
10: 10 mm [0.394 in.] width

Specification
PPM : Individual air supply spacer (with M5 female thread for F10)
PRM : Individual exhaust spacer (with M5 female thread for F10)


※ For details, see p. 27.

Serial transmission block (single unit)

YS2  

Transmission block specification
31 : For OMRON B7A Link Terminal (standard)
32 : For OMRON B7A Link Terminal (high speed)

Wiring position
L : For stand-alone type, left-side mounting ※
R : For stand-alone type, right-side mounting ※
 ※ DIN rail included (length 75 mm [2.95 in.])

YS6  (Dedicated for manifold mounting)

Transmission block specification
B1 : For CC-Link (16 outputs)
B3 : For CC-Link (32 outputs)
D1 : For DeviceNet (16 outputs)
D3 : For DeviceNet (32 outputs)
H1 : For CompoNet (16 outputs)

YS7   (Dedicated for manifold mounting)

Transmission block specification
K1 : For EtherCAT (16 outputs)
K3 : For EtherCAT (32 outputs)
M1 : For EtherNet/IP (16 outputs)
M3 : For EtherNet/IP (32 outputs)

Wiring position
L : Left-side mounting
R : Right-side mounting

■ Table for maximum number of valve units by transmission block specification

		Maximum number of units	
		Wiring connection specification	
Transmission block specifications	Max. outputs	Packed wiring (Blank)	Double wiring (-W)
-31: For Omron B7A Link Terminal (standard)	16	Varies depending on the number of mounted single solenoids, double solenoids, and block-off plates.	8 units
-32: For Omron B7A Link Terminal (high speed)	16		8 units
-B1: For CC-Link (16 outputs)	16		8 units
-B3: For CC-Link (32 outputs)	32	The number of controlled solenoids should be designated as the maximum number of outputs or less. -B3, -D3, -K3, and -M3 are a maximum of 20 units.	16 units
-D1: For DeviceNet (16 outputs)	16		8 units
-D3: For DeviceNet (32 outputs)	32	16 units	8 units
-H1: For CompoNet (16 outputs)	16	8 units	8 units
-K1: For EtherCAT (16 outputs)	16	8 units	8 units
-K3: For EtherCAT (32 outputs)	32	16 units	8 units
-M1: For EtherNet/IP (16 outputs)	16	8 units	8 units
-M3: For EtherNet/IP (32 outputs)	32	16 units	16 units

Muffler

KM - J

Fitting size


- 6: Outer diameter $\phi 6$ (for individual exhaust spacer)
 - 8: Outer diameter $\phi 8$ (for individual exhaust spacer)
 - 10: Outer diameter $\phi 10$
- (Sales unit: Set of 10 mufflers)

DIN rail

DIN - (Unit:1)

Rail length

- 125: 125mm [4.921 in.]
- : (25 mm [0.984 in.] pitch)
- 525: 525mm [20.669 in.]

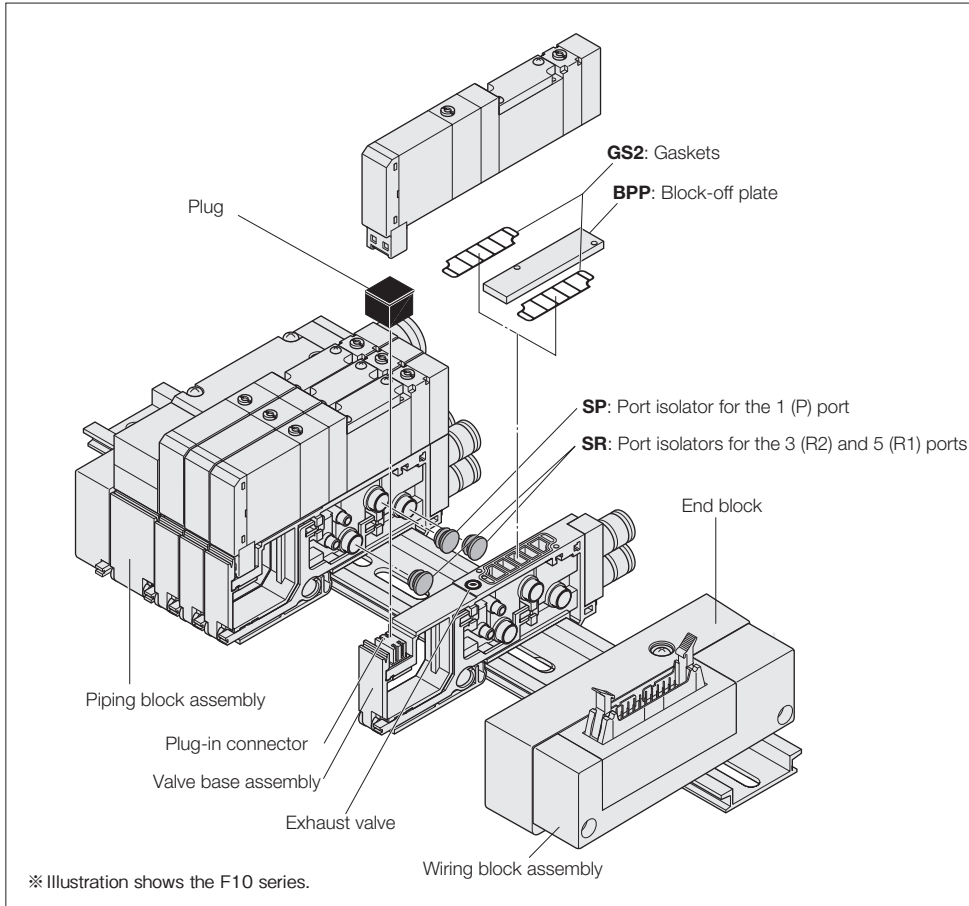

Manifold Order Code Example

(8 units of F10 Series)

F10M8SL-J5R-B1-W

- stn.1~5 F10T0-A1-J5 DC24V
- stn.6~7 F10T2-A1-J6 DC24V
- stn.8 F10BPP-J6

Note: This order code example has no relationship to the illustration above.

Precautions for Order Codes

- **Orders for valves only**
Place orders from "Single Valve Unit Order Codes" on p. 66.
However, Blank, A2, F3, F4, F5, F6, F4A, F4B, F5A, F5B, F6A, and F6B cannot be selected for the valve outlet type. For the wiring specification, Blank is the only selection.
- **Wiring connection specification**
Blank (packed wiring): Wiring is made in accordance with the mounted valve specifications.
-W (double wiring): Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

Caution

Caution should be exercised that the block-off plate wiring is always double wiring (allocated 2 control pins at 1 stn.), regardless of the wiring connection specification. The block-off plate wiring can be made as wiring for a single solenoid. Add -1W to the end of the block-off plate order code in the case. For details, consult us.


F10 Series Easy Assembly Type Manifold Non-Plug-in Type Order Codes

Valve size

F10M
10 mm [0.394 in.] width

Manifold outlet specification


With dual use fitting blocks (base piping type)



J

Outlet port fitting
F10: φ4, φ6


With selectable fittings (base piping type)



L

Outlet port should be selected in accordance with the manifold fitting specification.


With female thread blocks (base piping type)



M

Outlet port female thread
F10: M5 x 0.8

With plates (direct piping type)



Blank

Pilot specification

Blank
Internal pilot manifold

G
External pilot manifold

Piping block specification (air supply, exhaust and intermediate)

Fitting block

- JR: Dual use fitting, right-side mounting
- JL: Dual use fitting, left-side mounting
- JD: Dual use fitting, both-side mounting

Fitting size (1(P), 3, 5(R) ports), φ6, φ8

Female thread block

- MR: Female thread, right-side mounting
- ML: Female thread, left-side mounting
- MD: Female thread, both-side mounting

Female thread size (1(P), 3, 5(R) ports), Rc1/8

Female thread block

- MRH: Female thread, right-side mounting^{Note15}
- MLH: Female thread, left-side mounting^{Note15}
- MDH: Female thread, both-side mounting^{Note15}

Female thread size (1(P), 3, 5(R) ports), NPT1/8

Single use fitting block

- J5R: Single use fitting, right-side mounting
- J5L: Single use fitting, left-side mounting
- J5D: Single use fitting, both-side mounting

Fitting size (1(P), 3, 5(R) ports), φ6

- J6R: Single use fitting, right-side mounting
- J6L: Single use fitting, left-side mounting
- J6D: Single use fitting, both-side mounting

Fitting size (1(P), 3, 5(R) ports), φ8

Intermediate piping block

- JT : Dual use fitting, both-side mounting, intermediate piping block, φ6, φ8
- J5T: Single use fitting, both-side mounting, intermediate piping block, φ6
- J6T: Single use fitting, both-side mounting, intermediate piping block, φ8
- MT : Female thread, both-side mounting, intermediate piping block, Rc1/8
- MTH: Female thread, both-side mounting, intermediate piping block NPT1/8^{Note15}

Mounting specification

Blank
Direct mounting

-DN
With DIN bracket (no rail)

-DR
With DIN bracket, with rail

Caution: For information on rails assembled and shipped, see pages 144 and 145.

Valve size	Valve units	Manifold type	Manifold outlet specification	Pilot specification	Piping block specification	Mounting specification
Manifold model						

	Valve size	Valve units	Manifold type	Manifold outlet specification	Pilot specification	Piping block specification	Mounting specification
Base piping type			XN (※Rc)	J M	Blank G	-JR -J5R -JT -JL -J5L -J5T -JD -J5D -J6T -MR -J6R -MT -ML -J6L -MD -J6D	Blank -DN -DR
Base piping type selectable fitting	F10M	2 ⋮ 21 ^{Note1}	XN (※Rc) XNH (※NPT)	L	Blank G	-JR -MLH ^{Note15} -J6D -JL -MDH ^{Note15} -JT -JD -J5R -J5T -MR -J5L -J6T -ML -J5D -MT -MD -J6R -MTH ^{Note15} -MRH ^{Note15} -J6L	Blank -DN -DR
Direct piping type			Only L or Blank is available in the inch female thread specification and the manifold outlet specification.	Blank	Blank G	-JR -MLH ^{Note15} -J6D -JL -MDH ^{Note15} -JT -JD -J5R -J5T -MR -J5L -J6T -ML -J5D -MT -MD -J6R -MTH ^{Note15} -MRH ^{Note15} -J6L	Blank -DN -DR

- Notes: 1. Up to 20 valves, with one intermediate piping block.
 2. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
 3. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
 4. When selecting J, M, or L (base piping type) for the manifold outlet specification, always enter -A1 (with plate) for the valve outlet type.
 5. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for -XSA, or 1 each port isolator for -XSP and -XSR for a total of 2 locations. When shipping, the designated port isolators are mounted between the designated station and the station to its immediate left (the next smaller str. No.).


Valve type

- T0:** 2-position, for single solenoid only
- T1:** 2-position, single solenoid specification
- T2:** 2-position, double solenoid specification
- T3:** 3-position, closed center
- T4:** 3-position, exhaust center
- T5:** 3-position, pressure center
- TA:** Tandem 3-port (NC and NO)^{Note7}
- TB:** Tandem 3-port (NO and NO)^{Note7}
- TC:** Tandem 3-port (NC and NO)^{Note7}

Operation type

- Blank**
Internal pilot type^{Note5}
- G**
External pilot type^{Note6} (for positive pressure)
※No vacuum valve can be mounted.

Manual override

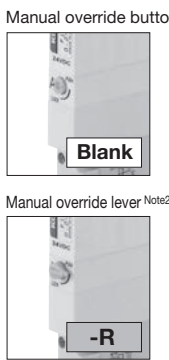

Valve size

- F10** Standard type
- F10L** Low-current type

Valve outlet type

- A1** With plate^{Note4} (base piping type)

5-port specification

- FJ** With dual use fitting block **F10:** φ4, φ6 (direct piping type)
- FJ5** With single use fitting block **F10:** φ4 (direct piping type)
- FJ6** With single use fitting block **F10:** φ6 (direct piping type)
- FM** With female thread block **F10:** M5 x 0.8 (direct piping type)
- FMH** With female thread block^{Note15} **F10:** 10-32UNF (direct piping type)

3-port specification

- FJ5A** With single use fitting block, normally closed (NC) (direct piping type) **F10:** φ4
- FJ5B** With single use fitting block, normally open (NO) (direct piping type) **F10:** φ4
- FJ6A** With single use fitting block, normally closed (NC) (direct piping type) **F10:** φ6
- FJ6B** With single use fitting block, normally open (NO) (direct piping type) **F10:** φ6
- FMA** With female thread block, normally closed (NC) (direct piping type) **F10:** M5 x 0.8
- FMAH** With female thread block, normally closed (NC)^{Note15} **F10:** 10-32UNF (direct piping type)
- FMB** With female thread block, normally open (NO) (direct piping type) **F10:** M5 x 0.8
- FMBH** With female thread block, normally open (NO)^{Note15} **F10:** 10-32UNF (direct piping type)

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Wiring specification^{Note12}

S type plug connector Without connector



S type plug connector Lead wire 300 mm [11.8 in.]



S type plug connector Lead wire 3000 mm [118 in.]

Pre-wired positive common terminal S type plug connector



Lead wire 300 mm [11.8 in.]

Pre-wired positive common terminal S type plug connector

Lead wire 3000 mm [118 in.]

Pre-wired negative common terminal S type plug connector

Lead wire 300 mm [11.8 in.]

Pre-wired negative common terminal S type plug connector

Lead wire 3000 mm [118 in.]

Pre-wired negative common terminal S type plug connector

Lead wire 3000 mm [118 in.]

Pre-wired negative common terminal S type plug connector

Lead wire 3000 mm [118 in.]

Manifold fitting specification

5-port specification

- J5** With single use fitting block **F10:** φ4 (base piping type)
- J6** With single use fitting block **F10:** φ6 (base piping type)
- M** With female thread block **F10:** M5 x 0.8 (base piping type)
- MH** With female thread block^{Note15} (base piping type) **F10:** 10-32UNF

3-port specification

- J5A** With single use fitting block, normally closed (NC) (base piping type) **F10:** φ4
- J5B** With single use fitting block, normally open (NO) (base piping type) **F10:** φ4
- J6A** With single use fitting block, normally closed (NC) (base piping type) **F10:** φ6
- J6B** With single use fitting block, normally open (NO) (base piping type) **F10:** φ6
- MA** With female thread block, normally closed (NC) (base piping type) **F10:** M5 x 0.8
- MAH** With female thread block, normally closed (NC)^{Note15} (base piping type) **F10:** 10-32UNF
- MB** With female thread block, normally open (NO) (base piping type) **F10:** M5 x 0.8
- MBH** With female thread block, normally open (NO)^{Note15} (base piping type) **F10:** 10-32UNF

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Port isolator

- Blank:** No port isolator
- XSP:** For 1 (P) port^{Note4}
- XSR:** For 3 (R2), 5 (R1) ports^{Note4}
- XSA:** For 1 (P), 3 (R2), and 5(R1) ports^{Note4}

Back pressure prevention valve

- Blank:** No back pressure prevention valve
- E2:** With back pressure prevention valve^{Note8}

Individual air supply and exhaust spacer

- Blank:** No spacer
- XNPM:** Individual air supply spacer (with M5 female thread for F10)
- XNRM:** Individual exhaust spacer (with M5 female thread for F10)
- STP :** With stop valve^{Note5}

See page 27 for details.

Station	Valve size	Valve specification	Operation type	IP Specifications	Manual override	Valve outlet type	Wiring specification	Manifold fitting specification	Back pressure prevention valve	Individual air supply, exhaust spacer and stop valve	Port isolator	Voltage
---------	------------	---------------------	----------------	-------------------	-----------------	-------------------	----------------------	--------------------------------	--------------------------------	--	---------------	---------

Mounting valve model

stn. 1 . . stn. □ Note2	F10 F10L	T0 TA ^{Note6} T1 TB ^{Note6} T2 TC ^{Note6} T3 T4 T5	Blank ^{Note6} G ^{Note7}	Blank -P ^{Note12}	Blank -R ^{Note3}	-A1 ^{Note4}	-PN -MS -PS ^{Note12} -MS3 -PS3 -CMS -CPS -CMS3 -CPS3	Blank -E2 ^{Note9}	Blank -XNPM -XNRM -STP ^{Note6}	Blank -XSP ^{Note5} -XSR ^{Note5} -XSA ^{Note5}	DC24V DC12V ^{Note10} AC100V ^{Note11}
F10		XBPN (for block-off plate)									

When selecting the intermediate piping block, see page 100 when specifying it.

stn. 1 . . stn. □ Note2	F10 F10L	T0 TA ^{Note6} T1 TB ^{Note6} T2 TC ^{Note6} T3 T4 T5	Blank ^{Note6} G ^{Note7}	Blank -P ^{Note12}	Blank -R ^{Note3}	-A1 ^{Note4}	-PN -MS -PS ^{Note12} -MS3 -PS3 -CMS -CPS -CMS3 -CPS3	-J5 ^{Note14} -J6 ^{Note14} -M ^{Note14} -MH ^{Note15} -J5A ^{Note14} -J6A ^{Note14} -MA ^{Note14} -MAH ^{Note15} -MB ^{Note15} -MBH ^{Note15}	Blank -E2 ^{Note9}	Blank -XNPM -XNRM -STP ^{Note6}	Blank -XSP ^{Note5} -XSR ^{Note5} -XSA ^{Note5}	DC24V DC12V ^{Note10} AC100V ^{Note11}
F10		XBPN (for block-off plate)										

When selecting the intermediate piping block, see page 100 when specifying it.

stn. 1 . . stn. □ Note2	F10 F10L	T0 TA ^{Note6} T1 TB ^{Note6} T2 TC ^{Note6} T3 T4 T5	Blank ^{Note6} G ^{Note7}	Blank -P ^{Note12}	Blank -R ^{Note3}	-FJ ^{Note14} -FJ5 ^{Note14} -FJ6 ^{Note14} -FMA ^{Note14} -FMAH ^{Note15} -FMB ^{Note14} -FMBH ^{Note15} -FJ5A ^{Note14} -FJ5B ^{Note14}	-PN -MS -PS ^{Note12} -MS3 -PS3 -CMS -CPS -CMS3 -CPS3	Blank -E2 ^{Note9}	Blank -XNPM -XNRM -STP ^{Note6}	Blank -XSP ^{Note5} -XSR ^{Note5} -XSA ^{Note5}	DC24V DC12V ^{Note10} AC100V ^{Note11}
F10		XBPN (for block-off plate)									

When selecting the intermediate piping block, see page 102 when specifying it.


Notes:6. Cannot be mounted on the external pilot manifold. Only direct mounting is available.
 7. Cannot be mounted on the internal pilot manifold.
 8. Not available in external pilot type.
 9. Not available with the individual exhaust spacer.
 10. Not available in low-current type.
 11. Not available in low-current type and tandem 3-port valves.

12. Wiring specifications of -P□ and -CP□, the -M□ and -CM□, positive common and negative common cannot be mounted together.
 13. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.
 14. The 3-port specifications are only available in the valve specification T0, T1, and T2.
 15. Can be selected only when the manifold type is XNH.

F10 Series Easy Assembly Type Manifold Non-Plug-in Type Order Codes

Intermediate piping block

(When mounting an intermediate piping block to the manifold, complete the following type and specify the station specified [on page 101](#).)

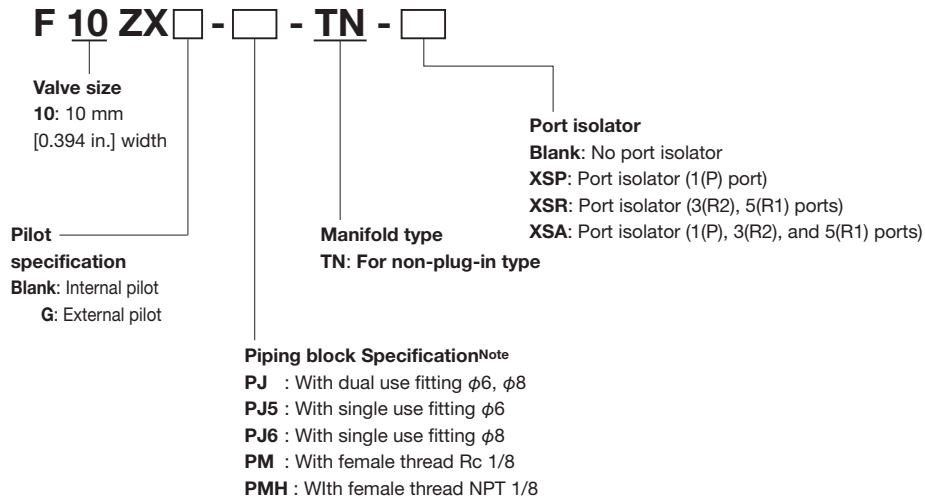

Note: See the following table for combinations of intermediate piping block port specifications and manifold piping block specifications.

Manifold piping specifications	Intermediate piping block
JT	PJ
J5T	PJ5
J6T	PJ6
MT	PM
MTH	PMH

F10 Series Easy Assembly Type Manifold Non-Plug-in Type Additional Parts Order Codes

Parts for manifold

F 10 ZX -

Valve size

10: 10 mm [0.394 in.] width

Parts content

- GS2**: Gasket (gasket and exhaust valve)
- GS3**: Gasket (valve base side)
- XSP**: Port isolator (for 1(P) port)
- XSR**: Port isolator (for 3(R2), 5(R1) ports)
- XSA**: Port isolator (for 1(P), 3(R2), 5(R1) ports)
- DN**: DIN mounting bracket (one set of two)

Back pressure prevention valve (2 pieces for split type, with dedicated gasket)

F 10 Z - E2

Valve size

10: 10 mm [0.394 in.] width

Individual air supply and exhaust spacer (Spacer for non-plug-in type, gasket, exhaust valve, and 2 mounting screws)

F 10 ZX -

Valve size

10: 10 mm [0.394 in.] width

Specification

- XNPM**: Individual air supply spacer (with M5 female thread for F10)
- XNRM**: Individual exhaust spacer (with M5 female thread for F10)

※For details, see p.27.

Block-off plate (block-off plate, 2 mounting screws, and plug)

F 10 XBP N

Valve size

10: 10 mm [0.394 in.] width

For non-plug-in type

Valve base assembly (valve base, gasket, and two connecting rods for adding)

F 10 ZX -

*For use with both internal pilot and external pilot

Valve size

10: 10 mm [0.394 in.] width

Piping specifications

- VJ**: Dual use fitting valve base
- VJ5**: Single use fitting valve base F10: φ4
- VJ6**: Single diameter fitting valve base F10: φ6
- VJ5A**: 3-port specification normally closed, single use fitting valve base F10: φ4
- VJ5B**: 3-port specification normally open, single use fitting valve base F10: φ4
- VJ6A**: 3-port specification normally closed, single use fitting valve base F10: φ6
- VJ6B**: 3-port specification normally open, single use fitting valve base F10: φ6
- VM**: Female thread valve base F10: M5 x 0.8
- VMA**: 3-port specification normally closed, female thread valve base F10: M5 x 0.8
- VMB**: 3-port specification normally open, female thread valve base F10: M5 x 0.8
- VMH**: Female thread valve base F10:10-32UNF
- VMAH**: 3-port specification normally closed, female valve base F10:10-32UNF
- VMBH**: 3-port specification normally open, female valve base F10:10-32UNF
- VP**: Valve base plate

Piping block assembly (non-plug-in)

F 10 ZX - - - -

Valve size

10: 10 mm [0.394 in.] width

Port isolator^{Note2}

- Blank**: No port isolator
- XSP**: Port isolator (1(P) port)
- XSR**: Port isolator (3(R2), 5(R1) ports)
- XSA**: Port isolator (1(P), 3(R2), and 5(R1) ports)

Mounting specification^{Note3}

- Blank**: Without DIN bracket
- DN**: With DIN bracket

Pilot

specification

- Blank**: Internal pilot
- G**: External pilot

Manifold type

- LN**: Left side piping block (for non-plug-in type) without circuit board (with end lid)
- RN**: Right piping block, without circuit board
- TN**: Intermediate piping block (for non-plug-in type) without circuit board

Piping block Specification^{Note1}

- PJ**: With dual use fitting φ6, φ8
- PJ5**: With single use fitting φ6
- PJ6**: With single use fitting φ8
- PM**: With female thread Rc 1/8
- PMH**: With female thread NPT 1/8
- PP**: Plate (without fitting)

Notes:1.The fitting of the piping block is included. One set of two connecting rods is also included for a LN and TN type manifold.

2.Port isolator selection only available when the piping block name is TN.

3.Only when the manifold type is LN or RN.

F10 Series Easy Assembly Type Manifold Non-Plug-in Type Additional Parts Order Codes

Muffler

KM - J

Fitting size

- 6: Outer diameter φ6 (for piping block)
 - 8: Outer diameter φ8 (for piping block)
- (Sales unit: Set of 10 mufflers)

Connecting rod (1 set of 2)

F 10 ZX - -

Valve size
10: 10 mm
[0.394 in.]
width

Number of units

- 01 ~ 20: When type for valve base (RV) is selected
- 01: When type for left side piping block (RH) is selected
- 01: When type for intermediate piping block (RC) is selected

Specification

- RV: For valve base
- RH: For left piping block
- RC: For intermediate piping block

DIN rail

DIN - (Unit:1)

Rail length

- 125: 125mm [4.921 in.]
- : (25 mm [0.984 in.] pitch)
- 525: 525mm [20.669 in.]

Connector-related order codes

JAZ - P - (for double use only)

Valve specification
For T2, T3, T4, T5, TA, TB, or TC

IP Specification

Connector specification

- CP: Positive common, connector, lead wire length 300 mm [11.8 in.] (black, red, white, for total of 3 lead wires)
- CP3: Positive common, connector, lead wire length 3000 mm [118 in.] (black, red, white, for total of 3 lead wires)
- PA: Positive common A type, lead wire length 300 mm [11.8 in.]**
- PA3: Positive common A type, lead wire length 3000 mm [118 in.]**
- PB: Positive common B type, lead wire length 300 mm [11.8 in.]**
- PB3: Positive common B type, lead wire length 3000 mm [118 in.]**
- PC: Positive common C type, lead wire length 300 mm [11.8 in.]**
- PC3: Positive common C type, lead wire length 3000 mm [118 in.]**
- CM: Negative common, connector, lead wire length 300 mm [11.8 in.]**
- CM3: Negative common, connector, lead wire length 3000 mm [118 in.]**
- MA: Negative common A type, lead wire length 300 mm [11.8 in.]**
- MA3: Negative common A type, lead wire length 3000 mm [118 in.]**
- MB: Negative common B type, lead wire length 300 mm [11.8 in.]**
- MB3: Negative common B type, lead wire length 3000 mm [118 in.]**
- MC: Negative common C type, lead wire length 300 mm [11.8 in.]**
- MC3: Negative common C type, lead wire length 3000 mm [118 in.]**

**A common connector assembly.

JAZO - P - (for single use only)

Valve specification
For T0, or T1

IP Specification

Connector specification

- CP: Positive common, connector, lead wire length 300 mm [11.8 in.] (black, red, for total of 2 lead wires)
- CP3: Positive common, connector, lead wire length 3000 mm [118 in.] (black, red, for total of 2 lead wires)
- PA: Positive common A type, lead wire length 300 mm [11.8 in.]**
- PA3: Positive common A type, lead wire length 3000 mm [118 in.]**
- PB: Positive common B type, lead wire length 300 mm [11.8 in.]**
- PB3: Positive common B type, lead wire length 3000 mm [118 in.]**
- PC: Positive common C type, lead wire length 300 mm [11.8 in.]**
- PC3: Positive common C type, lead wire length 3000 mm [118 in.]**
- CM: Negative common, connector, lead wire length 300 mm [11.8 in.]**
- CM3: Negative common, connector, lead wire length 3000 mm [118 in.]**
- MA: Negative common A type, lead wire length 300 mm [11.8 in.]**
- MA3: Negative common A type, lead wire length 3000 mm [118 in.]**
- MB: Negative common B type, lead wire length 300 mm [11.8 in.]**
- MB3: Negative common B type, lead wire length 3000 mm [118 in.]**
- MC: Negative common C type, lead wire length 300 mm [11.8 in.]**
- MC3: Negative common C type, lead wire length 3000 mm [118 in.]**

**A common connector assembly.

Connector-related order codes

**For details, see p. 22.

JAZ -

Valve specification


- Blank: For T1, T2, T3, T4, T5, TA, TB, or TC
- 0: For T0

Connector type

- CP: Positive common, connector, lead wire length 300 mm [11.8 in.]
- CP3: Positive common, connector, lead wire length 3000 mm [118 in.]
- CPN: Positive common, connector, no lead wire (with shorting bar and contact)
- PA: Positive common A type, lead wire length 300 mm [11.8 in.]**
- PA3: Positive common A type, lead wire length 3000 mm [118 in.]**
- PB: Positive common B type, lead wire length 300 mm [11.8 in.]**
- PB3: Positive common B type, lead wire length 3000 mm [118 in.]**
- PC: Positive common C type, lead wire length 300 mm [11.8 in.]**
- PC3: Positive common C type, lead wire length 3000 mm [118 in.]**
- CMN: Negative common, connector, no lead wire (with shorting bar and contact)
- CM: Negative common, connector, lead wire length 300 mm [11.8 in.]**
- CM3: Negative common, connector, lead wire length 3000 mm [118 in.]**
- MA: Negative common A type, lead wire length 300 mm [11.8 in.]**
- MA3: Negative common A type, lead wire length 3000 mm [118 in.]**
- MB: Negative common B type, lead wire length 300 mm [11.8 in.]**
- MB3: Negative common B type, lead wire length 3000 mm [118 in.]**
- MC: Negative common C type, lead wire length 300 mm [11.8 in.]**
- MC3: Negative common C type, lead wire length 3000 mm [118 in.]**


Common connector assembly

A type: **JAZ-PA** **




- Red common wire (+)
- Black A side (-)
- White B side (-) (Insert when using as double solenoid)^{Note}

B type: **JAZ-PB** **



- Red common wire (+)
- Black A side (-)
- White B side (-) (Insert when using as double solenoid)^{Note}

C type: **JAZ-PC** **




- Red common wire (+)
- Black A side (-)
- White B side (-) (Insert when using as double solenoid)^{Note}
- Red common wire (+)

** Lead wire length **Blank**: 300 mm [11.8 in.]
3: 3000 mm [118 in.]

Note: White lead wire is not available for **JAZO-P** .


For negative common

A type: **JAZ-MA** **



- Black common wire (-)
- Red A side (+)
- White B side (+) (Insert when using as double solenoid)

B type: **JAZ-MB** **



- Black common wire (-)
- Red A side (+)
- White B side (+) (Insert when using as double solenoid)

C type: **JAZ-MC** **



- Black common wire (-)
- Red A side (+)
- White B side (+) (Insert when using as double solenoid)
- Black common wire (-)

Single negative common plug connector unit

Type: **JAZ-CM** **

** Lead wire length **Blank**: 300 mm [11.8 in.]
3: 3000 mm [118 in.]


FZ -

Valve specification
For T1, T2, T3, T4, T5, TA, TB, or TC

Connector specification

- CC1.5: Cabytre cable, length 1500 mm [59 in.]**
- CC3: Cabytre cable, length 3000 mm [118 in.]**

- Notes:**
1. When the valve specification is T1, select the **JAZO-P** - single dedicated type.
 2. When switching between the single and double type (T1/T2), purchase and use a dedicated connector for single or double use (the number of seal holes in the lead wire differs for the single and double type).
 3. There is no white lead wire for the **JAZO-P** - .
 4. It is necessary to disassemble the connector to add a common connector assembly. Contact your nearest KOGANEI sales office.
 5. For information on use in locations/atmospheres subject to substances other than water, such as organic solvents, cutting oil, or reagents, contact your nearest KOGANEI sales office.
 6. For information on replacing the waterproof seal, contact your nearest KOGANEI sales office.

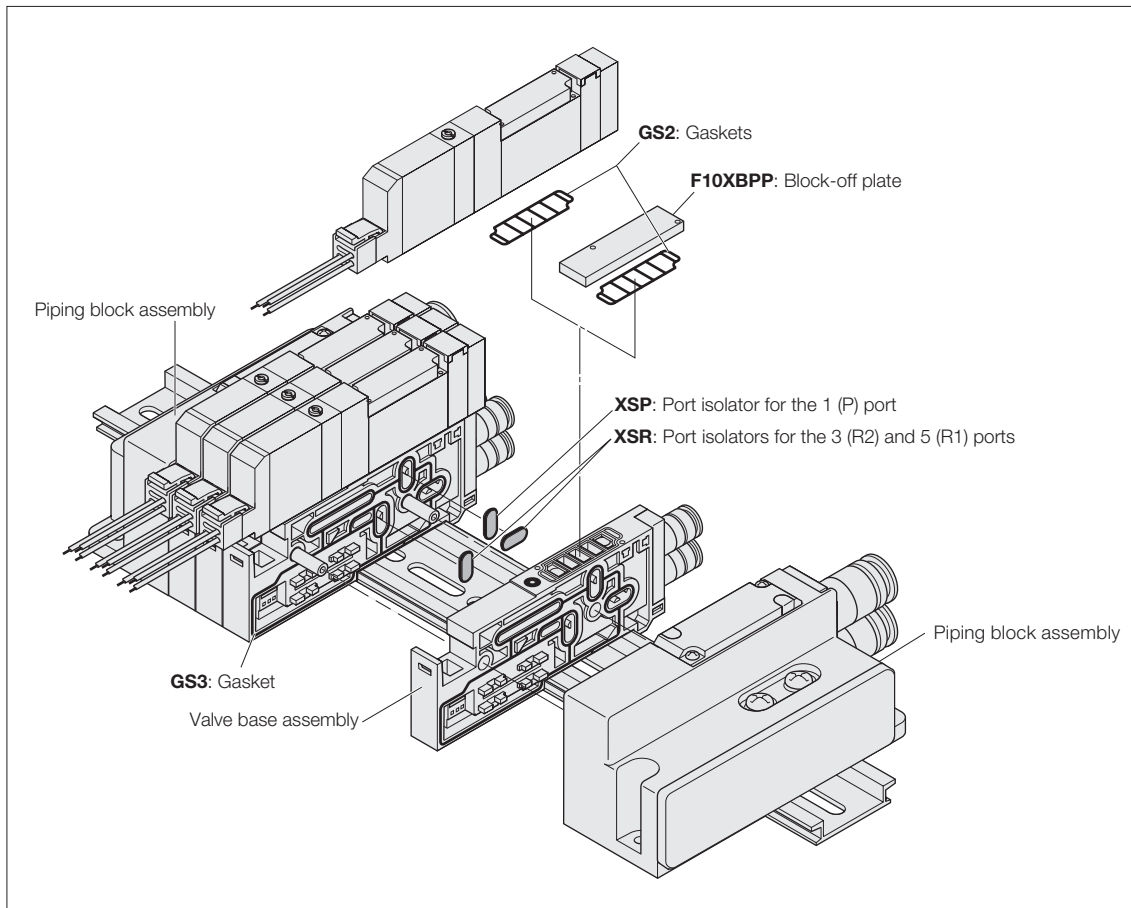

Manifold Order Code Example

(4 units of F10 Series)

F10M4XNJ-J6T-DR

stn.1 ~ 2 F10T0-A1-PS DC24V

stn.3 F10ZX-PJ6-TN

stn.4 F10T0-A1-PS DC24V

Note: This order code example has no relationship to the illustration above.

Precautions for Order Codes

●Orders for valves only


Place orders from "Single Valve Unit Order Codes" on p. 66.

However, Blank, A2□, F3, F4□, F5, F6, F4A□, F4B□, F5A, F5B, F6A, and F6B cannot be selected for the valve outlet type. And for the wiring specification, Blank, PL, and PL3 cannot be selected. In addition, for common terminal wiring connections, separately order the common connector assemblies listed on the left.


F10 Series Easy Assembly Type Manifold Plug-in Type Order Codes

Manifold outlet specification

With dual use fitting blocks (base piping type)




With selectable fittings (base piping type)



Outlet port fitting
F10: φ4, φ6


Outlet port should be selected in accordance with the manifold fitting specification.

With female thread blocks (base piping type)



Outlet port female thread
F10: M5 x 0.8

With plates (direct piping type)



Valve size

F10M 10 mm [0.394 in.] width

Pilot type

Blank

Internal pilot manifold

G

External pilot manifold

Piping block specification (air supply and exhaust)

Fitting block

-JR: Dual use fitting, right-side mounting
-JL: Dual use fitting, left-side mounting
-JD: Dual use fitting, both-side mounting
Fitting size (1(P), 3, 5(R) ports), φ6, φ8

Female thread block

-MR: Female thread, right-side mounting
-ML: Female thread, left-side mounting
-MD: Female thread, both-side mounting
Female thread size (1(P), 3, 5(R) ports), Rc1/8

Female thread block

-MRH: Female thread, right-side mounting^{Note15}
-MLH: Female thread, left-side mounting^{Note15}
-MDH: Female thread, both-side mounting^{Note15}
Female thread size (1(P), 3, 5(R) ports), NPT1/8

Single size fitting block

-J5R: Single use fitting, right-side mounting
-J5L: Single use fitting, left-side mounting
-J5D: Single use fitting, both-side mounting
Fitting size (1(P), 3, 5(R) ports), φ6
-J6R: Single use fitting, right-side mounting
-J6L: Single use fitting, left-side mounting
-J6D: Single use fitting, both-side mounting
Fitting size (1(P), 3, 5(R) ports), φ8



Intermediate piping block

-JT: Dual use fitting, both-side mounting, intermediate piping block φ6, φ8
-J5T: Single use fitting, both-side mounting, intermediate piping block φ6
-J6T: Single use fitting, both-side mounting, intermediate piping block φ8
-MT: Female thread, both-side mounting, intermediate piping block Rc1/8
-MTH: Female thread, both-side mounting, intermediate piping block NPT1/8^{Note15}

Wiring specification (wiring block)

※ All wiring blocks are mounted on the left.

Flat cable connector (with socket and strain relief)




<Connector top surface wiring>

-F100: 10-pin
-F100N: 10-pin without power terminal
-F101: 10-pin
-F101N: 10-pin without power terminal
-F200: 20-pin
-F200N: 20-pin without power terminal
-F201: 20-pin
-F201N: 20-pin without power terminal
-F260: 26-pin
-F260N: 26-pin without power terminal

<Connector side surface wiring>

-F100E: 10-pin
-F100EN: 10-pin without power terminal
-F101E: 10-pin
-F101EN: 10-pin without power terminal
-F200E: 20-pin
-F200EN: 20-pin without power terminal
-F201E: 20-pin
-F201EN: 20-pin without power terminal
-F260E: 26-pin
-F260EN: 26-pin without power terminal

D-sub connector



<Connector top surface wiring> (M2.6 mounting screws)


-D250: 25-pin^{Note14}
-D250N: 25-pin without power terminal^{Note14}
-D251: 25-pin^{Note14}
-D251N: 25-pin without power terminal^{Note14}
-D251U: 25-pin^{Note15}
-D251U: 25-pin^{Note15}
-D370NU: 37-pin without power terminal^{Note15}

<Connector side surface wiring> (M2.6 mounting screws)

-D250E: 25-pin^{Note14}
-D250EN: 25-pin without power terminal^{Note14}
-D251E: 25-pin^{Note14}
-D251EN: 25-pin without power terminal^{Note14}
-D251EU: 25-pin^{Note15}
-D251EU: 25-pin^{Note15}

For details, see p. 47.

Terminal block (19 terminals, M3 screws)



For details, see p. 47.

Wiring connection specification

Blank

Packed wiring:

Specification of the valve base is always in accordance with the mounted valve specifications.

-W

Double wiring:

Valve base is always double wiring, regardless of the specifications of the mounted valve.

Common specification

Blank: Positive common
-CM: Negative common

Mounting specification

Blank

Direct mounting

-DN

With DIN bracket (no rail)


-DR

With DIN bracket, with rail
Caution: For information on rails assembled and shipped, see pages 146 and 147.

Valve size

F10 Standard type

F10L Low-current type



Base piping type	Valve units	Manifold type	Manifold outlet specification	Pilot specification	Piping block specification				Wiring specification				Wiring connection specification	Common specification	Mounting specification	Voltage
					-JR	-J5R	-JT	-F100	-F260	-F101E	-D250E	-W				
Base piping type		XP (※Rc)	J M	Blank G	-JR -JL -JD -MR -ML -MD	-J5R -J5L -J5D -J6R -J6L -J6D	-JT -J5T -J6T -MT	-F100 -F100N -F101 -F101N -F200 -F200N -F201 -F201N -F260	-F260N -D250 -D250N -D251 -D251N -F100E -F100EN	-F101E -F101EN -F200E -F200EN -F201E -F201EN -F260E -F260EN	-D250E -D250EN -D251E -D251EN -T200	-W	-CM	Blank -DN -DR	DC24V DC12V ^{Note2}	
Base piping type selectable fitting	F10M	XP (※Rc) Note1	L	Blank G	-JR ^{Note14} -JL ^{Note14} -JD ^{Note14} -MR ^{Note14} -ML ^{Note14} -MD ^{Note14}	-MRH ^{Note15} -MLH ^{Note15} -MDH ^{Note15} -J5R ^{Note14} -J6R ^{Note14} -J5L ^{Note14}	-J6L ^{Note14} -J5D ^{Note14} -J6D ^{Note14} -MTH ^{Note15}	-F100 -F100N -F101 -F101N -F200 -F200N -F201 -F201N -F260	-D250 ^{Note14} -D250N ^{Note14} -D251 ^{Note14} -D251N ^{Note14} -D250U ^{Note15} -D251U ^{Note15} -D370NU ^{Note15} -F100E	-F100EN -F101E -F101EN -F200E -F200EN -F201E -F201EN -F260E -F260EN	-D250E ^{Note14} -D250EN ^{Note14} -D251E ^{Note14} -D251EN ^{Note14} -D250EU ^{Note15} -D251EU ^{Note15} -T200	-W	-CM	Blank -DN -DR	DC24V DC12V ^{Note2}	
Direct piping type		XPH (※NPT) Note13	Blank	Blank G	-JR ^{Note14} -JL ^{Note14} -JD ^{Note14} -MR ^{Note14} -ML ^{Note14} -MD ^{Note14}	-MRH ^{Note15} -MLH ^{Note15} -MDH ^{Note15} -J5R ^{Note14} -J6R ^{Note14} -J5L ^{Note14}	-J6L ^{Note14} -J5D ^{Note14} -J6D ^{Note14} -MTH ^{Note15}	-F100 -F100N -F101 -F101N -F200 -F200N -F201 -F201N -F260	-D250 ^{Note14} -D250N ^{Note14} -D251 ^{Note14} -D251N ^{Note14} -D250U ^{Note15} -D251U ^{Note15} -D370NU ^{Note15} -F100E	-F100EN -F101E -F101EN -F200E -F200EN -F201E -F201EN -F260E -F260EN	-D250E ^{Note14} -D250EN ^{Note14} -D251E ^{Note14} -D251EN ^{Note14} -D250EU ^{Note15} -D251EU ^{Note15} -T200	-W	-CM	Blank -DN -DR	DC24V DC12V ^{Note2}	

Notes: 1. For the maximum number of units, see the table for maximum number of valve units by wiring specification, on p. 110.
2. Not available in low-current type.
3. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
4. When selecting J, M, or L (base piping type) for the manifold outlet specification, always enter -A1 (with plate) for the valve outlet type.


Valve type

- T0:** 2-position, for single solenoid only
- T1:** 2-position, single solenoid specification
- T2:** 2-position, double solenoid specification
- T3:** 3-position, closed center
- T4:** 3-position, exhaust center
- T5:** 3-position, pressure center
- TA:** Tandem 3-port (NC and NO)^{Note10}
- TB:** Tandem 3-port (NO and NO)^{Note10}
- TC:** Tandem 3-port (NC and NO)^{Note10}

Operation type

- Blank**
Internal pilot type^{Note8}
- G**
External pilot type^{Note9}
(for positive pressure)
* No vacuum valve can be mounted.

Manual override

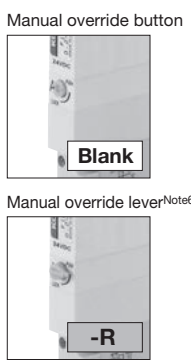

Valve type

-A1 With plate^{Note4}
(base piping type)

5-port specification

- FJ** With dual use fitting block **F10:** φ4, φ6
(direct piping type)
- FJ5** With single use fitting block **F10:** φ4
(direct piping type)
- FJ6** With single use fitting block **F10:** φ6
(direct piping type)
- FM** With female thread block **F10:** M5 x 0.8
(direct piping type)
- FMH** With female thread block^{Note15}
(direct piping type) **F10:** 10-32UNF

3-port specification

- FJ5A** With single use fitting block, normally closed (NC)
(direct piping type) **F10:** φ4
- FJ5B** With single use fitting block, normally open (NO)
(direct piping type) **F10:** φ4
- FJ6A** With single use fitting block, normally closed (NC)
(direct piping type) **F10:** φ6
- FJ6B** With single use fitting block, normally open (NO)
(direct piping type) **F10:** φ6
- FMA** With female thread block, normally closed (NC)
(direct piping type) **F10:** M5 x 0.8
- FMAH** With female thread block, normally closed (NC)^{Note15}
(direct piping type) **F10:** 10-32UNF
- FMB** With female thread block, normally open (NO)
(direct piping type) **F10:** M5 x 0.8
- FMBH** With female thread block, normally open (NO)^{Note15}
(direct piping type) **F10:** 10-32UNF

Caution:The 3-port specifications are only available in the valve specification T0, T1, and T2.

Manifold fitting specification

5-port specification

- J5** With single use fitting block **F10:** φ4
(base piping type)
- J6** With single use fitting block **F10:** φ6
(base piping type)
- M** With female thread block **F10:** M5 x 0.8
(base piping type)
- MH** With female thread block^{Note15}
(base piping type) **F10:** 10-32UNF

3-port specification

- J5A** With single use fitting block, normally closed (NC)
(base piping type) **F10:** φ4
- J5B** With single use fitting block, normally open (NO)
(base piping type) **F10:** φ4
- J6A** With single use fitting block, normally closed (NC)
(base piping type) **F10:** φ6
- J6B** With single use fitting block, normally open (NO)
(base piping type) **F10:** φ6
- MA** With female thread block, normally closed (NC)
(base piping type) **F10:** M5 x 0.8
- MAH** With female thread block, normally closed (NC)^{Note15}
(base piping type) **F10:** 10-32UNF
- MB** With female thread block, normally open (NO)
(base piping type) **F10:** M5 x 0.8
- MBH** With female thread block, normally open (NO)^{Note15}
(base piping type) **F10:** 10-32UNF

Caution:The 3-port specifications are only available in the valve specification T0, T1, and T2.

Back pressure prevention valve


- Blank**
No back pressure prevention valve
- E2**
With back pressure prevention valve^{Note11}

Individual air supply and exhaust spacer

- Blank:** No spacer
 - XPPM:** Individual air supply spacer
(with M5 female thread for F10)
 - XPRM:** Individual exhaust spacer
(with M5 female thread for F10)
- For details, see p.27.

Block-off plate wiring specification

- Blank:** Double wiring
- S:** Single wiring

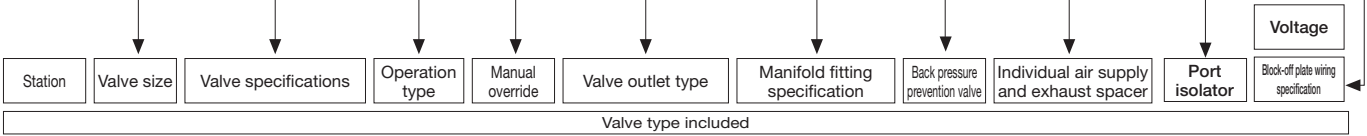


Valve type included													
Station	Valve size	Valve specifications			Operation type	Manual override	Valve outlet type	Manifold fitting specification	Back pressure prevention valve	Individual air supply and exhaust spacer	Port isolator	Block-off plate wiring specification	
stn. 1 ⋮ stn. □ Note3	F10 F10L	T0 T1 T2	T3 T4 T5	TA ^{Note10} TB ^{Note10} TC ^{Note10}	Blank ^{Note8} G ^{Note9}	Blank -R ^{Note6}	-A1 ^{Note4}		Blank -E2 ^{Note11}	Blank -XPPM -XPRM	Blank -XSP ^{Note7} -XSR ^{Note7} -XSA ^{Note7}	DC24V DC12V ^{Note2} Blank-S	
When selecting the intermediate piping block, see page 106 when specifying it.													
stn. 1 ⋮ stn. □ Note3	F10 F10L	T0 T1 T2	T3 T4 T5	TA ^{Note10} TB ^{Note10} TC ^{Note10}	Blank ^{Note8} G ^{Note9}	Blank -R ^{Note6}	-A1 ^{Note4}	-J5 ^{Note12} -J6 ^{Note12} -M ^{Note12} -MH ^{Note15} -J5A ^{Note12} -J5B ^{Note12}	-J6A ^{Note12} -J6B ^{Note12} -MA ^{Note12} -MAH ^{Note15} -MB ^{Note12} -MBH ^{Note15}	Blank -E2 ^{Note11}	Blank -XPPM -XPRM	Blank -XSP ^{Note7} -XSR ^{Note7} -XSA ^{Note7}	DC24V DC12V ^{Note2} Blank-S
When selecting the intermediate piping block, see page 106 when specifying it.													
stn. 1 ⋮ stn. □ Note3	F10 F10L	T0 T1 T2	T3 T4 T5	TA ^{Note10} TB ^{Note10} TC ^{Note10}	Blank ^{Note8} G ^{Note9}	Blank -R ^{Note6}	-A1 ^{Note4}	-FJ ^{Note12} -FJ5 ^{Note12} -FJ6 ^{Note12} -FM ^{Note12} -FMH ^{Note15} -FJ5A ^{Note12} -FJ5B ^{Note12}	-FJ6A ^{Note12} -FJ6B ^{Note12} -FMA ^{Note15} -FMAH ^{Note15} -FMB ^{Note12} -FMBH ^{Note15}	Blank -E2 ^{Note11}	Blank -XPPM -XPRM	Blank -XSP ^{Note7} -XSR ^{Note7} -XSA ^{Note7}	DC24V DC12V ^{Note2} Blank-S
When selecting the intermediate piping block, see page 108 when specifying it.													

Notes: 5. Select the block-off plate wiring in the block-off plate wiring connection specification.
 6. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
 7. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for -XSA, or 1 each port isolator for -XSP and -XSR for a total of 2 locations. When shipping, the designated port isolators are mounted between the designated station and the station to its immediate left (the next smaller stn. No.).
 8. Cannot be mounted on the external pilot manifold.
 9. Cannot be mounted on the internal pilot manifold.
 10. Not available in external pilot type.
 11. Not available with the individual exhaust spacer.
 12. The 3-port specifications are only available in the valve specification T0, T1, and T2.
 13. Only L or Blank is available in the inch female thread specification and the manifold outlet specification.
 14. Can be selected only when the manifold type is XP.
 15. Can be selected only when the manifold type is XPH.

F10 Series Easy Assembly Type Manifold Plug-in Type Order Codes

Intermediate piping block

(When mounting an intermediate piping block to the manifold, complete the following type and specify the station specified [on page 107.](#))

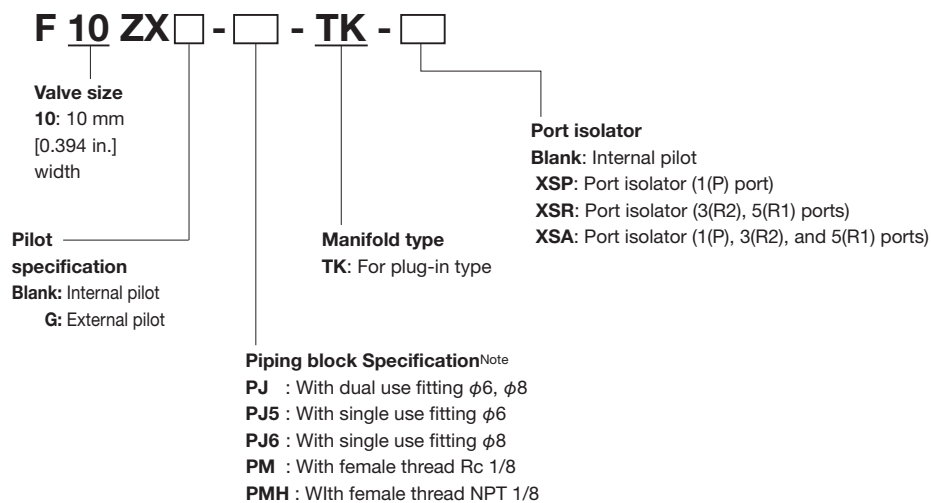

Note: See the following table for combinations of intermediate piping block port specifications and manifold piping block specifications.

Manifold piping specifications	Intermediate piping block
JT	PJ
J5T	PJ5
J6T	PJ6
MT	PM
MTH	PMH

F10 Series Easy Assembly Type Manifold Plug-in Type Additional Parts Order Codes

Parts for manifold

F 10 ZX -

Valve size
10: 10 mm
[0.394 in.]
width

Parts content

GS2: Gasket (gasket and exhaust valve)
GS3: Gasket (valve base side)
XSP: Port isolator (for 1(P) port)
XSR: Port isolator (for 3(R2), 5(R1) ports)
XSA: Port isolator (for 1(P), 3(R2), 5(R1) ports)
DN: DIN mounting bracket (1 set of 2)

Back pressure prevention valve (2 pieces for split type, with dedicated gasket)

F 10 Z - E2

Valve size
10: 10 mm [0.394 in.] width

Individual air supply and exhaust spacer (Spacer for plug-in type, gasket, exhaust valve, and 2 mounting screws)

F 10 ZX -

Valve size
10: 10 mm [0.394 in.]
width

Specification

XPPM: Individual air supply spacer (with M5 female thread for F10)

XPRM: Individual exhaust spacer (with M5 female thread for F10)

※For details, see p.27.

Block-off plate (block-off plate, 2 mounting screws, and plug)

F 10 XBP P

Valve size
10: 10 mm [0.394 in.]
width

For plug-in type

Muffler

KM - J

Fitting size

6: Outer diameter φ6 (for piping block)
8: Outer diameter φ8 (for piping block)
(Sales unit: Set of 10 mufflers)

Valve base assembly (valve base, gasket, and 2 connecting rods for adding)

F 10 ZX - - -

Valve size
10: 10 mm [0.394 in.]
width

*For use with both internal pilot and external pilot

Common specification

Blank: For positive common
CM: For negative common

Wiring specification

S: For single wiring
W: For double wiring

Piping specifications

VJ: Dual use fitting valve base
VJ5: Single use fitting valve base F10: φ4
VJ6: Single diameter fitting valve base F10: φ6
VJ5A: 3-port specification normally closed, single use fitting valve base F10: φ4
VJ5B: 3-port specification normally open, single use fitting valve base F10: φ4
VJ6A: 3-port specification normally closed, single use fitting valve base F10: φ6
VJ6B: 3-port specification normally open, single use fitting valve base F10: φ6
VM: Female thread valve base F10: M5 x 0.8
VMA: 3-port specification normally closed, female thread valve base F10: M5 x 0.8
VMB: 3-port specification normally open, female thread valve base F10: M5 x 0.8
VMH: Female thread valve base F10:10-32UNF
VMAH: 3-port specification normally closed, female valve base F10:10-32UNF
VMBH: 3-port specification normally open, female valve base F10:10-32UNF
VP: Valve base plate

DIN rail

DIN - (Unit:1)

Rail length

125: 125mm [4.921 in.]
: (25 mm [0.984 in.] pitch)
525: 525mm [20.669 in.]

Piping block assembly (plug-in)

F 10 ZX - - - -

Valve size
10: 10 mm
[0.394 in.]
width

Port isolator^{Note2}

Blank: No port isolator
XSP: Port isolator (1(P) port)
XSR: Port isolator (3(R2), 5(R1) ports)
XSA: Port isolator (1(P), 3(R2), and 5(R1) ports)

Mounting specification^{Note3}

Blank: Without DIN bracket
DN: With DIN bracket

Pilot specification

Blank: Internal pilot
G: External pilot

Manifold type

LK: Left side piping block (for plug-in type) with circuit board
RN: Right piping block, without circuit board
TK: Intermediate piping block (for plug-in type) with circuit board

Piping block Specification^{Note1}

PJ: With dual use fitting φ6, φ8
PJ5: With single use fitting φ6
PJ6: With single use fitting φ8
PM: With female thread Rc 1/8
PMH: With female thread NPT 1/8
PP: Plate (without fitting)

Notes: 1. The fitting of the piping block is included. One set of two connecting rods is also included for a LN and TN type manifold.

2. Port isolator selection only available when the piping block name is TK.

3. Only when the manifold type is LK or RN.

F10 Series Easy Assembly Type Manifold Plug-in Type Additional Parts Order Codes

Connecting rod (1 set of 2)

F 10 ZX - -

Valve size
10: 10 mm
 [0.394 in.]
 width

Number of units

- 01 ~ 20:** When type for valve base (RV) is selected
- 01:** When type for left side piping block (RH) is selected
- 01:** When type for intermediate piping block (RC) is selected

Specification

- RV:** For valve base
- RH:** For left piping block
- RC:** For intermediate piping block

Wiring block assembly (1 set)

FZX - -

Common specification

- Blank:** Positive common
- CM:** Negative common

Wiring specification


- F100** : Flat cable connector (DC specification)
- F101** : Flat cable connector (DC specification)
- F200** : Flat cable connector (DC specification)
- F201** : Flat cable connector (DC specification)
- F260** : Flat cable connector (DC specification)
- D250** : D-sub connector (M2.6 screws)
- D251** : D-sub connector (M2.6 screws)
- F100N** : Flat cable connector (DC specification), without power terminal
- F101N** : Flat cable connector (DC specification), without power terminal
- F200N** : Flat cable connector (DC specification), without power terminal
- F201N** : Flat cable connector (DC specification), without power terminal
- F260N** : Flat cable connector (DC specification), without power terminal
- D250N** : D-sub connector, without power terminal (M2.6 screws)
- D251N** : D-sub connector, without power terminal (M2.6 screws)
- D250U** : D-sub connector, (4-40UNC screws)
- D250NU** : D-sub connector, without power terminal (4-40UNC screws)
- D251U** : D-sub connector, (4-40UNC screws)
- D251NU** : D-sub connector, without power terminal (4-40UNC screws)
- D370NU** : D-sub connector, without power terminal (4-40UNC screws)
- T200** : Terminal block, for left-side mounting

※ The above flat cable connectors and D-sub connectors can be switched between the top and side type.

■ Table for maximum number of valve units by wiring specification

Wiring specification		Maximum number of units ※	
		Wiring connection specification	
Wiring specification	Max. outputs	Packed wiring (Blank)	Double wiring (-W)
F100 <input type="checkbox"/> Flat cable (10P)	8	Varies depending on the number of mounted single solenoids, double solenoids, and block-off plates. The number of controlled solenoids should be designated as the maximum number of outputs or less. D370NU is a maximum of 20 units.	4 units
F101 <input type="checkbox"/> Flat cable (10P)	8		4 units
F200 <input type="checkbox"/> Flat cable (20P)	16		8 units
F201 <input type="checkbox"/> Flat cable (20P)	16		8 units
F260 <input type="checkbox"/> Flat cable (26P)	20		10 units
D250 <input type="checkbox"/> D-sub connector (25P)	16		8 units
D251 <input type="checkbox"/> D-sub connector (25P)	20		10 units
D370NU D-sub connector (37P)	32		16 units
T200 Terminal block (19 terminals)	18		9 units

※Note : When the intermediate piping block is selected, the maximum number of units will be added +1.

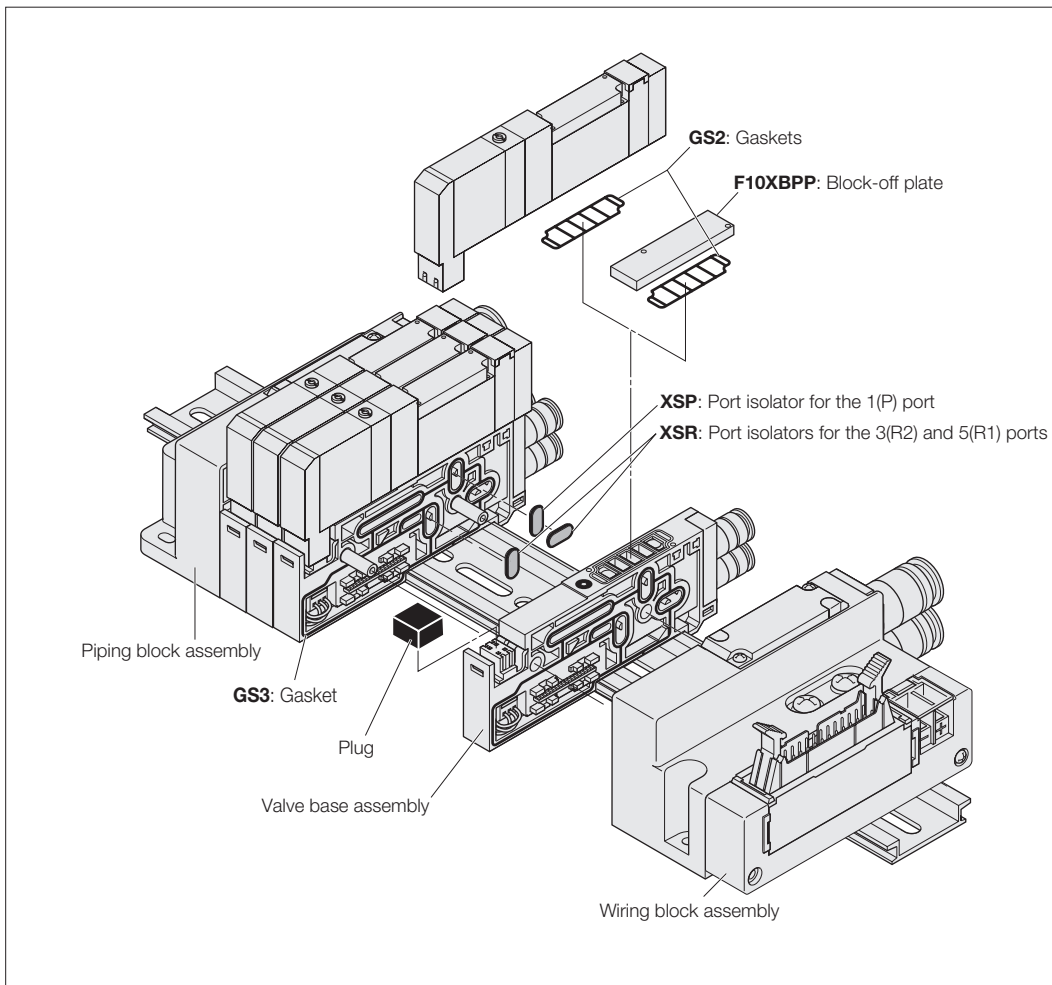

Manifold Order Code Example
 (12 units of F10 Series)
F10M12XPL-J6T-F201-DR DC24V
 stn.1 ~ 8 F10T1-A1-J5 DC24V
 stn.9 F10ZX-PJ6-TK
 stn.10 ~ 12 F10T1-A1-J5 DC24V
 Note: This order code example has no relationship to the illustration above.

Precautions for Order Codes

● **Orders for valves only**

Place orders from "Single Valve Unit Order Codes" on p. 66.

However, **Blank**, **A2**, **F3**, **F4**, **F5**, **F6**, **F4A**, **F4B**, **F5A**, **F5B**, **F6A**, or **F6B** cannot be selected for the valve outlet type. For the wiring specification, **Blank** is the only selection.

● **Wiring connection specification**

Blank (packed wiring): Wiring is made in accordance with the mounted valve specifications.

-W (double wiring): Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.


Caution

Single or double can also be selected as the block-off plate wiring specification separately from the manifold (valve) wiring specification.

F10 Series Easy Assembly Type Manifold Serial Transmission Type Order Codes

Manifold outlet specification


With dual use fitting blocks (base piping type)



J

Outlet port fitting
F10: $\phi 4/\phi 6$


With selectable fittings (base piping type)



L

Outlet port should be selected in accordance with the manifold fitting specification.


With female thread blocks (base piping type)



M

Outlet port female thread
F10: M5 x 0.8

With plates (direct piping type)



Blank

Pilot specification

Blank

Internal pilot manifold

G

External pilot manifold

Piping block specification (air supply and exhaust)

Fitting block

- JR: Dual use fitting, right-side mounting
- JL: Dual use fitting, left-side mounting
- JD: Dual use fitting, both-side mounting
- Fitting size (1(P), 3, 5(R) ports), $\phi 6$, $\phi 8$

Female thread block

- MR: Female thread, right-side mounting
- ML: Female thread, left-side mounting
- MD: Female thread, both-side mounting
- Female thread size (1(P), 3, 5(R) ports), Rc1/8

Female thread block

- MRH: Female thread, right-side mounting^{Note13}
- MLH: Female thread, left-side mounting^{Note13}
- MDH: Female thread, both-side mounting^{Note13}
- Female thread size (1(P), 3, 5(R) ports), NPT1/8

Single use fitting block



- J5R: Single use fitting, right-side mounting
- J5L: Single use fitting, left-side mounting
- J5D: Single use fitting, both-side mounting
- Fitting size (1(P), 3, 5(R) ports), $\phi 6$
- J6R: Single use fitting, right-side mounting
- J6L: Single use fitting, left-side mounting
- J6D: Single use fitting, both-side mounting
- Fitting size (1(P), 3, 5(R) ports), $\phi 8$

Intermediate piping block

- JT: Dual use fitting, both-side mounting, intermediate piping block $\phi 6$, $\phi 8$
- J5T: Single use fitting, both-side mounting, intermediate piping block $\phi 6$
- J6T: Single use fitting, both-side mounting, intermediate piping block $\phi 8$
- MT: Female thread, both-side mounting, intermediate piping block Rc1/8
- MTH: Female thread, both-side mounting, intermediate piping block NPT1/8^{Note13}

Transmission block specification

- ※ All transmission blocks are left-side mounting
- ※ These are the serial transmission block specifications compatible with each system.



● Block on the right photo is the case of B7A Link Terminal.
For details, see p. 41-44.

Integrated type

- B1: For CC-Link (16 outputs)^{Note2}
- B3: For CC-Link (32 outputs)^{Note2}
- D1: For DeviceNet (16 outputs)
- D3: For DeviceNet (32 outputs)
- H1: For CompoNet (16 outputs)
- K1: For EtherCAT (16 outputs)
- K3: For EtherCAT (32 outputs)
- M1: For EtherNet/IP (16 outputs)^{Note2}
- M3: For EtherNet/IP (32 outputs)^{Note2}

Wiring connection specification

Blank

Packed wiring: Specification of the valve base is always in accordance with the mounted valve specifications.

-W

Double wiring: Valve base is always double wiring, regardless of the specifications of the mounted valve.

Mounting specification

Blank

Direct mounting

-DN

With DIN bracket (no rail)

-DR

With DIN bracket, with rail
Caution: For information on rails assembled and shipped, see pages 151 and 152.

Valve size

F10 Standard type

F10L Low-current type

Valve size

F10M 10 mm [0.394 in.] width

Valve size Valve units Manifold type Manifold outlet specification Pilot specification Piping block specification Transmission block specification Wiring connection specification Mounting specification

		Manifold type								
Base piping type	Valve size	Valve units	Manifold type	Manifold outlet specification	Pilot specification	Piping block specification	Transmission block specification	Wiring connection specification	Mounting specification	
Base piping type	F10M	2 : : □ Note1	XS (※Rc)	J M	Blank G	-JR -J5R -JT -JL -J5L -J5T -JD -J5D -J6T -MR -J6R -MT -ML -J6L -MD -J6D	-B1 ^{Note2} -D3 -K3 -B3 ^{Note2} -H1 -M1 ^{Note2} -D1 -K1 -M3 ^{Note2}	Blank -W	Blank -DN -DR	
Base piping type selectable fitting						Blank G	-JR -MLH ^{Note13} -J6D -JL -MDH ^{Note13} -JT -JD -J5R -J5T -MR -J5L -J6T -ML -J5D -MT -MD -J6R -MTH ^{Note13} -MRH ^{Note13} -J6L			-B1 ^{Note2} -D3 -K3 -B3 ^{Note2} -H1 -M1 ^{Note2} -D1 -K1 -M3 ^{Note2}
Direct piping type							Blank			Blank G

Notes 1. To determine the maximum number of units, see the table for maximum number of valve units by transmission block specification, on p. 116.
2. Complies with the CE marking regulation.


Valve specification

- T0 : 2-position, for single solenoid only
- T1 : 2-position, single solenoid specification
- T2 : 2-position, double solenoid specification
- T3 : 3-position, closed center
- T4 : 3-position, exhaust center
- T5 : 3-position, pressure center
- TA : Tandem 3-port (NC and NO)^{Note10}
- TB : Tandem 3-port (NO and NO)^{Note10}
- TC : Tandem 3-port (NC and NO)^{Note10}

Operation type

- Blank**
Internal pilot type^{Note8}
- G**
External pilot type^{Note9}
(for positive pressure)
※ No vacuum valve can be mounted.

Manual override

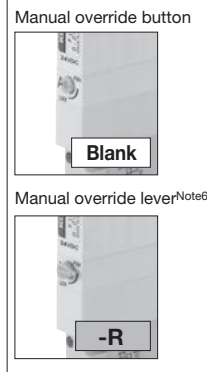

Valve outlet type

- A1** With plate^{Note4}
(base piping type)
- 5-port specification**
- FJ** With dual use fitting block F10: φ4, φ6
(direct piping type)
- FJ5** With single use fitting block F10: φ4
(direct piping type)
- FJ6** With single use fitting block F10: φ6
(direct piping type)
- FM** With female thread block F10: M5 x 0.8
(direct piping type)
- FMH** With female thread block^{Note13}
(direct piping type) F10: 10-32UNF
- 3-port specification**
- FJ5A** With single use fitting block, normally closed (NC)
(direct piping type) F10: φ4
- FJ5B** With single use fitting block, normally open (NO)
(direct piping type) F10: φ4
- FJ6A** With single use fitting block, normally closed (NC)
(direct piping type) F10: φ6
- FJ6B** With single use fitting block, normally open (NO)
(direct piping type) F10: φ6
- FMA** With female thread block, normally closed (NC)
(direct piping type) F10: M5 x 0.8
- FMAH** With female thread block, normally closed (NC)^{Note13}
(direct piping type) F10: 10-32UNF
- FMB** With female thread block, normally open (NO)
(direct piping type) F10: M5 x 0.8
- FMBH** With female thread block, normally open (NO)^{Note13}
(direct piping type) F10: 10-32UNF

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Manifold fitting specification

- 5-port specification**
- J5** With single use fitting block F10: φ4
(base piping type)
- J6** With single use fitting block F10: φ6
(base piping type)
- M** With female thread block F10: M5 x 0.8
(base piping type)
- MH** With female thread block^{Note13}
(base piping type) F10: 10-32UNF
- 3-port specification**
- J5A** With single use fitting block, normally closed (NC)
(base piping type) F10: φ4
- J5B** With single use fitting block, normally open (NO)
(base piping type) F10: φ4
- J6A** With single use fitting block, normally closed (NC)
(base piping type) F10: φ6
- J6B** With single use fitting block, normally open (NO)
(base piping type) F10: φ6
- MA** With female thread block, normally closed (NC)
(base piping type) F10: M5 x 0.8
- MAH** With female thread block, normally closed (NC)^{Note13}
(base piping type) F10: 10-32UNF
- MB** With female thread block, normally open (NO)
(base piping type) F10: M5 x 0.8
- MBH** With female thread block, normally open (NO)^{Note13}
(base piping type) F10: 10-32UNF

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Back pressure prevention valve


- Blank**
No back pressure prevention valve
- E2**
With back pressure prevention valve^{Note11}

Individual air supply and exhaust spacer

- Blank**: Without spacer
 - XPPM**: Individual air supply spacer
(with M5 female thread for F10)
 - XPRM**: Individual exhaust spacer
(with M5 female thread for F10)
- For details, see p.27.

Block-off plate wiring specification

- Blank**: Double wiring
- S**: Single wiring

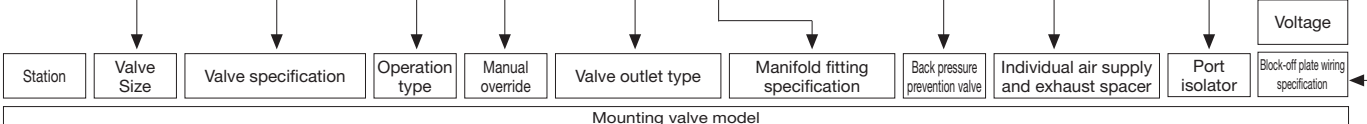


Mounting valve model											
stn. 1 ⋮ stn. □ <small>Note3</small>	F10	T0	T3	TA ^{Note10}	Blank ^{Note8} G ^{Note9}	Blank -R ^{Note6}	-A1 ^{Note4}	Blank -E2 ^{Note11}	Blank -XPPM -XPRM	Blank -XSP ^{Note7} -XSR ^{Note7} -XSA ^{Note7}	DC24V
	F10L	T1	T4	TB ^{Note10}							
When selecting the intermediate piping block, see page 112 when specifying it.											
F10 XBPP (for block-off plate) ^{Note3}											
stn. 1 ⋮ stn. □ <small>Note3</small>	F10	T0	T3	TA ^{Note10}	Blank ^{Note8} G ^{Note9}	Blank -R ^{Note6}	-A1 ^{Note4}	Blank -E2 ^{Note11}	Blank -XPPM -XPRM	Blank -XSP ^{Note7} -XSR ^{Note7} -XSA ^{Note7}	DC24V
	F10L	T1	T4	TB ^{Note10}							
When selecting the intermediate piping block, see page 112 when specifying it.											
F10 XBPP (for block-off plate) ^{Note3}											
stn. 1 ⋮ stn. □ <small>Note3</small>	F10	T0	T3	TA ^{Note10}	Blank ^{Note8} G ^{Note9}	Blank -R ^{Note6}	-A1 ^{Note4}	Blank -E2 ^{Note11}	Blank -XPPM -XPRM	Blank -XSP ^{Note7} -XSR ^{Note7} -XSA ^{Note7}	DC24V
	F10L	T1	T4	TB ^{Note10}							
When selecting the intermediate piping block, see page 114 when specifying it.											
F10 XBPP (for block-off plate) ^{Note5}											

Notes: 3. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
 4. When selecting J, M, or L (base piping type) for the manifold outlet specifications, always enter -A1 (with plate) for the valve outlet type.
 5. Single or double can also be selected as the block-off plate wiring specification separately from the manifold (valve) wiring specification.
 6. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
 7. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for -XSA, or 1 each port isolator for -XSP and -XSR for a total of 2 locations. When shipping, the designated port isolators are mounted between the designated station and the station to its immediate left (the next smaller stn. No.).
 8. Cannot be mounted on the external pilot manifold.
 9. Cannot be mounted on the internal pilot manifold.
 10. Not available in external pilot type.
 11. Not available with the individual exhaust spacer.
 12. The 3-port specifications are only available in the valve specification T0, T1, and T2.
 13. Can be selected only when the manifold type is XSH.

F10 Series Easy Assembly Type Manifold Serial Transmission Type Order Codes

Intermediate piping block

(When mounting an intermediate piping block to the manifold, complete the following type and specify the station specified [on page 113](#).)

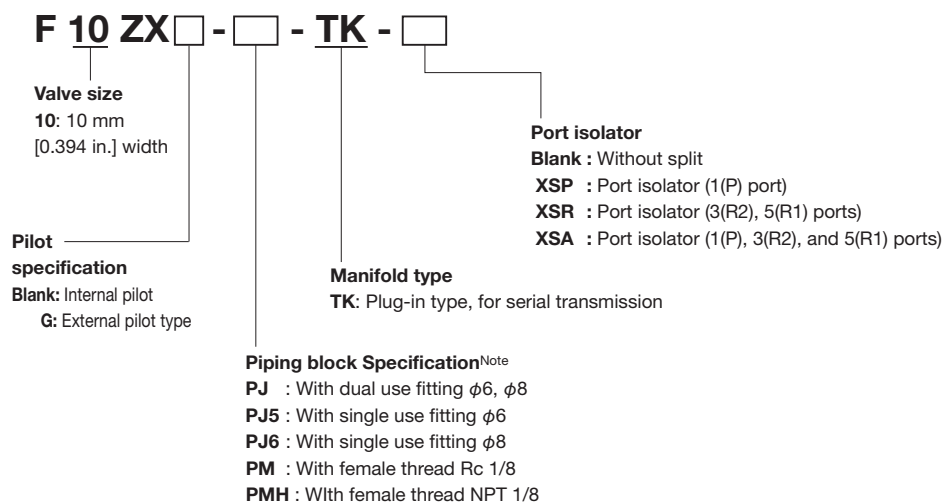

Note: See the following table for combinations of intermediate piping block port specifications and manifold piping block specifications.

Manifold piping specifications	Intermediate piping block
JT	PJ
J5T	PJ5
J6T	PJ6
MT	PM
MTH	PMH

F10 Series Easy Assembly Type Manifold Serial Transmission Type Additional Parts Order Codes

Parts for manifold

F 10 ZX -

Valve size
10: 10 mm [0.394 in.] width

Parts content
GS2 : Gasket (gasket and exhaust valve)
GS3 : Gasket (valve base side)
XSP : Port isolator (for 1(P) port)
XSR : Port isolator (for 3(R2), 5(R1) ports)
XSA : Port isolator (for 1(P), 3(R2), 5(R1) ports)
DN : DIN mounting bracket (one set of two)

Block-off plate (block-off plate, 2 mounting screws, and plug)

F 10 XBPP

Valve size
10: 10 mm [0.394 in.] width

Back pressure prevention valve (2 units for split type, with dedicated gasket)

F 10 Z - E2

Valve size
10: 10 mm [0.394 in.] width

Individual air supply and exhaust spacer (Spacer for plug-in type, gasket, exhaust valve, and 2 mounting screws)

F 10 ZX -

Valve size
10: 10 mm [0.394 in.] width

Specifications
XPPM: Individual air supply spacer (with M5 female thread for F10)
XPRM: Individual exhaust spacer (with M5 female thread for F10)

※For details, see p.27.

Valve base assembly (valve base, gasket, and 2 connecting rods for adding)

F 10 ZX - - - ※For use with both internal pilot and external pilot

Valve size
10: 10 mm [0.394 in.] width

Common specification
Blank: For positive common
Wiring specification
S : For single wiring
W : For double wiring

Piping specification
VJ : Dual use fitting valve base
VJ5 : Single use fitting valve base F10: $\phi 4$
VJ6 : Single diameter fitting valve base F10: $\phi 6$
VJ5A : 3-port specification normally closed, single use fitting valve base F10: $\phi 4$
VJ5B : 3-port specification normally open, single use fitting valve base F10: $\phi 4$
VJ6A : 3-port specification normally closed, single use fitting valve base F10: $\phi 6$
VJ6B : 3-port specification normally open, single use fitting valve base F10: $\phi 6$
VM : Female thread valve base F10: M5 x 0.8
VMA : 3-port specification normally closed, female thread valve base F10: M5 x 0.8
VMB : 3-port specification normally open, female thread valve base F10: M5 x 0.8
VMH : Female thread valve base F10:10-32UNF
VMAH : 3-port specification normally closed, female valve base F10:10-32UNF
VMBH : 3-port specification normally open, female valve base F10:10-32UNF
VP : Valve base plate

Muffler

KM - J

Fitting size
6: Outer diameter $\phi 6$ (for piping block)
8: Outer diameter $\phi 8$ (for piping block)

DIN rail

DIN - (Unit:1)

Rail length
125: 125mm [4.921 in.]
 : (25 mm [0.984 in.] pitch)
525: 525mm [20.669 in.]

Connecting rod (1 set of 2)

F 10 ZX - -

Valve size
10: 10 mm [0.394 in.] width

Number of units
01 ~ 20: When type for valve base (RV) is selected
01 : When type for left side piping block (RH) is selected
01 : When type for intermediate piping block (RC) is selected

Specification
RV : For valve base
RH : For left piping block
RC : For intermediate piping block

Piping block assembly (plug-in)

F 10 ZX - - - -

Valve size
10: 10 mm [0.394 in.] width

Pilot specification
Blank: Internal pilot
G: External pilot type

Port isolator^{Note2}
Blank: No port isolator
XSP: Port isolator (1(P) port)
XSR: Port isolator (3(R2), 5(R1) ports)
XSA: Port isolator (1(P), 3(R2), and 5(R1) ports)

Manifold type
LK : Left side piping block (for plug-in type) with circuit board
RN : Right piping block, without circuit board
TK : Intermediate piping block (for plug-in type) with circuit board

Piping block specification^{Note1}
PJ : With dual use fitting $\phi 6$, $\phi 8$
PJ5: With single use fitting $\phi 6$
PJ6: With single use fitting $\phi 8$
PM : With female thread Rc 1/8
PMH : With female thread NPT 1/8
PP : Plate (without fitting)

Mounting specification^{Note3}
Blank: Without DIN bracket
DN: With DIN bracket

Notes: 1. The fitting of the piping block is included. One set of two connecting rods is also included for a LN and TN type manifold.
 2. Port isolator selection only available when the piping block name is TK.
 3. Only when the manifold type is LK or RN.

Serial transmission block (single unit)

YS6  (dedicated for manifold mounting)

Transmission block specification

- B1:** For CC-Link (16 outputs)
- B3:** For CC-Link (32 outputs)
- D1:** For DeviceNet (16 outputs)
- D3:** For DeviceNet (32 outputs)
- H1:** For CompoNet (16 outputs)

YS7  **L** (dedicated for manifold mounting)

Wiring position

L: Left-side mounting


Transmission block specification

- K1:** For EtherCAT (16 outputs)
- K3:** For EtherCAT (32 outputs)
- M1:** For EtherNet/IP (16 outputs)
- M3:** For EtherNet/IP (32 outputs)

■ **Table for maximum number of valve units by transmission block specification**

Transmission block specifications		Maximum number of units※	
		Wiring connection specification	
	Max. outputs	Packed wiring (Blank)	Double wiring (-W)
-B1: For CC-Link (16 outputs)	16	Varies depending on the number of mounted single solenoids, double solenoids, and block-off plates. The number of controlled solenoids should be designated as the maximum number of outputs or less. -B3, -D3, -K3, and -M3 are a maximum of 20 units.	8 units
-B3: For CC-Link (32 outputs)	32		16 units
-D1: For DeviceNet (16 outputs)	16		8 units
-D3: For DeviceNet (32 outputs)	32		16 units
-H1: For CompoNet (16 outputs)	16		8 units
-K1: For EtherCAT (16 outputs)	16		8 units
-K3: For EtherCAT (32 outputs)	32		16 units
-M1: For EtherNet/IP (16 outputs)	16		8 units
-M3: For EtherNet/IP (32 outputs)	32		16 units

※Note : When the intermediate piping block is selected, the maximum number of units will be added +1.

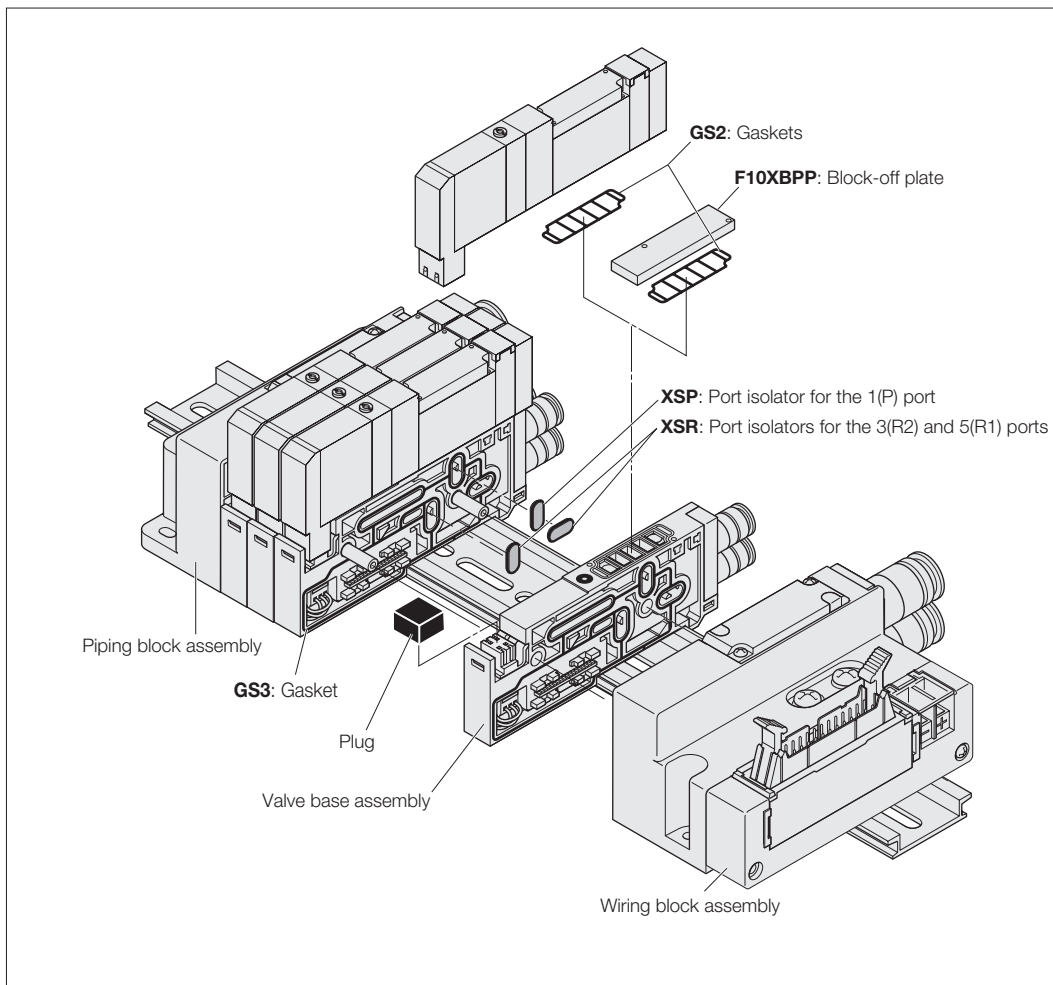

Manifold Order Code Example

(8 units of F10 Series)

F10M8XSL-J5R-B1-W

stn.1 ~ 5 F10T0-A1-J5 DC24V

stn.6 ~ 7 F10T2-A1-J6 DC24V

stn.8 F10XBPP-J6

Note: This order code example has no relationship to the illustration above.

Precautions for Order Codes

● Orders for valves only

Place orders from "Single Valve Unit Order Codes" on p. 66.

However, **Blank**, **A2**, **F3**, **F4**, **F5**, **F6**, **F4A**, **F4B**, **F5A**, **F5B**, **F6A**, or **F6B** cannot be selected for the valve outlet type. For the wiring specification, **Blank** is the only selection.

● Wiring connection specification

Blank (packed wiring): Wiring is made in accordance with the mounted valve specifications.

-**W** (double wiring): Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.


Caution

Single or double can also be selected as the block-off plate wiring specification separately from the manifold (valve) wiring specification.

F10T Valve specifications -F3-PS

With outlet port dual use fitting block
 With inlet port female thread block
 S type plug connector

* For T0 Type dimensions, see page 119.

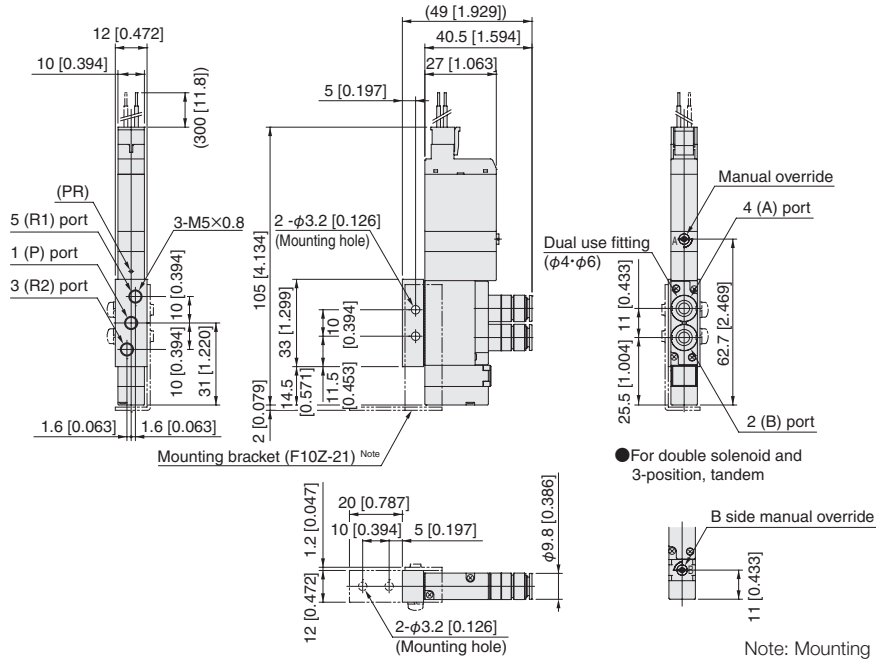


Note: Mounting brackets are additional parts (options).

F10T Valve specifications -F4-PS

F10T Valve specifications -F4H-PS

With outlet port female thread block
 With inlet port female thread block
 S type plug connector


* For T0 Type dimensions, see page 119.

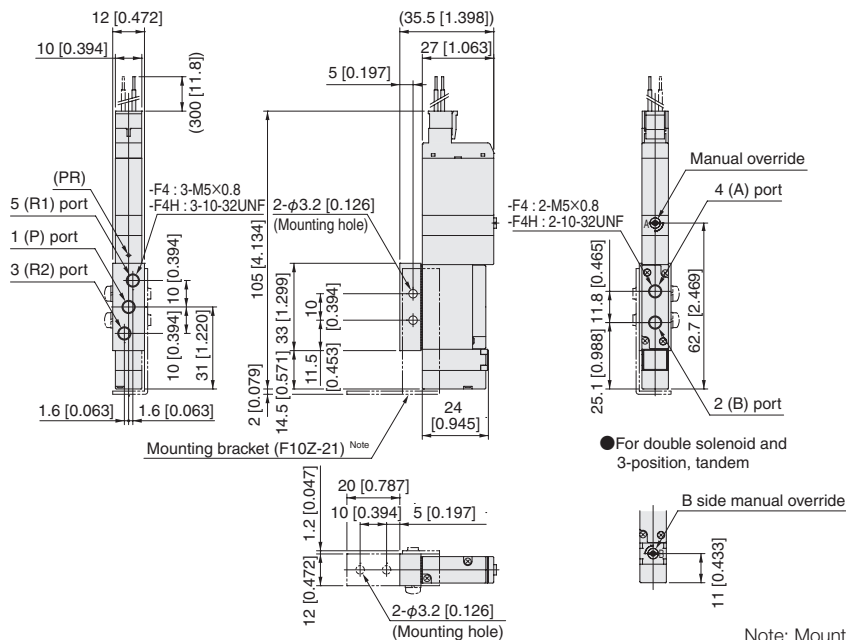

Note: Mounting brackets are additional parts (options).

F10T0-F□-PS


With outlet port single use fitting
 With inlet port female thread block
 S type plug connector

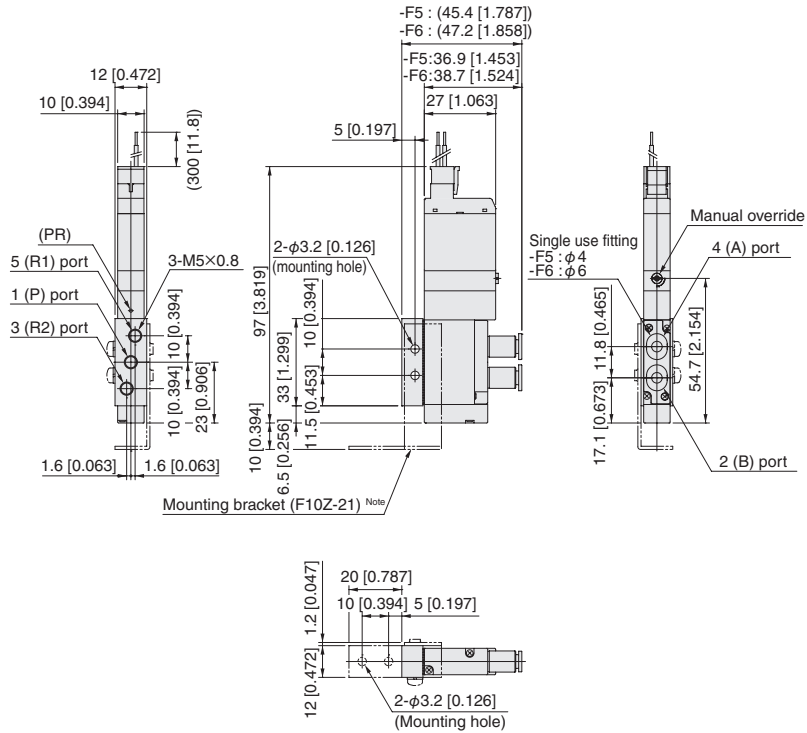

Note: Mounting brackets are additional parts (options).

IP type

F10T Valve specifications Operation system -P-A2-PS

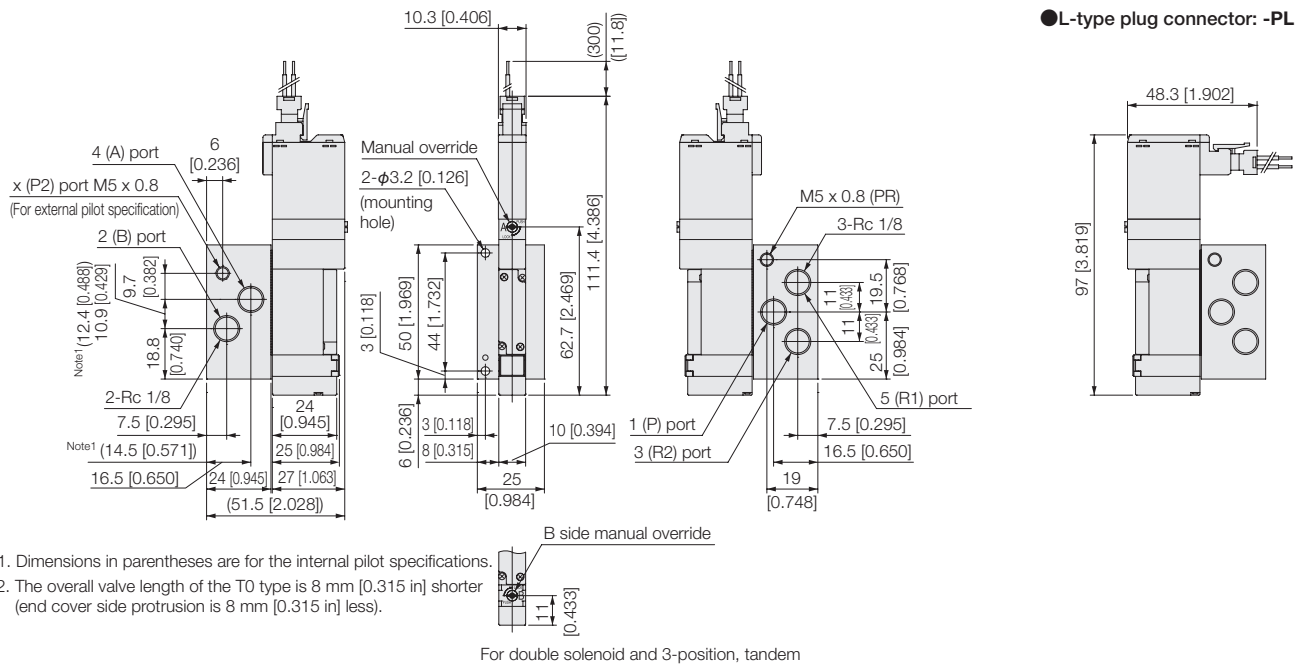

●L-type plug connector: -PL


Notes: 1. Dimensions in parentheses are for the internal pilot specifications.
 2. The overall valve length of the T0 type is 8 mm [0.315 in] shorter (end cover side protrusion is 8 mm [0.315 in] less).

F10T Valve specifications Operation system -A2-PS

F10T Valve specifications Operation system -A2H-PS


With A-type sub-base
S type plug connector

● Internal pilot specifications

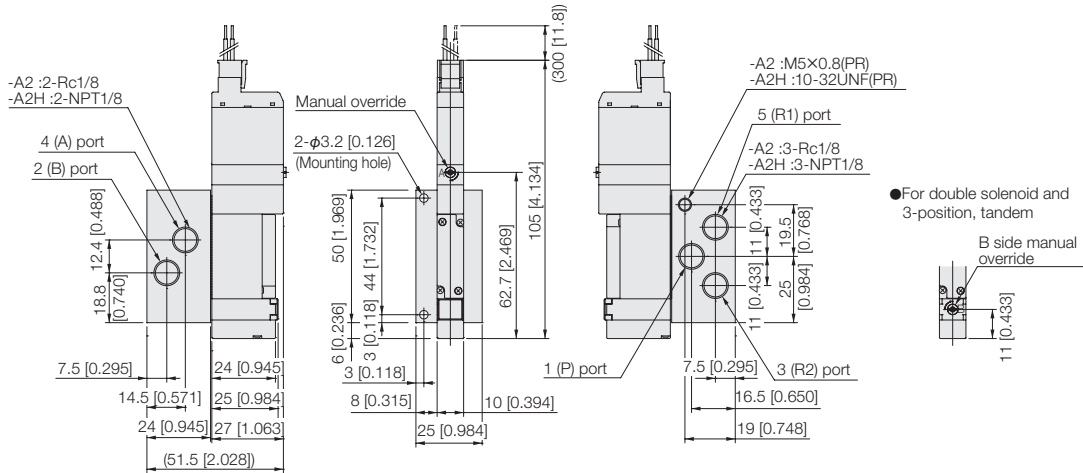

Note: The overall valve length of the T0 type is 8 mm [0.315 in] shorter (end cover side protrusion is 8 mm [0.315 in] less).

● External pilot specifications

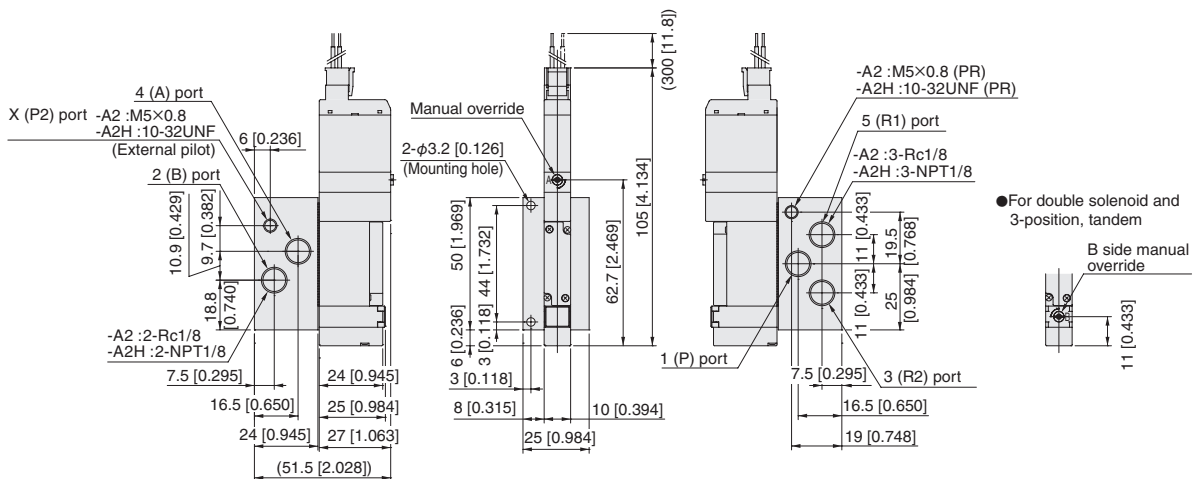


Note: The overall valve length of the T0 type is 8 mm [0.315 in] shorter (end cover side protrusion is 8 mm [0.315 in] less).

Options

● L-type plug connector: -PL

● Manual lever: -R



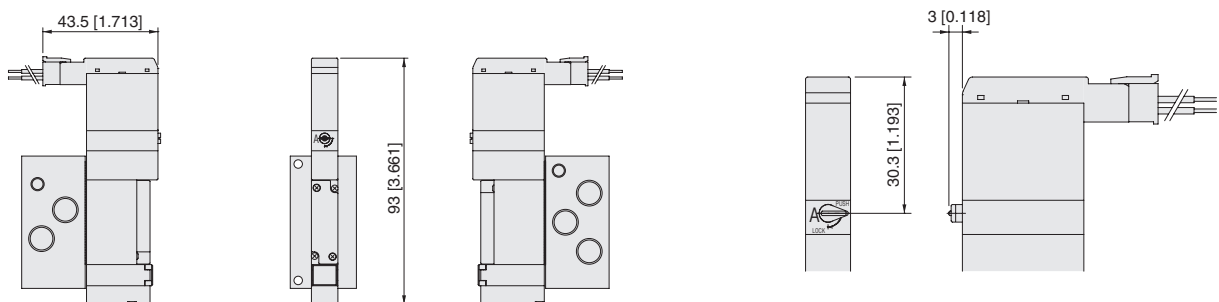


Note: The overall valve length of the T0 type is 8 mm [0.315 in] shorter (end cover side protrusion is 8 mm [0.315 in] less).

Dimensions of F10 series monoblock manifold A type mm [in]


F10M Number of valves **A M** Pilot specifications (Base piping type)

Monoblock manifold A type
 With manifold outlet port dual use fitting block
 S type plug connector

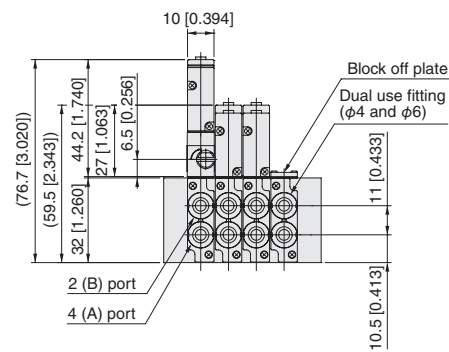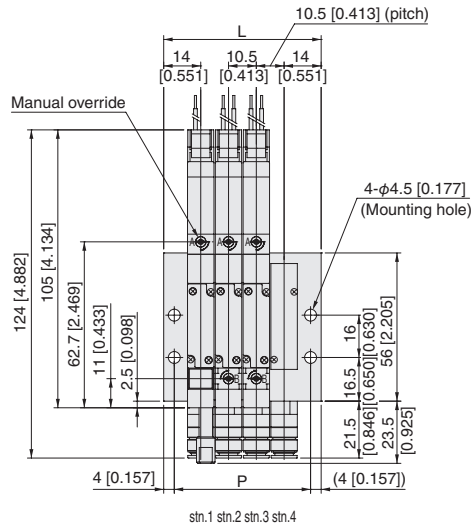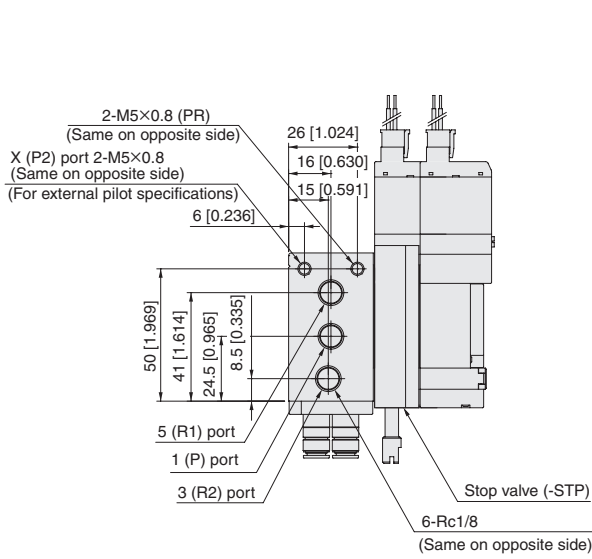

Unit dimensions

Number of units	L	P
2	38.5 [1.516]	30.5 [1.201]
3	49.0 [1.929]	41.0 [1.614]
4	59.5 [2.343]	51.5 [2.028]
5	70.0 [2.756]	62.0 [2.441]
6	80.5 [3.169]	72.5 [2.854]
7	91.0 [3.583]	83.0 [3.268]
8	101.5 [3.996]	93.5 [3.681]
9	112.0 [4.409]	104.0 [4.094]
10	122.5 [4.823]	114.5 [4.508]
11	133.0 [5.236]	125.0 [4.921]
12	143.5 [5.650]	135.5 [5.335]
13	154.0 [6.063]	146.0 [5.748]
14	164.5 [6.476]	156.5 [6.161]
15	175.0 [6.890]	167.0 [6.575]
16	185.5 [7.303]	177.5 [6.988]
17	196.0 [7.717]	188.0 [7.402]
18	206.5 [8.130]	198.5 [7.815]
19	217.0 [8.543]	209.0 [8.228]
20	227.5 [8.957]	219.5 [8.642]

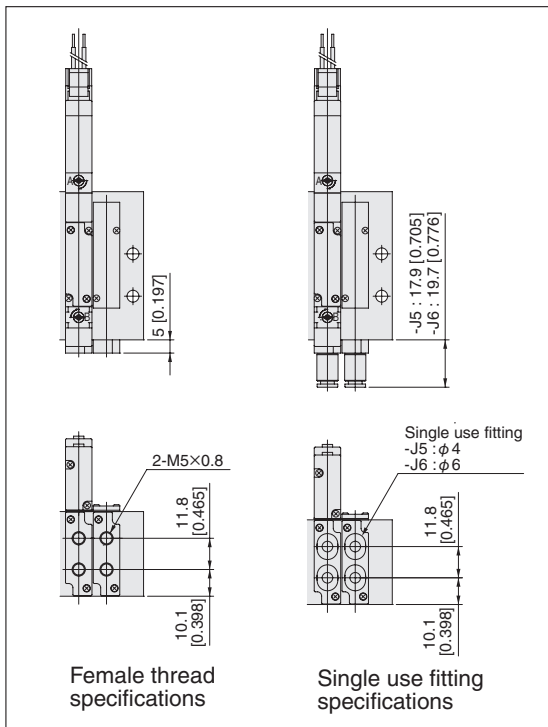


F10 DIMENSIONS

Dimensions of F10 series monoblock manifold F type mm [in]

F10M Number of valves F (Direct piping type)

Monoblock manifold F type
 With valve outlet port dual use fitting block
 S type plug connector

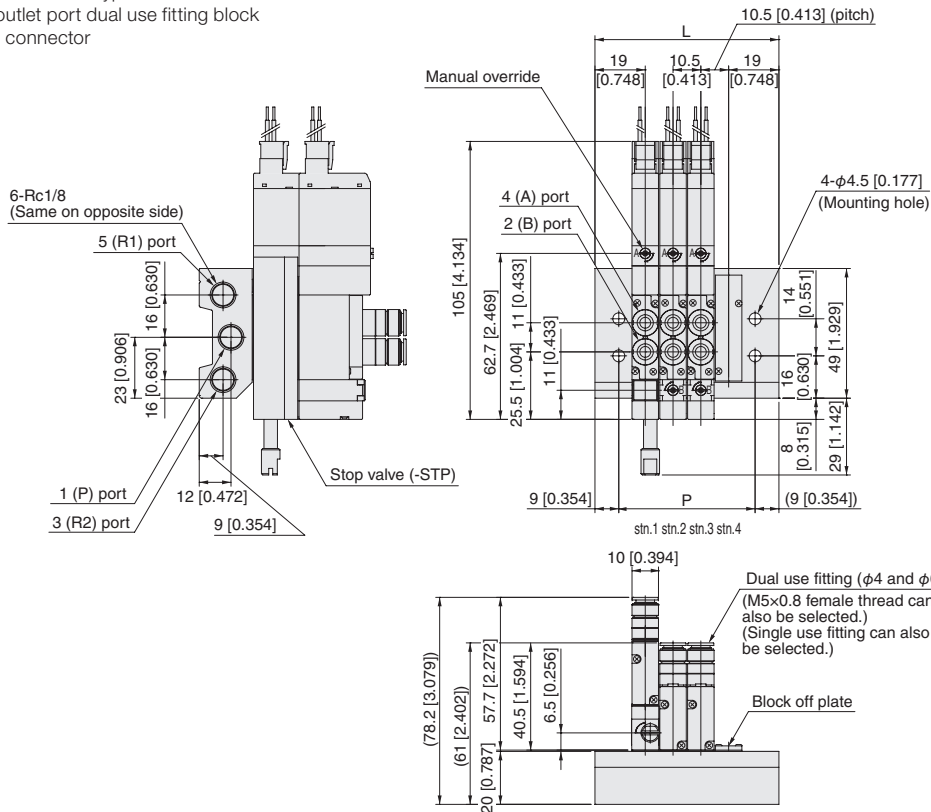


Note: The overall valve length of the T0 type is 8 mm [0.315 in] shorter (end cover side protrusion is 8 mm [0.315 in] less).

Unit dimensions

Number of units	L	P
2	48.5 [1.909]	30.5 [1.201]
3	59.0 [2.323]	41.0 [1.614]
4	69.5 [2.736]	51.5 [2.028]
5	80.0 [3.150]	62.0 [2.441]
6	90.5 [3.563]	72.5 [2.854]
7	101.0 [3.976]	83.0 [3.268]
8	111.5 [4.390]	93.5 [3.681]
9	122.0 [4.803]	104.0 [4.094]
10	132.5 [5.217]	114.5 [4.508]
11	143.0 [5.630]	125.0 [4.921]
12	153.5 [6.043]	135.5 [5.335]
13	164.0 [6.457]	146.0 [5.748]
14	174.5 [6.870]	156.5 [6.161]
15	185.0 [7.283]	167.0 [6.575]
16	195.5 [7.697]	177.5 [6.988]
17	206.0 [8.110]	188.0 [7.402]
18	216.5 [8.524]	198.5 [7.815]
19	227.0 [8.937]	209.0 [8.228]
20	237.5 [9.350]	219.5 [8.642]

F10M Number of valves FH (Direct piping type)

Monoblock manifold F type
 With valve outlet port female thread block
 S type plug connector

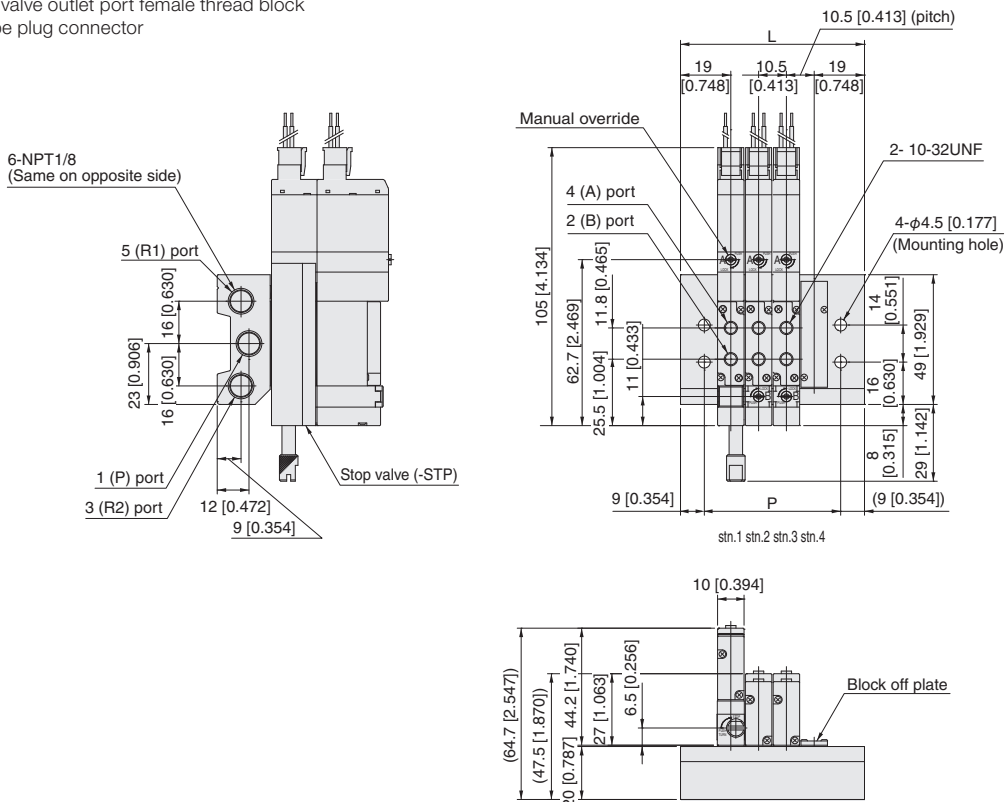


Note: The overall valve length of the T0 type is 8 mm [0.315 in] shorter (end cover side protrusion is 8 mm [0.315 in] less).

Unit dimensions

Number of units	L	P
2	48.5 [1.909]	30.5 [1.201]
3	59.0 [2.323]	41.0 [1.614]
4	69.5 [2.736]	51.5 [2.028]
5	80.0 [3.150]	62.0 [2.441]
6	90.5 [3.563]	72.5 [2.854]
7	101.0 [3.976]	83.0 [3.268]
8	111.5 [4.390]	93.5 [3.681]
9	122.0 [4.803]	104.0 [4.094]
10	132.5 [5.217]	114.5 [4.508]
11	143.0 [5.630]	125.0 [4.921]
12	153.5 [6.043]	135.5 [5.335]
13	164.0 [6.457]	146.0 [5.748]
14	174.5 [6.870]	156.5 [6.161]
15	185.0 [7.283]	167.0 [6.575]
16	195.5 [7.697]	177.5 [6.988]
17	206.0 [8.110]	188.0 [7.402]
18	216.5 [8.524]	198.5 [7.815]
19	227.0 [8.937]	209.0 [8.228]
20	237.5 [9.350]	219.5 [8.642]

F10M Number of valves **A** **M** Pilot specifications (Base piping type)

Monoblock manifold A type, wire saving type
 With manifold outlet port dual use fitting block
 These dimensions show flat cable connector 20-pin specifications

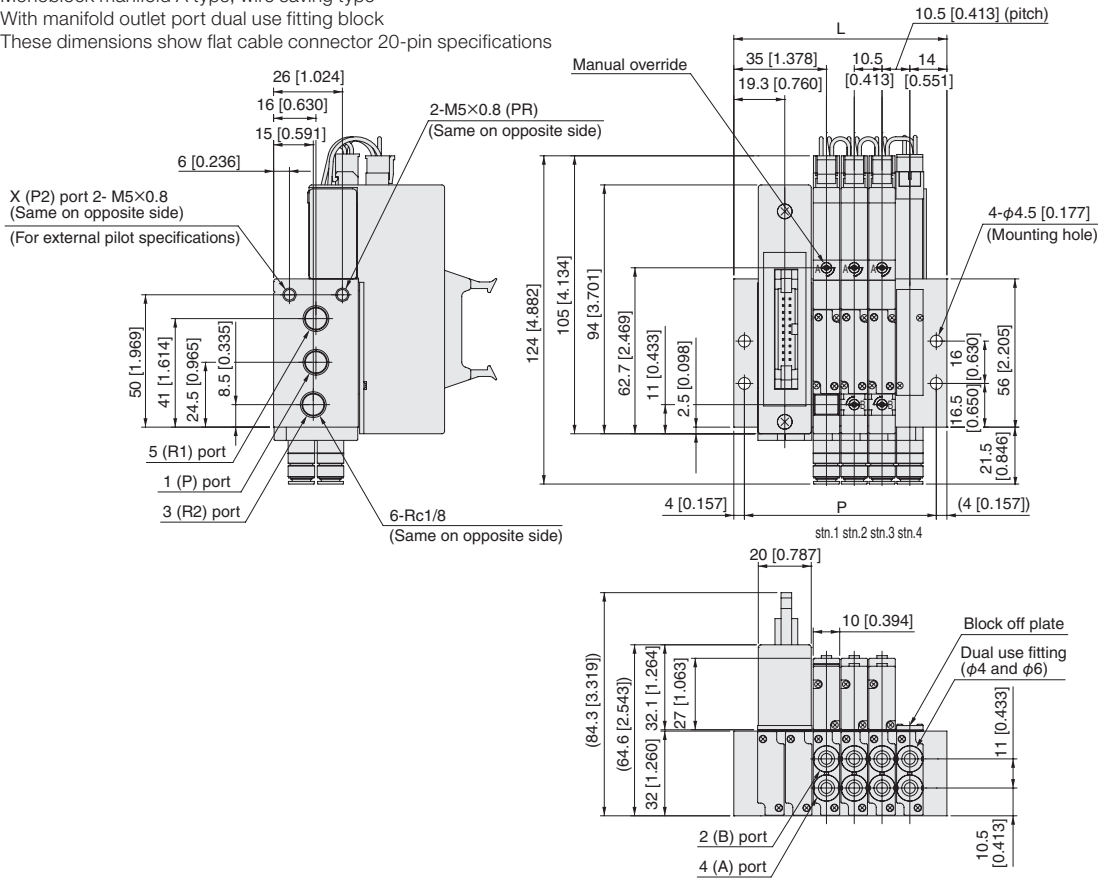


Unit dimensions

Number of units	L	P
2	59.5 [2.343]	51.5 [2.028]
3	70.0 [2.756]	62.0 [2.441]
4	80.5 [3.169]	72.5 [2.854]
5	91.0 [3.583]	83.0 [3.268]
6	101.5 [3.996]	93.5 [3.681]
7	112.0 [4.409]	104.0 [4.094]
8	122.5 [4.823]	114.5 [4.508]
9	133.0 [5.236]	125.0 [4.921]
10	143.5 [5.650]	135.5 [5.335]
11	154.0 [6.063]	146.0 [5.748]
12	164.5 [6.476]	156.5 [6.161]
13	175.0 [6.890]	167.0 [6.575]
14	185.5 [7.303]	177.5 [6.988]
15	196.0 [7.717]	188.0 [7.402]
16	206.5 [8.130]	198.5 [7.815]
17	217.0 [8.543]	209.0 [8.228]
18	227.5 [8.957]	219.5 [8.642]
19	238.0 [9.370]	230.0 [9.055]
20	248.5 [9.783]	240.5 [9.469]

F10M Number of valves **F** (Direct piping type)

F10M Number of valves **FH** (Direct piping type)

Monoblock manifold F type, wire saving type
 With manifold outlet port dual use fitting block
 These dimensions show flat cable connector 20-pin specifications

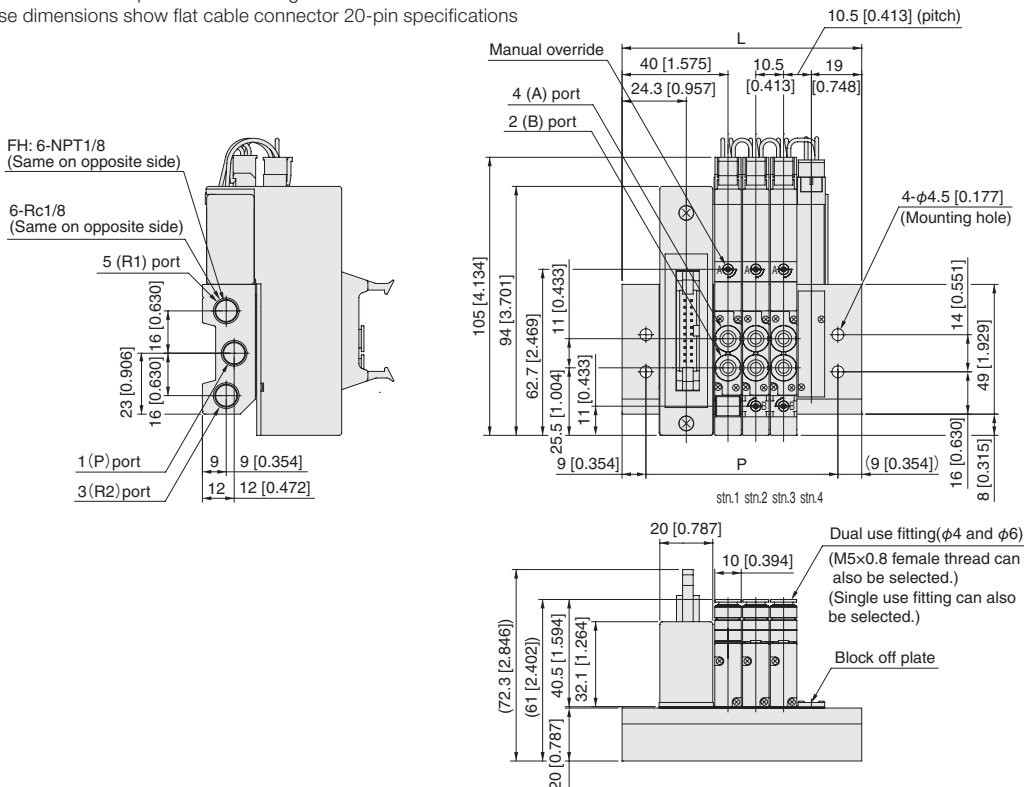

Unit dimensions


Number of units	L	P
2	69.5 [2.736]	51.5 [2.028]
3	80.0 [3.150]	62.0 [2.441]
4	90.5 [3.563]	72.5 [2.854]
5	101.0 [3.976]	83.0 [3.268]
6	111.5 [4.390]	93.5 [3.681]
7	122.0 [4.803]	104.0 [4.094]
8	132.5 [5.217]	114.5 [4.508]
9	143.0 [5.630]	125.0 [4.921]
10	153.5 [6.043]	135.5 [5.335]
11	164.0 [6.457]	146.0 [5.748]
12	174.5 [6.870]	156.5 [6.161]
13	185.0 [7.283]	167.0 [6.575]
14	195.5 [7.697]	177.5 [6.988]
15	206.0 [8.110]	188.0 [7.402]
16	216.5 [8.524]	198.5 [7.815]
17	227.0 [8.937]	209.0 [8.228]
18	237.5 [9.350]	219.5 [8.642]
19	248.0 [9.764]	230.0 [9.055]
20	258.5 [10.177]	240.5 [9.469]

F10M [Number of valves] **F** (Direct piping type)

Monoblock manifold F type, wire saving type
 With valve outlet port dual use fitting block
 These dimensions show flat cable connector 20-pin specifications

Unit dimensions

Number of units	L	P
2	69.5 [2.736]	51.5 [2.028]
3	80.0 [3.150]	62.0 [2.441]
4	90.5 [3.563]	72.5 [2.854]
5	101.0 [3.976]	83.0 [3.268]
6	111.5 [4.390]	93.5 [3.681]
7	122.0 [4.803]	104.0 [4.094]
8	132.5 [5.217]	114.5 [4.508]
9	143.0 [5.630]	125.0 [4.921]
10	153.5 [6.043]	135.5 [5.335]
11	164.0 [6.457]	146.0 [5.748]
12	174.5 [6.870]	156.5 [6.161]
13	185.0 [7.283]	167.0 [6.575]
14	195.5 [7.697]	177.5 [6.988]
15	206.0 [8.110]	188.0 [7.402]
16	216.5 [8.524]	198.5 [7.815]
17	227.0 [8.937]	209.0 [8.228]
18	237.5 [9.350]	219.5 [8.642]
19	248.0 [9.764]	230.0 [9.055]
20	258.5 [10.177]	240.5 [9.469]

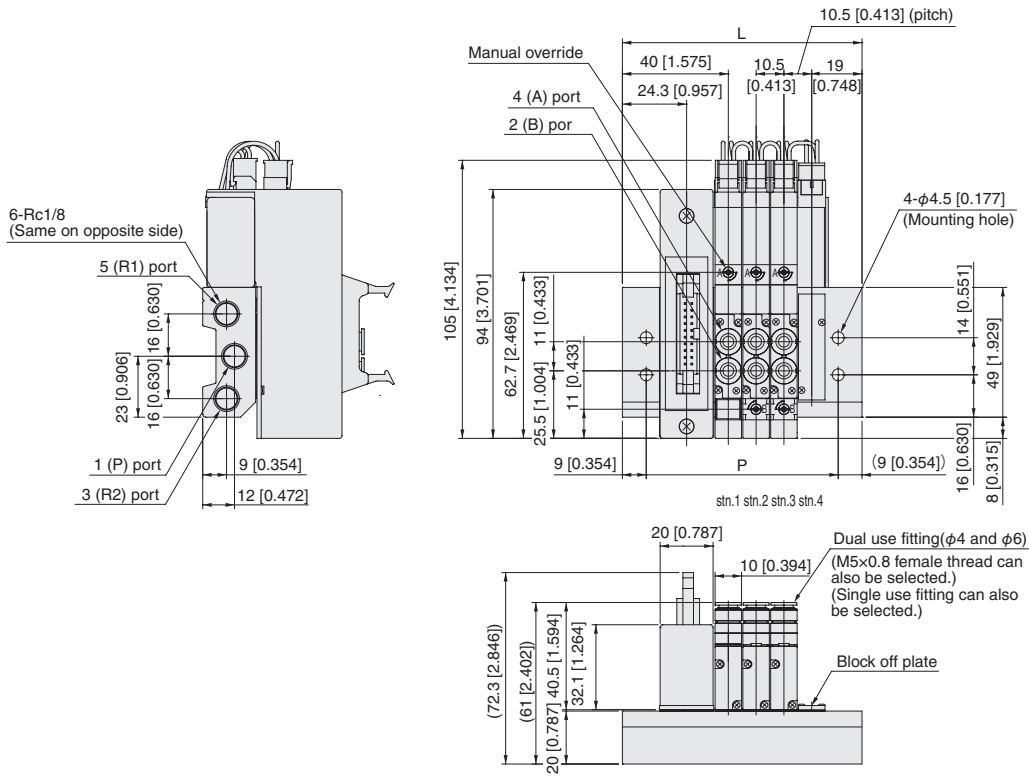


F10M [Number of valves] **FH** (Direct piping type)

Monoblock manifold F type, wire saving type
 With valve outlet port female thread block
 These dimensions show flat cable connector 20-pin specifications

Unit dimensions


Number of units	L	P
2	69.5 [2.736]	51.5 [2.028]
3	80.0 [3.150]	62.0 [2.441]
4	90.5 [3.563]	72.5 [2.854]
5	101.0 [3.976]	83.0 [3.268]
6	111.5 [4.390]	93.5 [3.681]
7	122.0 [4.803]	104.0 [4.094]
8	132.5 [5.217]	114.5 [4.508]
9	143.0 [5.630]	125.0 [4.921]
10	153.5 [6.043]	135.5 [5.335]
11	164.0 [6.457]	146.0 [5.748]
12	174.5 [6.870]	156.5 [6.161]
13	185.0 [7.283]	167.0 [6.575]
14	195.5 [7.697]	177.5 [6.988]
15	206.0 [8.110]	188.0 [7.402]
16	216.5 [8.524]	198.5 [7.815]
17	227.0 [8.937]	209.0 [8.228]
18	237.5 [9.350]	219.5 [8.642]
19	248.0 [9.764]	230.0 [9.055]
20	258.5 [10.177]	240.5 [9.469]

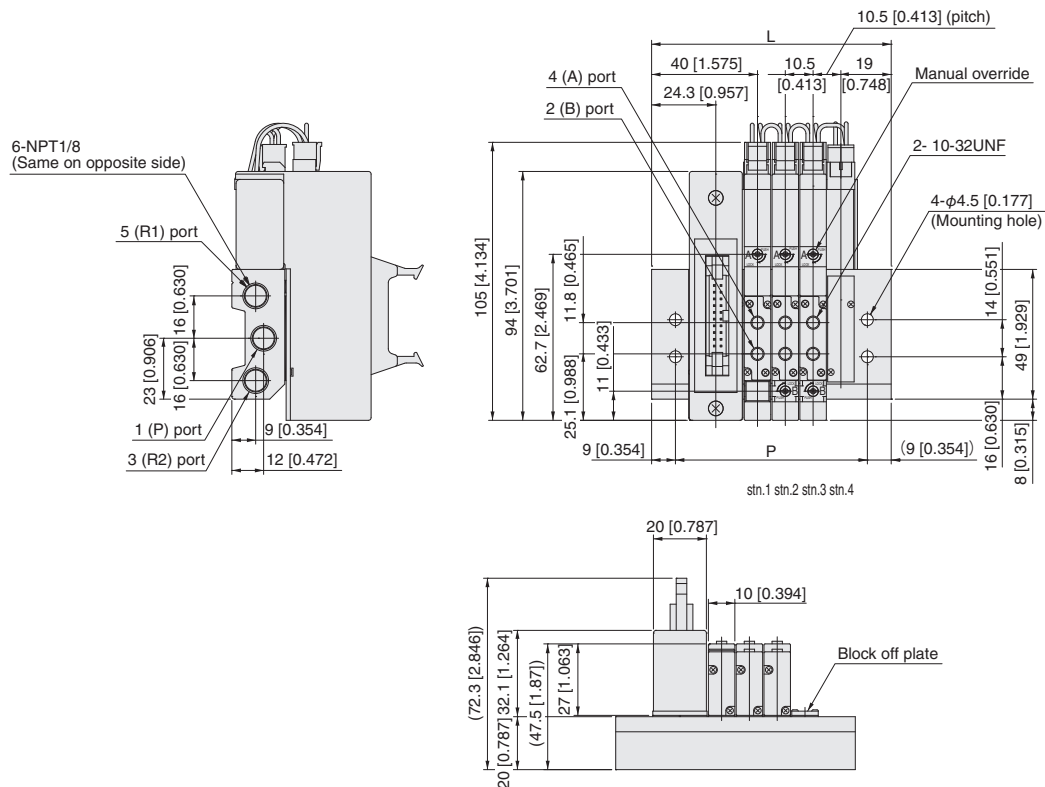



F10M [Number of valves] **AP^JML** [Pilot specifications] (Base piping type)

PC board manifold A type
With manifold outlet port dual use fitting block

Note: Mounted valve example shows -W wiring specifications.
In the case of -S wiring specifications, the mounted valve becomes T0 or T1 type.

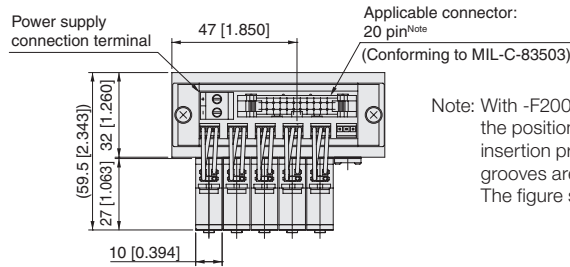

Note: With -F200 and -F201, the positions of the misinsertion prevention grooves are reversed. The figure shows -F200.

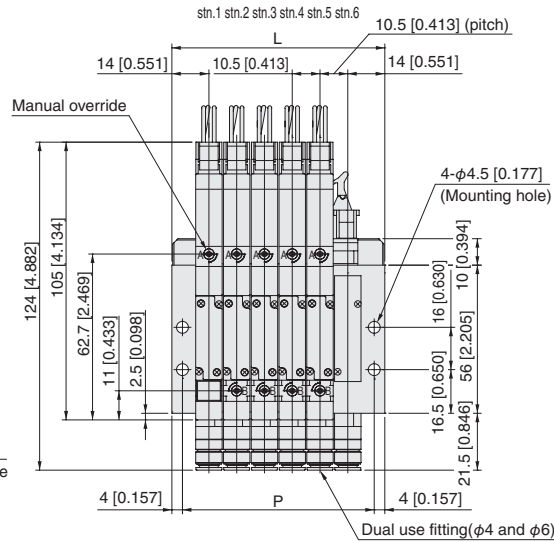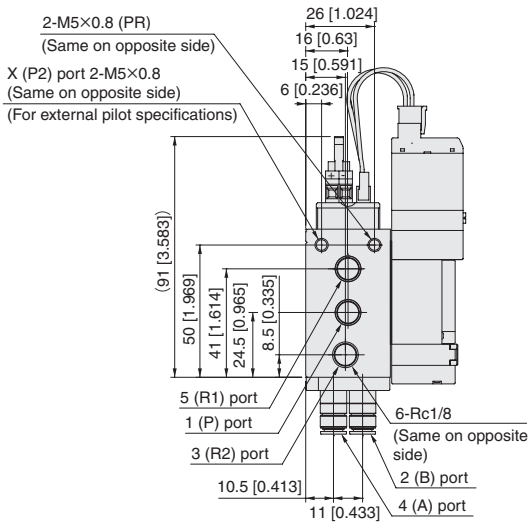

Unit dimensions

Number of units	L	P
6	80.5 [3.169]	72.5 [2.854]
8	101.5 [3.996]	93.5 [3.681]
10	122.5 [4.823]	114.5 [4.508]
12	143.5 [5.650]	135.5 [5.335]
14	164.5 [6.476]	156.5 [6.161]
16	185.5 [7.303]	177.5 [6.988]


Note: Wiring specifications
For -S
6, 8, 10, 12, 14, 16 units

For -W
Only 6 and 8 units selectable



F10M [Number of valves] **FP** (Direct piping type)

PC board manifold F type
With valve outlet port dual use fitting block

Note: Mounted valve example shows -W wiring specifications.
In the case of -S wiring specifications, the mounted valve becomes T0 or T1 type.

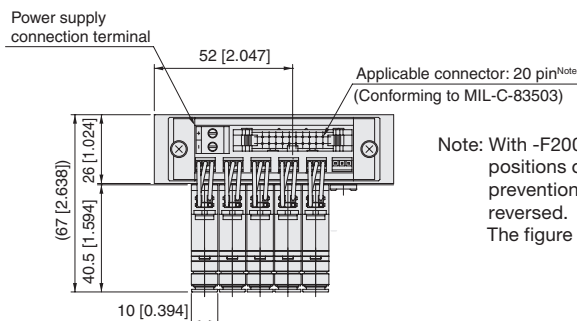

Note: With -F200 and -F201, the positions of the misinsertion prevention grooves are reversed. The figure shows -F200.

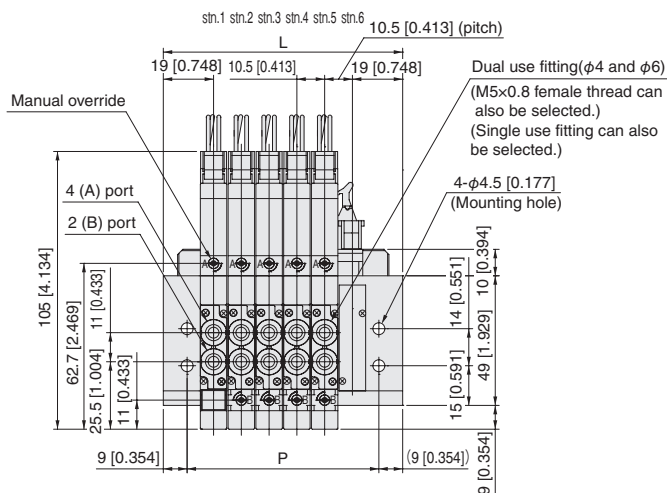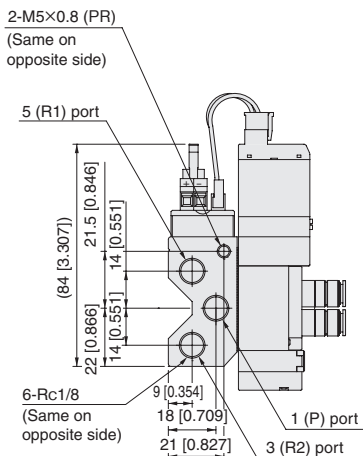

Unit dimensions

Number of units	L	P
6	90.5 [3.563]	72.5 [2.854]
8	111.5 [4.390]	93.5 [3.681]
10	132.5 [5.217]	114.5 [4.508]
12	153.5 [6.043]	135.5 [5.335]
14	174.5 [6.870]	156.5 [6.161]
16	195.5 [7.697]	177.5 [6.988]


Note: Wiring specifications
For -S
6, 8, 10, 12, 14, 16 units

For -W
Only 6 and 8 units selectable

Note: The overall valve length of the T0 type is 8 mm [0.315 in] shorter (end cover side protrusion is 8 mm [0.315 in] less).

F10M [Number of valves] **N M** [Pilot specifications] (Base piping type)

With manifold outlet port dual use fitting block
S type plug connector

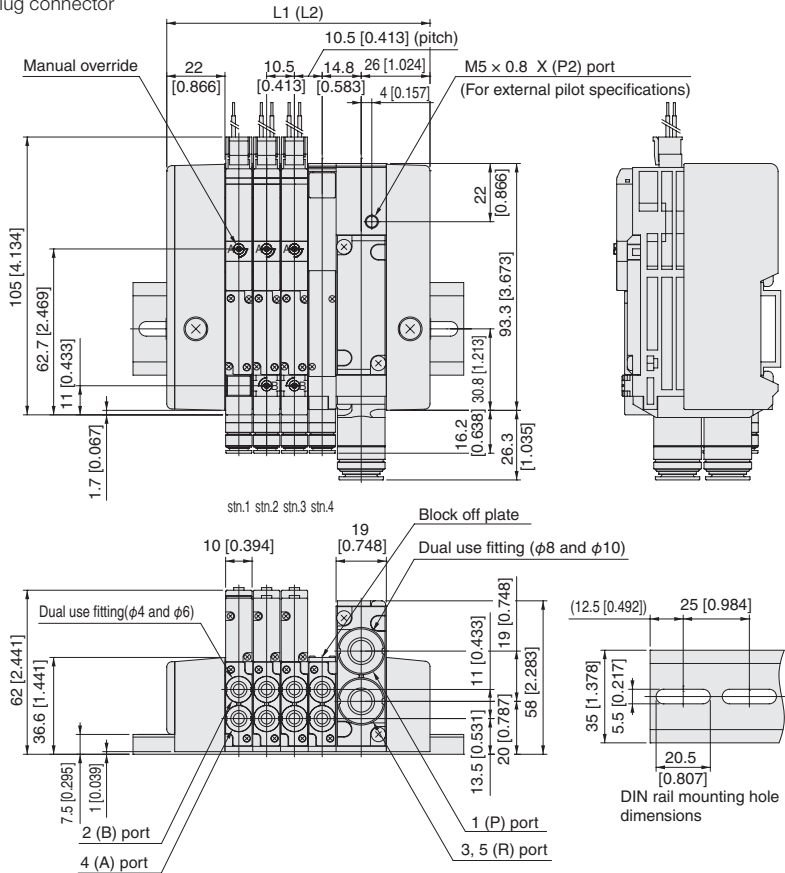


Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	78.5 [3.091]	125 [4.921]	97.5 [3.839]	125 [4.921]
3	89.0 [3.504]	125 [4.921]	108.0 [4.252]	150 [5.906]
4	99.5 [3.917]	125 [4.921]	118.5 [4.665]	150 [5.906]
5	110.0 [4.331]	150 [5.906]	129.0 [5.079]	175 [6.890]
6	120.5 [4.744]	150 [5.906]	139.5 [5.492]	175 [6.890]
7	131.0 [5.157]	175 [6.890]	150.0 [5.906]	175 [6.890]
8	141.5 [5.571]	175 [6.890]	160.5 [6.319]	200 [7.874]
9	152.0 [5.984]	200 [7.874]	171.0 [6.732]	200 [7.874]
10	162.5 [6.398]	200 [7.874]	181.5 [7.146]	225 [8.858]
11	173.0 [6.811]	200 [7.874]	192.0 [7.559]	225 [8.858]
12	183.5 [7.224]	225 [8.858]	202.5 [7.972]	250 [9.843]
13	194.0 [7.638]	225 [8.858]	213.0 [8.386]	250 [9.843]
14	204.5 [8.051]	250 [9.843]	223.5 [8.799]	250 [9.843]
15	215.0 [8.465]	250 [9.843]	234.0 [9.213]	275 [10.827]
16	225.5 [8.878]	275 [10.827]	244.5 [9.626]	275 [10.827]
17	236.0 [9.291]	275 [10.827]	255.0 [10.039]	300 [11.811]
18	246.5 [9.705]	275 [10.827]	265.5 [10.453]	300 [11.811]
19	257.0 [10.118]	300 [11.811]	276.0 [10.866]	325 [12.795]
20	267.5 [10.531]	300 [11.811]	286.5 [11.280]	325 [12.795]

Note: When two piping blocks are used.

F10M [Number of valves] **N** [Pilot specifications] (Direct piping type)

With valve outlet port dual use fitting block
S type plug connector

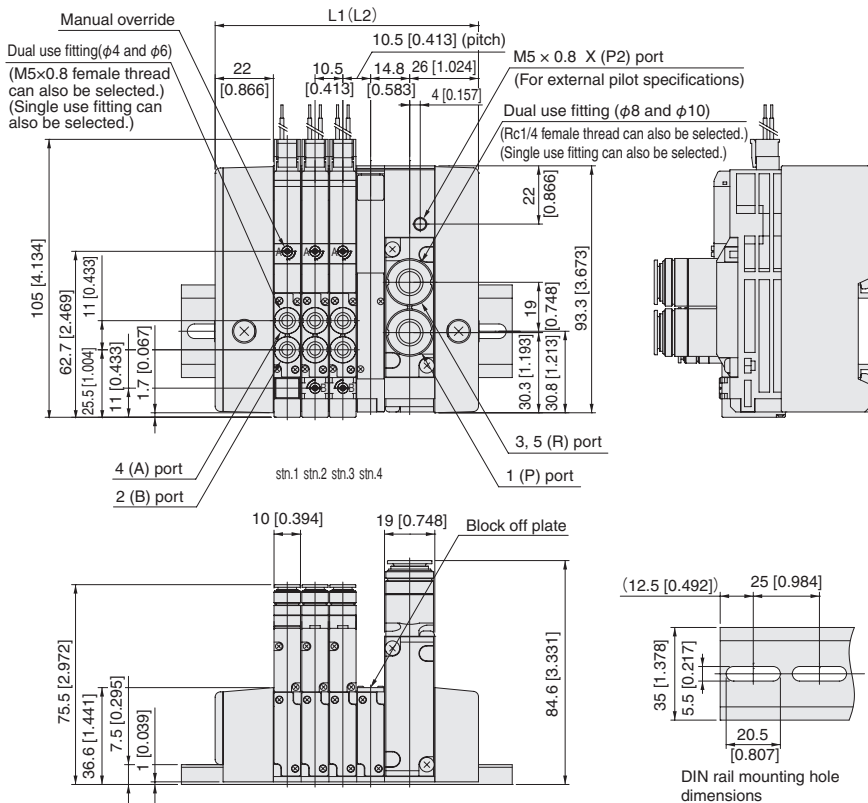

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	78.5 [3.091]	125 [4.921]	97.5 [3.839]	125 [4.921]
3	89.0 [3.504]	125 [4.921]	108.0 [4.252]	150 [5.906]
4	99.5 [3.917]	125 [4.921]	118.5 [4.665]	150 [5.906]
5	110.0 [4.331]	150 [5.906]	129.0 [5.079]	175 [6.890]
6	120.5 [4.744]	150 [5.906]	139.5 [5.492]	175 [6.890]
7	131.0 [5.157]	175 [6.890]	150.0 [5.906]	175 [6.890]
8	141.5 [5.571]	175 [6.890]	160.5 [6.319]	200 [7.874]
9	152.0 [5.984]	200 [7.874]	171.0 [6.732]	200 [7.874]
10	162.5 [6.398]	200 [7.874]	181.5 [7.146]	225 [8.858]
11	173.0 [6.811]	200 [7.874]	192.0 [7.559]	225 [8.858]
12	183.5 [7.224]	225 [8.858]	202.5 [7.972]	250 [9.843]
13	194.0 [7.638]	225 [8.858]	213.0 [8.386]	250 [9.843]
14	204.5 [8.051]	250 [9.843]	223.5 [8.799]	250 [9.843]
15	215.0 [8.465]	250 [9.843]	234.0 [9.213]	275 [10.827]
16	225.5 [8.878]	275 [10.827]	244.5 [9.626]	275 [10.827]
17	236.0 [9.291]	275 [10.827]	255.0 [10.039]	300 [11.811]
18	246.5 [9.705]	275 [10.827]	265.5 [10.453]	300 [11.811]
19	257.0 [10.118]	300 [11.811]	276.0 [10.866]	325 [12.795]
20	267.5 [10.531]	300 [11.811]	286.5 [11.280]	325 [12.795]


Note: When two piping blocks are used.

Note: The overall valve length of the T0 type is 8 mm [0.315 in] shorter (end cover side protrusion is 8 mm [0.315 in] less).

Dimensions of F10 series split manifold non-plug-in type mm [in]

F10M Number of valves NHL Pilot specifications (Base piping type)

With manifold outlet port female thread block
S type plug connector

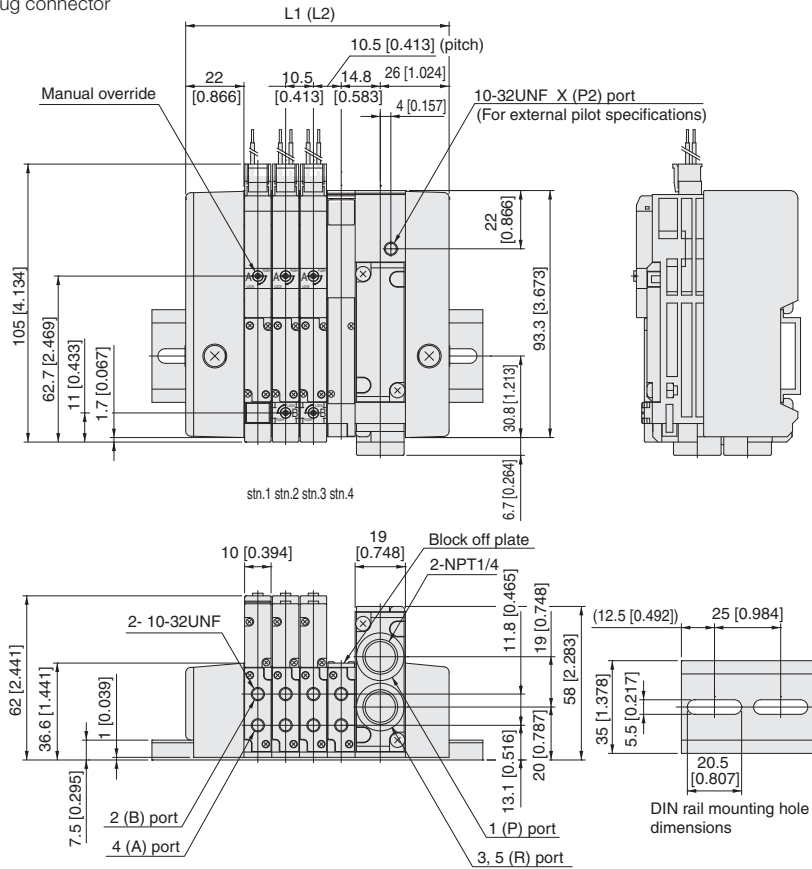


Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	78.5 [3.091]	125 [4.921]	97.5 [3.839]	125 [4.921]
3	89.0 [3.504]	125 [4.921]	108.0 [4.252]	150 [5.906]
4	99.5 [3.917]	125 [4.921]	118.5 [4.665]	150 [5.906]
5	110.0 [4.331]	150 [5.906]	129.0 [5.079]	175 [6.890]
6	120.5 [4.744]	150 [5.906]	139.5 [5.492]	175 [6.890]
7	131.0 [5.157]	175 [6.890]	150.0 [5.906]	175 [6.890]
8	141.5 [5.571]	175 [6.890]	160.5 [6.319]	200 [7.874]
9	152.0 [5.984]	200 [7.874]	171.0 [6.732]	200 [7.874]
10	162.5 [6.398]	200 [7.874]	181.5 [7.146]	225 [8.858]
11	173.0 [6.811]	200 [7.874]	192.0 [7.559]	225 [8.858]
12	183.5 [7.224]	225 [8.858]	202.5 [7.972]	250 [9.843]
13	194.0 [7.638]	225 [8.858]	213.0 [8.386]	250 [9.843]
14	204.5 [8.051]	250 [9.843]	223.5 [8.799]	250 [9.843]
15	215.0 [8.465]	250 [9.843]	234.0 [9.213]	275 [10.827]
16	225.5 [8.878]	275 [10.827]	244.5 [9.626]	275 [10.827]
17	236.0 [9.291]	275 [10.827]	255.0 [10.039]	300 [11.811]
18	246.5 [9.705]	275 [10.827]	265.5 [10.453]	300 [11.811]
19	257.0 [10.118]	300 [11.811]	276.0 [10.866]	325 [12.795]
20	267.5 [10.531]	300 [11.811]	286.5 [11.280]	325 [12.795]

Note: When two piping blocks are used.

F10M Number of valves NH Pilot specifications (Direct piping type)

With valve outlet port female thread block
S type plug connector

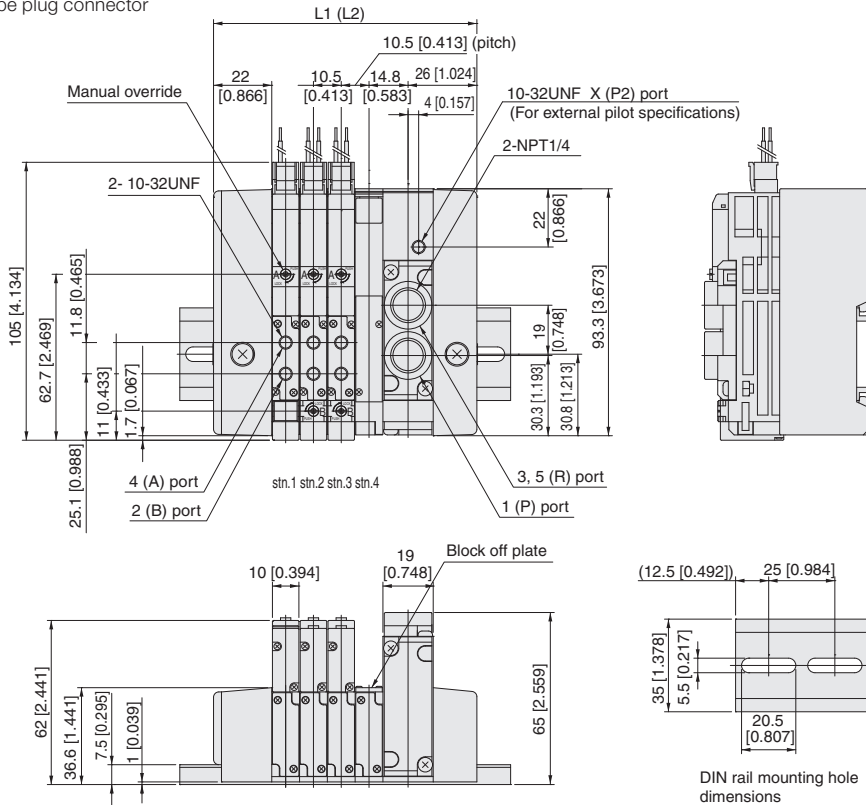

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	78.5 [3.091]	125 [4.921]	97.5 [3.839]	125 [4.921]
3	89.0 [3.504]	125 [4.921]	108.0 [4.252]	150 [5.906]
4	99.5 [3.917]	125 [4.921]	118.5 [4.665]	150 [5.906]
5	110.0 [4.331]	150 [5.906]	129.0 [5.079]	175 [6.890]
6	120.5 [4.744]	150 [5.906]	139.5 [5.492]	175 [6.890]
7	131.0 [5.157]	175 [6.890]	150.0 [5.906]	175 [6.890]
8	141.5 [5.571]	175 [6.890]	160.5 [6.319]	200 [7.874]
9	152.0 [5.984]	200 [7.874]	171.0 [6.732]	200 [7.874]
10	162.5 [6.398]	200 [7.874]	181.5 [7.146]	225 [8.858]
11	173.0 [6.811]	200 [7.874]	192.0 [7.559]	225 [8.858]
12	183.5 [7.224]	225 [8.858]	202.5 [7.972]	250 [9.843]
13	194.0 [7.638]	225 [8.858]	213.0 [8.386]	250 [9.843]
14	204.5 [8.051]	250 [9.843]	223.5 [8.799]	250 [9.843]
15	215.0 [8.465]	250 [9.843]	234.0 [9.213]	275 [10.827]
16	225.5 [8.878]	275 [10.827]	244.5 [9.626]	275 [10.827]
17	236.0 [9.291]	275 [10.827]	255.0 [10.039]	300 [11.811]
18	246.5 [9.705]	275 [10.827]	265.5 [10.453]	300 [11.811]
19	257.0 [10.118]	300 [11.811]	276.0 [10.866]	325 [12.795]
20	267.5 [10.531]	300 [11.811]	286.5 [11.280]	325 [12.795]




Note: When two piping blocks are used.

Note: The overall valve length of the T0 type is 8 mm [0.315 in] shorter (end cover side protrusion is 8 mm [0.315 in] less).

Dimensions of F10 series split manifold plug-in type mm [in]

F10M Number of valves P M J Pilot specifications (Base piping type)


With manifold outlet port dual use fitting block
Flat cable connector 10-pin specifications

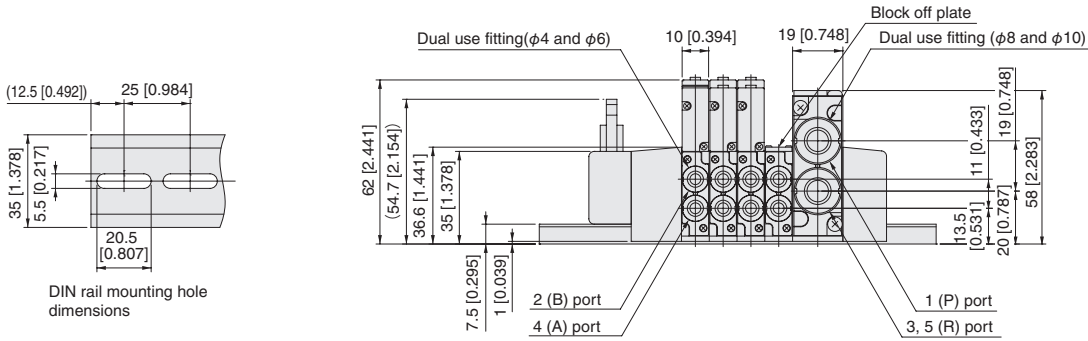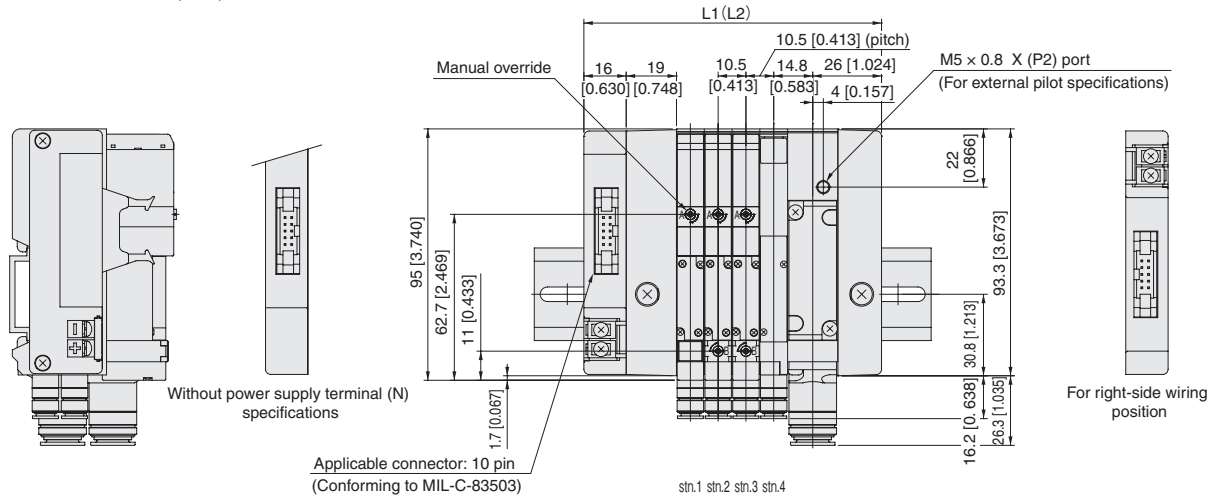

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	91.5 [3.602]	125 [4.921]	110.5 [4.350]	150 [5.906]
3	102.0 [4.016]	150 [5.906]	121.0 [4.764]	175 [6.890]
4	112.5 [4.429]	150 [5.906]	131.5 [5.177]	175 [6.890]
5	123.0 [4.843]	175 [6.890]	142.0 [5.591]	175 [6.890]
6	133.5 [5.256]	175 [6.890]	152.5 [6.004]	200 [7.874]
7	144.0 [5.669]	200 [7.874]	163.0 [6.417]	200 [7.874]
8	154.5 [6.083]	200 [7.874]	173.5 [6.831]	225 [8.858]


Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

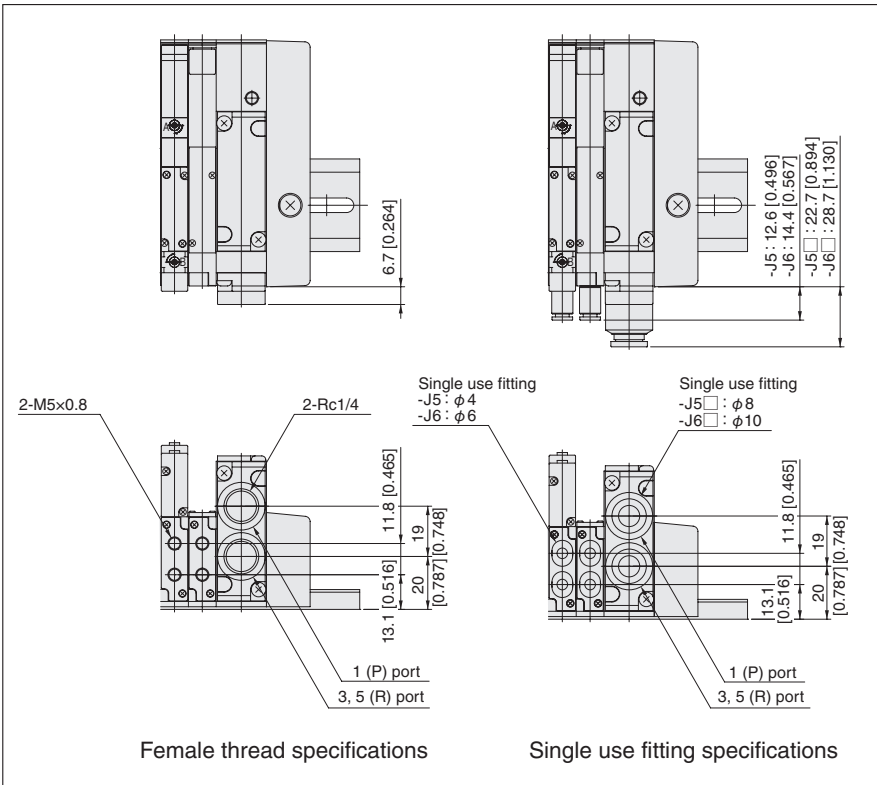

Dimensions of F10 series split manifold plug-in type mm [in]

F10M Number of valves P M J Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
Flat cable connector 20-pin specifications (side surface wiring)

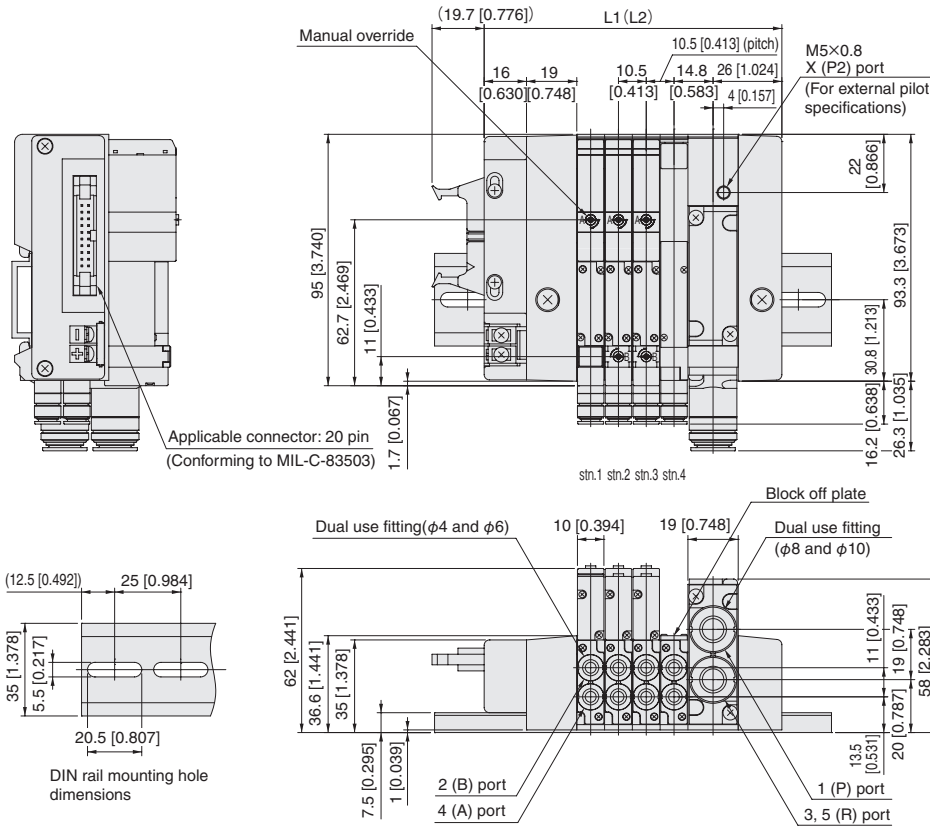


Unit dimensions

Number of units	L1	Length of DIN rail	L2 _{Note}	Length of DIN rail _{Note}
2	91.5 [3.602]	125 [4.921]	110.5 [4.350]	150 [5.906]
3	102.0 [4.016]	150 [5.906]	121.0 [4.764]	175 [6.890]
4	112.5 [4.429]	150 [5.906]	131.5 [5.177]	175 [6.890]
5	123.0 [4.843]	175 [6.890]	142.0 [5.591]	175 [6.890]
6	133.5 [5.256]	175 [6.890]	152.5 [6.004]	200 [7.874]
7	144.0 [5.669]	200 [7.874]	163.0 [6.417]	200 [7.874]
8	154.5 [6.083]	200 [7.874]	173.5 [6.831]	225 [8.858]
9	165.0 [6.496]	200 [7.874]	184.0 [7.244]	225 [8.858]
10	175.5 [6.909]	225 [8.858]	194.5 [7.657]	250 [9.843]
11	186.0 [7.323]	225 [8.858]	205.0 [8.071]	250 [9.843]
12	196.5 [7.736]	250 [9.843]	215.5 [8.484]	250 [9.843]
13	207.0 [8.150]	250 [9.843]	226.0 [8.898]	275 [10.827]
14	217.5 [8.563]	275 [10.827]	236.5 [9.311]	275 [10.827]
15	228.0 [8.976]	275 [10.827]	247.0 [9.724]	300 [11.811]
16	238.5 [9.390]	275 [10.827]	257.5 [10.138]	300 [11.811]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

F10M Number of valves P M J Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
Flat cable connector 26-pin specifications

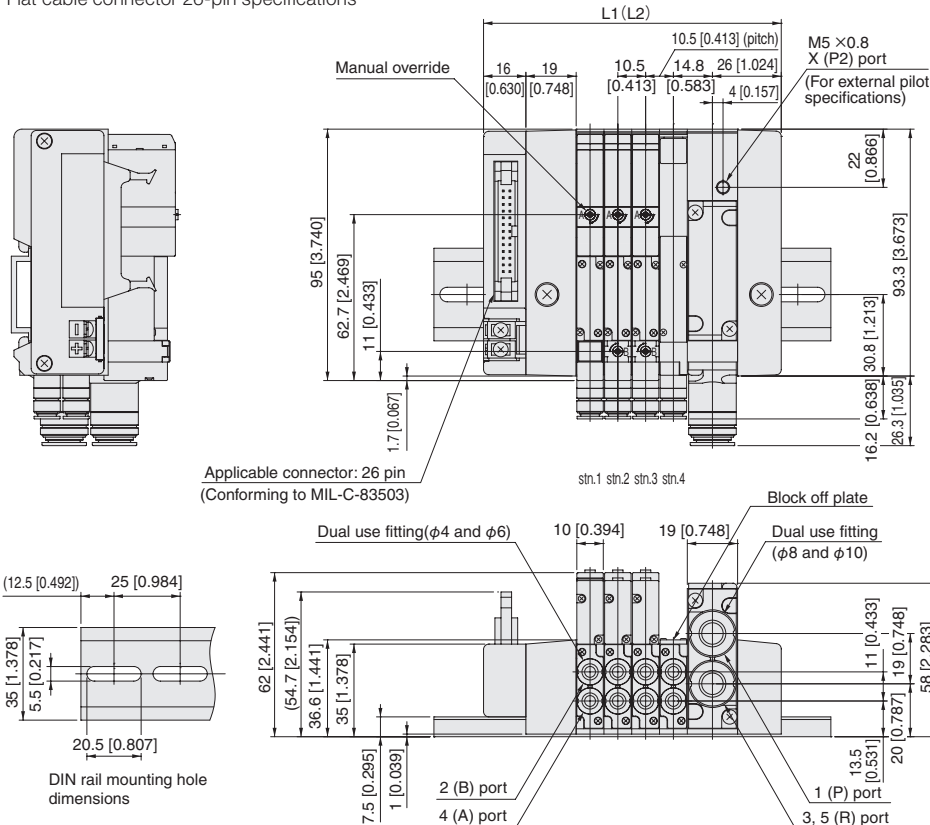

Unit dimensions


Number of units	L1	Length of DIN rail	L2 _{Note}	Length of DIN rail _{Note}
2	91.5 [3.602]	125 [4.921]	110.5 [4.350]	150 [5.906]
3	102.0 [4.016]	150 [5.906]	121.0 [4.764]	175 [6.890]
4	112.5 [4.429]	150 [5.906]	131.5 [5.177]	175 [6.890]
5	123.0 [4.843]	175 [6.890]	142.0 [5.591]	175 [6.890]
6	133.5 [5.256]	175 [6.890]	152.5 [6.004]	200 [7.874]
7	144.0 [5.669]	200 [7.874]	163.0 [6.417]	200 [7.874]
8	154.5 [6.083]	200 [7.874]	173.5 [6.831]	225 [8.858]
9	165.0 [6.496]	200 [7.874]	184.0 [7.244]	225 [8.858]
10	175.5 [6.909]	225 [8.858]	194.5 [7.657]	250 [9.843]
11	186.0 [7.323]	225 [8.858]	205.0 [8.071]	250 [9.843]
12	196.5 [7.736]	250 [9.843]	215.5 [8.484]	250 [9.843]
13	207.0 [8.150]	250 [9.843]	226.0 [8.898]	275 [10.827]
14	217.5 [8.563]	275 [10.827]	236.5 [9.311]	275 [10.827]
15	228.0 [8.976]	275 [10.827]	247.0 [9.724]	300 [11.811]
16	238.5 [9.390]	275 [10.827]	257.5 [10.138]	300 [11.811]
17	249.0 [9.803]	300 [11.811]	268.0 [10.551]	325 [12.795]
18	259.5 [10.217]	300 [11.811]	278.5 [10.965]	325 [12.795]
19	270.0 [10.630]	325 [12.795]	289.0 [11.378]	325 [12.795]
20	280.5 [11.043]	325 [12.795]	299.5 [11.791]	350 [13.780]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

Dimensions of F10 series split manifold plug-in type mm [in]

F10M Number of valves P M J Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
D-sub connector 25-pin specifications

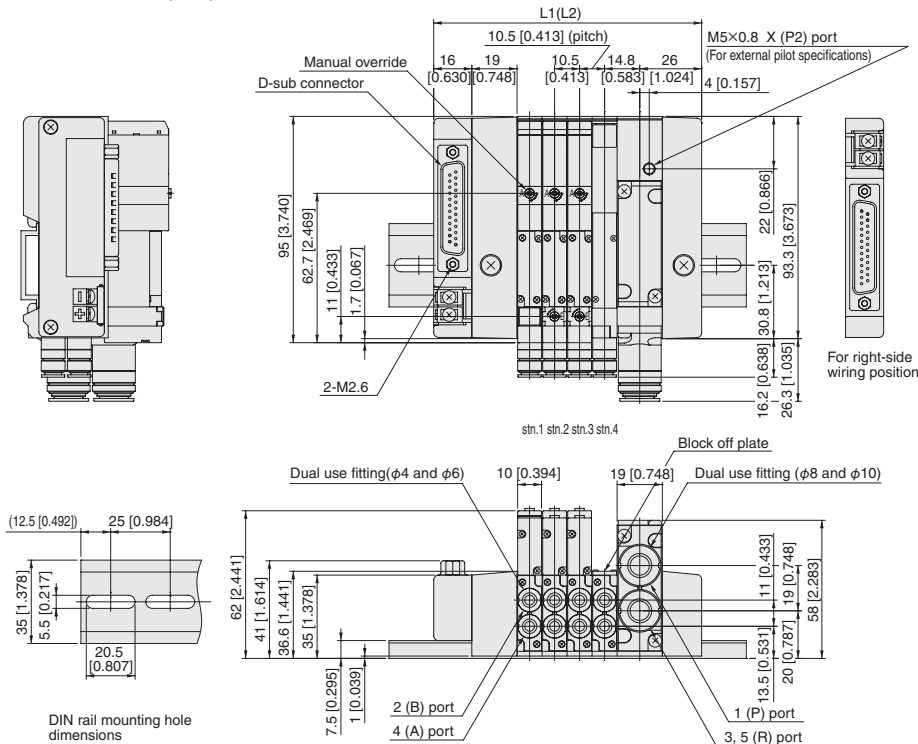


Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	91.5 [3.602]	125 [4.921]	110.5 [4.350]	150 [5.906]
3	102.0 [4.016]	150 [5.906]	121.0 [4.764]	175 [6.890]
4	112.5 [4.429]	150 [5.906]	131.5 [5.177]	175 [6.890]
5	123.0 [4.843]	175 [6.890]	142.0 [5.591]	175 [6.890]
6	133.5 [5.256]	175 [6.890]	152.5 [6.004]	200 [7.874]
7	144.0 [5.669]	200 [7.874]	163.0 [6.417]	200 [7.874]
8	154.5 [6.083]	200 [7.874]	173.5 [6.831]	225 [8.858]
9	165.0 [6.496]	200 [7.874]	184.0 [7.244]	225 [8.858]
10	175.5 [6.909]	225 [8.858]	194.5 [7.657]	250 [9.843]
11	186.0 [7.323]	225 [8.858]	205.0 [8.071]	250 [9.843]
12	196.5 [7.736]	250 [9.843]	215.5 [8.484]	250 [9.843]
13	207.0 [8.150]	250 [9.843]	226.0 [8.898]	275 [10.827]
14	217.5 [8.563]	275 [10.827]	236.5 [9.311]	275 [10.827]
15	228.0 [8.976]	275 [10.827]	247.0 [9.724]	300 [11.811]
16	238.5 [9.390]	275 [10.827]	257.5 [10.138]	300 [11.811]
17	249.0 [9.803]	300 [11.811]	268.0 [10.551]	325 [12.795]
18	259.5 [10.217]	300 [11.811]	278.5 [10.965]	325 [12.795]
19	270.0 [10.630]	325 [12.795]	289.0 [11.378]	325 [12.795]
20	280.5 [11.043]	325 [12.795]	299.5 [11.791]	350 [13.780]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

F10M Number of valves P M J Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
Terminal block type

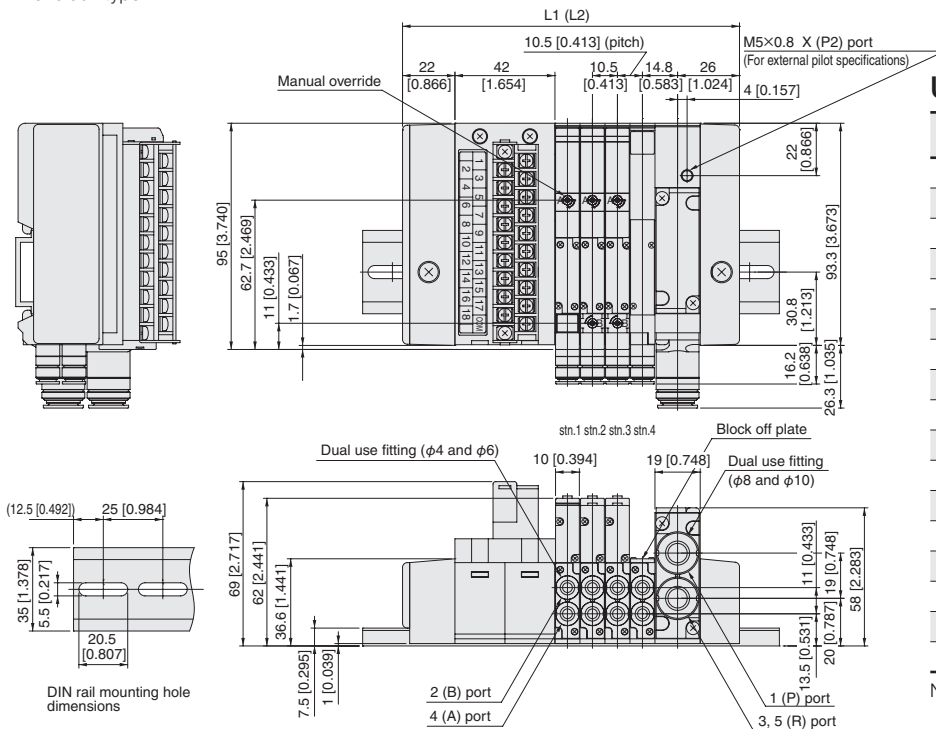

Unit dimensions



Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	120.5 [4.744]	150 [5.906]	139.5 [5.492]	175 [6.890]
3	131.0 [5.157]	175 [6.890]	150.0 [5.906]	175 [6.890]
4	141.5 [5.571]	175 [6.890]	160.5 [6.319]	200 [7.874]
5	152.0 [5.984]	200 [7.874]	171.0 [6.732]	200 [7.874]
6	162.5 [6.398]	200 [7.874]	181.5 [7.146]	225 [8.858]
7	173.0 [6.811]	200 [7.874]	192.0 [7.559]	225 [8.858]
8	183.5 [7.224]	225 [8.858]	202.5 [7.972]	250 [9.843]
9	194.0 [7.638]	225 [8.858]	213.0 [8.386]	250 [9.843]
10	204.5 [8.051]	250 [9.843]	223.5 [8.799]	250 [9.843]
11	215.0 [8.465]	250 [9.843]	234.0 [9.213]	275 [10.827]
12	225.5 [8.878]	275 [10.827]	244.5 [9.626]	275 [10.827]
13	236.0 [9.291]	275 [10.827]	255.0 [10.039]	300 [11.811]
14	246.5 [9.705]	275 [10.827]	265.5 [10.453]	300 [11.811]
15	257.0 [10.118]	300 [11.811]	276.0 [10.866]	325 [12.795]
16	267.5 [10.531]	300 [11.811]	286.5 [11.280]	325 [12.795]
17	278.0 [10.945]	325 [12.795]	297.0 [11.693]	325 [12.795]
18	288.5 [11.358]	325 [12.795]	307.5 [12.106]	350 [13.780]

Note: When two piping blocks are used.

Dimensions of F10 series split manifold plug-in type mm [in]

F10M Number of valves PHL Pilot specifications (Base piping type)

With manifold outlet port female thread block
Flat cable connector 10-pin specifications

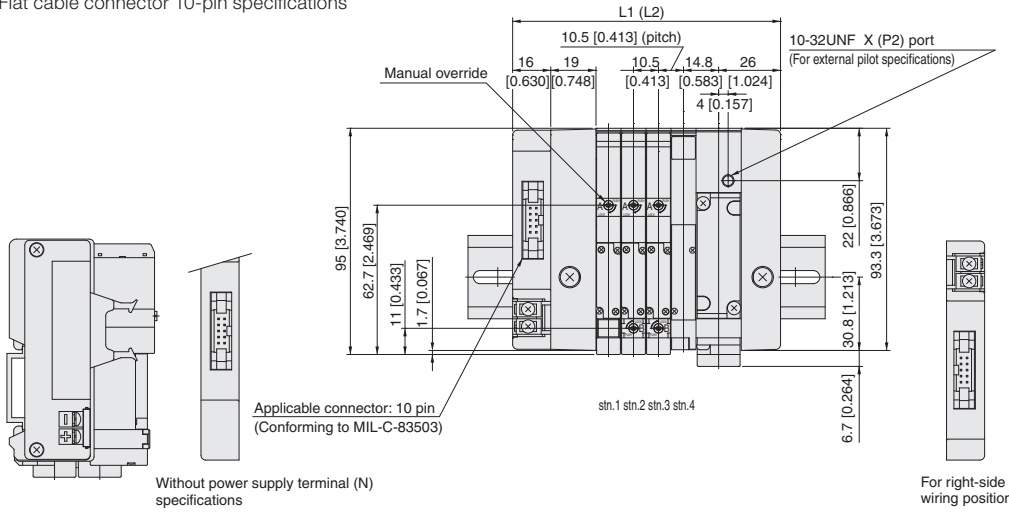



Unit dimensions

Number of units	L1	Length of DIN rail	L2 ^{Note}	Length of DIN rail ^{Note}
2	91.5 [3.602]	125 [4.921]	110.5 [4.350]	150 [5.906]
3	102.0 [4.016]	150 [5.906]	121.0 [4.764]	175 [6.890]
4	112.5 [4.429]	150 [5.906]	131.5 [5.177]	175 [6.890]
5	123.0 [4.843]	175 [6.890]	142.0 [5.591]	175 [6.890]
6	133.5 [5.256]	175 [6.890]	152.5 [6.004]	200 [7.874]
7	144.0 [5.669]	200 [7.874]	163.0 [6.417]	200 [7.874]
8	154.5 [6.083]	200 [7.874]	173.5 [6.831]	225 [8.858]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

F10M Number of valves Pilot specifications (Direct piping type)

With valve outlet port female thread block
Flat cable connector 10-pin specifications

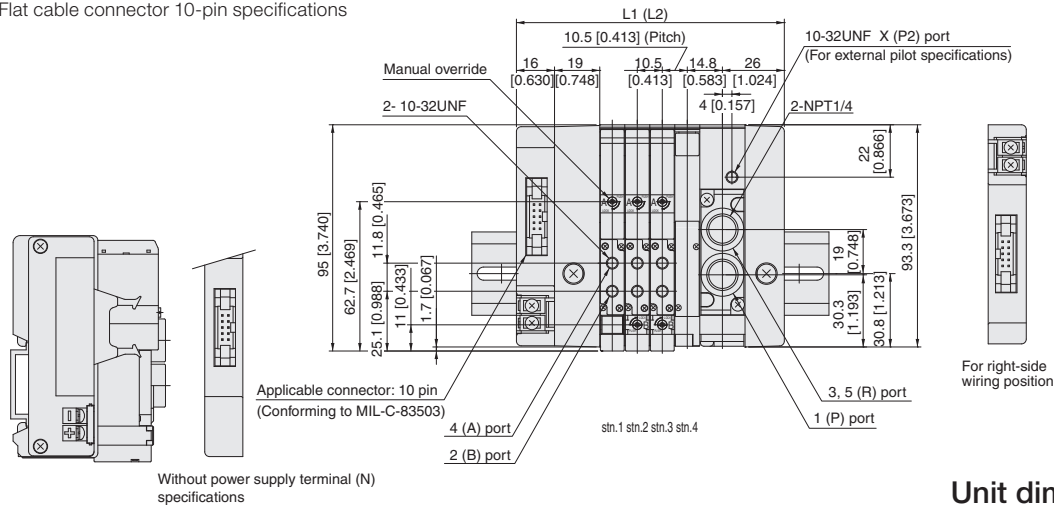

Unit dimensions


Number of units	L1	Length of DIN rail	L2 ^{Note}	Length of DIN rail ^{Note}
2	91.5 [3.602]	125 [4.921]	110.5 [4.350]	150 [5.906]
3	102.0 [4.016]	150 [5.906]	121.0 [4.764]	175 [6.890]
4	112.5 [4.429]	150 [5.906]	131.5 [5.177]	175 [6.890]
5	123.0 [4.843]	175 [6.890]	142.0 [5.591]	175 [6.890]
6	133.5 [5.256]	175 [6.890]	152.5 [6.004]	200 [7.874]
7	144.0 [5.669]	200 [7.874]	163.0 [6.417]	200 [7.874]
8	154.5 [6.083]	200 [7.874]	173.5 [6.831]	225 [8.858]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

Dimensions of F10 series split manifold plug-in type mm [in]

F10M Number of valves PHL Pilot specifications (Base piping type)

With manifold outlet port female thread block
Flat cable connector 20-pin specifications (side surface wiring)

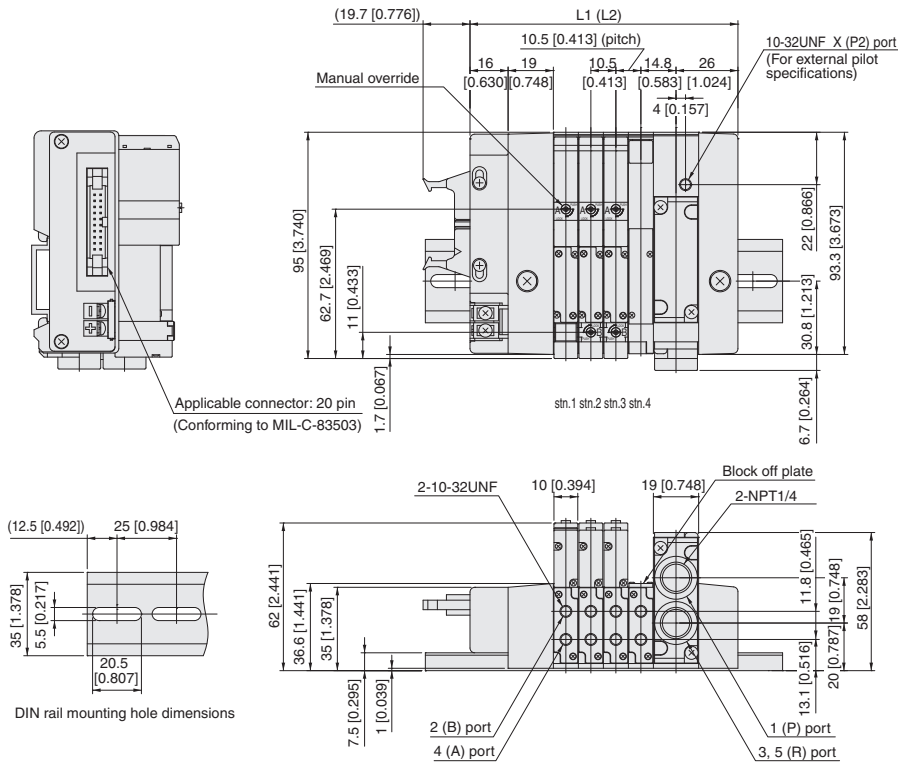


Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	91.5 [3.602]	125 [4.921]	110.5 [4.350]	150 [5.906]
3	102.0 [4.016]	150 [5.906]	121.0 [4.764]	175 [6.890]
4	112.5 [4.429]	150 [5.906]	131.5 [5.177]	175 [6.890]
5	123.0 [4.843]	175 [6.890]	142.0 [5.591]	175 [6.890]
6	133.5 [5.256]	175 [6.890]	152.5 [6.004]	200 [7.874]
7	144.0 [5.669]	200 [7.874]	163.0 [6.417]	200 [7.874]
8	154.5 [6.083]	200 [7.874]	173.5 [6.831]	225 [8.858]
9	165.0 [6.496]	200 [7.874]	184.0 [7.244]	225 [8.858]
10	175.5 [6.909]	225 [8.858]	194.5 [7.657]	250 [9.843]
11	186.0 [7.323]	225 [8.858]	205.0 [8.071]	250 [9.843]
12	196.5 [7.736]	250 [9.843]	215.5 [8.484]	250 [9.843]
13	207.0 [8.150]	250 [9.843]	226.0 [8.898]	275 [10.827]
14	217.5 [8.563]	275 [10.827]	236.5 [9.311]	275 [10.827]
15	228.0 [8.976]	275 [10.827]	247.0 [9.724]	300 [11.811]
16	238.5 [9.390]	275 [10.827]	257.5 [10.138]	300 [11.811]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

F10M Number of valves PH Pilot specifications (Direct piping type)

With valve outlet port female thread block
Flat cable connector 20-pin specifications

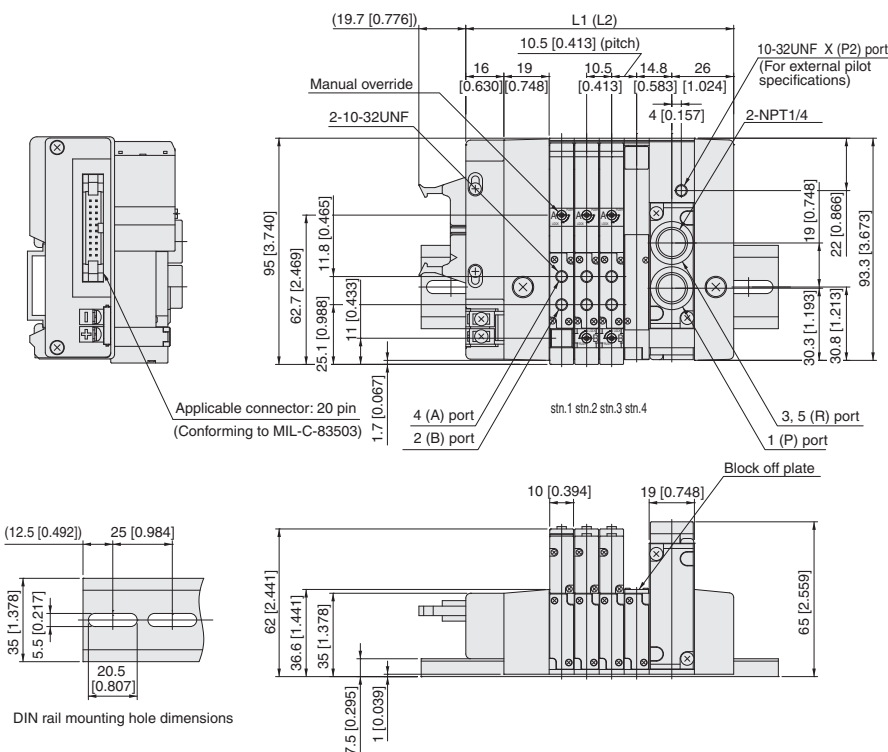

Unit dimensions


Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	91.5 [3.602]	125 [4.921]	110.5 [4.350]	150 [5.906]
3	102.0 [4.016]	150 [5.906]	121.0 [4.764]	175 [6.890]
4	112.5 [4.429]	150 [5.906]	131.5 [5.177]	175 [6.890]
5	123.0 [4.843]	175 [6.890]	142.0 [5.591]	175 [6.890]
6	133.5 [5.256]	175 [6.890]	152.5 [6.004]	200 [7.874]
7	144.0 [5.669]	200 [7.874]	163.0 [6.417]	200 [7.874]
8	154.5 [6.083]	200 [7.874]	173.5 [6.831]	225 [8.858]
9	165.0 [6.496]	200 [7.874]	184.0 [7.244]	225 [8.858]
10	175.5 [6.909]	225 [8.858]	194.5 [7.657]	250 [9.843]
11	186.0 [7.323]	225 [8.858]	205.0 [8.071]	250 [9.843]
12	196.5 [7.736]	250 [9.843]	215.5 [8.484]	250 [9.843]
13	207.0 [8.150]	250 [9.843]	226.0 [8.898]	275 [10.827]
14	217.5 [8.563]	275 [10.827]	236.5 [9.311]	275 [10.827]
15	228.0 [8.976]	275 [10.827]	247.0 [9.724]	300 [11.811]
16	238.5 [9.390]	275 [10.827]	257.5 [10.138]	300 [11.811]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

Dimensions of F10 series split manifold plug-in type mm [in]

F10M Number of valves PHL Pilot specifications (Base piping type)

With manifold outlet port female thread block
Flat cable connector 26-pin specifications

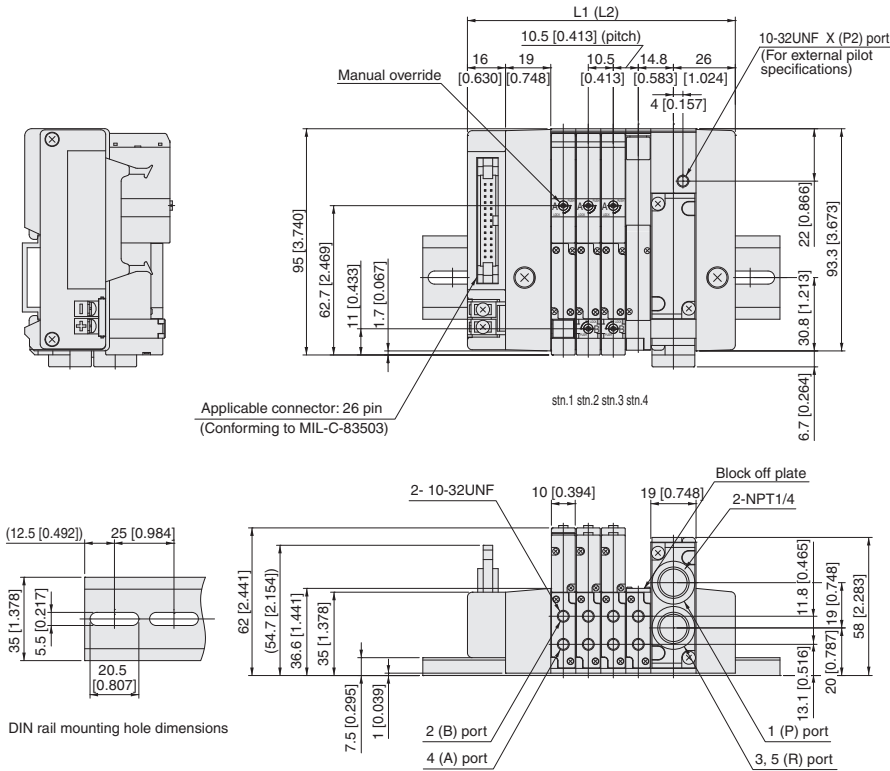


Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	91.5 [3.602]	125 [4.921]	110.5 [4.350]	150 [5.906]
3	102.0 [4.016]	150 [5.906]	121.0 [4.764]	175 [6.890]
4	112.5 [4.429]	150 [5.906]	131.5 [5.177]	175 [6.890]
5	123.0 [4.843]	175 [6.890]	142.0 [5.591]	175 [6.890]
6	133.5 [5.256]	175 [6.890]	152.5 [6.004]	200 [7.874]
7	144.0 [5.669]	200 [7.874]	163.0 [6.417]	200 [7.874]
8	154.5 [6.083]	200 [7.874]	173.5 [6.831]	225 [8.858]
9	165.0 [6.496]	200 [7.874]	184.0 [7.244]	225 [8.858]
10	175.5 [6.909]	225 [8.858]	194.5 [7.657]	250 [9.843]
11	186.0 [7.323]	225 [8.858]	205.0 [8.071]	250 [9.843]
12	196.5 [7.736]	250 [9.843]	215.5 [8.484]	250 [9.843]
13	207.0 [8.150]	250 [9.843]	226.0 [8.898]	275 [10.827]
14	217.5 [8.563]	275 [10.827]	236.5 [9.311]	275 [10.827]
15	228.0 [8.976]	275 [10.827]	247.0 [9.724]	300 [11.811]
16	238.5 [9.390]	275 [10.827]	257.5 [10.138]	300 [11.811]
17	249.0 [9.803]	300 [11.811]	268.0 [10.551]	325 [12.795]
18	259.5 [10.217]	300 [11.811]	278.5 [10.965]	325 [12.795]
19	270.0 [10.630]	325 [12.795]	289.0 [11.378]	325 [12.795]
20	280.5 [11.043]	325 [12.795]	299.5 [11.791]	350 [13.780]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

F10M Number of valves PH Pilot specifications (Direct piping type)

With valve outlet port female thread block
Flat cable connector 26-pin specifications

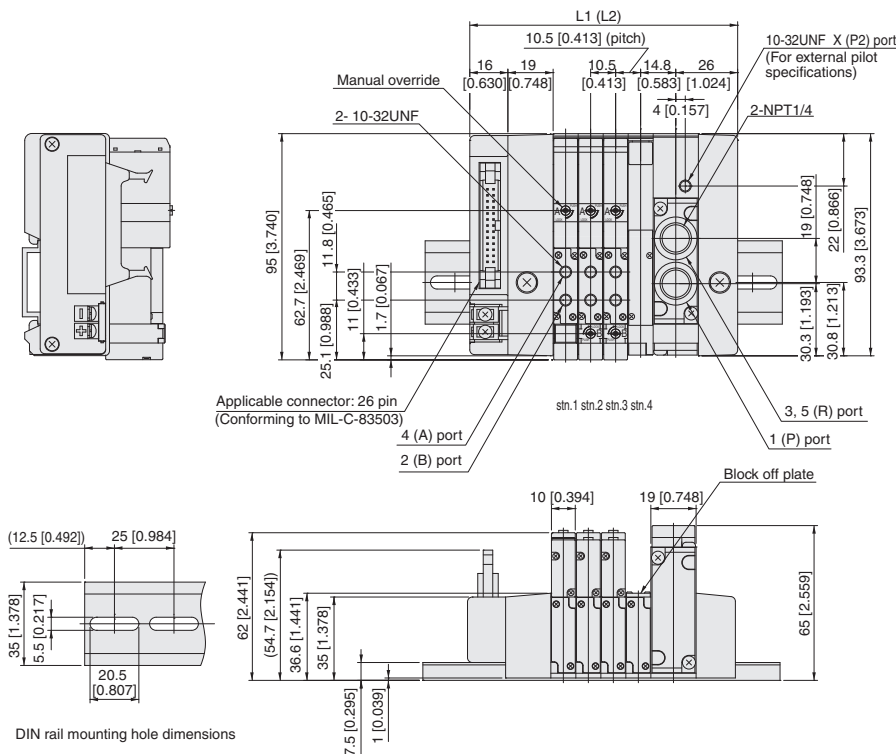

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	91.5 [3.602]	125 [4.921]	110.5 [4.350]	150 [5.906]
3	102.0 [4.016]	150 [5.906]	121.0 [4.764]	175 [6.890]
4	112.5 [4.429]	150 [5.906]	131.5 [5.177]	175 [6.890]
5	123.0 [4.843]	175 [6.890]	142.0 [5.591]	175 [6.890]
6	133.5 [5.256]	175 [6.890]	152.5 [6.004]	200 [7.874]
7	144.0 [5.669]	200 [7.874]	163.0 [6.417]	200 [7.874]
8	154.5 [6.083]	200 [7.874]	173.5 [6.831]	225 [8.858]
9	165.0 [6.496]	200 [7.874]	184.0 [7.244]	225 [8.858]
10	175.5 [6.909]	225 [8.858]	194.5 [7.657]	250 [9.843]
11	186.0 [7.323]	225 [8.858]	205.0 [8.071]	250 [9.843]
12	196.5 [7.736]	250 [9.843]	215.5 [8.484]	250 [9.843]
13	207.0 [8.150]	250 [9.843]	226.0 [8.898]	275 [10.827]
14	217.5 [8.563]	275 [10.827]	236.5 [9.311]	275 [10.827]
15	228.0 [8.976]	275 [10.827]	247.0 [9.724]	300 [11.811]
16	238.5 [9.390]	275 [10.827]	257.5 [10.138]	300 [11.811]
17	249.0 [9.803]	300 [11.811]	268.0 [10.551]	325 [12.795]
18	259.5 [10.217]	300 [11.811]	278.5 [10.965]	325 [12.795]
19	270.0 [10.630]	325 [12.795]	289.0 [11.378]	325 [12.795]
20	280.5 [11.043]	325 [12.795]	299.5 [11.791]	350 [13.780]


Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

F10 DIMENSIONS

Dimensions of F10 series split manifold plug-in type mm [in]

F10M Number of valves PHL Pilot specifications (Base piping type)

With manifold outlet port female thread block
D-sub connector 25-pin specifications

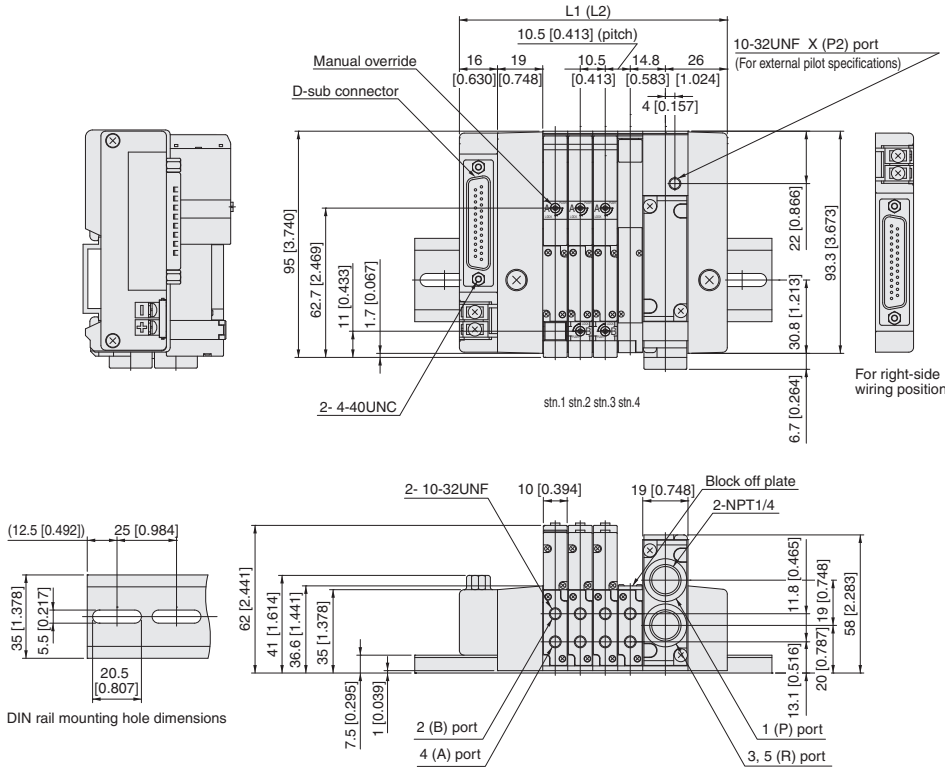


Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	91.5 [3.602]	125 [4.921]	110.5 [4.350]	150 [5.906]
3	102.0 [4.016]	150 [5.906]	121.0 [4.764]	175 [6.890]
4	112.5 [4.429]	150 [5.906]	131.5 [5.177]	175 [6.890]
5	123.0 [4.843]	175 [6.890]	142.0 [5.591]	175 [6.890]
6	133.5 [5.256]	175 [6.890]	152.5 [6.004]	200 [7.874]
7	144.0 [5.669]	200 [7.874]	163.0 [6.417]	200 [7.874]
8	154.5 [6.083]	200 [7.874]	173.5 [6.831]	225 [8.858]
9	165.0 [6.496]	200 [7.874]	184.0 [7.244]	225 [8.858]
10	175.5 [6.909]	225 [8.858]	194.5 [7.657]	250 [9.843]
11	186.0 [7.323]	225 [8.858]	205.0 [8.071]	250 [9.843]
12	196.5 [7.736]	250 [9.843]	215.5 [8.484]	250 [9.843]
13	207.0 [8.150]	250 [9.843]	226.0 [8.898]	275 [10.827]
14	217.5 [8.563]	275 [10.827]	236.5 [9.311]	275 [10.827]
15	228.0 [8.976]	275 [10.827]	247.0 [9.724]	300 [11.811]
16	238.5 [9.390]	275 [10.827]	257.5 [10.138]	300 [11.811]
17	249.0 [9.803]	300 [11.811]	268.0 [10.551]	325 [12.795]
18	259.5 [10.217]	300 [11.811]	278.5 [10.965]	325 [12.795]
19	270.0 [10.630]	325 [12.795]	289.0 [11.378]	325 [12.795]
20	280.5 [11.043]	325 [12.795]	299.5 [11.791]	350 [13.780]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

F10M Number of valves PH Pilot specifications (Direct piping type)

With valve outlet port female thread block
D-sub connector 25-pin specifications

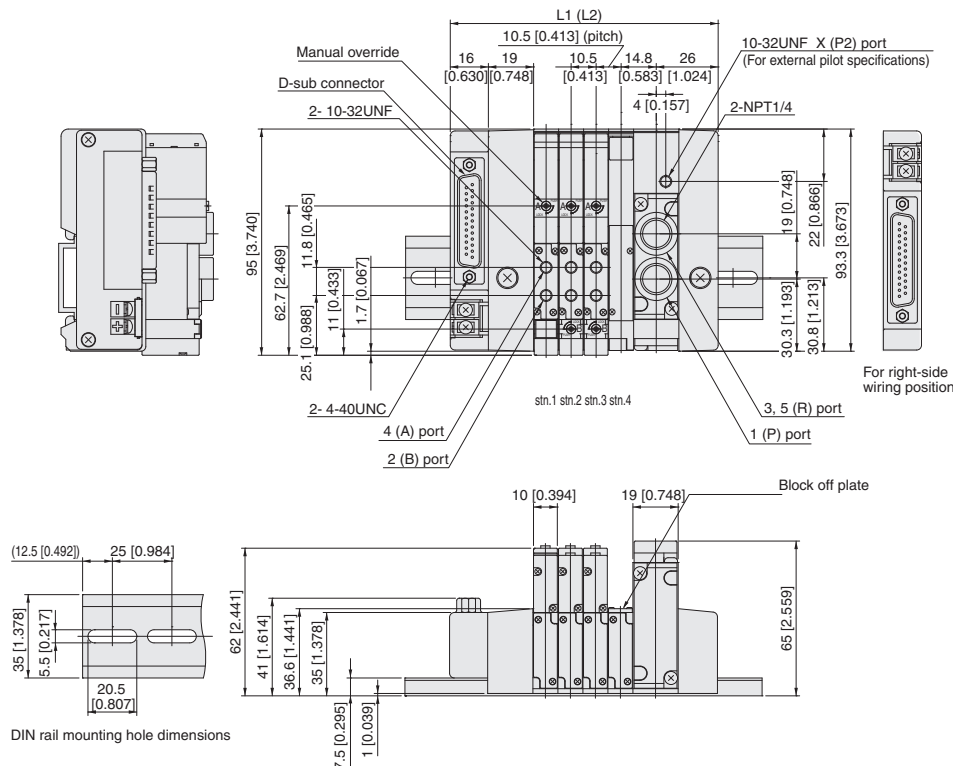

Unit dimensions


Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	91.5 [3.602]	125 [4.921]	110.5 [4.350]	150 [5.906]
3	102.0 [4.016]	150 [5.906]	121.0 [4.764]	175 [6.890]
4	112.5 [4.429]	150 [5.906]	131.5 [5.177]	175 [6.890]
5	123.0 [4.843]	175 [6.890]	142.0 [5.591]	175 [6.890]
6	133.5 [5.256]	175 [6.890]	152.5 [6.004]	200 [7.874]
7	144.0 [5.669]	200 [7.874]	163.0 [6.417]	200 [7.874]
8	154.5 [6.083]	200 [7.874]	173.5 [6.831]	225 [8.858]
9	165.0 [6.496]	200 [7.874]	184.0 [7.244]	225 [8.858]
10	175.5 [6.909]	225 [8.858]	194.5 [7.657]	250 [9.843]
11	186.0 [7.323]	225 [8.858]	205.0 [8.071]	250 [9.843]
12	196.5 [7.736]	250 [9.843]	215.5 [8.484]	250 [9.843]
13	207.0 [8.150]	250 [9.843]	226.0 [8.898]	275 [10.827]
14	217.5 [8.563]	275 [10.827]	236.5 [9.311]	275 [10.827]
15	228.0 [8.976]	275 [10.827]	247.0 [9.724]	300 [11.811]
16	238.5 [9.390]	275 [10.827]	257.5 [10.138]	300 [11.811]
17	249.0 [9.803]	300 [11.811]	268.0 [10.551]	325 [12.795]
18	259.5 [10.217]	300 [11.811]	278.5 [10.965]	325 [12.795]
19	270.0 [10.630]	325 [12.795]	289.0 [11.378]	325 [12.795]
20	280.5 [11.043]	325 [12.795]	299.5 [11.791]	350 [13.780]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

Dimensions of F10 series split manifold plug-in type mm [in]

F10M Number of valves PHL Pilot specifications (Base piping type)

With manifold outlet port female thread block
D-sub connector 37-pin specifications

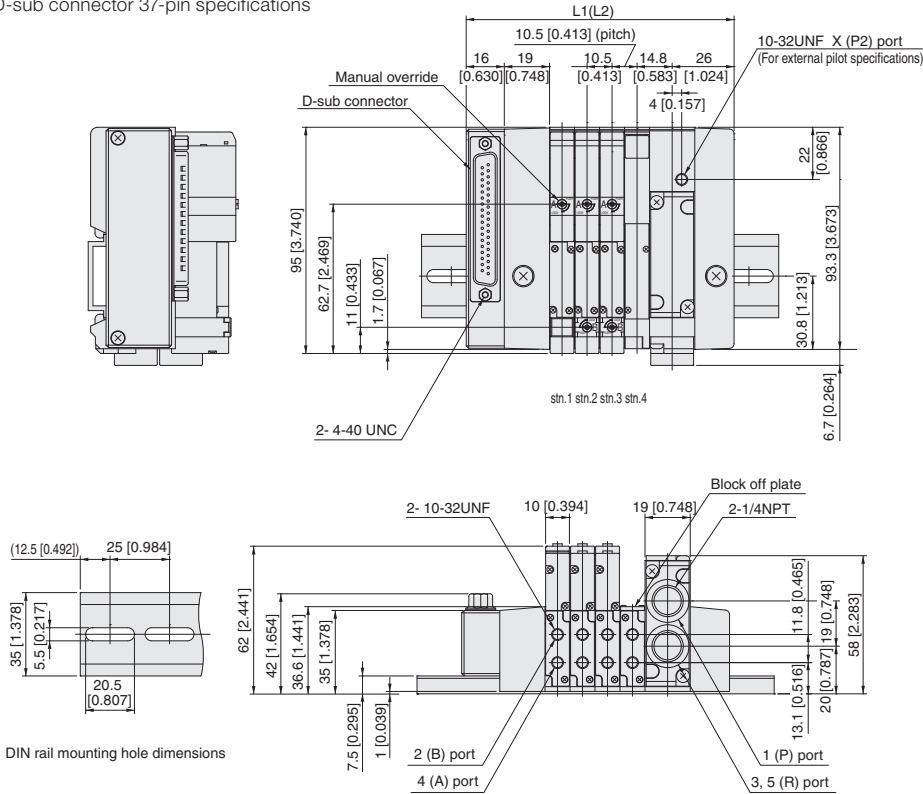

Unit dimensions


Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	91.5 [3.602]	125 [4.921]	110.5 [4.350]	150 [5.906]
3	102.0 [4.016]	150 [5.906]	121.0 [4.764]	175 [6.890]
4	112.5 [4.429]	150 [5.906]	131.5 [5.177]	175 [6.890]
5	123.0 [4.843]	175 [6.890]	142.0 [5.591]	175 [6.890]
6	133.5 [5.256]	175 [6.890]	152.5 [6.004]	200 [7.874]
7	144.0 [5.669]	200 [7.874]	163.0 [6.417]	200 [7.874]
8	154.5 [6.083]	200 [7.874]	173.5 [6.831]	225 [8.858]
9	165.0 [6.496]	200 [7.874]	184.0 [7.244]	225 [8.858]
10	175.5 [6.909]	225 [8.858]	194.5 [7.657]	250 [9.843]
11	186.0 [7.323]	225 [8.858]	205.0 [8.071]	250 [9.843]
12	196.5 [7.736]	250 [9.843]	215.5 [8.484]	250 [9.843]
13	207.0 [8.150]	250 [9.843]	226.0 [8.898]	275 [10.827]
14	217.5 [8.563]	275 [10.827]	236.5 [9.311]	275 [10.827]
15	228.0 [8.976]	275 [10.827]	247.0 [9.724]	300 [11.811]
16	238.5 [9.390]	275 [10.827]	257.5 [10.138]	300 [11.811]
17	249.0 [9.803]	300 [11.811]	268.0 [10.551]	325 [12.795]
18	259.5 [10.217]	300 [11.811]	278.5 [10.965]	325 [12.795]
19	270.0 [10.630]	325 [12.795]	289.0 [11.378]	325 [12.795]
20	280.5 [11.043]	325 [12.795]	299.5 [11.791]	350 [13.780]

Note: When two piping blocks are used.

* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

F10M Number of valves PH Pilot specifications (Direct piping type)

With valve outlet port female thread block
D-sub connector 37-pin specifications

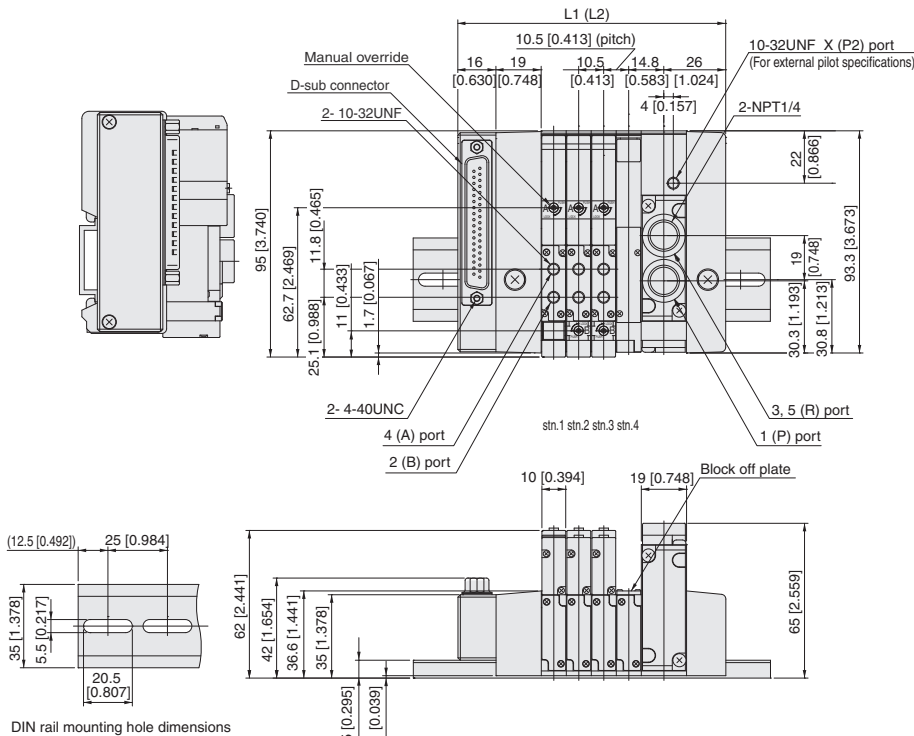

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	91.5 [3.602]	125 [4.921]	110.5 [4.350]	150 [5.906]
3	102.0 [4.016]	150 [5.906]	121.0 [4.764]	175 [6.890]
4	112.5 [4.429]	150 [5.906]	131.5 [5.177]	175 [6.890]
5	123.0 [4.843]	175 [6.890]	142.0 [5.591]	175 [6.890]
6	133.5 [5.256]	175 [6.890]	152.5 [6.004]	200 [7.874]
7	144.0 [5.669]	200 [7.874]	163.0 [6.417]	200 [7.874]
8	154.5 [6.083]	200 [7.874]	173.5 [6.831]	225 [8.858]
9	165.0 [6.496]	200 [7.874]	184.0 [7.244]	225 [8.858]
10	175.5 [6.909]	225 [8.858]	194.5 [7.657]	250 [9.843]
11	186.0 [7.323]	225 [8.858]	205.0 [8.071]	250 [9.843]
12	196.5 [7.736]	250 [9.843]	215.5 [8.484]	250 [9.843]
13	207.0 [8.150]	250 [9.843]	226.0 [8.898]	275 [10.827]
14	217.5 [8.563]	275 [10.827]	236.5 [9.311]	275 [10.827]
15	228.0 [8.976]	275 [10.827]	247.0 [9.724]	300 [11.811]
16	238.5 [9.390]	275 [10.827]	257.5 [10.138]	300 [11.811]
17	249.0 [9.803]	300 [11.811]	268.0 [10.551]	325 [12.795]
18	259.5 [10.217]	300 [11.811]	278.5 [10.965]	325 [12.795]
19	270.0 [10.630]	325 [12.795]	289.0 [11.378]	325 [12.795]
20	280.5 [11.043]	325 [12.795]	299.5 [11.791]	350 [13.780]

Note: When two piping blocks are used.


* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

F10 DIMENSIONS

Dimensions of F10 series split manifold plug-in type mm [in]

F10M Number of valves PHL Pilot specifications (Base piping type)

With manifold outlet port female thread block
Terminal block type

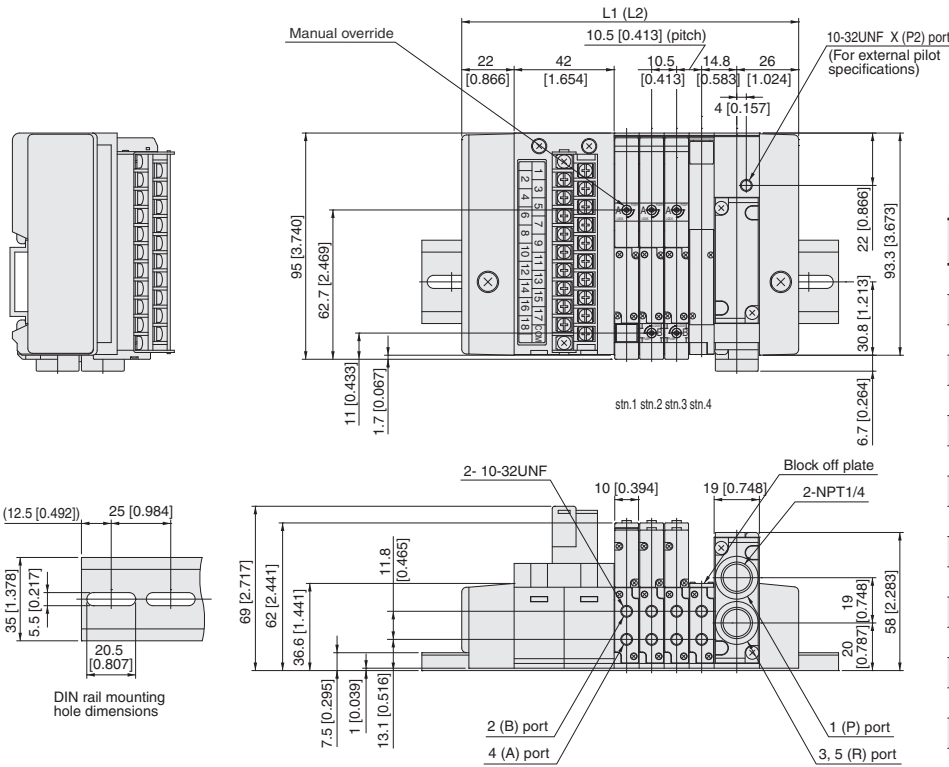


Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	120.5 [4.744]	150 [5.906]	139.5 [5.492]	175 [6.890]
3	131.0 [5.157]	175 [6.890]	150.0 [5.906]	175 [6.890]
4	141.5 [5.571]	175 [6.890]	160.5 [6.319]	200 [7.874]
5	152.0 [5.984]	200 [7.874]	171.0 [6.732]	200 [7.874]
6	162.5 [6.398]	200 [7.874]	181.5 [7.146]	225 [8.858]
7	173.0 [6.811]	200 [7.874]	192.0 [7.559]	225 [8.858]
8	183.5 [7.224]	225 [8.858]	202.5 [7.972]	250 [9.843]
9	194.0 [7.638]	225 [8.858]	213.0 [8.386]	250 [9.843]
10	204.5 [8.051]	250 [9.843]	223.5 [8.799]	250 [9.843]
11	215.0 [8.465]	250 [9.843]	234.0 [9.213]	275 [10.827]
12	225.5 [8.878]	275 [10.827]	244.5 [9.626]	275 [10.827]
13	236.0 [9.291]	275 [10.827]	255.0 [10.039]	300 [11.811]
14	246.5 [9.705]	275 [10.827]	265.5 [10.453]	300 [11.811]
15	257.0 [10.118]	300 [11.811]	276.0 [10.866]	325 [12.795]
16	267.5 [10.531]	300 [11.811]	286.5 [11.280]	325 [12.795]
17	278.0 [10.945]	325 [12.795]	297.0 [11.693]	325 [12.795]
18	288.5 [11.358]	325 [12.795]	307.5 [12.106]	350 [13.780]

Note: When two piping blocks are used.

F10M Number of valves PH Pilot specifications (Direct piping type)

With valve outlet port female thread block
Terminal block type

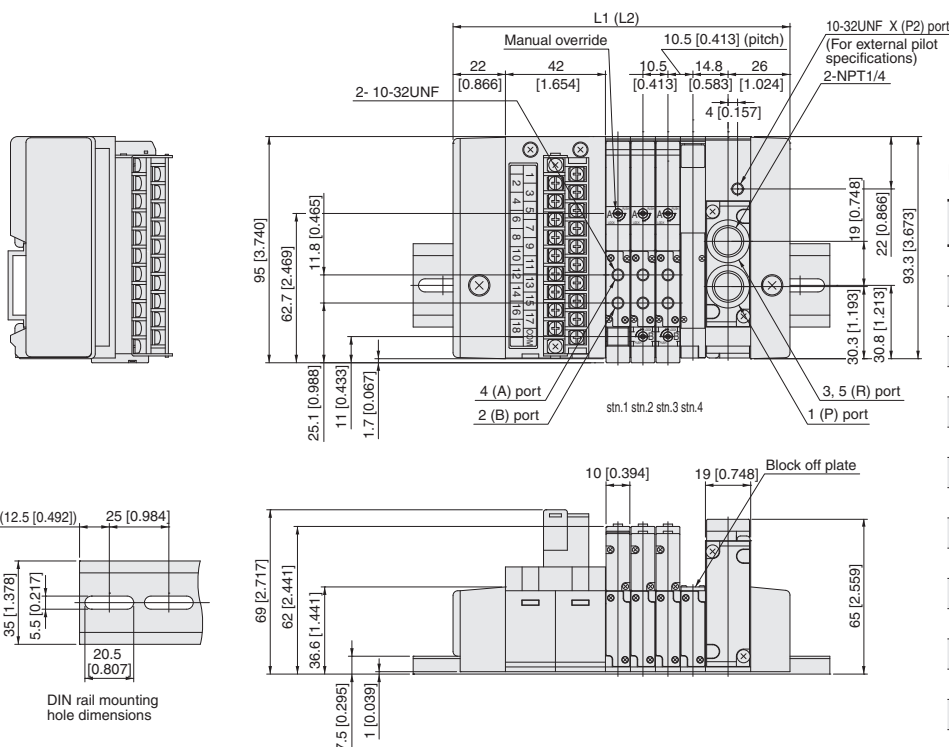

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	120.5 [4.744]	150 [5.906]	139.5 [5.492]	175 [6.890]
3	131.0 [5.157]	175 [6.890]	150.0 [5.906]	175 [6.890]
4	141.5 [5.571]	175 [6.890]	160.5 [6.319]	200 [7.874]
5	152.0 [5.984]	200 [7.874]	171.0 [6.732]	200 [7.874]
6	162.5 [6.398]	200 [7.874]	181.5 [7.146]	225 [8.858]
7	173.0 [6.811]	200 [7.874]	192.0 [7.559]	225 [8.858]
8	183.5 [7.224]	225 [8.858]	202.5 [7.972]	250 [9.843]
9	194.0 [7.638]	225 [8.858]	213.0 [8.386]	250 [9.843]
10	204.5 [8.051]	250 [9.843]	223.5 [8.799]	250 [9.843]
11	215.0 [8.465]	250 [9.843]	234.0 [9.213]	275 [10.827]
12	225.5 [8.878]	275 [10.827]	244.5 [9.626]	275 [10.827]
13	236.0 [9.291]	275 [10.827]	255.0 [10.039]	300 [11.811]
14	246.5 [9.705]	275 [10.827]	265.5 [10.453]	300 [11.811]
15	257.0 [10.118]	300 [11.811]	276.0 [10.866]	325 [12.795]
16	267.5 [10.531]	300 [11.811]	286.5 [11.280]	325 [12.795]
17	278.0 [10.945]	325 [12.795]	297.0 [11.693]	325 [12.795]
18	288.5 [11.358]	325 [12.795]	307.5 [12.106]	350 [13.780]


Note: When two piping blocks are used.

Dimensions of F10 series split manifold serial transmission type mm [in]

F10M Number of valves **S** **M** Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
(Integrated serial transmission block compatible model)

*For dimensions of EtherCAT, see p. 139.

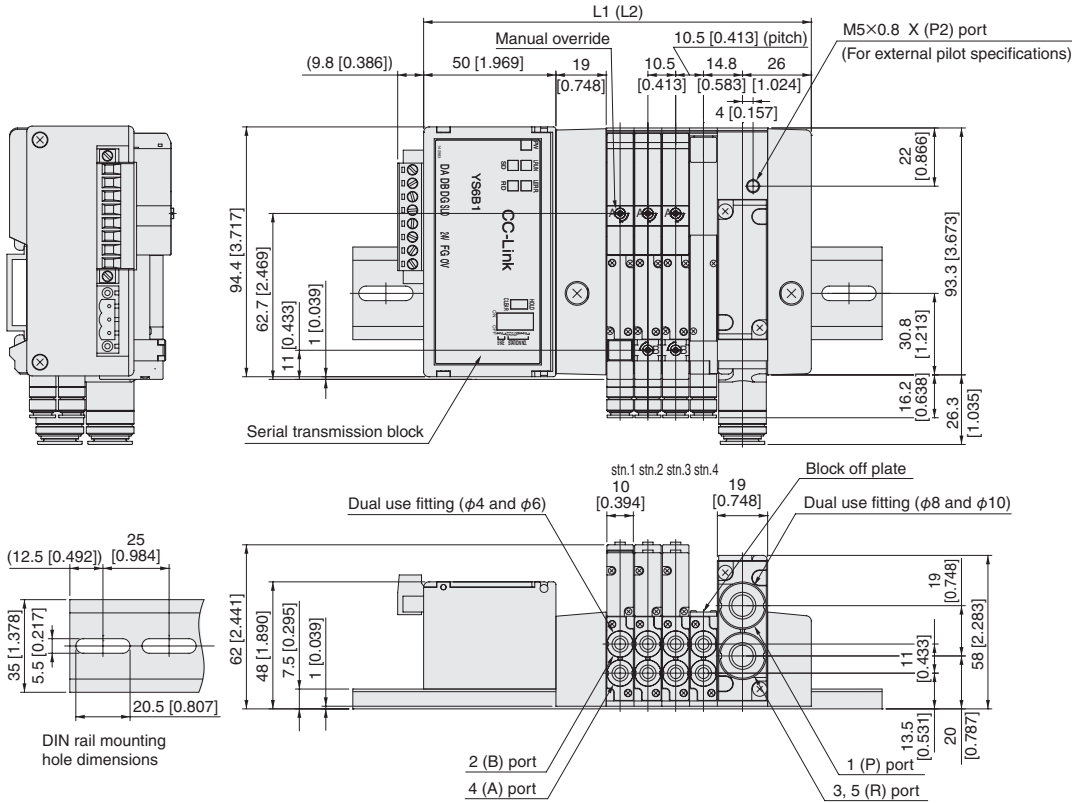

Unit dimensions


Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	125.5 [4.941]	175 [6.890]	144.5 [5.689]	200 [7.874]
3	136.0 [5.354]	200 [7.874]	155.0 [6.102]	200 [7.874]
4	146.5 [5.768]	200 [7.874]	165.5 [6.516]	225 [8.858]
5	157.0 [6.181]	200 [7.874]	176.0 [6.929]	225 [8.858]
6	167.5 [6.594]	225 [8.858]	186.5 [7.343]	250 [9.843]
7	178.0 [7.008]	225 [8.858]	197.0 [7.756]	250 [9.843]
8	188.5 [7.421]	250 [9.843]	207.5 [8.169]	250 [9.843]
9	199.0 [7.835]	250 [9.843]	218.0 [8.583]	275 [10.827]
10	209.5 [8.248]	250 [9.843]	228.5 [8.996]	275 [10.827]
11	220.0 [8.661]	275 [10.827]	239.0 [9.409]	300 [11.811]
12	230.5 [9.075]	275 [10.827]	249.5 [9.823]	300 [11.811]
13	241.0 [9.488]	300 [11.811]	260.0 [10.236]	300 [11.811]
14	251.5 [9.902]	300 [11.811]	270.5 [10.650]	325 [12.795]
15	262.0 [10.315]	325 [12.795]	281.0 [11.063]	325 [12.795]
16	272.5 [10.728]	325 [12.795]	291.5 [11.476]	350 [13.780]
17	283.0 [11.142]	350 [13.780]	302.0 [11.890]	375 [14.764]
18	293.5 [11.555]	350 [13.780]	312.5 [12.303]	375 [14.764]
19	304.0 [11.969]	350 [13.780]	323.0 [12.717]	375 [14.764]
20	314.5 [12.382]	375 [14.764]	333.5 [13.130]	400 [15.748]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

Dimensions of F10 series serial transmission compatible manifold mm [in]

F10M Number of valves SHL Pilot specifications (Base piping type)

With manifold outlet port female thread block
(Integrated serial transmission block compatible manifold)

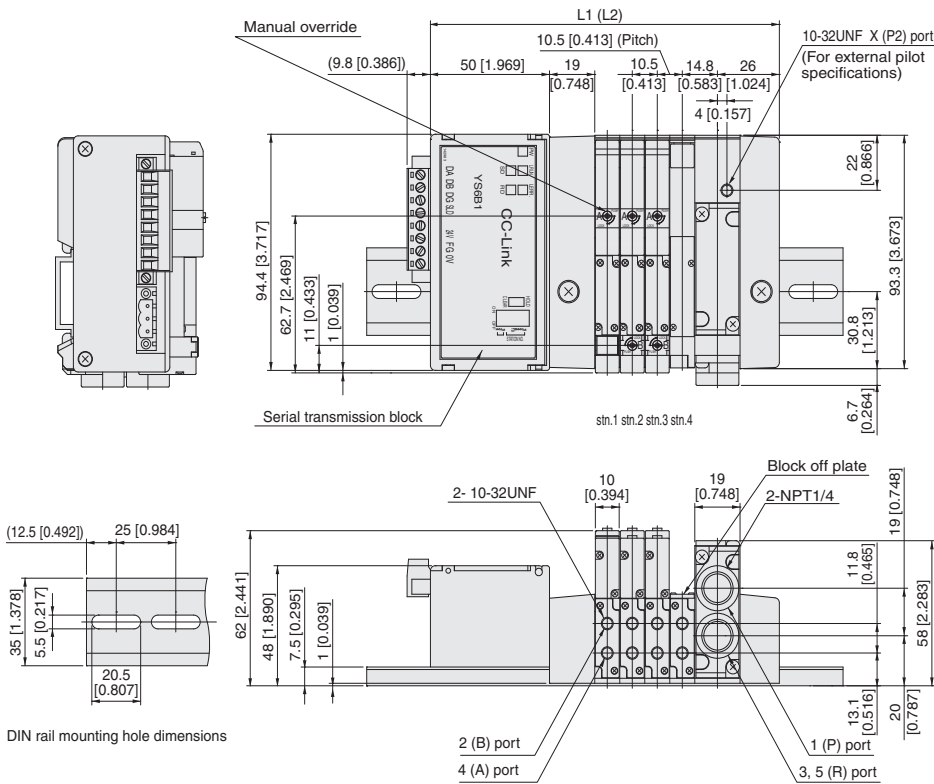


Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	125.5 [4.941]	175 [6.890]	144.5 [5.689]	200 [7.874]
3	136.0 [5.354]	200 [7.874]	155.0 [6.102]	200 [7.874]
4	146.5 [5.768]	200 [7.874]	165.5 [6.516]	225 [8.858]
5	157.0 [6.181]	200 [7.874]	176.0 [6.929]	225 [8.858]
6	167.5 [6.594]	225 [8.858]	186.5 [7.343]	250 [9.843]
7	178.0 [7.008]	225 [8.858]	197.0 [7.756]	250 [9.843]
8	188.5 [7.421]	250 [9.843]	207.5 [8.169]	250 [9.843]
9	199.0 [7.835]	250 [9.843]	218.0 [8.583]	275 [10.827]
10	209.5 [8.248]	250 [9.843]	228.5 [8.996]	275 [10.827]
11	220.0 [8.661]	275 [10.827]	239.0 [9.409]	300 [11.811]
12	230.5 [9.075]	275 [10.827]	249.5 [9.823]	300 [11.811]
13	241.0 [9.488]	300 [11.811]	260.0 [10.236]	300 [11.811]
14	251.5 [9.902]	300 [11.811]	270.5 [10.650]	325 [12.795]
15	262.0 [10.315]	325 [12.795]	281.0 [11.063]	325 [12.795]
16	272.5 [10.728]	325 [12.795]	291.5 [11.476]	350 [13.780]
17	283.0 [11.142]	350 [13.780]	302.0 [11.890]	375 [14.764]
18	293.5 [11.555]	350 [13.780]	312.5 [12.303]	375 [14.764]
19	304.0 [11.969]	350 [13.780]	323.0 [12.717]	375 [14.764]
20	314.5 [12.382]	375 [14.764]	333.5 [13.130]	400 [15.748]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

F10M Number of valves SH Pilot specifications (Direct piping type)

With valve outlet port female thread block
(Integrated serial transmission block compatible manifold)

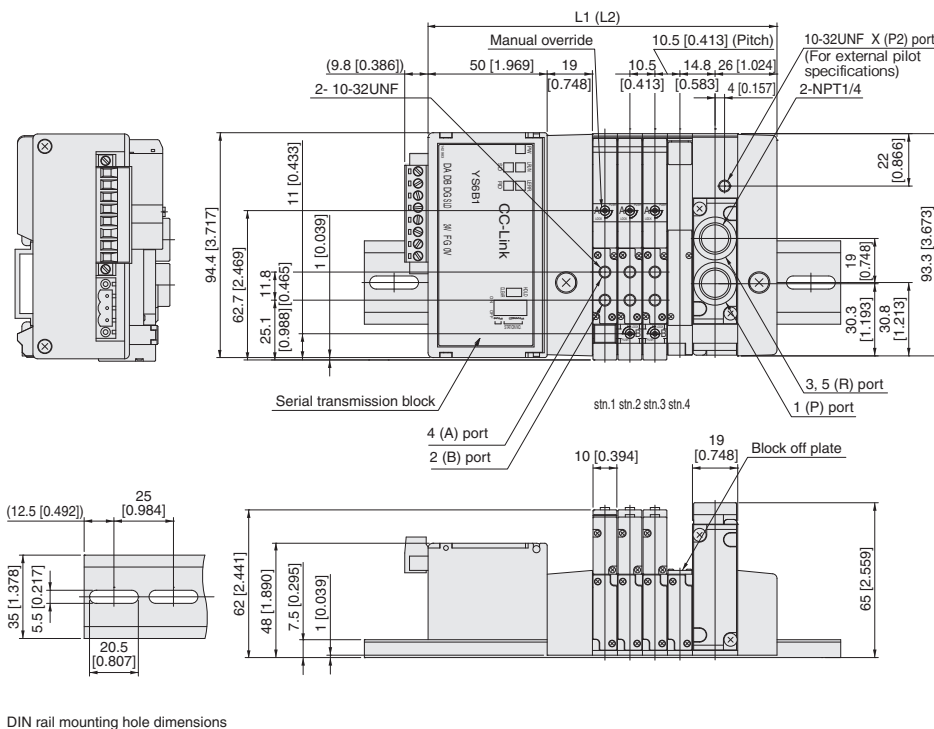

Unit dimensions


Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	125.5 [4.941]	175 [6.890]	144.5 [5.689]	200 [7.874]
3	136.0 [5.354]	200 [7.874]	155.0 [6.102]	200 [7.874]
4	146.5 [5.768]	200 [7.874]	165.5 [6.516]	225 [8.858]
5	157.0 [6.181]	200 [7.874]	176.0 [6.929]	225 [8.858]
6	167.5 [6.594]	225 [8.858]	186.5 [7.343]	250 [9.843]
7	178.0 [7.008]	225 [8.858]	197.0 [7.756]	250 [9.843]
8	188.5 [7.421]	250 [9.843]	207.5 [8.169]	250 [9.843]
9	199.0 [7.835]	250 [9.843]	218.0 [8.583]	275 [10.827]
10	209.5 [8.248]	250 [9.843]	228.5 [8.996]	275 [10.827]
11	220.0 [8.661]	275 [10.827]	239.0 [9.409]	300 [11.811]
12	230.5 [9.075]	275 [10.827]	249.5 [9.823]	300 [11.811]
13	241.0 [9.488]	300 [11.811]	260.0 [10.236]	300 [11.811]
14	251.5 [9.902]	300 [11.811]	270.5 [10.650]	325 [12.795]
15	262.0 [10.315]	325 [12.795]	281.0 [11.063]	325 [12.795]
16	272.5 [10.728]	325 [12.795]	291.5 [11.476]	350 [13.780]
17	283.0 [11.142]	350 [13.780]	302.0 [11.890]	375 [14.764]
18	293.5 [11.555]	350 [13.780]	312.5 [12.303]	375 [14.764]
19	304.0 [11.969]	350 [13.780]	323.0 [12.717]	375 [14.764]
20	314.5 [12.382]	375 [14.764]	333.5 [13.130]	400 [15.748]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

Dimensions of F10 series split manifold serial transmission type mm [in]

F10M Number of valves **SM^J** Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
 (EtherCAT/EtherNet/IP) *The figure shows EtherCAT.

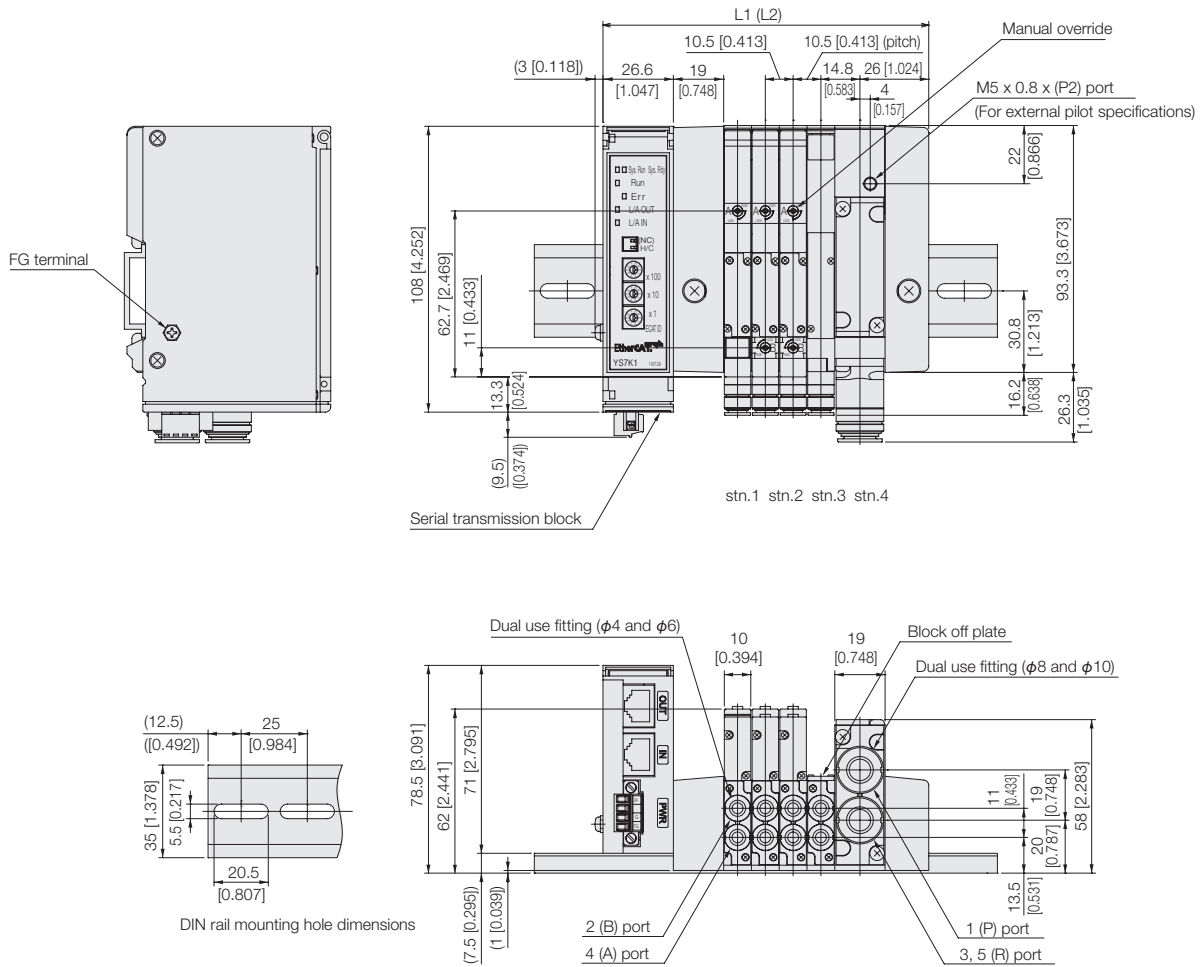

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	102.1 [4.020]	150 [5.906]	121.1 [4.768]	175 [6.890]
3	112.6 [4.433]	175 [6.890]	131.6 [5.181]	175 [6.890]
4	123.1 [4.846]	175 [6.890]	142.1 [5.594]	200 [7.874]
5	133.6 [5.260]	175 [6.890]	152.6 [6.008]	200 [7.874]
6	144.1 [5.673]	200 [7.874]	163.1 [6.421]	225 [8.858]
7	154.6 [6.087]	200 [7.874]	173.6 [6.835]	225 [8.858]
8	165.1 [6.500]	225 [8.858]	184.1 [7.248]	225 [8.858]
9	175.6 [6.913]	225 [8.858]	194.6 [7.661]	250 [9.843]
10	186.1 [7.327]	225 [8.858]	205.1 [8.075]	250 [9.843]
11	196.6 [7.740]	250 [9.843]	215.6 [8.488]	275 [10.827]
12	207.1 [8.154]	250 [9.843]	226.1 [8.902]	275 [10.827]
13	217.6 [8.567]	275 [10.827]	236.6 [9.315]	275 [10.827]
14	228.1 [8.980]	275 [10.827]	247.1 [9.728]	300 [11.811]
15	238.6 [9.394]	300 [11.811]	257.6 [10.142]	300 [11.811]
16	249.1 [9.807]	300 [11.811]	268.1 [10.555]	325 [12.795]
17	259.6 [10.220]	325 [12.795]	278.6 [10.969]	350 [13.780]
18	270.1 [10.633]	325 [12.795]	289.1 [11.382]	350 [13.780]
19	280.6 [11.047]	325 [12.795]	299.6 [11.795]	350 [13.780]
20	291.1 [11.461]	350 [13.780]	310.1 [12.209]	375 [14.764]


Note: When two piping blocks are used.
 * For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

Dimensions of F10 series split manifold serial transmission type mm [in]

F10M Number of valves S M L Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block

(Stand alone serial transmission block compatible manifold)


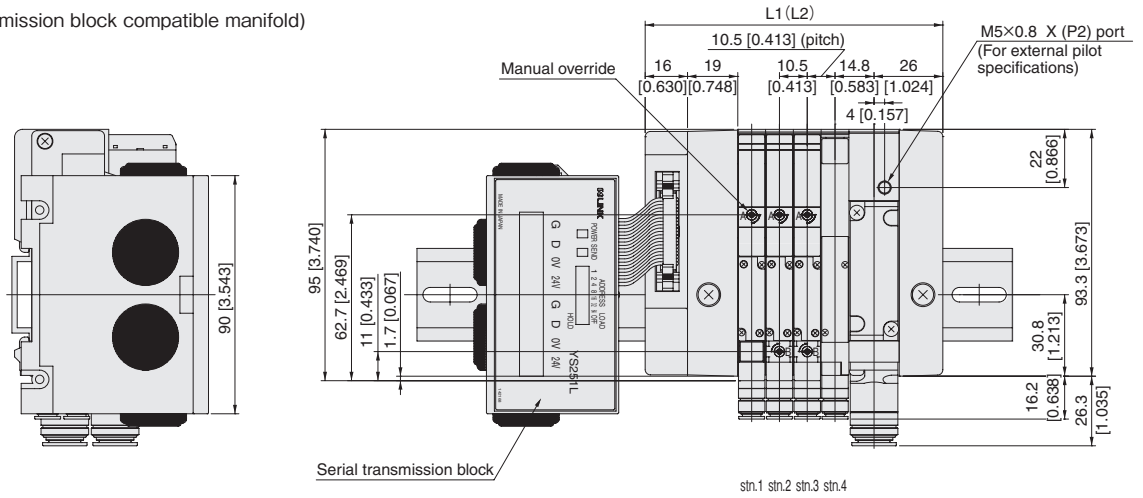


Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	91.5 [3.602]	200 [7.874]	110.5 [4.350]	200 [7.874]
3	102.0 [4.016]	200 [7.874]	121.0 [4.764]	225 [8.858]
4	112.5 [4.429]	225 [8.858]	131.5 [5.177]	225 [8.858]
5	123.0 [4.843]	225 [8.858]	142.0 [5.591]	250 [9.843]
6	133.5 [5.256]	225 [8.858]	152.5 [6.004]	250 [9.843]
7	144.0 [5.669]	250 [9.843]	163.0 [6.417]	275 [10.827]
8	154.5 [6.083]	250 [9.843]	173.5 [6.831]	275 [10.827]
9	165.0 [6.496]	275 [10.827]	184.0 [7.244]	275 [10.827]
10	175.5 [6.909]	275 [10.827]	194.5 [7.657]	300 [11.811]
11	186.0 [7.323]	300 [11.811]	205.0 [8.071]	300 [11.811]
12	196.5 [7.736]	300 [11.811]	215.5 [8.484]	325 [12.795]
13	207.0 [8.150]	300 [11.811]	226.0 [8.898]	325 [12.795]
14	217.5 [8.563]	325 [12.795]	236.5 [9.311]	350 [13.780]
15	228.0 [8.976]	325 [12.795]	247.0 [9.724]	350 [13.780]
16	238.5 [9.390]	350 [13.780]	257.5 [10.138]	350 [13.780]

Note: When two piping blocks are used.



* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

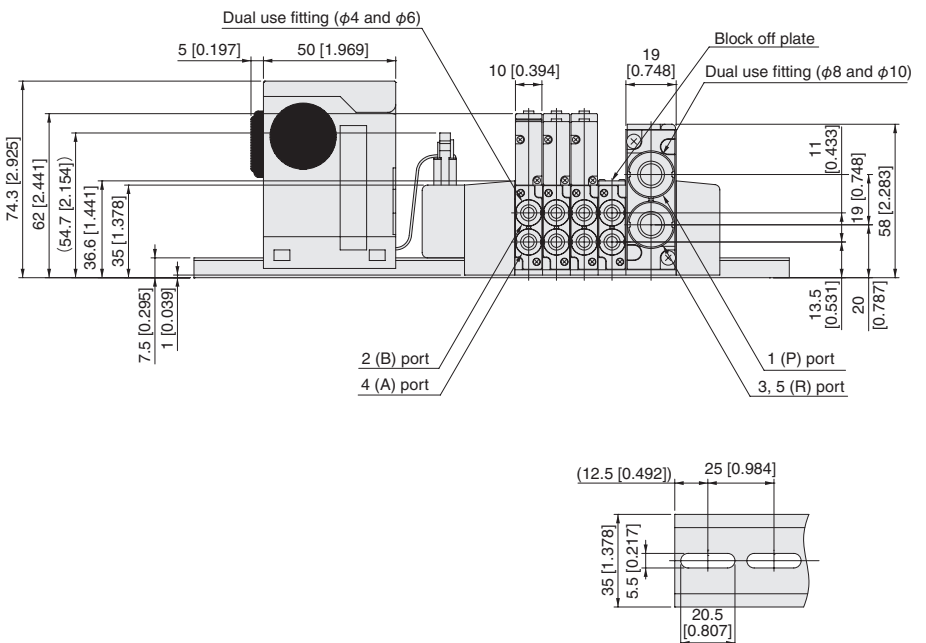

DIN rail mounting hole dimensions

Additional Parts (available separately)



- Muffler: KM-J10 for both plug-in and non-plug-in

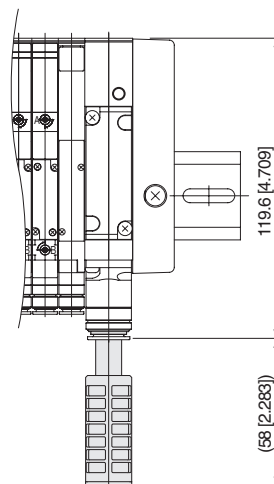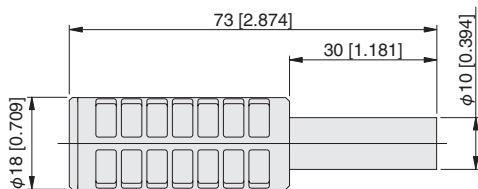

Dimensions of F10 series serial transmission compatible manifold mm [in]

F10M Number of valves SHL Pilot specifications (Base piping type)


With manifold outlet port female thread block
(Stand alone serial transmission block compatible manifold)

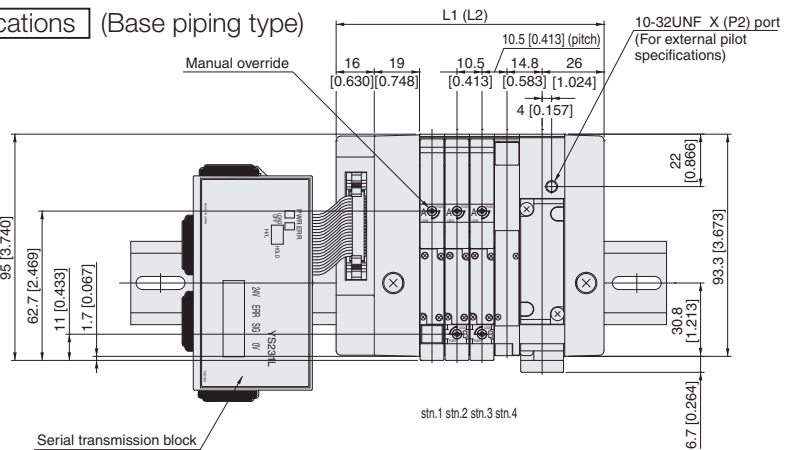

Unit dimensions



Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	91.5 [3.602]	200 [7.874]	110.5 [4.350]	200 [7.874]
3	102.0 [4.016]	200 [7.874]	121.0 [4.764]	225 [8.858]
4	112.5 [4.429]	225 [8.858]	131.5 [5.177]	225 [8.858]
5	123.0 [4.843]	225 [8.858]	142.0 [5.591]	250 [9.843]
6	133.5 [5.256]	225 [8.858]	152.5 [6.004]	250 [9.843]
7	144.0 [5.669]	250 [9.843]	163.0 [6.417]	275 [10.827]
8	154.5 [6.083]	250 [9.843]	173.5 [6.831]	275 [10.827]
9	165.0 [6.496]	275 [10.827]	184.0 [7.244]	275 [10.827]
10	175.5 [6.909]	275 [10.827]	194.5 [7.657]	300 [11.811]
11	186.0 [7.323]	300 [11.811]	205.0 [8.071]	300 [11.811]
12	196.5 [7.736]	300 [11.811]	215.5 [8.484]	325 [12.795]
13	207.0 [8.150]	300 [11.811]	226.0 [8.898]	325 [12.795]
14	217.5 [8.563]	325 [12.795]	236.5 [9.311]	350 [13.780]
15	228.0 [8.976]	325 [12.795]	247.0 [9.724]	350 [13.780]
16	238.5 [9.390]	350 [13.780]	257.5 [10.138]	350 [13.780]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

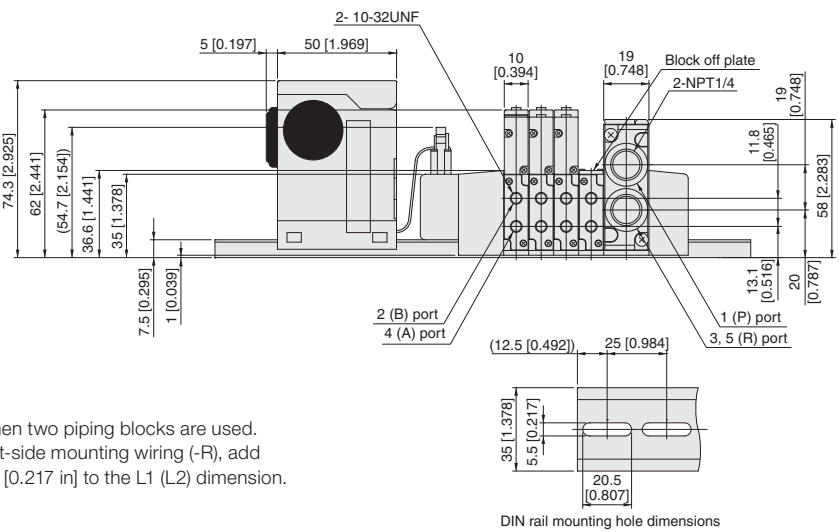

F10M Number of valves SH Pilot specifications (Direct piping type)


With valve outlet port female thread block
(Stand alone serial transmission block compatible manifold)

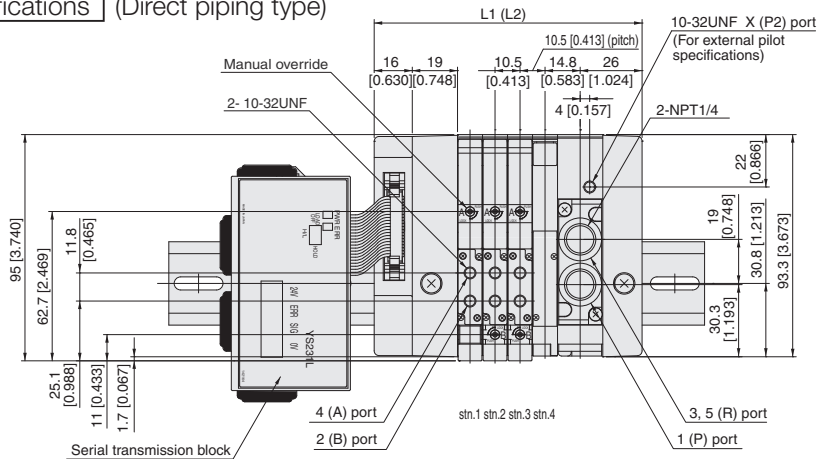

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	91.5 [3.602]	200 [7.874]	110.5 [4.350]	200 [7.874]
3	102.0 [4.016]	200 [7.874]	121.0 [4.764]	225 [8.858]
4	112.5 [4.429]	225 [8.858]	131.5 [5.177]	225 [8.858]
5	123.0 [4.843]	225 [8.858]	142.0 [5.591]	250 [9.843]
6	133.5 [5.256]	225 [8.858]	152.5 [6.004]	250 [9.843]
7	144.0 [5.669]	250 [9.843]	163.0 [6.417]	275 [10.827]
8	154.5 [6.083]	250 [9.843]	173.5 [6.831]	275 [10.827]
9	165.0 [6.496]	275 [10.827]	184.0 [7.244]	275 [10.827]
10	175.5 [6.909]	275 [10.827]	194.5 [7.657]	300 [11.811]
11	186.0 [7.323]	300 [11.811]	205.0 [8.071]	300 [11.811]
12	196.5 [7.736]	300 [11.811]	215.5 [8.484]	325 [12.795]
13	207.0 [8.150]	300 [11.811]	226.0 [8.898]	325 [12.795]
14	217.5 [8.563]	325 [12.795]	236.5 [9.311]	350 [13.780]
15	228.0 [8.976]	325 [12.795]	247.0 [9.724]	350 [13.780]
16	238.5 [9.390]	350 [13.780]	257.5 [10.138]	350 [13.780]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

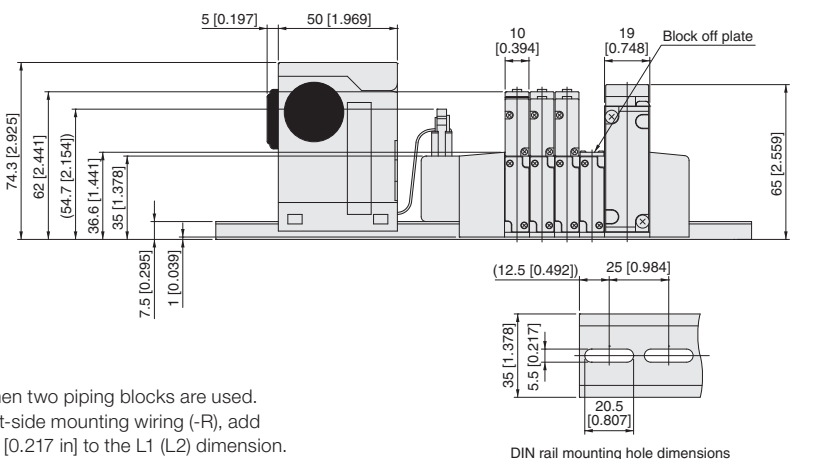


F10 DIMENSIONS

Dimensions of F10 series serial transmission compatible manifold mm [in]

F10M Number of valves SHL Pilot specifications (Base piping type)

With manifold outlet port female thread block
(Ether CAT)

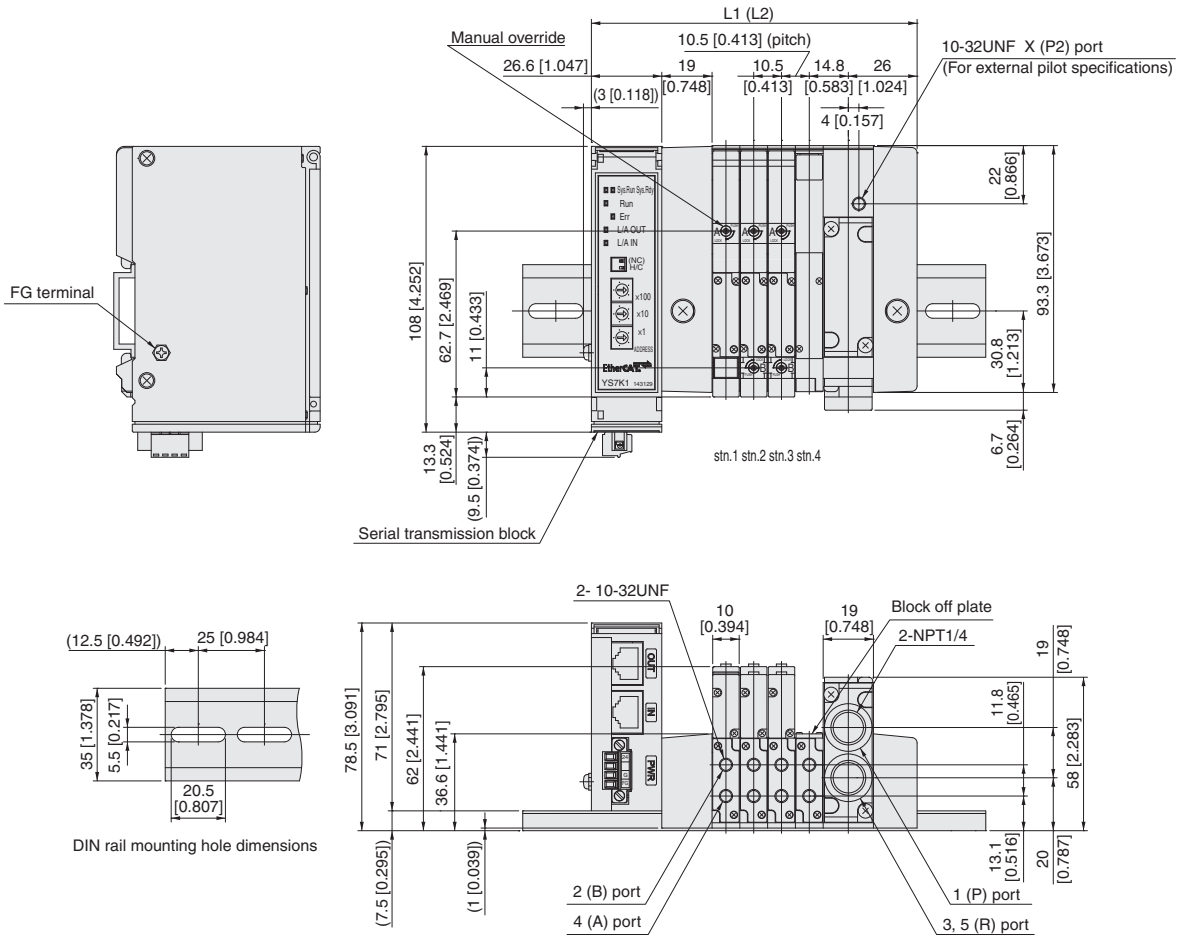

Unit dimensions


Number of units	L1	Length of DIN rail	L2 _{Note}	Length of DIN rail _{Note}
2	120.1 [4.728]	150 [5.906]	121.1 [4.768]	175 [6.890]
3	112.6 [4.433]	175 [6.890]	131.6 [5.181]	175 [6.890]
4	123.1 [4.846]	175 [6.890]	142.1 [5.594]	200 [7.874]
5	133.6 [5.260]	175 [6.890]	152.6 [6.008]	200 [7.874]
6	144.1 [5.673]	200 [7.874]	163.1 [6.421]	225 [8.858]
7	154.6 [6.087]	200 [7.874]	173.6 [6.835]	225 [8.858]
8	165.1 [6.500]	225 [8.858]	184.1 [7.248]	225 [8.858]
9	175.6 [6.913]	225 [8.858]	194.6 [7.661]	250 [9.843]
10	186.1 [7.327]	225 [8.858]	205.1 [8.075]	250 [9.843]
11	196.6 [7.740]	250 [9.843]	215.6 [8.488]	275 [10.827]
12	207.1 [8.154]	250 [9.843]	226.1 [8.902]	275 [10.827]
13	217.6 [8.567]	275 [10.827]	236.6 [9.315]	275 [10.827]
14	228.1 [8.980]	275 [10.827]	247.1 [9.728]	300 [11.811]
15	238.6 [9.394]	300 [11.811]	257.6 [10.142]	300 [11.811]
16	249.1 [9.807]	300 [11.811]	268.1 [10.555]	325 [12.795]
17	259.6 [10.220]	325 [12.795]	278.6 [10.969]	350 [13.780]
18	270.1 [10.634]	325 [12.795]	289.1 [11.382]	350 [13.780]
19	280.6 [11.047]	325 [12.795]	299.6 [11.795]	350 [13.780]
20	291.1 [11.461]	350 [13.780]	310.1 [12.209]	375 [14.764]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

Dimensions of F10 series serial transmission compatible manifold mm [in]

F10M Number of valves SH Pilot specifications (Direct piping type)

With valve outlet port female thread block
(Ether CAT)

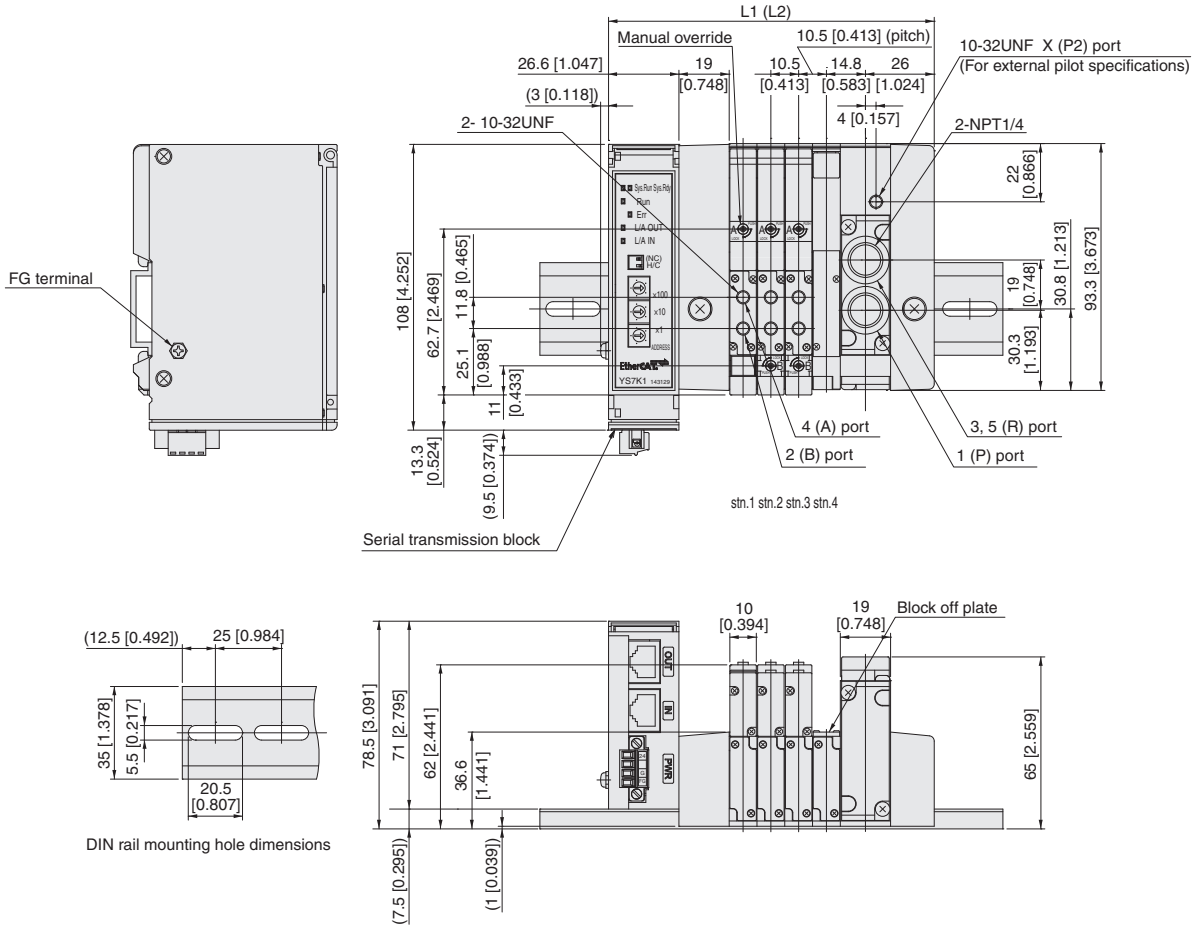

F10 DIMENSIONS

Unit dimensions


Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	120.1 [4.728]	150 [5.906]	121.1 [4.768]	175 [6.890]
3	112.6 [4.433]	175 [6.890]	131.6 [5.181]	175 [6.890]
4	123.1 [4.846]	175 [6.890]	142.1 [5.594]	200 [7.874]
5	133.6 [5.260]	175 [6.890]	152.6 [6.008]	200 [7.874]
6	144.1 [5.673]	200 [7.874]	163.1 [6.421]	225 [8.858]
7	154.6 [6.087]	200 [7.874]	173.6 [6.835]	225 [8.858]
8	165.1 [6.500]	225 [8.858]	184.1 [7.248]	225 [8.858]
9	175.6 [6.913]	225 [8.858]	194.6 [7.661]	250 [9.843]
10	186.1 [7.327]	225 [8.858]	205.1 [8.075]	250 [9.843]
11	196.6 [7.740]	250 [9.843]	215.6 [8.488]	275 [10.827]
12	207.1 [8.154]	250 [9.843]	226.1 [8.902]	275 [10.827]
13	217.6 [8.567]	275 [10.827]	236.6 [9.315]	275 [10.827]
14	228.1 [8.980]	275 [10.827]	247.1 [9.728]	300 [11.811]
15	238.6 [9.394]	300 [11.811]	257.6 [10.142]	300 [11.811]
16	249.1 [9.807]	300 [11.811]	268.1 [10.555]	325 [12.795]
17	259.6 [10.220]	325 [12.795]	278.6 [10.969]	350 [13.780]
18	270.1 [10.634]	325 [12.795]	289.1 [11.382]	350 [13.780]
19	280.6 [11.047]	325 [12.795]	299.6 [11.795]	350 [13.780]
20	291.1 [11.461]	350 [13.780]	310.1 [12.209]	375 [14.764]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 5.5 mm [0.217 in] to the L1 (L2) dimension.

Dimensions of F10 series easy assembly type manifold non-plug-in type mm [in]

F10M Number of units **XN^JM** Pilot specifications - Piping block specification (Base piping type)

With manifold outlet port dual use fitting block
S type plug connector

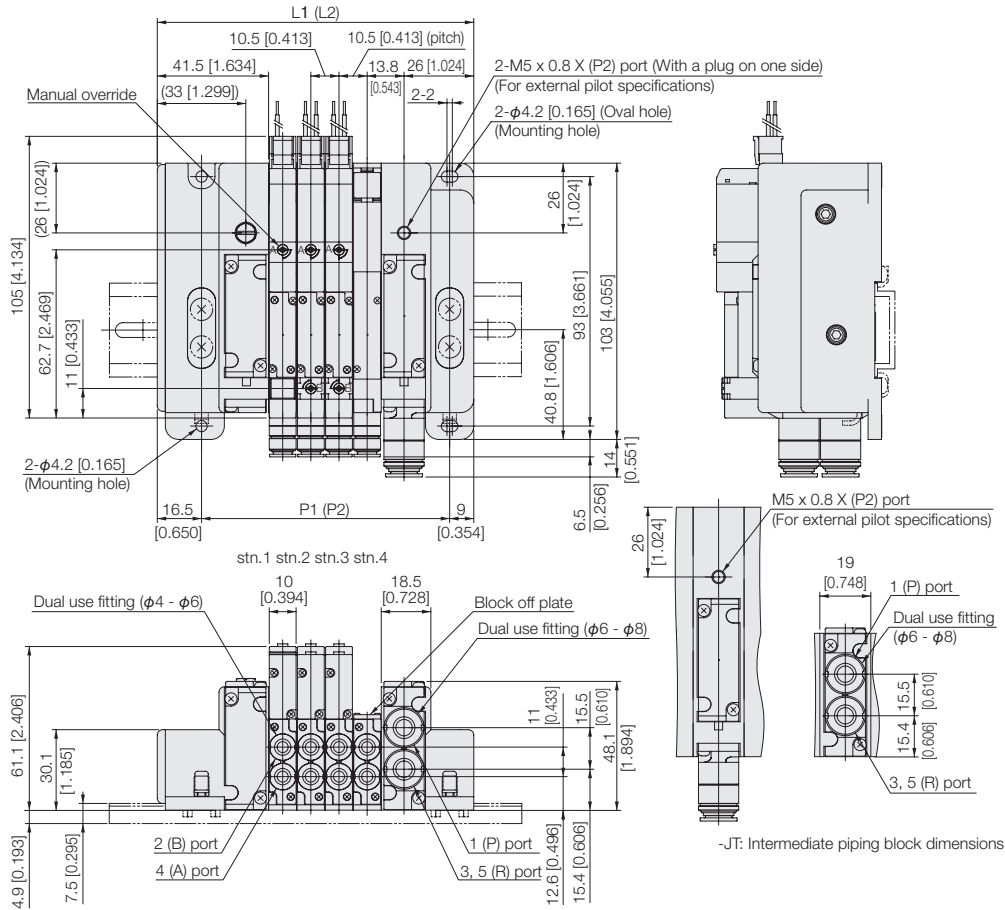

Unit dimensions


Number of units	L1	P1	Length of DIN rail	L2 <small>Note</small>	P2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	97.0 [3.819]	71.5 [2.815]	150 [5.906]	-	-	-
3	107.5 [4.232]	82.0 [3.228]	150 [5.906]	126.5 [4.980]	101.0 [3.976]	175 [6.890]
4	118.0 [4.646]	92.5 [3.642]	175 [6.890]	137.0 [5.394]	111.5 [4.390]	175 [6.890]
5	128.5 [5.059]	103.0 [4.055]	175 [6.890]	147.5 [5.807]	122.0 [4.803]	175 [6.890]
6	139.0 [5.472]	113.5 [4.469]	175 [6.890]	158.0 [6.220]	132.5 [5.217]	200 [7.874]
7	149.5 [5.886]	124.0 [4.882]	200 [7.874]	168.5 [6.634]	143.0 [5.630]	200 [7.874]
8	160.0 [6.299]	134.5 [5.295]	200 [7.874]	179.0 [7.047]	153.5 [6.043]	225 [8.858]
9	170.5 [6.713]	145.0 [5.709]	225 [8.858]	189.5 [7.461]	164.0 [6.457]	225 [8.858]
10	181.0 [7.126]	155.5 [6.122]	225 [8.858]	200.0 [7.874]	174.5 [6.870]	225 [8.858]
11	191.5 [7.539]	166.0 [6.535]	250 [9.843]	210.5 [8.287]	185.0 [7.283]	250 [9.843]
12	202.0 [7.953]	176.5 [6.949]	250 [9.843]	221.0 [8.701]	195.5 [7.697]	250 [9.843]
13	212.5 [8.366]	187.0 [7.362]	250 [9.843]	231.5 [9.114]	206.0 [8.110]	275 [10.827]
14	223.0 [8.780]	197.5 [7.776]	275 [10.827]	242.0 [9.528]	216.5 [8.524]	275 [10.827]
15	233.5 [9.193]	208.0 [8.189]	275 [10.827]	252.5 [9.941]	227.0 [8.937]	300 [11.811]
16	244.0 [9.606]	218.5 [8.602]	300 [11.811]	263.0 [10.354]	237.5 [9.350]	300 [11.811]
17	254.5 [10.020]	229.0 [9.016]	300 [11.811]	273.5 [10.768]	248.0 [9.764]	300 [11.811]
18	265.0 [10.433]	239.5 [9.429]	325 [12.795]	284.0 [11.181]	258.5 [10.177]	325 [12.795]
19	275.5 [10.846]	250.0 [9.843]	325 [12.795]	294.5 [11.594]	269.0 [10.591]	325 [12.795]
20	286.0 [11.260]	260.5 [10.256]	325 [12.795]	305.0 [12.008]	279.5 [11.004]	350 [13.780]
21	-	-	-	315.5 [12.421]	290.0 [11.417]	350 [13.780]

Note: When the J□T or MT piping block specification is selected.

Dimensions of F10 series easy assembly type manifold non-plug-in type mm [in]

F10M [Number of units] **XN** [Pilot specifications] - [Piping block specification] (Direct piping type)

With manifold outlet port dual use fitting block
S type plug connector

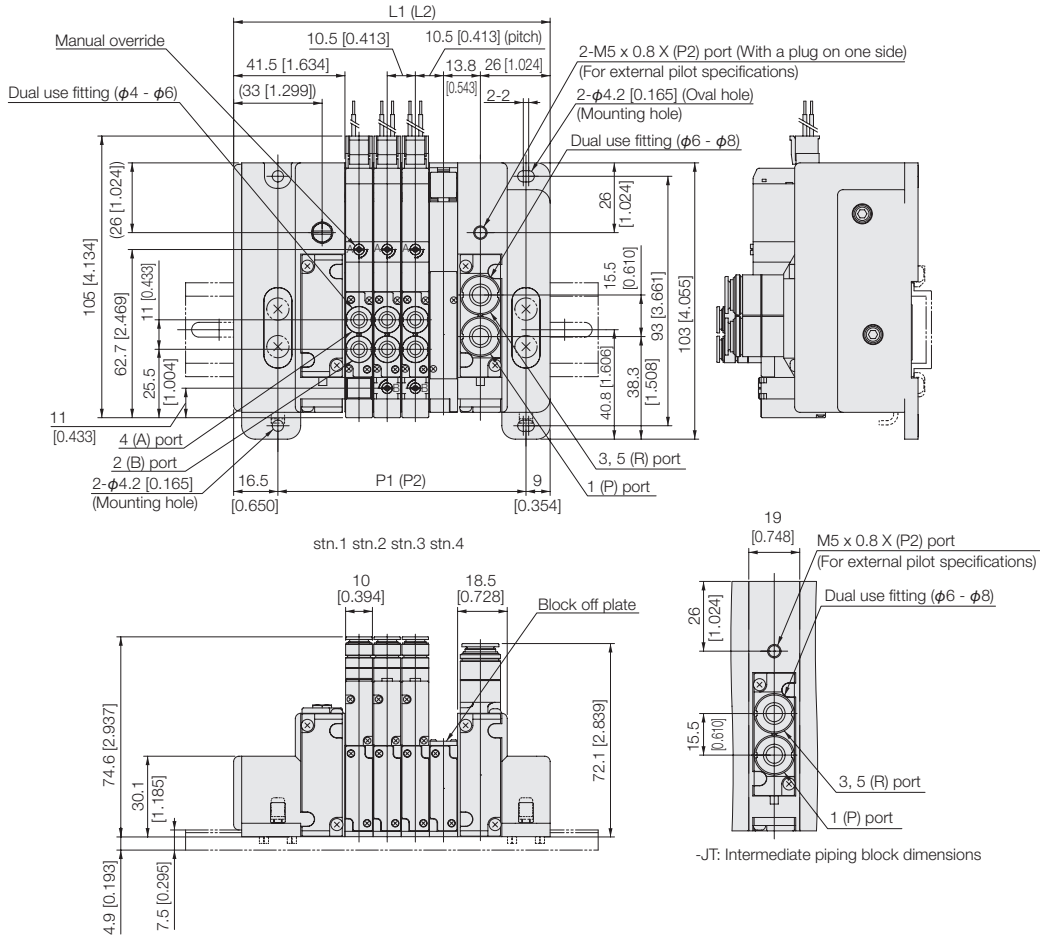

Unit dimensions

Number of units	L1	P1	Length of DIN rail	L2 Note	P2 Note	Length of DIN rail Note
2	97.0 [3.819]	71.5 [2.815]	150 [5.906]	-	-	-
3	107.5 [4.232]	82.0 [3.228]	150 [5.906]	126.5 [4.980]	101.0 [3.976]	175 [6.890]
4	118.0 [4.646]	92.5 [3.642]	175 [6.890]	137.0 [5.394]	111.5 [4.390]	175 [6.890]
5	128.5 [5.059]	103.0 [4.055]	175 [6.890]	147.5 [5.807]	122.0 [4.803]	175 [6.890]
6	139.0 [5.472]	113.5 [4.469]	175 [6.890]	158.0 [6.220]	132.5 [5.217]	200 [7.874]
7	149.5 [5.886]	124.0 [4.882]	200 [7.874]	168.5 [6.634]	143.0 [5.630]	200 [7.874]
8	160.0 [6.299]	134.5 [5.295]	200 [7.874]	179.0 [7.047]	153.5 [6.043]	225 [8.858]
9	170.5 [6.713]	145.0 [5.709]	225 [8.858]	189.5 [7.461]	164.0 [6.457]	225 [8.858]
10	181.0 [7.126]	155.5 [6.122]	225 [8.858]	200.0 [7.874]	174.5 [6.870]	225 [8.858]
11	191.5 [7.539]	166.0 [6.535]	250 [9.843]	210.5 [8.287]	185.0 [7.283]	250 [9.843]
12	202.0 [7.953]	176.5 [6.949]	250 [9.843]	221.0 [8.701]	195.5 [7.697]	250 [9.843]
13	212.5 [8.366]	187.0 [7.362]	250 [9.843]	231.5 [9.114]	206.0 [8.110]	275 [10.827]
14	223.0 [8.780]	197.5 [7.776]	275 [10.827]	242.0 [9.528]	216.5 [8.524]	275 [10.827]
15	233.5 [9.193]	208.0 [8.189]	275 [10.827]	252.5 [9.941]	227.0 [8.937]	300 [11.811]
16	244.0 [9.606]	218.5 [8.602]	300 [11.811]	263.0 [10.354]	237.5 [9.350]	300 [11.811]
17	254.5 [10.020]	229.0 [9.016]	300 [11.811]	273.5 [10.768]	248.0 [9.764]	300 [11.811]
18	265.0 [10.433]	239.5 [9.429]	325 [12.795]	284.0 [11.181]	258.5 [10.177]	325 [12.795]
19	275.5 [10.846]	250.0 [9.843]	325 [12.795]	294.5 [11.594]	269.0 [10.591]	325 [12.795]
20	286.0 [11.260]	260.5 [10.256]	325 [12.795]	305.0 [12.008]	279.5 [11.004]	350 [13.780]
21	-	-	-	315.5 [12.421]	290.0 [11.417]	350 [13.780]




Note: When the J□T or MT piping block specification is selected.

F10 DIMENSIONS

Dimensions of F10 series easy assembly type manifold plug-in type mm [in]

F10M Number of units **XP^JM** Pilot specifications (Base piping type)


With manifold outlet port dual use fitting block
Flat cable connector 10-pin specifications

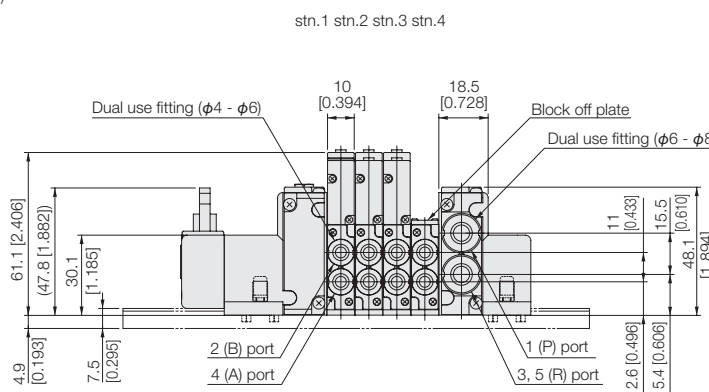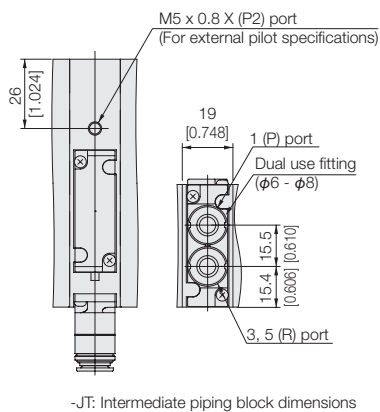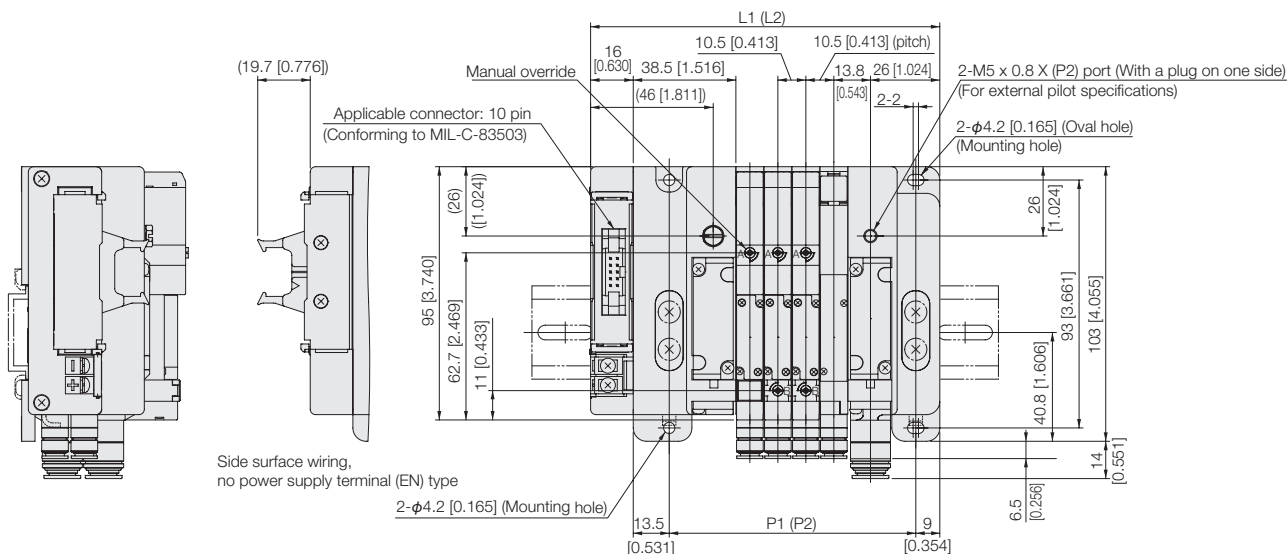

Unit dimensions

Number of units	L1	P1	Length of DIN rail	L2 ^{Note}	P2 ^{Note}	Length of DIN rail ^{Note}
2	110.0 [4.331]	71.5 [2.815]	150 [5.906]	-	-	-
3	120.5 [4.744]	82.0 [3.228]	175 [6.890]	139.5 [5.492]	101.0 [3.976]	175 [6.890]
4	131.0 [5.157]	92.5 [3.642]	175 [6.890]	150.0 [5.906]	111.5 [4.390]	175 [6.890]
5	141.5 [5.571]	103.0 [4.055]	200 [7.874]	160.5 [6.319]	122.0 [4.803]	200 [7.874]
6	152.0 [5.984]	113.5 [4.469]	200 [7.874]	171.0 [6.732]	132.5 [5.217]	200 [7.874]
7	162.5 [6.398]	124.0 [4.882]	200 [7.874]	181.5 [7.146]	143.0 [5.630]	225 [8.858]
8	173.0 [6.811]	134.5 [5.295]	225 [8.858]	192.0 [7.559]	153.5 [6.043]	225 [8.858]
9	-	-	-	202.5 [7.972]	164.0 [6.457]	250 [9.843]


Note: When the J□ or MT piping block specification is selected.

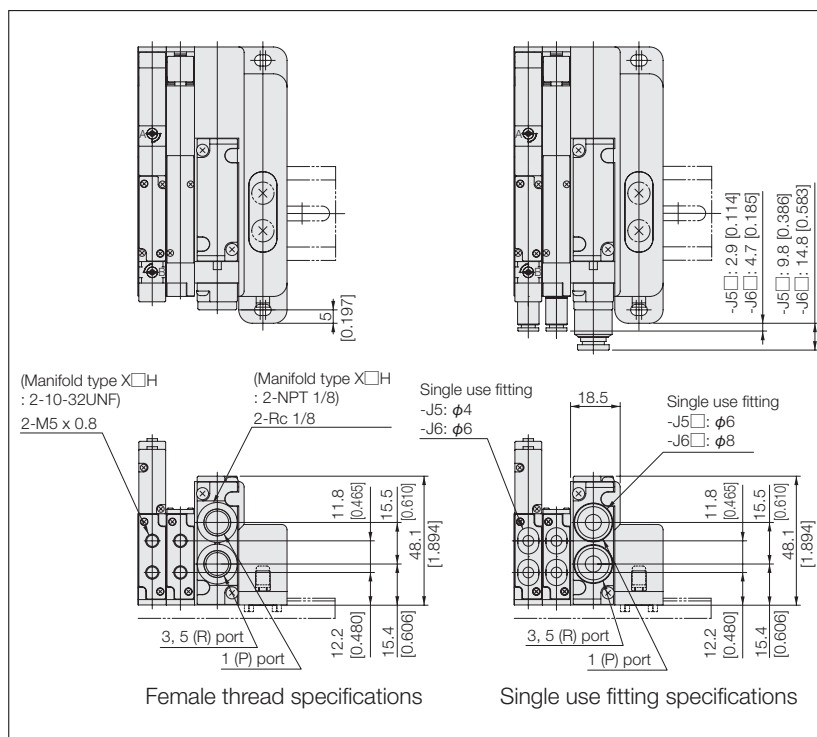

Dimensions of F10 series easy assembly type manifold plug-in type mm [in]

F10M Number of units **XP** ^J_M Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
Flat cable connector 20-pin specifications

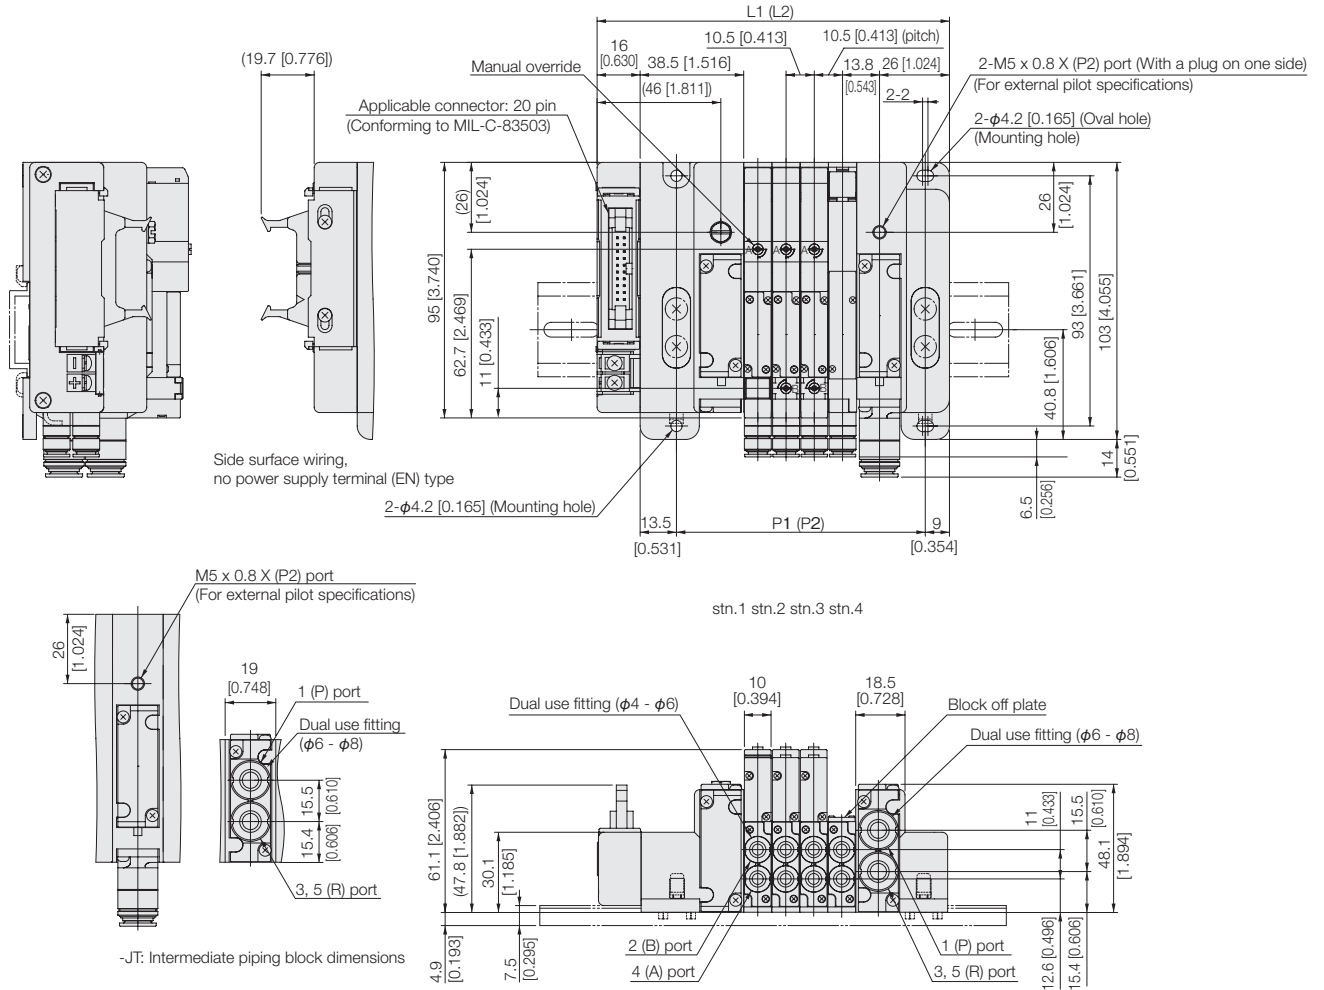

Unit dimensions


Number of units	L1	P1	Length of DIN rail	L2 Note	P2 Note	Length of DIN rail Note
2	110.0 [4.331]	71.5 [2.815]	150 [5.906]	-	-	-
3	120.5 [4.744]	82.0 [3.228]	175 [6.890]	139.5 [5.492]	101.0 [3.976]	175 [6.890]
4	131.0 [5.157]	92.5 [3.642]	175 [6.890]	150.0 [5.906]	111.5 [4.390]	175 [6.890]
5	141.5 [5.571]	103.0 [4.055]	200 [7.874]	160.5 [6.319]	122.0 [4.803]	200 [7.874]
6	152.0 [5.984]	113.5 [4.469]	200 [7.874]	171.0 [6.732]	132.5 [5.217]	200 [7.874]
7	162.5 [6.398]	124.0 [4.882]	200 [7.874]	181.5 [7.146]	143.0 [5.630]	225 [8.858]
8	173.0 [6.811]	134.5 [5.295]	225 [8.858]	192.0 [7.559]	153.5 [6.043]	225 [8.858]
9	183.5 [7.224]	145.0 [5.709]	225 [8.858]	202.5 [7.972]	164.0 [6.457]	250 [9.843]
10	194.0 [7.638]	155.5 [6.122]	250 [9.843]	213.0 [8.386]	174.5 [6.870]	250 [9.843]
11	204.5 [8.051]	166.0 [6.535]	250 [9.843]	223.5 [8.799]	185.0 [7.283]	250 [9.843]
12	215.0 [8.465]	176.5 [6.949]	275 [10.827]	234.0 [9.213]	195.5 [7.697]	275 [10.827]
13	225.5 [8.878]	187.0 [7.362]	275 [10.827]	244.5 [9.626]	206.0 [8.110]	275 [10.827]
14	236.0 [9.291]	197.5 [7.776]	275 [10.827]	255.0 [10.039]	216.5 [8.524]	300 [11.811]
15	246.5 [9.705]	208.0 [8.189]	300 [11.811]	265.5 [10.453]	227.0 [8.937]	300 [11.811]
16	257.0 [10.118]	218.5 [8.602]	300 [11.811]	276.0 [10.866]	237.5 [9.350]	325 [12.795]
17	-	-	-	286.5 [11.280]	248.0 [9.764]	325 [12.795]

Note:When the J□T or MT piping block specification is selected.

Dimensions of F10 series easy assembly type manifold plug-in type mm [in]

F10M Number of units **XP^M** Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
Flat cable connector 26-pin specifications

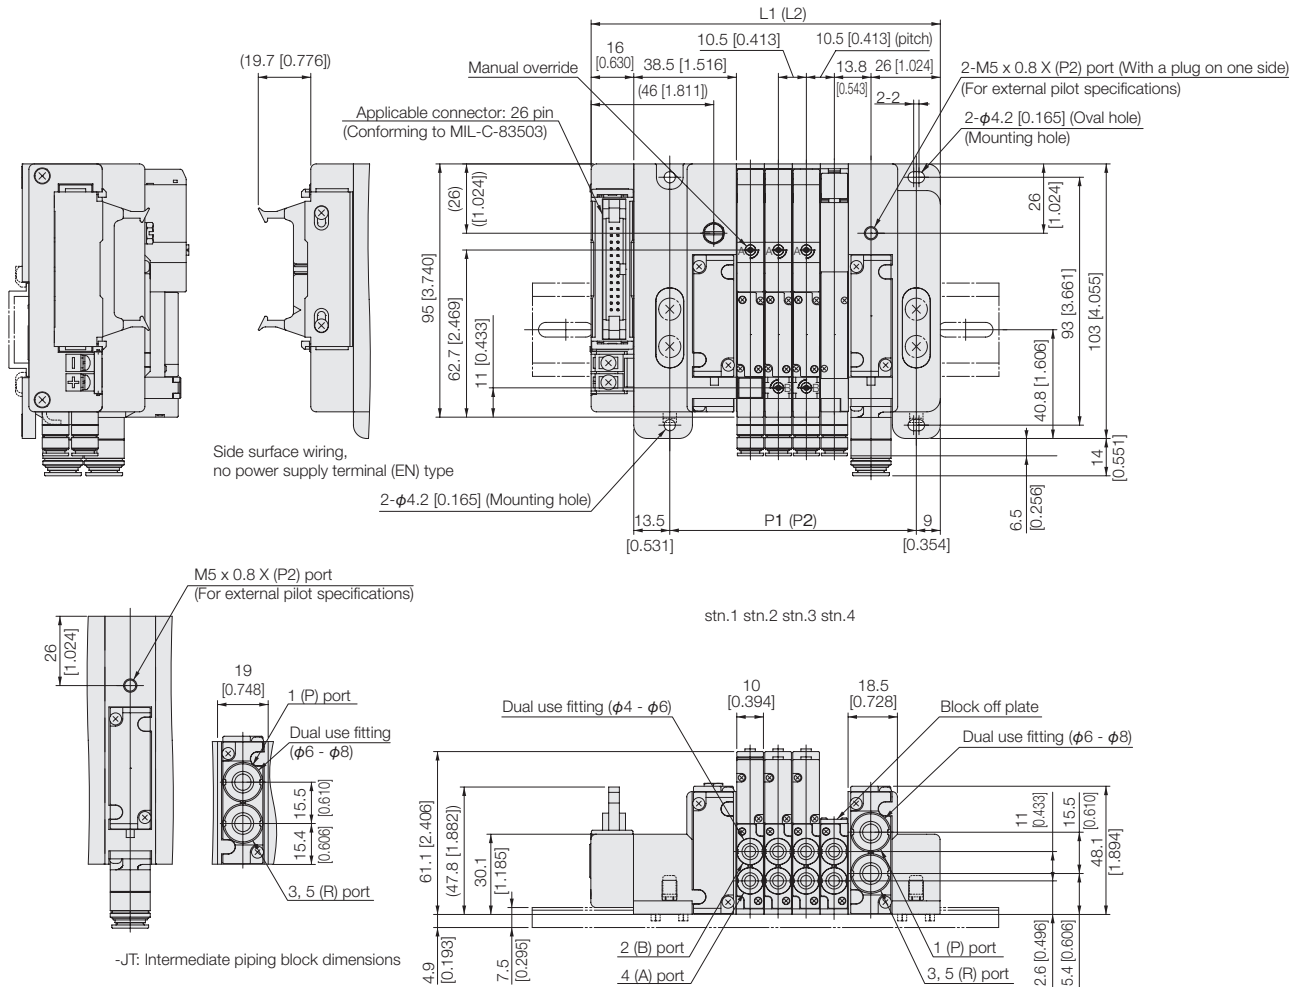

-JT: Intermediate piping block dimensions

Unit dimensions


Number of units	L1	P1	Length of DIN rail	L2 <small>Note</small>	P2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	110.0 [4.331]	71.5 [2.815]	150 [5.906]	-	-	-
3	120.5 [4.744]	82.0 [3.228]	175 [6.890]	139.5 [5.492]	101.0 [3.976]	175 [6.890]
4	131.0 [5.157]	92.5 [3.642]	175 [6.890]	150.0 [5.906]	111.5 [4.390]	175 [6.890]
5	141.5 [5.571]	103.0 [4.055]	200 [7.874]	160.5 [6.319]	122.0 [4.803]	200 [7.874]
6	152.0 [5.984]	113.5 [4.469]	200 [7.874]	171.0 [6.732]	132.5 [5.217]	200 [7.874]
7	162.5 [6.398]	124.0 [4.882]	200 [7.874]	181.5 [7.146]	143.0 [5.630]	225 [8.858]
8	173.0 [6.811]	134.5 [5.295]	225 [8.858]	192.0 [7.559]	153.5 [6.043]	225 [8.858]
9	183.5 [7.224]	145.0 [5.709]	225 [8.858]	202.5 [7.972]	164.0 [6.457]	250 [9.843]
10	194.0 [7.638]	155.5 [6.122]	250 [9.843]	213.0 [8.386]	174.5 [6.870]	250 [9.843]
11	204.5 [8.051]	166.0 [6.535]	250 [9.843]	223.5 [8.799]	185.0 [7.283]	250 [9.843]
12	215.0 [8.465]	176.5 [6.949]	275 [10.827]	234.0 [9.213]	195.5 [7.697]	275 [10.827]
13	225.5 [8.878]	187.0 [7.362]	275 [10.827]	244.5 [9.626]	206.0 [8.110]	275 [10.827]
14	236.0 [9.291]	197.5 [7.776]	275 [10.827]	255.0 [10.039]	216.5 [8.524]	300 [11.811]
15	246.5 [9.705]	208.0 [8.189]	300 [11.811]	265.5 [10.453]	227.0 [8.937]	300 [11.811]
16	257.0 [10.118]	218.5 [8.602]	300 [11.811]	276.0 [10.866]	237.5 [9.350]	325 [12.795]
17	267.5 [10.531]	229.0 [9.016]	325 [12.795]	286.5 [11.280]	248.0 [9.764]	325 [12.795]
18	278.0 [10.945]	239.5 [9.429]	325 [12.795]	297.0 [11.693]	258.5 [10.177]	325 [12.795]
19	288.5 [11.358]	250.0 [9.843]	325 [12.795]	307.5 [12.106]	269.0 [10.591]	350 [13.780]
20	299.0 [11.772]	260.5 [10.256]	350 [13.780]	318.0 [12.520]	279.5 [11.004]	350 [13.780]
21	-	-	-	328.5 [12.933]	290.0 [11.417]	375 [14.764]

Note: When the JT or MT piping block specification is selected.

Dimensions of F10 series easy assembly type manifold plug-in type mm [in]

F10M Number of units **XP^J** Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
D-sub connector 25-pin specifications

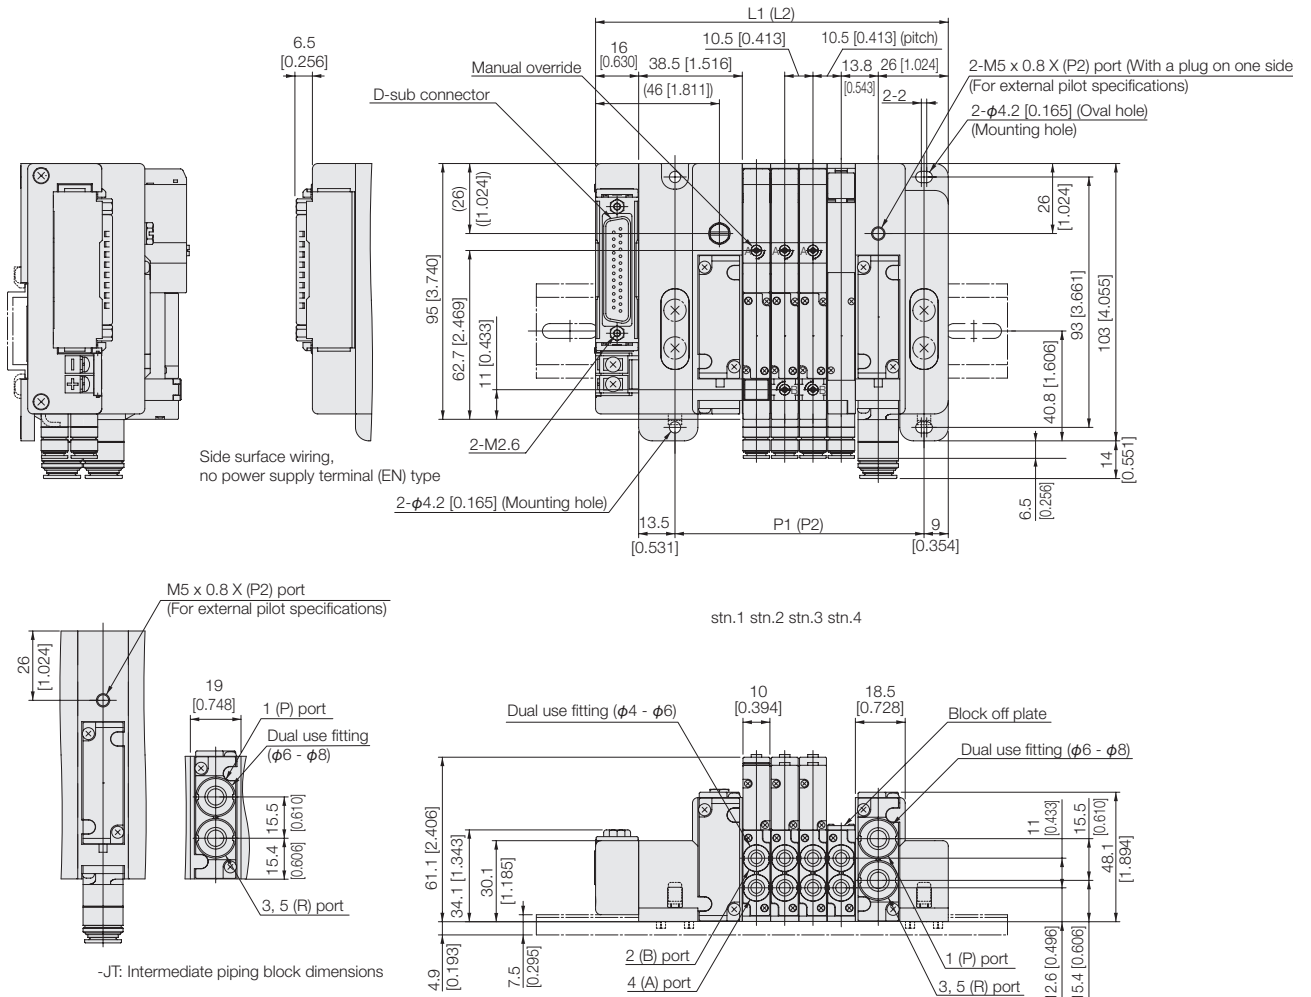

Unit dimensions


Number of units	L1	P1	Length of DIN rail	L2 Note	P2 Note	Length of DIN rail Note
2	110.0 [4.331]	71.5 [2.815]	150 [5.906]	-	-	-
3	120.5 [4.744]	82.0 [3.228]	175 [6.890]	139.5 [5.492]	101.0 [3.976]	175 [6.890]
4	131.0 [5.157]	92.5 [3.642]	175 [6.890]	150.0 [5.906]	111.5 [4.390]	175 [6.890]
5	141.5 [5.571]	103.0 [4.055]	200 [7.874]	160.5 [6.319]	122.0 [4.803]	200 [7.874]
6	152.0 [5.984]	113.5 [4.469]	200 [7.874]	171.0 [6.732]	132.5 [5.217]	200 [7.874]
7	162.5 [6.398]	124.0 [4.882]	200 [7.874]	181.5 [7.146]	143.0 [5.630]	225 [8.858]
8	173.0 [6.811]	134.5 [5.295]	225 [8.858]	192.0 [7.559]	153.5 [6.043]	225 [8.858]
9	183.5 [7.224]	145.0 [5.709]	225 [8.858]	202.5 [7.972]	164.0 [6.457]	250 [9.843]
10	194.0 [7.638]	155.5 [6.122]	250 [9.843]	213.0 [8.386]	174.5 [6.870]	250 [9.843]
11	204.5 [8.051]	166.0 [6.535]	250 [9.843]	223.5 [8.799]	185.0 [7.283]	250 [9.843]
12	215.0 [8.465]	176.5 [6.949]	275 [10.827]	234.0 [9.213]	195.5 [7.697]	275 [10.827]
13	225.5 [8.878]	187.0 [7.362]	275 [10.827]	244.5 [9.626]	206.0 [8.110]	275 [10.827]
14	236.0 [9.291]	197.5 [7.776]	275 [10.827]	255.0 [10.039]	216.5 [8.524]	300 [11.811]
15	246.5 [9.705]	208.0 [8.189]	300 [11.811]	265.5 [10.453]	227.0 [8.937]	300 [11.811]
16	257.0 [10.118]	218.5 [8.602]	300 [11.811]	276.0 [10.866]	237.5 [9.350]	325 [12.795]
17	267.5 [10.531]	229.0 [9.016]	325 [12.795]	286.5 [11.280]	248.0 [9.764]	325 [12.795]
18	278.0 [10.945]	239.5 [9.429]	325 [12.795]	297.0 [11.693]	258.5 [10.177]	325 [12.795]
19	288.5 [11.358]	250.0 [9.843]	325 [12.795]	307.5 [12.106]	269.0 [10.591]	350 [13.780]
20	299.0 [11.772]	260.5 [10.256]	350 [13.780]	318.0 [12.520]	279.5 [11.004]	350 [13.780]
21	-	-	-	328.5 [12.933]	290.0 [11.417]	375 [14.764]

Note: When the J□T or MT piping block specification is selected.

Dimensions of F10 series easy assembly type manifold plug-in type mm [in]

F10M Number of units J Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
Terminal block type

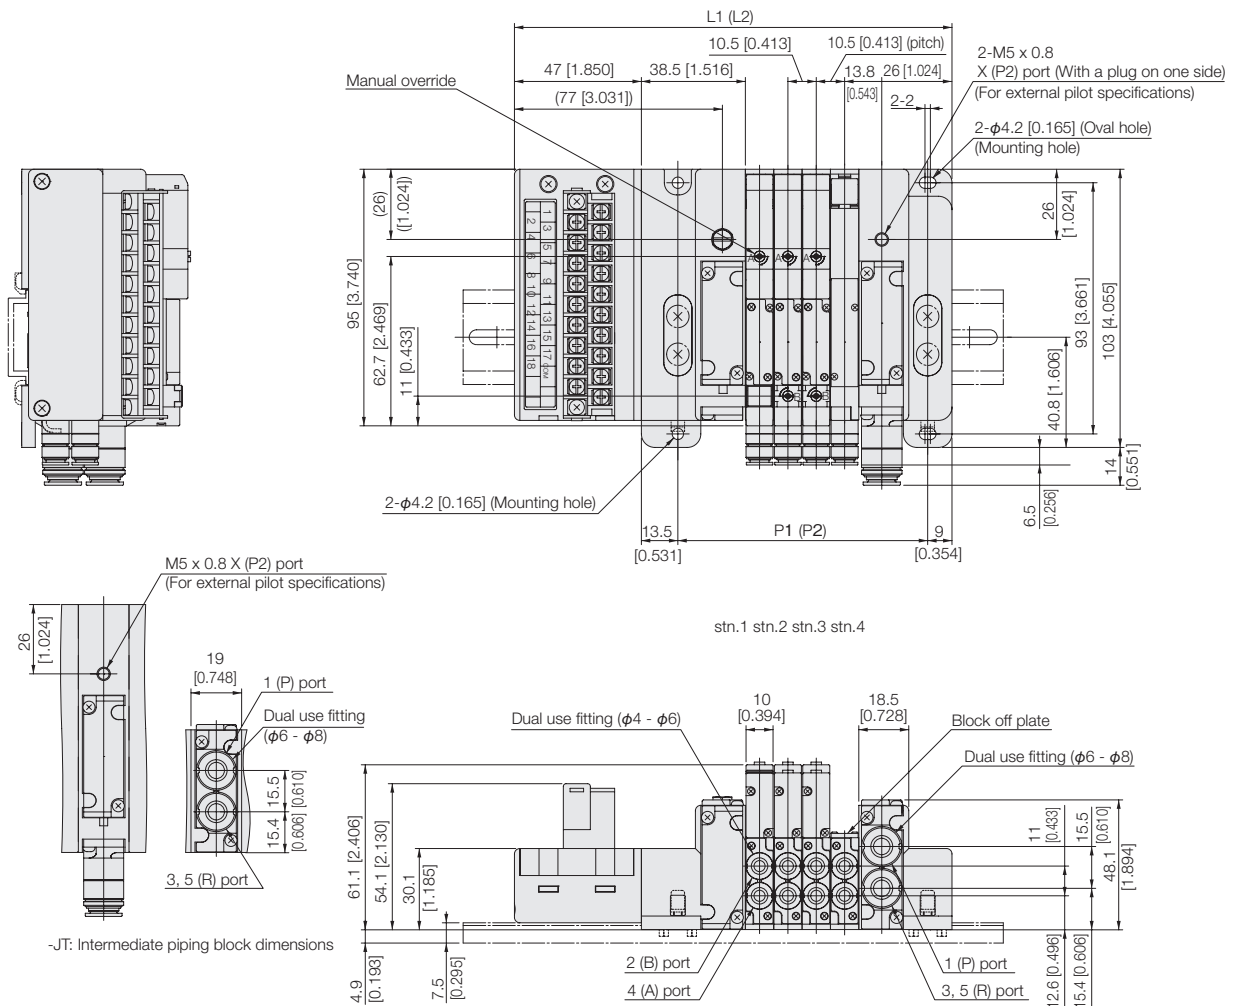

-JT: Intermediate piping block dimensions

Unit dimensions


Number of units	L1	P1	Length of DIN rail	L2 <small>Note</small>	P2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	141.0 [5.551]	71.5 [2.815]	200 [7.874]	-	-	-
3	151.5 [5.965]	82.0 [3.228]	200 [7.874]	170.5 [6.713]	101.0 [3.976]	200 [7.874]
4	162.0 [6.378]	92.5 [3.642]	200 [7.874]	181.0 [7.126]	111.5 [4.390]	225 [8.858]
5	172.5 [6.791]	103.0 [4.055]	225 [8.858]	191.5 [7.539]	122.0 [4.803]	225 [8.858]
6	183.0 [7.205]	113.5 [4.469]	225 [8.858]	202.0 [7.953]	132.5 [5.217]	250 [9.843]
7	193.5 [7.618]	124.0 [4.882]	250 [9.843]	212.5 [8.366]	143.0 [5.630]	250 [9.843]
8	204.0 [8.032]	134.5 [5.295]	250 [9.843]	223.0 [8.780]	153.5 [6.043]	250 [9.843]
9	214.5 [8.445]	145.0 [5.709]	250 [9.843]	233.5 [9.193]	164.0 [6.457]	275 [10.827]
10	225.0 [8.858]	155.5 [6.122]	275 [10.827]	244.0 [9.606]	174.5 [6.870]	275 [10.827]
11	235.5 [9.272]	166.0 [6.535]	275 [10.827]	254.5 [10.020]	185.0 [7.283]	300 [11.811]
12	246.0 [9.685]	176.5 [6.949]	300 [11.811]	265.0 [10.433]	195.5 [7.697]	300 [11.811]
13	256.5 [10.098]	187.0 [7.362]	300 [11.811]	275.5 [10.846]	206.0 [8.110]	325 [12.795]
14	267.0 [10.512]	197.5 [7.776]	325 [12.795]	286.0 [11.260]	216.5 [8.524]	325 [12.795]
15	277.5 [10.925]	208.0 [8.189]	325 [12.795]	296.5 [11.673]	227.0 [8.937]	325 [12.795]
16	288.0 [11.339]	218.5 [8.602]	325 [12.795]	307.0 [12.087]	237.5 [9.350]	350 [13.780]
17	298.5 [11.752]	229.0 [9.016]	350 [13.780]	317.5 [12.500]	248.0 [9.764]	350 [13.780]
18	309.0 [12.165]	239.5 [9.429]	350 [13.780]	328.0 [12.913]	258.5 [10.177]	375 [14.764]
19	-	-	-	338.5 [13.327]	269.0 [10.591]	375 [14.764]

Note: When the JT or MT piping block specification is selected.

Dimensions of F10 series easy assembly type manifold serial transmission type mm [in]

F10M Number of units **X^MJ** Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
 (Stand alone serial transmission block compatible manifold) *The figure shows CC-Link.

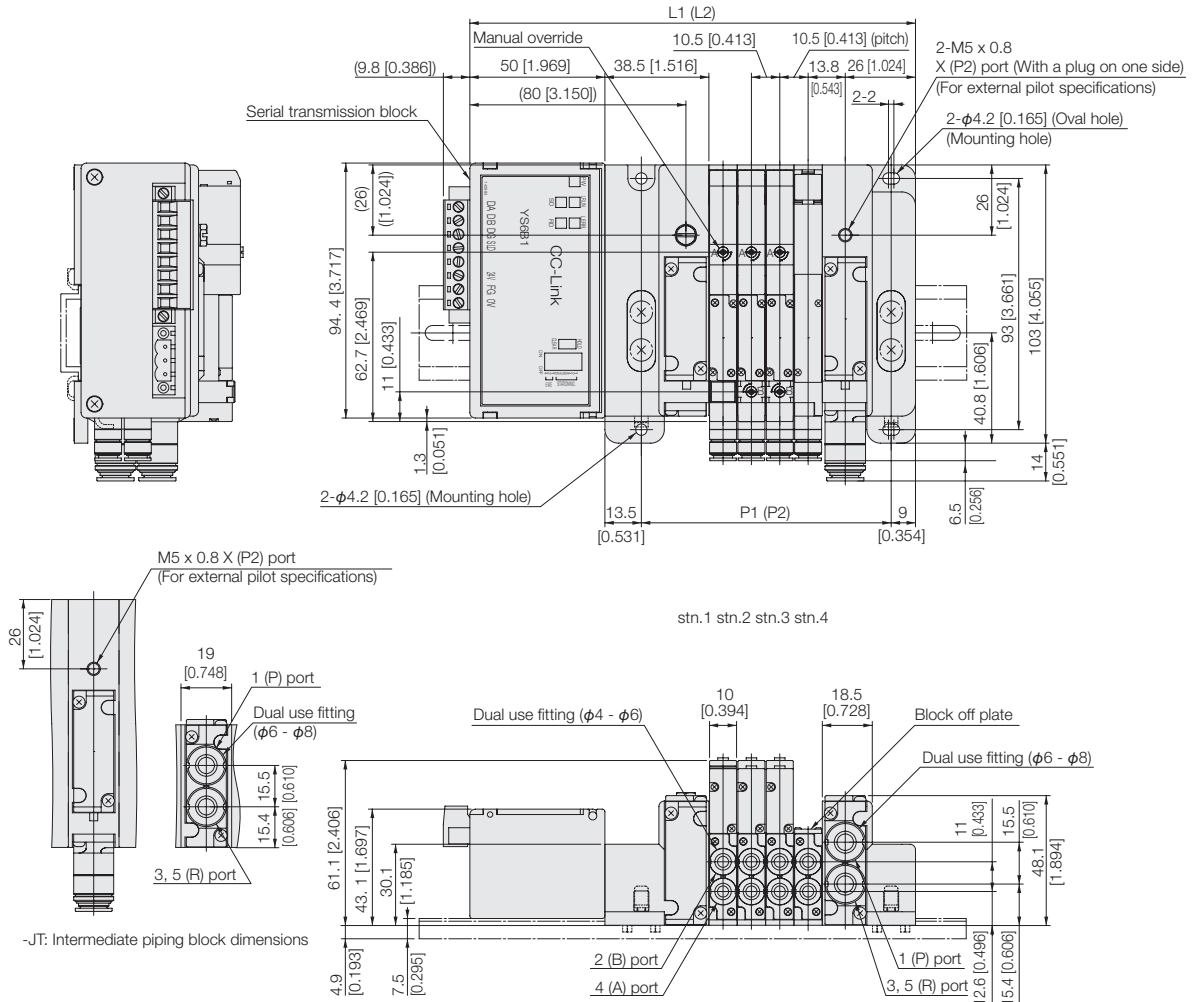

Unit dimensions


Number of units	L1	P1	Length of DIN rail	L2 <small>Note</small>	P2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	144.0 [5.669]	71.5 [2.815]	200 [7.874]	-	-	-
3	154.5 [6.083]	82.0 [3.228]	200 [7.874]	173.5 [6.831]	101.0 [3.976]	200 [7.874]
4	165.0 [6.496]	92.5 [3.642]	225 [8.858]	184.0 [7.244]	111.5 [4.390]	225 [8.858]
5	175.5 [6.909]	103.5 [4.075]	225 [8.858]	194.5 [7.657]	122.0 [4.803]	225 [8.858]
6	186.0 [7.323]	113.5 [4.469]	225 [8.858]	205.0 [8.071]	132.5 [5.217]	250 [9.843]
7	196.5 [7.736]	124.0 [4.882]	250 [9.843]	215.5 [8.484]	143.0 [5.630]	250 [9.843]
8	207.0 [8.150]	134.5 [5.295]	250 [9.843]	226.0 [8.898]	153.5 [6.043]	275 [10.827]
9	217.5 [8.563]	145.0 [5.709]	275 [10.827]	236.5 [9.311]	164.0 [6.457]	275 [10.827]
10	228.0 [8.976]	155.5 [6.122]	275 [10.827]	247.0 [9.724]	174.5 [6.870]	275 [10.827]
11	238.5 [9.390]	166.0 [6.535]	275 [10.827]	257.5 [10.138]	185.0 [7.283]	300 [11.811]
12	249.0 [9.803]	176.5 [6.949]	300 [11.811]	268.0 [10.551]	195.5 [7.697]	300 [11.811]
13	259.5 [10.217]	187.0 [7.362]	300 [11.811]	278.5 [10.965]	206.0 [8.110]	325 [12.795]
14	270.0 [10.630]	197.5 [7.776]	325 [12.795]	289.0 [11.378]	216.5 [8.524]	325 [12.795]
15	280.5 [11.043]	208.0 [8.189]	325 [12.795]	299.5 [11.791]	227.0 [8.937]	325 [12.795]
16	291.0 [11.457]	218.5 [8.602]	350 [13.780]	310.0 [12.205]	237.5 [9.350]	350 [13.780]
17	301.5 [11.870]	229.0 [9.016]	350 [13.780]	320.5 [12.618]	248.0 [9.764]	350 [13.780]
18	312.0 [12.283]	239.5 [9.429]	350 [13.780]	331.0 [13.031]	258.5 [10.177]	375 [14.764]
19	322.5 [12.697]	250.0 [9.843]	375 [14.764]	341.5 [13.445]	269.0 [10.591]	375 [14.764]
20	333.0 [13.110]	260.5 [10.256]	375 [14.764]	352.0 [13.858]	279.5 [11.004]	400 [15.748]
21	-	-	-	362.5 [14.272]	290.0 [11.417]	400 [15.748]

Note: When the J□T or MT piping block specification is selected.

Dimensions of F10 series easy assembly type manifold serial transmission type mm [in]

F10M Number of units **XS^JM** Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
(EtherCAT/EtherNet/IP) *The figure shows EtherCAT.

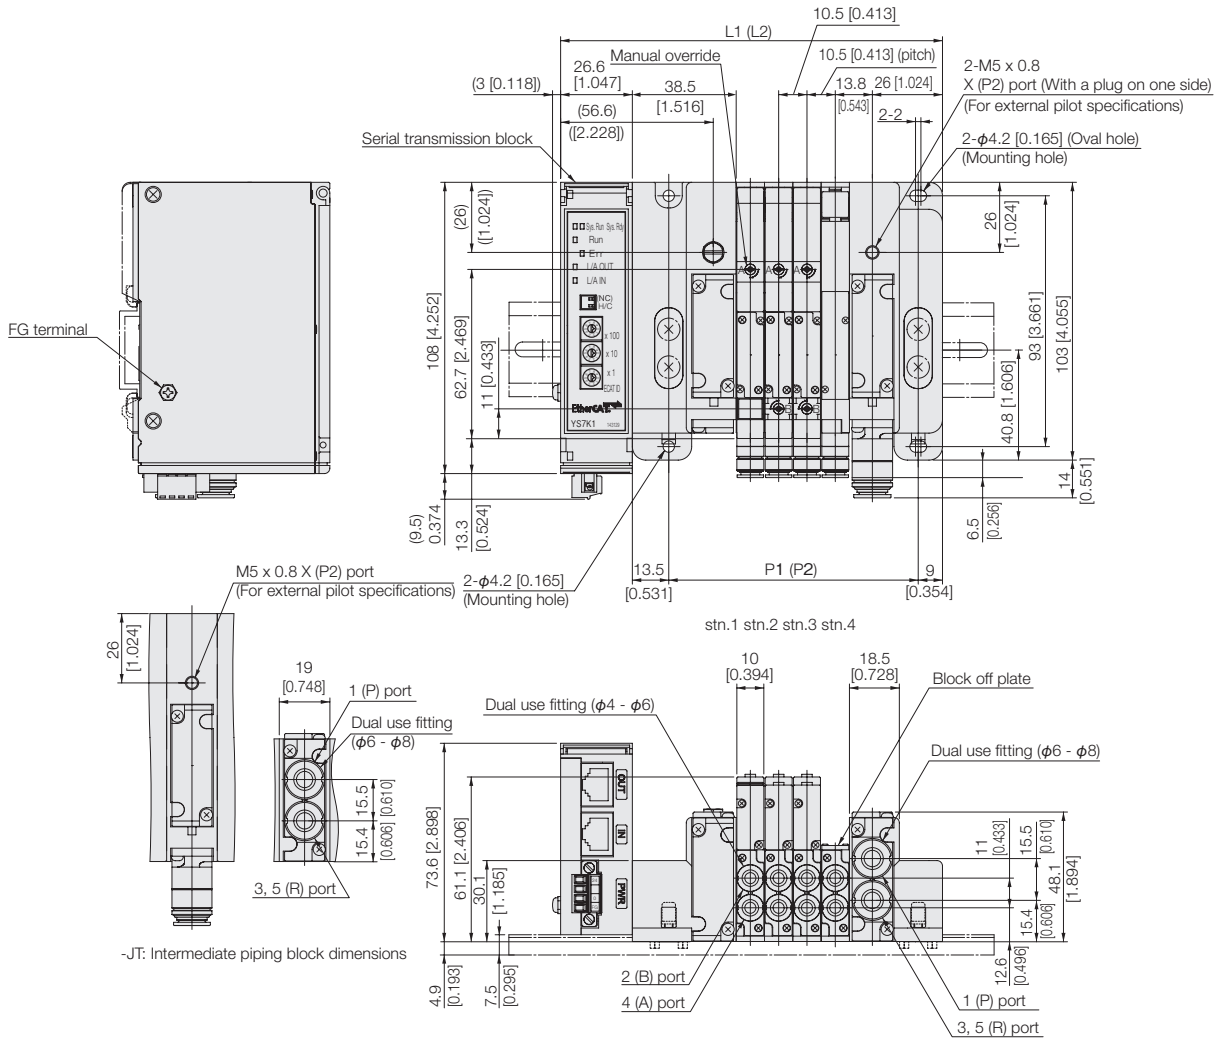


Unit dimensions

Number of units	L1	P1	Length of DIN rail	L2 <small>Note</small>	P2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	120.6 [4.748]	71.5 [2.815]	175 [6.890]	-	-	-
3	131.1 [5.161]	82.0 [3.228]	175 [6.890]	150.1 [5.909]	101.0 [3.976]	200 [7.874]
4	141.6 [5.575]	92.5 [3.642]	200 [7.874]	160.6 [6.323]	111.5 [4.390]	200 [7.874]
5	152.1 [5.988]	103.0 [4.055]	200 [7.874]	171.1 [6.736]	122.0 [4.803]	200 [7.874]
6	162.6 [6.402]	113.5 [4.469]	200 [7.874]	181.6 [7.150]	132.5 [5.217]	225 [8.858]
7	173.1 [6.815]	124.0 [4.882]	225 [8.858]	192.1 [7.563]	143.0 [5.630]	225 [8.858]
8	183.6 [7.228]	134.5 [5.295]	225 [8.858]	202.6 [7.976]	153.5 [6.043]	250 [9.843]
9	194.1 [7.642]	145.0 [5.709]	250 [9.843]	213.1 [8.390]	164.0 [6.457]	250 [9.843]
10	204.6 [8.055]	155.5 [6.122]	250 [9.843]	223.6 [8.803]	174.5 [6.870]	250 [9.843]
11	215.1 [8.469]	166.0 [6.535]	275 [10.827]	234.1 [9.217]	185.0 [7.283]	275 [10.827]
12	225.6 [8.882]	176.5 [6.949]	275 [10.827]	244.6 [9.630]	195.5 [7.697]	275 [10.827]
13	236.1 [9.295]	187.0 [7.362]	275 [10.827]	255.1 [10.043]	206.0 [8.110]	300 [11.811]
14	246.6 [9.709]	197.5 [7.776]	300 [11.811]	265.6 [10.457]	216.5 [8.524]	300 [11.811]
15	257.1 [10.122]	208.0 [8.189]	300 [11.811]	276.1 [10.870]	227.0 [8.937]	325 [12.795]
16	267.6 [10.535]	218.5 [8.602]	325 [12.795]	286.6 [11.283]	237.5 [9.350]	325 [12.795]
17	278.1 [10.949]	229.0 [9.016]	325 [12.795]	297.1 [11.697]	248.0 [9.764]	325 [12.795]
18	288.6 [11.362]	239.5 [9.429]	325 [12.795]	307.6 [12.110]	258.5 [10.177]	350 [13.780]
19	299.1 [11.776]	250.0 [9.843]	350 [13.780]	318.1 [12.524]	269.0 [10.591]	350 [13.780]
20	309.6 [12.189]	260.5 [10.256]	350 [13.780]	328.6 [12.937]	279.5 [11.004]	375 [14.764]
21	-	-	-	339.1 [13.350]	290.0 [11.417]	375 [14.764]



Note: When the J-T or MT piping block specification is selected.

Additional Parts (available separately)

- Muffler: KM-J8 [for both plug-in and non-plug-in]



- Muffler: KM-J6

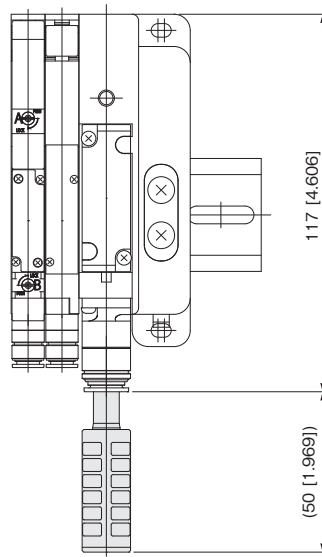

SOLENOID VALVES


F15 SERIES

Contents

Specifications	156
----------------	-----

ORDER CODES	Single Valve Unit	162
	Monoblock Manifold A Type (Base Piping Type)	166
	Monoblock Manifold F Type (Direct Piping Type)	170
	Monoblock Manifold A Type, Wire-saving Type (Base Piping Type)	174
	Monoblock Manifold F Type, Wire-saving Type (Direct Piping Type)	176
	PC Board Manifold A Type (Base Piping Type)	178
	PC Board Manifold F Type (Direct Piping Type)	182
	Split Manifold Non-plug-in Type	184
	Split Manifold Plug-in Type	190
	Split Manifold Serial Transmission Type	194
	Easy Assembly Type Manifold Non-plug-in Type	198
Easy Assembly Type Manifold Plug-in Type	204	
Easy Assembly Type Manifold Serial Transmission Type	210	

DIMENSIONS	Single Valve Unit	216
	Monoblock Manifold	219
	Monoblock Manifold, Wire-saving Type	222
	PC Board Manifold	224
	Split Manifold Non-plug-in Type	225
	Split Manifold Plug-in Type	227
	Split Manifold Serial Transmission Type	236
	Easy Assembly Type Manifold Non-plug-in Type	242
	Easy Assembly Type Manifold Plug-in Type	244
Easy Assembly Type Manifold Serial Transmission Type	249	

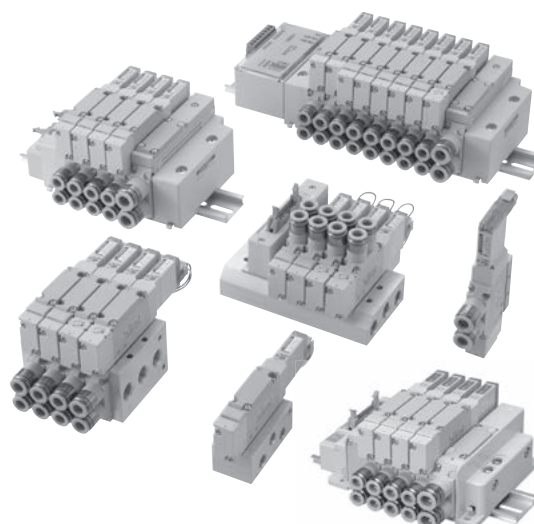

F15 SERIES Specifications

Specifications

Basic Models and Valve Functions

Item	Basic model	F15□T0	F15□T1 F15□T2	F15□T3 F15□T4 F15□T5	F15□TA F15□TB F15□TC
	Number of positions	2 positions		3 positions	
Number of ports	5				Tandem 3-port
Valve function	Single solenoid only	Both single and double solenoid use		Closed center, Exhaust center, Pressure center	NC/NC, NO/NO, NC/NO

Remark: For the optional specifications and order codes, see p.162.

Specifications

Item	Basic model	F15□T0 F15□T1 F15□T2	F15□T3 F15□T4 F15□T5	F15□TA F15□TB F15□TC	F15□T0G F15□T1G F15□T2G	F15□T3G F15□T4G F15□T5G	F15□T0V F15□T1V F15□T2V	F15□T3V
	Media	Air						
Operation type	Internal pilot type				External pilot type (for positive pressure)		External pilot type (for vacuum)	
Flow rate characteristics	Sonic conductance C dm ³ /(s · bar) ^{Note1}	2.05	2.05	1.60	2.05	2.05	2.05	2.05
	Effective area ^{Note2} mm ² [Cv]	10.3 [0.57]	10.3 [0.57]	8 [0.44]	10.3 [0.57]	10.3 [0.57]	10.3 [0.57]	10.3 [0.57]
Port size ^{Note3}	Dual use fitting for φ6 and φ8, Rc1/8, NPT1/8				M5×0.8,10-32UNF, dual use fitting for φ6 and φ8, Rc1/8, NPT1/8			
Lubrication	Not required							
Operating pressure range	Main valve	0.15~0.7 MPa [22~102 psi.]			0~0.7 MPa [0~102 psi.] ^{Note4}		-100 kPa~0.15 MPa [-29.53 in.Hg~22 psi.]	
	External pilot	—			0.2~0.7 MPa [29~102 psi.] ^{Note4}		0.2~0.7 MPa [29~102 psi.]	
Proof pressure	MPa [psi.]	—			1.05 [152]			
Response time ^{Note5} ms	12VDC, 24VDC	20/25 (30) or below	15/45 (50) or below	20/30 (35) or below	20/25 (30) or below	15/45 (50) or below	20/25 (30) or below	15/45 (50) or below
	100VAC	20/25 or below	15/45 or below	—	20/25 or below	15/45 or below	20/25 or below	15/45 or below
ON/OFF	—	—	—	—	—	—	—	—
Maximum operating frequency	Hz	5						
Minimum time to energize for self holding ^{Note6}	ms	50	—	—	50	—	50	—
Operating temperature range (atmosphere and media)	°C [°F]	5~50 [41~122]						
Shock resistance	m/s ² [G]	294.2 [30] (245 [25]) Figure in parentheses is for when mounted on the split manifold.						
Mounting direction	—	Any						

Notes: 1. For details, see the flow rate characteristics on p.157.

2. The effective area is a calculated value, and not a measured value.

3. For details, see the port size on p.157.

4. When the main valve pressure is 0.2~0.7 MPa [29~102 psi.], set the external pilot pressure to the main valve pressure or higher, and to 0.7 MPa [102 psi.] or less.

Remark: Specification values are based on Koganei test standards.

Notes: 5. Values when air pressure is 0.5 MPa [73 psi.]. For switching phase timing in the AC specification, add a maximum of 5 ms to the response time. The values for 2-position valves are those when used as a single solenoid, and the values for 3-position valves are those when switching from the neutral position of closed center. Values in parentheses () are for low-current type.

6. When used as a double solenoid valve. Excludes T0.

Solenoid Specifications

Item	Rated voltage	12VDC	24VDC (Standard type)	24VDC (Low-current type)	100VAC	120VAC	
	Voltage range	V	10.8~13.2 (12±10%)	21.6~26.4 (24±10%)	21.6~26.4 (24±10%)	90~110 (100±10%)	108~132 (120±10%)
Rated frequency	Hz	—	—	—	50 60	50 60	
Standard	Current (when rated voltage is applied) mA (r.m.s)	33	17	—	8	8.3	
	Power consumption	W	0.4	0.4	—	0.8 VA	1 VA
Low-current type	Current (when rated voltage is applied)	Starting	—	—	17	—	
		Holding	—	—	4.2	—	
	Power consumption	Starting	—	—	0.4	—	—
		Holding	—	—	0.1	—	—
Starting time (standard)	ms	—	—	70	—	—	
Allowable leakage current	mA	2.0	1.0	—	1.0	1.0	
Type of insulation	—	Type B					
Insulation resistance ^{Note 1}	MΩ	Over 100					
Color of LED indicator ^{Note2}	—	14(SA) : Red, 12(SB) : Green					
Surge suppression (as standard)	—	Surge absorption transistor		Flywheel diode	Bridge diode		


Notes: 1. Value at 500VDC megger.

2. The color of the T0 indicator is red only.

Remark: Specification values are based on Koganei test standards.


Cylinder operating speed

How to obtain cylinder speed




Measuring conditions


- Air pressure: 0.5 MPa [73 psi.]
- Piping (outer diameter x inner diameter x length):
φ8 x φ6 x 1000 mm [39 in.]
- Fitting: Quick fitting TS8-01
- Load ratio = $\frac{\text{Load}}{\text{Cylinder theoretical thrust}}$ (%)
- Cylinder stroke: 150 mm [5.91 in.]



Maximum operating speed

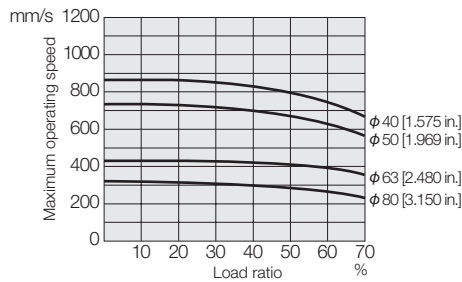


Delay time

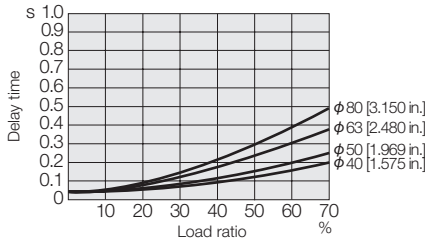

Note: Delay time may vary according to the cylinder stroke.

Flow rate



How to read the graph

When the supply pressure is 0.5 MPa [73 psi.] and flow rate is 500R/min [17.7 ft.3/min.] (ANR), the valve outlet pressure becomes 0.4 MPa [58 psi.].

- 1 mm/s = 0.0394 in./sec.
- 1 MPa = 145 psi.
- 1 l/min = 0.0353 ft.³/min.

Port Size

Description/Piping specification		PR	X (P2)	4 (A), 2 (B)	1 (P), 3 (R2), 5 (R1), 3, 5 (R)
With sub-base		M5×0.8, 10-32UNF	M5×0.8, 10-32UNF	Rc1/8, NPT1/8	Rc1/8, NPT1/8
Single unit	With female thread block	—	—	Rc1/8, NPT1/8	Rc1/8, NPT1/8
	With dual use fitting block	—	—	Dual use fitting for φ6 and φ8	Rc1/8, NPT1/8
	With single use fitting block	—	—	φ6 or φ8	Rc1/8, NPT1/8
Manifold	Monoblock type with female thread block, and PC board type with female thread block	M5×0.8, 10-32UNF	M5×0.8, 10-32UNF	Rc1/8, NPT1/8	Rc1/4, NPT1/4
	Monoblock type with fitting block, and PC board type with fitting block	M5×0.8, 10-32UNF	M5×0.8, 10-32UNF	Dual use fitting for φ6 and φ8	Rc1/4, NPT1/4
	Monoblock type with single use fitting block, and PC board type with single use fitting block	M5×0.8, 10-32UNF	M5×0.8, 10-32UNF	φ6 or φ8	Rc1/4, NPT1/4
	Split type with female thread block, and serial transmission type with female thread block	—	M5×0.8, 10-32UNF	Rc1/8, NPT1/8	Rc1/4, NPT1/4
	Split type with fitting block, and serial transmission type with fitting block	—	M5×0.8, 10-32UNF	Dual use fitting for φ6 and φ8	Dual use fitting for φ8 and φ10
	Split type with single use fitting block, and serial transmission type with single use fitting block	—	M5×0.8, 10-32UNF	φ6 or φ8	Single use fitting for φ8 or φ10
	Easy assembly type with female thread block, and serial transmission type with female thread block	—	M5×0.8, 10-32UNF	Rc1/8, NPT1/8	Rc1/4, NPT1/4
	Easy assembly type with fitting block, and serial transmission type with fitting block	—	M5×0.8, 10-32UNF	Dual use fitting for φ6 and φ8	Dual use fitting for φ8 and φ10
	Easy assembly type with single use fitting block, and serial transmission type with single use fitting block	—	M5×0.8, 10-32UNF	φ6 or φ8	Single use fitting for φ8 or φ10

Specifications for DIN Connector (-39□) Type

Specifications

Remark: Specification values are the same as the Standard type, excluding the response time. [See page 156.](#)

Item	Basic model	F15T0	F15T3	F15T0G	F15T3G	F15T0V	F15T3V
		F15T2	F15T4	F15T2G	F15T4G	F15T2V	
Response time ^{Note} ON/OFF	ms	20/30 or below	15/50 or below	20/30 or below	15/50 or below	20/30 or below	15/50 or below

Note: Values when air pressure is 0.5 MPa [73 psi.]. For switching phase timing in the AC specification, add a maximum of 5 ms to the response time. The values for 2-position valves are those when used as a single solenoid, and the values for 3-position valves are those when switching from the neutral position of closed center.

Solenoid Specifications for DIN Connector (-39□) Type

Item		Rated voltage	12VDC	24VDC	120VAC	240VAC
Voltage range		V	10.8~13.2 (12±10%)	21.6~26.4 (24±10%)	90~132	180~264
Current	Frequency	Hz	—	—	50	60
	Starting	mA (r.m.s)	—	—	43	38
	Holding	mA (r.m.s)	140 (1.7W)	75 (1.8W)	29	24
Allowable leakage current		mA	8	4	4	2
Insulation resistance ^{Note}		MΩ	Over 100			
Surge suppression (as standard)			Surge absorption transistor		Varistor	Varistor

Note: Value at 500VDC megger.

Remark: Specification values are based on Koganei test standards.

F15 SERIES

Flow Rate Characteristics

● When used as a single unit

Basic model	1 (P)→2 (B)/1 (P)→4 (A)		2 (B)→3 (R2)/4 (A)→5 (R1)	
	Sonic conductance C dm ³ /(s·bar)	Critical pressure ratio b	Sonic conductance C dm ³ /(s·bar)	Critical pressure ratio b
F15□T0-A2				
F15□T1-A2	1.76	0.25	1.72	0.26
F15□T2-A2				
F15□T3-A2				
F15□T4-A2	1.78	0.25	1.72	0.24
F15□T5-A2				
F15□TA-A2				
F15□TB-A2	1.53	0.26	1.61	0.23
F15□TC-A2				
F15□T0-F3				
F15□T1-F3	1.80	0.25	1.71	0.29
F15□T2-F3				
F15□T3-F3				
F15□T4-F3	1.81	0.23	1.61	0.27
F15□T5-F3				
F15□TA-F3				
F15□TB-F3	1.57	0.28	1.57	0.24
F15□TC-F3				
F15□T0-F4				
F15□T1-F4	1.83	0.30	1.62	0.33
F15□T2-F4				
F15□T3-F4				
F15□T4-F4	1.57	0.36	1.51	0.25
F15□T5-F4				
F15□TA-F4				
F15□TB-F4	1.54	0.31	1.55	0.27
F15□TC-F4				

Basic model	1 (P)→2 (B)/1 (P)→4 (A)		2 (B)→3 (R2)/4 (A)→5 (R1)	
	Sonic conductance C dm ³ /(s·bar)	Critical pressure ratio b	Sonic conductance C dm ³ /(s·bar)	Critical pressure ratio b
F15□T0-F5				
F15□T1-F5	1.62	0.38	1.56	0.28
F15□T2-F5				
F15□T3-F5				
F15□T4-F5	1.57	0.36	1.51	0.25
F15□T5-F5				
F15□TA-F5				
F15□TB-F5	1.44	0.34	1.46	0.24
F15□TC-F5				
F15□T0-F6				
F15□T1-F6	1.86	0.30	1.70	0.30
F15□T2-F6				
F15□T3-F6				
F15□T4-F6	1.84	0.29	1.64	0.29
F15□T5-F6				
F15□TA-F6				
F15□TB-F6	1.58	0.31	1.57	0.31
F15□TC-F6				

● When mounted on a manifold

Manifold model		Monoblock manifold F type F15M□F (FP)		Monoblock manifold A type F15M□A (AP)		Split manifold F15M□N (P) (S)		Easy assembly type manifold F15M□XN (P) (S)	
		1 (P)→2 (B)/1 (P)→4 (A)	2 (B)→3 (R2)/4 (A)→5 (R1)	1 (P)→2 (B)/1 (P)→4 (A)	2 (B)→3 (R2)/4 (A)→5 (R1)	1 (P)→2 (B)/1 (P)→4 (A)	2 (B)→3 (R2)/4 (A)→5 (R1)	1 (P)→2 (B)/1 (P)→4 (A)	2 (B)→3 (R2)/4 (A)→5 (R1)
Valve model		Sonic conductance C	dm ³ /(s·bar)	Sonic conductance C	dm ³ /(s·bar)	Sonic conductance C	dm ³ /(s·bar)	Sonic conductance C	dm ³ /(s·bar)
F15□T0□	Outlet port dual use fitting for φ6 and φ8 ※These are the cases of φ8.	1.72	1.56	1.56	1.46	2.01	1.84	2.00	1.90
F15□T1□									
F15□T2□									
F15□T3□									
F15□T4□									
F15□T5□									
F15□TA□									
F15□TB□		1.48	1.47	1.38	1.34	1.57	1.61	1.46	1.56
F15□TC□									
F15□T0□	Outlet port φ6 fitting	1.50	1.46	1.38	1.39	1.67	1.70	1.77	1.71
F15□T1□									
F15□T2□									
F15□T3□									
F15□T4□									
F15□T5□		1.52	1.46	1.39	1.37	1.67	1.66	1.77	1.69
F15□TA□									
F15□TB□		1.37	1.39	1.28	1.30	1.41	1.50	1.39	1.44
F15□TC□									
F15□T0□	Outlet port φ8 fitting	1.73	1.56	1.60	1.47	2.05	1.83	1.98	1.92
F15□T1□									
F15□T2□									
F15□T3□									
F15□T4□			1.72	1.54	1.60	1.45	2.05	1.78	2.11
F15□T5□									
F15□TA□									
F15□TB□		1.49	1.48	1.39	1.36	1.58	1.60	1.47	1.55
F15□TC□									

Notes: 1. When the individual air supply spacer or the individual air exhaust spacer, the back pressure prevention valve, or the stop valve is used, sonic conductance decreases by about 30%.

2: For the flow rate characteristics of other outlet ports, consult us.

Remark: Specification values are based on Koganei test standards.

Mass

Single Valve Unit Mass

g [oz.]

F15□T□□	F15□T□□-A1	F15□T□□-A2	F15□T□□-FJ	F15□T□□-FJ5	F15□T□□-FJ6
Outlet portion None	Outlet portion With plate	Outlet portion With plate	Outlet portion With dual use fitting block	Outlet portion With φ 6 fitting block	Outlet portion With φ 8 fitting block
Inlet portion None	Inlet portion None	Inlet portion With A type sub-base	Inlet portion None	Inlet portion None	Inlet portion None
82 [2.89]	101 [3.56]	210 [7.41]	114 [4.02]	125 [4.41]	130 [4.59]

g [oz.]

F15□T□□-FM	F15□T□□-F3	F15□T□□-F4	F15□T□□-F5	F15□T□□-F6
Outlet portion With female thread block	Outlet portion With dual use fitting block	Outlet portion With female thread block	Outlet portion With φ 6 fitting block	Outlet portion With φ 8 fitting block
Inlet portion None	Inlet portion With female thread block	Inlet portion With female thread block	Inlet portion With female thread block	Inlet portion With female thread block
104 [3.67]	127 [4.48]	117 [4.13]	138 [4.87]	143 [5.04]

Basic Type **F15T0** is 13 g [0.46 oz.] less than the mass shown above.

Monoblock Manifold Mass (single valve unit included)

g [oz.]

Monoblock manifold	Mass calculation of each unit				
	4(A), 2(B) ports outlet specifications				
	Female thread block	Dual use fitting block	φ 6 fitting block	φ 8 fitting block	
A type	(230×n)+128 [(8.11×n)+4.51]	(240×n)+128 [(8.47×n)+4.51]	(251×n)+128 [(8.85×n)+4.51]	(256×n)+128 [(9.03×n)+4.51]	
F type	(156×n)+116 [(5.50×n)+4.09]	(166×n)+116 [(5.86×n)+4.09]	(177×n)+116 [(6.24×n)+4.09]	(182×n)+116 [(6.42×n)+4.09]	

g [oz.]

Monoblock manifold	Additional mass (wire-saving type)		
	Wiring specification		
	-F100N, -F101N	-F200N, -F201N, -F260N	-D250N, -D251N
A type	340+4n [11.99+0.14n]	342+4n [12.06+0.14n]	346+4n [12.20+0.14n]
F type	192+4n [6.77+0.14n]	194+4n [6.84+0.14n]	198+4n [6.98+0.14n]

Calculation example : **F15M8AM**

stn.1~stn.8 **F15T1-A1-PS DC24V**

(230×8)+128=1968 g [69.42 oz.]

When mounting the block-off plate, subtract 100 g [3.53 oz.] per unit from the above calculation result.

When mounting the **F15□T0** specification valve, subtract 13 g [0.46 oz.] per unit from the above calculation result.

PC Board Manifold Mass (single valve unit included)

g [oz.]

PC board manifold	Mass calculation of each unit				
	4(A), 2(B) ports outlet specifications				Circuit board and connector portion
	Female thread block	Dual use fitting block	φ 6 fitting block	φ 8 fitting block	
A type	(230×n)+128 [(8.11×n)+4.51]	(240×n)+128 [(8.47×n)+4.51]	(251×n)+128 [(8.85×n)+4.51]	(256×n)+128 [(9.03×n)+4.51]	(2×n)+29
F type	(162×n)+121 [(5.71×n)+4.27]	(172×n)+121 [(6.07×n)+4.27]	(183×n)+121 [(6.46×n)+4.27]	(188×n)+121 [(6.63×n)+4.27]	[(0.07×n)+1.02]

Calculation example : **F15M8APM-F201-W**

stn.1~stn.8 **F15T1-A1-PP DC24V**

(230×8)+128+(2×8)+29=2013 g [71.01 oz.]

When mounting the block-off plate, subtract 100 g [3.53 oz.] per unit from the above calculation result.

When mounting the **F15□T0** specification valve, subtract 13 g [0.46 oz.] per unit from the above calculation result.

Optional Parts Mass

Stop valve (-STP): 50 g [1.76 oz.]

Mass

Mass of Split Manifold and Serial Transmission Compatible Manifold

Because the valve and manifold have the same output specifications, their mass is the same. The mass can only be changed by choosing a different type of inlet/outlet block.

Mass of Split Manifold Non-Plug-in Type (single valve unit included)

g [oz.]

Non-plug-in type	Mass calculation of each unit			
	4(A), 2(B) ports outlet specifications			
	Female thread block	Dual use fitting block	φ 6 fitting block	φ 8 fitting block
	$(173 \times n) + 249$ [(6.10 × n) + 8.78]	$(183 \times n) + 249$ [(6.46 × n) + 8.78]	$(194 \times n) + 249$ [(6.84 × n) + 8.78]	$(199 \times n) + 249$ [(7.02 × n) + 8.78]
g [oz.]				
Additional mass				
Piping block specification				
Female thread block	Dual use fitting block	φ 8 fitting block	φ 10 fitting block	
153 [5.40]	167 [5.89]	191 [6.74]	201 [7.09]	

Calculation example : **F15M8N-MR**

stn.1~stn.8 F15T1-A1-PS DC24V

$(173 \times 8) + 249 + 153 = 1786$ g [63.00 oz.]

When mounting the block-off plate, subtract 100 g [3.53 oz.] per unit from the above calculation result.

When mounting the **F15□T0** specification valve, subtract 13 g [0.46 oz.] per unit from the above calculation result.

Mass of Split Manifold Plug-in Type/ Serial Transmission Type (single valve unit included)

g [oz.]

Plug-in type Serial transmission compatible manifold	Mass calculation of each unit			
	4(A), 2(B) ports outlet specifications			
	Female thread block	Dual use fitting block	φ 6 fitting block	φ 8 fitting block
	$(177 \times n) + 249$ [(6.24 × n) + 8.78]	$(187 \times n) + 249$ [(6.60 × n) + 8.78]	$(198 \times n) + 249$ [(6.98 × n) + 8.78]	$(203 \times n) + 249$ [(7.16 × n) + 8.78]
g [oz.]				
Additional mass				
Piping block specification				
Female thread block	Dual use fitting block	φ 8 fitting block	φ 10 fitting block	
153 [5.40]	167 [5.89]	191 [6.74]	201 [7.09]	
g [oz.]				
Additional mass				
Wiring block specification				
-F100□□, -F101□□	-F200□□, -F201□□, -F260□□	-D250□□, -D251□□	-D370NU	-T200
32 [1.13]	34 [1.20]	39 [1.38]	72 [2.54]	158 [5.57]
g [oz.]				
Additional mass				
Serial transmission block specification				
Stand-alone type	Integrated type	Integrated type (For EtherCAT)	Integrated type (For EtherNet/IP)	
231 [8.15]	138 [4.87]	100 [3.53]	110 [3.88]	

Calculation example : **F15M8PM-MR-F201 DC24V**

stn.1~stn.8 F15T1-A1 DC24V

$(177 \times 8) + 249 + 153 + 34 = 1852$ g [65.33 oz.]

When mounting the block-off plate, subtract 100 g [3.53 oz.] per unit from the above calculation result.

When mounting the **F15□T0** specification valve, subtract 13 g [0.46 oz.] per unit from the above calculation result.

Mass of Easy Assembly Type Manifold and Serial Transmission Type Manifold

Mass of Easy Assembly Type Manifold Non-Plug-in Type (single valve unit included)

g [oz.]

Mounting type	Mass calculation of each unit			
	Outlet port specifications			
	Female thread block	Dual use fitting block	φ6 fitting block	φ8 fitting block
No code	$(186 \times n) + 309 [(6.56 \times n) + 10.90]$	$(196 \times n) + 309 [(6.91 \times n) + 10.90]$	$(207 \times n) + 309 [(7.30 \times n) + 10.90]$	$(212 \times n) + 309 [(7.48 \times n) + 10.90]$
-DN	$(186 \times n) + 371 [(6.56 \times n) + 13.09]$	$(196 \times n) + 371 [(6.91 \times n) + 13.09]$	$(207 \times n) + 371 [(7.30 \times n) + 13.09]$	$(212 \times n) + 371 [(7.48 \times n) + 13.09]$
-DR	$(189 \times n) + 387 [(6.67 \times n) + 13.65]$	$(199 \times n) + 387 [(7.02 \times n) + 13.65]$	$(210 \times n) + 387 [(7.41 \times n) + 13.65]$	$(215 \times n) + 387 [(7.58 \times n) + 13.65]$

g [oz.]

Fitting specifications	Additional mass			
	Intake/exhaust outlet			
	Female thread block	Dual use fitting block	φ8 fitting block	φ10 fitting block
J□ M□	34 [1.20]	48 [1.70]	72 [2.54]	82 [2.90]
J□D MD□	44 [1.55]	72 [2.54]	120 [4.23]	140 [4.94]
J□T MT□	-25 [-0.88]	17 [0.60]	89 [3.14]	119 [4.20]

Calculation example: F15M8XNJ-JR-DR DC24V

stn.1 ~ 8 F15T1-A1-PS DC24V

$(199 \times 8) + 387 + 48 = 2027 \text{ g [71.50 oz.]}$

When mounting the block-off plate, subtract 100 g [3.53 oz.] per unit from the above calculation result.

When mounting the F15□T0 specification valve, subtract 13g [0.46 oz.] per unit from the above calculation result.

Mass of Easy Assembly Type Manifold Plug-in Type/Serial Transmission Type (single valve unit included)

g [oz.]

Mounting type	Mass calculation of each unit			
	Outlet port specifications			
	Female thread block	Dual use fitting block	φ6 fitting block	φ8 fitting block
No code	$(189 \times n) + 306 [(6.67 \times n) + 10.80]$	$(199 \times n) + 306 [(7.02 \times n) + 10.80]$	$(210 \times n) + 306 [(7.41 \times n) + 10.80]$	$(215 \times n) + 306 [(7.58 \times n) + 10.80]$
-DN	$(189 \times n) + 369 [(6.67 \times n) + 13.01]$	$(199 \times n) + 369 [(7.02 \times n) + 13.01]$	$(210 \times n) + 369 [(7.41 \times n) + 13.01]$	$(215 \times n) + 369 [(7.58 \times n) + 13.01]$
-DR	$(192 \times n) + 391 [(6.77 \times n) + 13.79]$	$(201 \times n) + 391 [(7.09 \times n) + 13.79]$	$(213 \times n) + 391 [(7.51 \times n) + 13.79]$	$(218 \times n) + 391 [(7.69 \times n) + 13.79]$

g [oz.]

Fitting specifications	Additional mass			
	Intake/exhaust outlet			
	Female thread block	Dual use fitting block	φ8 fitting block	φ10 fitting block
J□ M□	34 [1.20]	48 [1.70]	72 [2.54]	82 [2.90]
J□D MD□	44 [1.55]	72 [2.54]	120 [4.23]	140 [4.94]
J□T MT□	-27 [-0.95]	15 [0.53]	87 [3.07]	117 [4.13]

g [oz.]

Additional mass			
Wiring block specifications			
-F100□□, -F101□□	-F200□□, -F201□□, -F260□□	-D250□□, -D251□□	-T200
36 [1.27]	38 [1.34]	43 [1.52]	116 [4.09]

g [oz.]

Additional mass		
Serial transmission block specifications (Monoblock)		
For CC-Link, DeviceNet, and CompoNet	For EtherCAT	For EtherNet/IP
138 [4.87]	100 [3.53]	110 [3.88]

Calculation example: F15M8XPJ-JR-F201-DR DC24V

stn.1 ~ 8 F15T1-A1 DC24V

$(201 \times 8) + 391 + 48 + 38 = 2085 \text{ g [73.55 oz.]}$

When mounting the block-off plate, subtract 100g [3.53 oz.] per unit from the above calculation result.

When mounting the F10□T0 specification valve, subtract 13g [0.46 oz.] per unit from the above calculation result.

F15 Series Single Valve Unit Order Codes

Valve size

F15


15mm [0.591 in.] width
Standard type

F15L


15mm [0.591 in.] width
Low-current type

Valve outlet type


Without inlet/
outlet block



With A type
outlet plate




With A type sub-base




-A2 inlet/outlet port
F15: Rc1/8
-A2H inlet/outlet port
F15: NPT1/8

With outlet port dual use
fitting block




Outlet port fitting
F15: φ 6, φ 8

With outlet port
single use fitting block




Outlet port fitting
F15: φ 6

With outlet port
single use fitting block



Outlet port fitting
F15: φ 8

With outlet port
female thread block



-FM outlet port
F15: Rc1/8
-FMH outlet port
F15: NPT1/8

With outlet port dual use
fitting block




Outlet port fitting
F15: φ 6, φ 8

With inlet port
female thread block




Outlet port fitting
F15: φ 6

With outlet port
female thread block
With inlet port
female thread block




-F4 inlet/outlet port
F15: Rc1/8
-F4H inlet/outlet port
F15: NPT1/8

With outlet port
single use fitting block
With inlet port
female thread block




Outlet port fitting
F15: φ 6

With outlet port
single use fitting block
With inlet port
female thread block




Outlet port fitting
F15: φ 8

3-port normally closed
(NC)




Outlet port fitting
F15: φ 6

3-port normally open
(NO)




Outlet port fitting
F15: φ 6

3-port normally closed
(NC)




Outlet port fitting
F15: φ 8

3-port normally open
(NO)




Outlet port fitting
F15: φ 8

3-port normally closed
(NC)




-FMA outlet port
F15: Rc1/8
-FMAH outlet port
F15: NPT1/8

3-port normally open
(NO)




-FMB outlet port
F15: Rc1/8
-FMBH outlet port
F15: NPT1/8

3-port normally closed
(NC)



-F4A inlet/outlet port
F15: Rc1/8
-F4AH inlet/outlet port
F15: NPT1/8

3-port normally open
(NO)



-F4B inlet/outlet port
F15: Rc1/8
-F4BH inlet/outlet port
F15: NPT1/8

3-port normally closed
(NC)



Outlet port fitting
F15: φ 6

3-port normally open
(NO)




Outlet port fitting
F15: φ 6

3-port normally closed
(NC)



Outlet port fitting
F15: φ 8

3-port normally open
(NO)




Outlet port fitting
F15: φ 8

Wiring specification

L type plug connector
Without connector



S type plug connector
Without connector



S type plug connector
Lead wire 300 mm
[11.8 in.]



L type plug connector
Lead wire 300 mm
[11.8 in.]



S type plug connector
Lead wire 3000 mm
[118 in.]




L type plug connector
Lead wire 3000 mm
[118 in.]



DIN connector type
with indicator



DIN connector type
without connector



Valve specification

- T0 : 2-position, for single solenoid only
- T1 : 2-position single solenoid specification (for both single and double solenoid use)
- T2 : 2-position double solenoid specification (for both single and double solenoid use)
- T3 : 3-position closed center
- T4 : 3-position exhaust center
- T5 : 3-position pressure center
- TA : Tandem 3-port (NC and NO)
- TB : Tandem 3-port (NO and NO)
- TC : Tandem 3-port (NC and NO)

Operation type

Blank

Internal pilot type

G

External pilot type
(for positive pressure)


V

External pilot type
(for vacuum)
※ This is a vacuum valve.

Note: When using as a single unit, select -A2 (A type with sub-base) for the valve outlet type. Without a sub-base, piping for the external pilot is not possible.


Manual override

Manual override button




No protrusion with
DIN connector

Manual override lever



Protruding locking type



Valve size	Valve specification	Operation type	IP Specifications	Manual override	Valve outlet type	UL compatible type	Wiring specification	Voltage
------------	---------------------	----------------	-------------------	-----------------	-------------------	--------------------	----------------------	---------

F15 F15L	T0 T1 T2 T3 T4Note3 T5Note3 TA TB TC	Blank G V	Blank -P	Blank -R -83	BlankNote2 -A1Note2 -A2 -A2H -FJNote2,3 -FJ5Note2,3 -FJ6Note2,3 -FMNote2,3 -FMHNote2,3 -F3Note4 -F4Note4 -F4HNote4 -F5Note4 -F6Note4 -FJ5ANote2,3 -FJ5BNote2,3 -FJ6ANote2,3 -FJ6BNote2,3 -F4ANote4 -F4AHNote4 -F4BNote4 -F4BHNote4 -F5ANote4 -F5BNote4 -F6ANote4 -F6BNote4 -FMANote2,3 -FMAHNote2,3 -FMBNote2,3 -FMBHNote2,3 -F4ANote4 -F4AHNote4 -F4BNote4 -F4BHNote4 -F5ANote4 -F5BNote4 -F6ANote4 -F6BNote4	-UR: UL certified product	Blank -PN -PS -PL -PS3 -PL3 -39LNote12 -39NNote12	DC24V DC12VNote7 AC100VNote8, 13 AC120VNote8 AC240VNote8, 11
-------------	--	-----------------	-------------	--------------------	---	---------------------------	--	--

- Notes: 1. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
- 2. Two manifold mounting screws are included.
- 3. Not available in the vacuum valves.
- 4. Not available in external pilot type and vacuum valves.
- 5. Only for valve specification T0, T1, and T2.
- 6. Thread size for the inlet port female thread block is F15: Rc 1/8.
- 7. Not available in low-current type.
- 8. Not available in low-current type and tandem 3-port valves.
- 9. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.
- 10. UR is unsupported.
- 11 Only for wiring specification -39 □ .
- 12 Only for F15 series and not available for valve specification T1, TA, TB, and TC. In addition, the valve is used only as a double solenoid for T2.
- 13 Not available with DIN connectors.

Remark: Negative common specifications are also available as made to order products (add -129W to the end of order code). For details, consult us.

F15 Series Single Valve Unit Additional Parts Order Codes

● For internal pilot

F15Z -

Valve size
15: 15 mm
[0.591 in.] width

Parts content

- 21** : Mounting bracket (mounting bracket, 2 mounting screws)
- 25** : Sub-base Rc1/8 (sub-base body, gasket, exhaust valve)^{Note1}
- 25H** : Sub-base NPT1/8 (sub-base body, gasket, exhaust valve)^{Note1}
- P** : Plate (plate, gasket, 2 mounting screws)
- J** : Dual use fitting block (fitting block, gasket, 2 mounting screws)
- J5** : Single use fitting block **F15: φ 6** (fitting block, gasket, 2 mounting screws)
- J6** : Single use fitting block **F15: φ 8** (fitting block, gasket, 2 mounting screws)
- J5A** : Single use fitting block for 3-port **F15: φ 6** (fitting block, gasket, 2 mounting screws) ^{Note3}
- J6A** : Single use fitting block for 3-port **F15: φ 8** (fitting block, gasket, 2 mounting screws) ^{Note3}
- M** : Female thread block (female thread block, gasket, 2 mounting screws)
- MH** : Female thread block **F15: NPT1/8** (female thread block, gasket, 2 mounting screws)
- MA** : Female thread block for 3-port (female thread block, gasket, 2 mounting screws)^{Note3}
- MAH** : Female thread block for 3-port **F15: NPT1/8** (female thread block, gasket, 2 mounting screws)^{Note3}
- MP** : P port female thread block (P port female thread block, gasket)^{Note1}
- MPH** : P port female thread block **F15: NPT1/8** (P port female thread block, gasket)^{Note1}
- MPP** : IP dedicated P port female thread block (P port female thread block, gasket)
- GS1** : Gasket (gasket, exhaust valve)^{Note2}

Notes: 1. Valve mounting screws are not included.
2. Caution should be exercised as this gasket is different from the **GS2** gasket for the split-type manifolds.
3. Common to both normally closed (NC) and normally open (NO) types. Select the mounting direction by application requirements.

● For external pilot

F15Z -

Valve size
15: 15mm
[0.591 in.] width

Parts content

- P** : Plate (plate, gasket, 2 mounting screws)
- J** : Dual use fitting block (fitting block, gasket, 2 mounting screws)
- J5** : Single use fitting block **F15: φ 6** (fitting block, gasket, 2 mounting screws)
- J6** : Single use fitting block **F15: φ 8** (fitting block, gasket, 2 mounting screws)
- J5A** : Single use fitting block for 3-port **F15: φ 6** (fitting block, gasket, 2 mounting screws) ^{Note1}
- J6A** : Single use fitting block for 3-port **F15: φ 8** (fitting block, gasket, 2 mounting screws) ^{Note1}
- M** : Female thread block (female thread block, gasket, 2 mounting screws)
- MH** : Female thread block **F15: NPT1/8** (female thread block, gasket, 2 mounting screws)
- MA** : Female thread block for 3-port (female thread block, gasket, 2 mounting screws)^{Note1}
- MAH** : Female thread block for 3-port **F15: NPT1/8** (female thread block, gasket, 2 mounting screws)^{Note1}
- GS1** : Gasket (gasket, exhaust valve)^{Note2}

Notes: 1. Common to both normally closed (NC) and normally open (NO) types. Select the mounting direction by application requirements.
2. Caution should be exercised as this gasket is different from the **GS2** gasket for the split type manifolds.

Sub-base for external pilot

F15ZG - 25

Valve size
15: 15 mm [0.591 in.] width
Sub-base Rc1/8

F15ZG - 25H

Valve size
15: 15 mm [0.591 in.] width
Sub-base NPT1/8

Connector-related order codes

JAZ -

Valve specification
For T1, T2, T3, T4, T5, TA, TB, TC

Connector specification

- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, white, for total of 3 lead wires)
- CP3** : Connector, lead wire length 3000 mm [118 in.] (black, red, white, for total of 3 lead wires)
- CPN** : Connector without lead wire (1 short bar and 3 contacts included)

UL compatible type ^{Note1}
Blank: -
UR : UL certified product

JAZO -

Valve specification
For T0

Connector specification

- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, for total of 2 lead wires)
- CP3** : Connector, lead wire length 3000 mm [118 in.] (black, red, for total of 2 lead wires)
- CPN** : Connector without lead wire (1 short bar, 2 contacts included)

UL compatible type ^{Note1}
Blank: -
UR : UL certified product


Remarks: A connector for negative common is also available. See p. 22 for details. (UR is unsupported)
Notes: 1. The lead wire thickness is 24AWG when Blank or 22AWG when UR is specified.

FZ -

Valve specification
For T1, T2, T3, T4, T5, TA, TB, TC

- CC1.5** : Cabtyre cable length 1500 mm [59 in.]^{*}
- CC3** : Cabtyre cable length 3000 mm [118 in.]^{*}

^{*} For details, see p. 22.

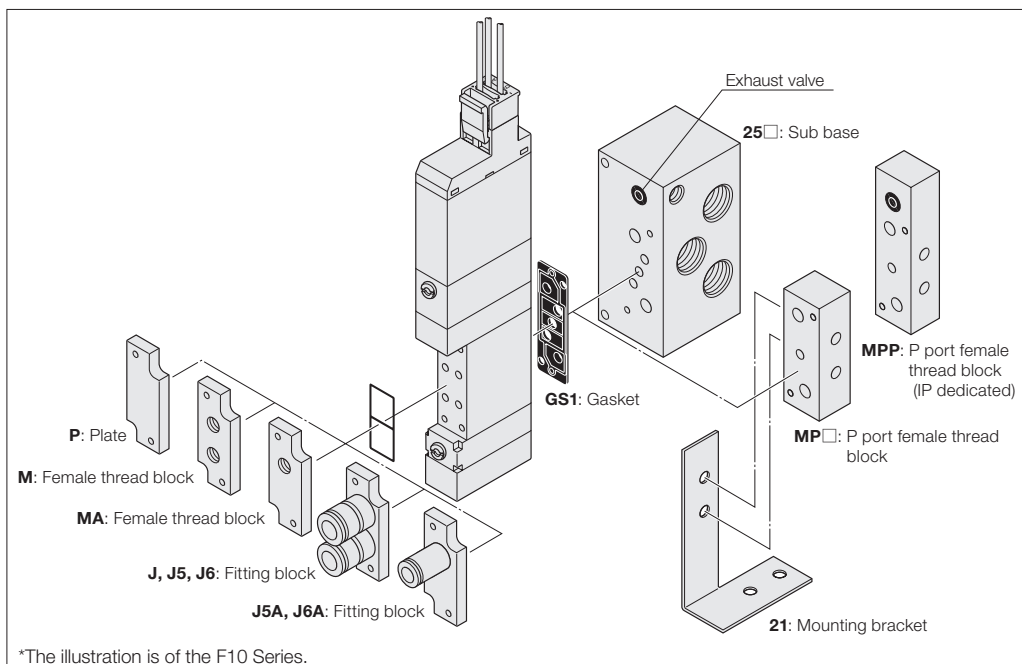

*The illustration is of the F10 Series.

Connector-related order codes

JAZ - P - (for double use only)

Valve specification
For **T2, T3, T4, T5, TA, TB,** or **TC**

Connector specification

- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, white, for total of 3 lead wires)
 - CP3**: Connector, lead wire length 3000 mm [118 in.] (black, red, white, for total of 3 lead wires)
 - PA** : Positive common A type, lead wire length 300 mm [11.8 in.]*
 - PA3**: Positive common A type, lead wire length 3000 mm [118 in.]*
 - PB** : Positive common B type, lead wire length 300 mm [11.8 in.]*
 - PB3**: Positive common B type, lead wire length 3000 mm [118 in.]*
 - PC** : Positive common C type, lead wire length 300 mm [11.8 in.]*
 - PC3**: Positive common C type, lead wire length 3000 mm [118 in.]*
- ※A common connector assembly.

JAZ0 - P - (for single use only)

Valve specification
For **T0/T1**

Connector specification

- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, for total of 2 lead wires)
 - CP3**: Connector, lead wire length 3000 mm [118 in.] (black, red, for total of 2 lead wires)
 - PA** : Positive common A type, lead wire length 300 mm [11.8 in.]*
 - PA3**: Positive common A type, lead wire length 3000 mm [118 in.]*
 - PB** : Positive common B type, lead wire length 300 mm [11.8 in.]*
 - PB3**: Positive common B type, lead wire length 3000 mm [118 in.]*
 - PC** : Positive common C type, lead wire length 300 mm [11.8 in.] *
 - PC3**: Positive common C type, lead wire length 3000 mm [118 in.]*
- ※A common connector assembly.

- Notes:
1. When the valve specification is **T1**, select the **JAZ0-P-** single dedicated type.
 2. When switching between the single and double type (**T1/T2**), purchase and use a dedicated connector for single or double use (the number of seal holes in the lead wire differs for the single and double type).
 3. There is no white lead wire for the **JAZ0-P-** .
 4. It is necessary to disassemble the connector to add a common connector assembly. Contact your nearest KOGANEI sales office.
 5. For information on use in locations/atmospheres subject to substances other than water, such as organic solvents, cutting oil, or reagents, contact your nearest KOGANEI sales office.
 6. For information on replacing the waterproof seal, contact your nearest KOGANEI sales office.

F15 Series Monoblock Manifold A Type (Base Piping Type) Order Codes

Valve size

F15M 15 mm [0.591 in.] width

Operation type

Blank Internal pilot type^{Note4}

G External pilot type^{Note5} (for positive pressure)

V External pilot type^{Note5} (for vacuum) *
* : This is a vacuum valve.

Note: Cannot be mounted together with a positive pressure valve.

Wiring specification^{Note11}

L type plug connector Without connector

S type plug connector Without connector

S type plug connector Lead wire 300 mm [11.8 in.]

L type plug connector Lead wire 300 mm [11.8 in.]

S type plug connector Lead wire 300 mm [11.8 in.]

L type plug connector Lead wire 300 mm [11.8 in.]

S type plug connector Lead wire 3000 mm [118 in.]

L type plug connector Lead wire 3000 mm [118 in.]

S type plug connector Lead wire 3000 mm [118 in.]

L type plug connector Lead wire 3000 mm [118 in.]

DIN connector type with indicator^{Note15}

DIN connector type without connector^{Note15}

Individual air supply and exhaust spacer, stop valve

Blank : No spacer and no stop valve

-NP6 : Single intake spacer (with φ 6 joint for F15)

-NP8 : Single intake spacer (with φ 8 joint for F15)

-NR6 : Single exhaust spacer (with φ 6 joint for F15)

-NR8 : Single exhaust spacer (with φ 8 joint for F15)

-STP : With stop valve^{Note4}

For details, see p. 26.

Manifold outlet specification

With dual use fitting blocks (base piping type)

With selectable fittings (base piping type)

Outlet port fitting F15: φ 6, φ 8

Outlet port should be selected in accordance with the manifold fitting specification.

With female thread blocks (base piping type)

Outlet port female thread F15: Rc1/8

Manifold fitting specification

5-port specification

-J5 With single use fitting block (base piping type) F15: φ 6

-J6 With single use fitting block (base piping type) F15: φ 8

-M With female thread block (base piping type) F15: Rc1/8

-MH With female thread block^{Note17} (base piping type) F15: NPT1/8

3-port specification

-J5A With single use fitting block, normally closed (NC) (base piping type) F15: φ 6

-J5B With single use fitting block, normally open (NO) (base piping type) F15: φ 6

-J6A With single use fitting block, normally closed (NC) (base piping type) F15: φ 8

-J6B With single use fitting block, normally open (NO) (base piping type) F15: φ 8

-MA With female thread block, normally closed (NC) (base piping type) F15: Rc1/8

-MAH With female thread block, normally closed (NC)^{Note17} (base piping type) F15: NPT1/8

-MB With female thread block, normally open (NO)^{Note16} (base piping type) F15: Rc1/8

-MBH With female thread block, normally open (NO)^{Note17} (base piping type) F15: NPT1/8

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Manual override

Manual override button

Manual override lever^{Note2}

Protruding locking type

Valve outlet type

With plate^{Note3} (base piping type)

Valve specification

T0 : 2-position, for single solenoid only

T1 : 2-position, single solenoid specification

T2 : 2-position, double solenoid specification

T3 : 3-position, closed center

T4 : 3-position, exhaust center^{Note6}

T5 : 3-position, pressure center^{Note6}

TA : Tandem 3-port (NC and NO)^{Note7}

TB : Tandem 3-port (NO and NO)^{Note7}

TC : Tandem 3-port (NC and NO)^{Note7}

Valve size

F15 Standard type

F15L Low-current type

Pilot specification

Blank Internal pilot manifold

G External pilot manifold

Valve size	Valve units	Manifold type	Manifold output specification	Pilot specification	Station	Valve size	Valve specification	Operation type	IP specification	Manual override	Valve outlet type	Wiring specification	Manifold fitting specification	Back pressure prevention valve	Individual air supply and exhaust spacer, stop valve	Voltage
Manifold model				Mounting valve model												

F15M	2 : 20	A	J M	Blank G	stn. 1 : stn. <input type="checkbox"/> Note1	F15 F15L	T0 T1 T2 T3 T4 T5	TA ^{Note7} TB ^{Note7} TC ^{Note7}	Blank ^{Note4} G ^{Note5} V ^{Note5}	Blank -P ^{Note12}	Blank -R ^{Note2} -83	-A1 ^{Note3}	Blank -PN -PS -PL -PS3 -PL3	-CPS -CPL -CPS3 -CPL3	-J5 ^{Note16} -J6 ^{Note16} -M ^{Note16} -MH ^{Note17} -J5A ^{Note16} -J5B ^{Note16}	-J6A ^{Note16} -J6B ^{Note16} -MA ^{Note16} -MAH ^{Note17} -MB ^{Note16} -MBH ^{Note17}	Blank -E1 ^{Note8}	Blank -NP6 -NP8 -NR6 -NR8 -STP ^{Note4}	DC24V DC12V ^{Note9} AC100V ^{Note10} AC120V ^{Note10}
		A AH	L	Blank G	stn. 1 : stn. <input type="checkbox"/> Note1	F15 F15L	T0 T1 T2 T3 T4 T5	TA ^{Note7} TB ^{Note7} TC ^{Note7}	Blank ^{Note4} G ^{Note5} V ^{Note5}	Blank -P ^{Note12}	Blank -R ^{Note2} -83	-A1 ^{Note3}	Blank -PN -PS -PL -PS3 -PL3	-CPS -CPL -CPS3 -CPL3	-J5 ^{Note16} -J6 ^{Note16} -M ^{Note16} -MH ^{Note17} -J5A ^{Note16} -J5B ^{Note16}	-J6A ^{Note16} -J6B ^{Note16} -MA ^{Note16} -MAH ^{Note17} -MB ^{Note16} -MBH ^{Note17}	Blank -E1 ^{Note8}	Blank -NP6 -NP8 -NR6 -NR8 -STP ^{Note4}	DC24V DC12V ^{Note9} AC100V ^{Note10,18} AC120V ^{Note10} AC240V ^{Note10,14}

Notes: 1. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
 2. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
 3. Always enter -A1.
 4. Cannot be mounted on the external pilot manifold.
 5. Cannot be mounted on the internal pilot manifold.
 6. Not available in the vacuum valves.
 7. Not available in external pilot type and vacuum valves.
 8. Not available with the individual exhaust spacer and vacuum valve.
 9. Not available in low-current type.
 10. Not available in the low current type and tandem 3-port valves.
 11. The -P (including when Blank) and -CP wiring specifications cannot be mixed.
 12. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.
 13. 3 port type is only supported by the T0, T1, and T2 valve type.
 14. Only for wiring specification -39□.
 15. Only for F15 series and not available for valve specification T1, TA, TB, and TC. In addition, the valve is used only as a double solenoid for T2.
 16. Can be selected only when the manifold type is A.
 17. Can be selected only when the manifold type is AH.
 18. Not available with DIN connectors (-39□).
 Remark: Negative common specifications are also available as made to order products (add -129W to the ends of the valve and manifold model order codes). For details, consult us.

F15 Series Monoblock Manifold A Type Additional Parts Order Codes

Gasket (gasket and exhaust valve)

F15Z - GS1

Valve size
15: 15 mm [0.591 in.] width

Block-off plate (block-off plate and 2 mounting screws)

F15BP

Valve size
15: 15 mm [0.591 in.] width

Connector-related order codes

JAZ □ - □


※ For details, see p. 22.

Valve specification

Blank: For T1, T2, T3, T4, T5, TA, TB, TC
0: For T0

Connector specification

- CP : Connector, lead wire length 300 mm [11.8 in.]
- CP3 : Connector, lead wire length 3000 mm [118 in.]
- CPN : Connector without lead wire (short bar and contacts included)
- PA : Positive common A type, lead wire length 300 mm [11.8 in.] *
- PA3 : Positive common A type, lead wire length 3000 mm [118 in.] *
- PB : Positive common B type, lead wire length 300 mm [11.8 in.] *
- PB3 : Positive common B type, lead wire length 3000 mm [118 in.] *
- PC : Positive common C type, lead wire length 300 mm [11.8 in.] *
- PC3 : Positive common C type, lead wire length 3000 mm [118 in.] *

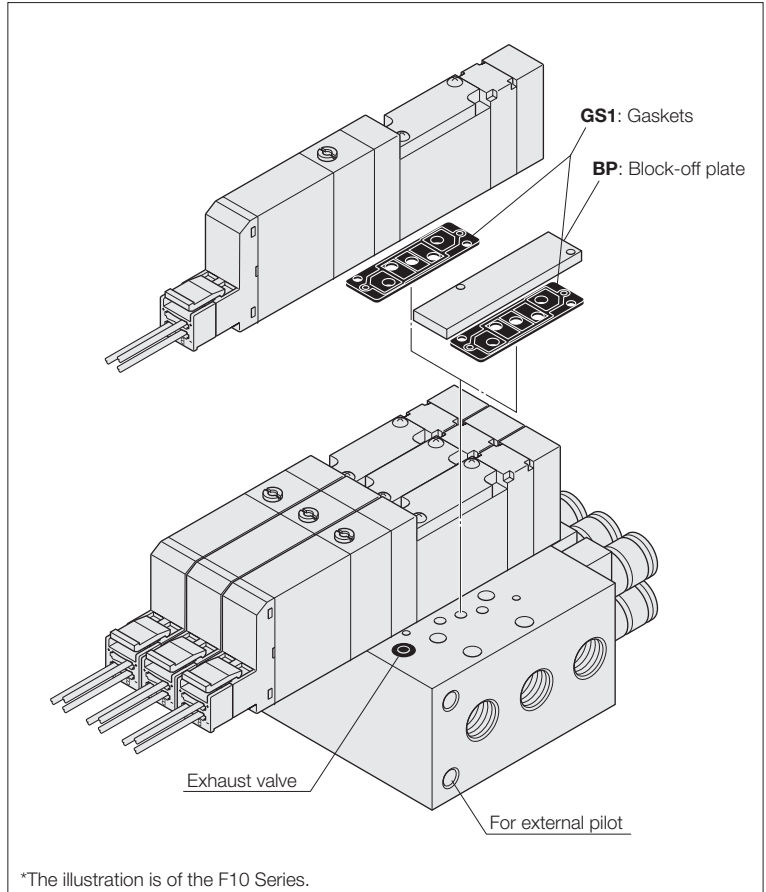

FZ - □


Valve specification
For T1, T2, T3, T4, T5, TA, TB, TC

Connector specification


- CC1.5 : Cabtyre cable length 1500 mm [59 in.] *
- CC3 : Cabtyre cable length 3000 mm [118 in.] *

Common connector assembly


A type: JAZ-PA□*



B type: JAZ-PB□*



C type: JAZ-PC□*



※ Lead wire length Blank: 300 mm [11.8 in.] Note: White lead wire is not available for JAZ0-P□□.
3: 3000 mm [118 in.]

Remark: Connector for negative common type also available. For details, see p.22.

Back pressure prevention valve (for monoblock type, 2 pieces)

F15Z - E1

Valve size
15: 15 mm [0.591 in.] width

Individual air supply and exhaust spacer (Spacer for non-plug-in type, gasket, exhaust valve, and 2 mounting screws)

F15Z - □

Valve size
15: 15 mm [0.591 in.] width

Specification

- NP6: Single intake spacer (with $\phi 6$ joint for F15)
- NP8: Single intake spacer (with $\phi 8$ joint for F15)
- NR6: Single exhaust spacer (with $\phi 6$ joint for F15)
- NR8: Single exhaust spacer (with $\phi 8$ joint for F15)

※ For details, see p. 27.

Manifold Order Code Example

(6 units of F15 Series)

F15M6AL

- stn.1 ~ 2 F15T0-A1-PS-J5 DC24V
- stn.3 ~ 5 F15T2-A1-PS-J6 DC24V
- stn.6 F15BP-J6

Note: This order code example has no relationship to the illustration at upper right.

Muffler

KM - J□

Fitting size

- 6: Outer diameter $\phi 6$ (for individual exhaust spacer)
 - 8: Outer diameter $\phi 8$ (for individual exhaust spacer)
- (Sales unit: Set of 10 mufflers)

Precautions for Order Codes

Manifold outlet specification

Select from among "dual use fitting blocks", "with female thread blocks" or "with selectable fittings." For repair or replacement, purchase the single valve unit additional parts, F □ Z-J (dual use fitting block), F □ Z-J □ (single use fitting block), or F □ Z-M □ (female thread block), on p. 163.

Orders for valves only

Place orders from "Single Valve Unit Order Codes" on p. 66. Note, however, that the only available valve outlet type is A1. In addition, for common terminal wiring connections, order the common connector assemblies listed above separately.

Connector-related order codes

JAZ - P - (for double use only)

Valve specification
For **T2, T3, T4, T5, TA, TB, or TC**

Connector specification

- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, white, for total of 3 lead wires)
 - CP3**: Connector, lead wire length 3000 mm [118 in.] (black, red, white, for total of 3 lead wires)
 - PA** : Positive common A type, lead wire length 300 mm [11.8 in.]*
 - PA3**: Positive common A type, lead wire length 3000 mm [118 in.]*
 - PB** : Positive common B type, lead wire length 300 mm [11.8 in.]*
 - PB3**: Positive common B type, lead wire length 3000 mm [118 in.]*
 - PC** : Positive common C type, lead wire length 300 mm [11.8 in.]*
 - PC3**: Positive common C type, lead wire length 3000 mm [118 in.]*
- ※A common connector assembly.

JAZ0 - P - (for single use only)

Valve specification
For **T0/T1**

Connector specification

- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, for total of 2 lead wires)
 - CP3**: Connector, lead wire length 3000 mm [118 in.] (black, red, for total of 2 lead wires)
 - PA** : Positive common A type, lead wire length 300 mm [11.8 in.]*
 - PA3**: Positive common A type, lead wire length 3000 mm [118 in.]*
 - PB** : Positive common B type, lead wire length 300 mm [11.8 in.]*
 - PB3**: Positive common B type, lead wire length 3000 mm [118 in.]*
 - PC** : Positive common C type, lead wire length 300 mm [11.8 in.] *
 - PC3**: Positive common C type, lead wire length 3000 mm [118 in.]*
- ※A common connector assembly.

- Notes:
1. When the valve specification is **T1**, select the **JAZ0-P-** single dedicated type.
 2. When switching between the single and double type (**T1/T2**), purchase and use a dedicated connector for single or double use (the number of seal holes in the lead wire differs for the single and double type).
 3. There is no white lead wire for the **JAZ0-P-** .
 4. It is necessary to disassemble the connector to add a common connector assembly. Contact your nearest KOGANEI sales office.
 5. For information on use in locations/atmospheres subject to substances other than water, such as organic solvents, cutting oil, or reagents, contact your nearest KOGANEI sales office.
 6. For information on replacing the waterproof seal, contact your nearest KOGANEI sales office.

Valve size

F15M
15 mm [0.591 in.] width

Valve outlet type

5-port specification













- FJ** With dual use fitting block (direct piping type) F15: φ 6, φ 8
- FJ5** With single use fitting block (direct piping type) F15: φ 6
- FJ6** With single use fitting block (direct piping type) F15: φ 8
- FM** With female thread block (direct piping type) F15: Rc1/8
- FMH** With female thread block^{Note11} (direct piping type) F15: NPT1/8

3-port specification

- FJ5A** With single use fitting block, normally closed (NC) (direct piping type) F15: φ 6
- FJ5B** With single use fitting block, normally open (NO) (direct piping type) F15: φ 6
- FJ6A** With single use fitting block, normally closed (NC) (direct piping type) F15: φ 8
- FJ6B** With single use fitting block, normally open (NO) (direct piping type) F15: φ 8
- FMA** With female thread block, normally closed (NC) (direct piping type) F15: Rc1/8
- FMAH** With female thread block, normally closed (NC)^{Note9} (direct piping type) F15: NPT1/8
- FMB** With female thread block, normally open (NO)^{Note8} (direct piping type) F15: Rc1/8
- FMBH** With female thread block, normally open (NO)^{Note9} (direct piping type) F15: NPT1/8

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.


Wiring specification^{Note6}


L type plug connector Without connector 	S type plug connector Lead wire 3000 mm [118 in.] 	Pre-wired positive common terminal S type plug connector Lead wire 3000 mm [118 in.] 
S type plug connector Without connector 	L type plug connector Lead wire 3000 mm [118 in.] 	Pre-wired positive common terminal L type plug connector Lead wire 3000 mm [118 in.] 
S type plug connector Lead wire 300 mm [11.8 in.] 	Pre-wired positive common terminal S type plug connector Lead wire 300 mm [11.8 in.] 	DIN connector type with indicator ^{Note7} 
L type plug connector Lead wire 300 mm [11.8 in.] 	Pre-wired positive common terminal L type plug connector Lead wire 300 mm [11.8 in.] 	DIN connector type without connector ^{Note7} 

Valve specification


T0 : 2-position, for single solenoid only
 T1 : 2-position, single solenoid specification
 T2 : 2-position, double solenoid specification
 T3 : 3-position, closed center
 T4 : 3-position, exhaust center
 T5 : 3-position, pressure center
 TA : Tandem 3-port (NC and NC)
 TB : Tandem 3-port (NO and NO)
 TC : Tandem 3-port (NC and NO)

Manual override

Manual override button


No protrusion with DIN connector


Manual override lever^{Note2}

Protruding locking type^{Note9}


Valve size

F15 Standard type
F15L Low-current type

Individual air supply and exhaust spacer, stop valve

Blank : No spacer and no stop valve
-NP6 : Single intake spacer (with φ6 joint for F15)
-NP8 : Single intake spacer (with φ8 joint for F15)
-NR6 : Single exhaust spacer (with φ6 joint for F15)
-NR8 : Single exhaust spacer (with φ8 joint for F15)
-STP : With stop valve

For details, see p. 27.

Back pressure prevention valve

Blank No back pressure prevention valve
-E1 With back pressure prevention valve^{Note3}

Valve size	Valve units	Manifold type	Station	Valve size	Valve specification	IP specification	Manual override	Valve outlet type	Wiring specification	Back pressure prevention valve	Individual air supply and exhaust spacer, stop valve	Voltage	
Manifold model													
Mounting valve model													
F15M	2 : 20	F : FH	stn. 1 : stn. □ <small>Note1</small>	F15 : F15L : F15	T0 T1 T2 T3 T4 T5 TA TB TC	Blank : -P ^{Note7}	Blank : -R ^{Note2} : -83 ^{Note9}	-FJ ^{Note11} -FJ5 ^{Note11} -FJ6 ^{Note11} -FM ^{Note11} -FMH ^{Note11} -FJ5A ^{Note11} -FJ5B ^{Note11}	-FJ6A ^{Note11} -FJ6B ^{Note11} -FMA ^{Note11} -FMAH ^{Note12} -FMB ^{Note11} -FMBH ^{Note12}	Blank : -PN : -PS : -PL : -PS3 : -PL3	-CPS : -CPS3 : -CPL3 : -39L ^{Note10} : -39N ^{Note10}	Blank : -NP6 : -NP8 : -NR6	DC24V DC12V ^{Note4} AC100V ^{Note5, 13} AC120V ^{Note5} AC240V ^{Note5, 6}
BP (for block-off plate)											Blank : -STP		

Notes: 1. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(E) ports side in front.
 2. When the valve specification is T1 or T2, the manual override lever is placed only on the A side. This is not available with -39□.
 3. Not available with the individual exhaust spacer.
 4. Not available in low-current type.
 5. Not available in low-current type and tandem 3-port valves.
 6. The -P□ (including when Blank) and -CP□ wiring specifications cannot be mixed.
 7. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.
 8. 3 port type is only supported by the T0, T1, and T2 valve type.
 9. Only for wiring specification -39□.
 10. Only for F15 series and not available for valve specification T1, TA, TB, and TC. In addition, the valve is used only as a double solenoid for T2.
 11. Can be selected only when the manifold type is F.
 12. Can be selected only when the manifold type is FH.
 13. Not available with DIN connectors (-39□).
 Remarks: 1. The external pilot type valve cannot be mounted on the F type manifold.
 2. Negative common specifications are also available as made to order products (add -129W to the ends of the valve and manifold model order codes). For details, consult us.

Gasket (gasket and exhaust valve)

F15Z - GS1

Valve size
15: 15 mm [0.591 in.] width

Block-off plate (block-off plate and 2 mounting screws)

F15BP

Valve size
15: 15 mm [0.591 in.] width

Connector-related order codes

JAZ -


※ For details, see p. 22.

Valve specification

Blank: For T1, T2, T3, T4, T5, TA, TB, TC
0: For T0

Connector specification

CP : Connector, lead wire length 300 mm [11.8 in.]
CP3 : Connector, lead wire length 3000 mm [118 in.]
CPN : Connector without lead wire (short bar, contacts included)
PA : Positive common A type, lead wire length 300 mm [11.8 in.] *
PA3 : Positive common A type, lead wire length 3000 mm [118 in.] *
PB : Positive common B type, lead wire length 300 mm [11.8 in.] *
PB3 : Positive common B type, lead wire length 3000 mm [118 in.] *
PC : Positive common C type, lead wire length 300 mm [11.8 in.] *
PC3 : Positive common C type, lead wire length 3000 mm [118 in.] *

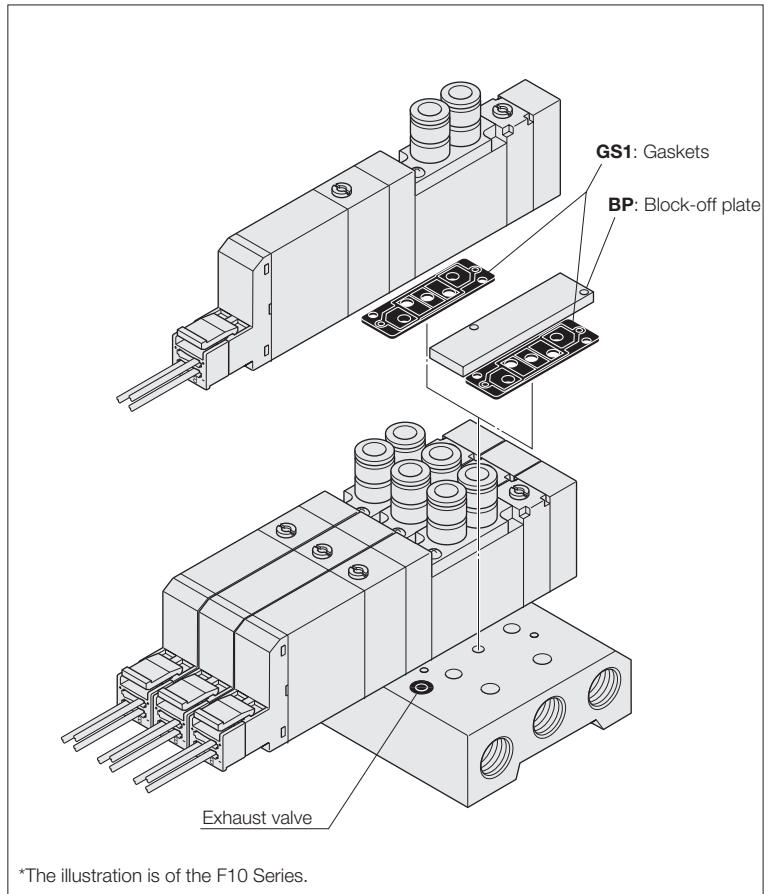

FZ -


Valve specification
For T1, T2, T3, T4, T5, TA, TB, TC

Connector specification


CC1.5 : Cabtyre cable length 1500 mm [59 in.] *
CC3 : Cabtyre cable length 3000 mm [118 in.] *

Common connector assembly


A type: JAZ-PA *



B type: JAZ-PB *



C type: JAZ-PC *



※ Lead wire length **Blank**: 300 mm [11.8 in.] Note: White lead wire is not available for JAZ0-P .
3: 3000 mm [118 in.]

Remark: Connector for negative common type also available. For details, see p. 27.

Back pressure prevention valve (for monoblock type, 2 pieces)

F15Z - E1

Valve size
15: 15 mm [0.591 in.] width

Individual air supply and exhaust spacer

(Spacer for non-plug-in type, gasket, exhaust valve, and 2 mounting screws)

F15Z -

Valve size
15: 15 mm [0.591 in.] width

Specification

NP6: Single intake spacer (with ϕ 6 joint for F15)
NP8: Single intake spacer (with ϕ 8 joint for F15)
NR6: Single exhaust spacer (with ϕ 6 joint for F15)
NR8: Single exhaust spacer (with ϕ 8 joint for F15)

※ For details, see p. 27.

Manifold Order Code Example

(4 units of F15 Series)

F15M4F

stn.1 ~ 2 F15T0-FJ5-PS DC24V
 stn.3 F15T2-FJ6-PS DC24V
 stn.4 F15BP

Note: This order code example has no relationship to the illustration at upper right.

Muffler

KM - J

Fitting size

6: Outer diameter ϕ 6 (for individual exhaust spacer)
8: Outer diameter ϕ 8 (for individual exhaust spacer)
 (Sales unit: Set of 10 mufflers)

Precautions for Order Codes

Orders for valves only

Place orders from "Single Valve Unit Order Codes" on p. 163.

Select from valve outlet types **-FJ**, **-FJ5**, **-FJ6**, **-FM**, **-FJ5A**, **-FJ5B**, **-FJ6A**, **-FJ6B**, **-FMA**, or **-FMB**. In addition, for common terminal wiring connections, order the common connector assemblies listed above separately.

Connector-related order codes

JAZ - P - (for double use only)

Valve specification
For **T2, T3, T4, T5, TA, TB, or TC**

Connector specification

- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, white, for total of 3 lead wires)
 - CP3** : Connector, lead wire length 3000 mm [118 in.] (black, red, white, for total of 3 lead wires)
 - PA** : Positive common A type, lead wire length 300 mm [11.8 in.]*
 - PA3** : Positive common A type, lead wire length 3000 mm [118 in.]*
 - PB** : Positive common B type, lead wire length 300 mm [11.8 in.]*
 - PB3** : Positive common B type, lead wire length 3000 mm [118 in.]*
 - PC** : Positive common C type, lead wire length 300 mm [11.8 in.]*
 - PC3** : Positive common C type, lead wire length 3000 mm [118 in.]*
- ※A common connector assembly.

JAZ0 - P - (for single use only)

Valve specification
For **T0/T1**

Connector specification

- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, for total of 2 lead wires)
 - CP3** : Connector, lead wire length 3000 mm [118 in.] (black, red, for total of 2 lead wires)
 - PA** : Positive common A type, lead wire length 300 mm [11.8 in.]*
 - PA3** : Positive common A type, lead wire length 3000 mm [118 in.]*
 - PB** : Positive common B type, lead wire length 300 mm [11.8 in.]*
 - PB3** : Positive common B type, lead wire length 3000 mm [118 in.]*
 - PC** : Positive common C type, lead wire length 300 mm [11.8 in.] *
 - PC3** : Positive common C type, lead wire length 3000 mm [118 in.]*
- ※A common connector assembly.

- Notes:
1. When the valve specification is **T1**, select the **JAZ0-P-** single dedicated type.
 2. When switching between the single and double type (**T1/T2**), purchase and use a dedicated connector for single or double use (the number of seal holes in the lead wire differs for the single and double type).
 3. There is no white lead wire for the **JAZ0-P-** .
 4. It is necessary to disassemble the connector to add a common connector assembly. Contact your nearest KOGANEI sales office.
 5. For information on use in locations/atmospheres subject to substances other than water, such as organic solvents, cutting oil, or reagents, contact your nearest KOGANEI sales office.
 6. For information on replacing the waterproof seal, contact your nearest KOGANEI sales office.

F15 Series Monoblock Manifold A Type, Wire-Saving Type (Base Piping Type) Order Codes

Valve size

F15M 15 mm [0.591 in.] width

Operation type

Blank Internal pilot type^{Note5}

G External pilot type^{Note6} (for positive pressure)

V External pilot type^{Note6} (for vacuum) *
* This is a vacuum valve.

Note: Cannot be mounted together with a positive pressure valve.

Manual override

Manual override button

Blank

Manual override lever^{Note3}

-R

Valve outlet type

With plate^{Note4} (base piping type)

-A1

Individual air supply and exhaust spacer, stop valve

Blank: No spacer and no stop valve

-NP6: Single intake spacer (with $\phi 6$ joint for F15)

-NP8: Single intake spacer (with $\phi 8$ joint for F15)

-NR6: Single exhaust spacer (with $\phi 6$ joint for F15)

-NR8: Single exhaust spacer (with $\phi 8$ joint for F15)

-STP: With stop valve^{Note5}

For details, see p. 26.

Manifold outlet specification

With dual use fitting blocks (base piping type)

J

Outlet port fitting F15: $\phi 6, \phi 8$

With selectable fittings (base piping type)

L

Outlet port should be selected in accordance with the manifold fitting specification.

With female thread blocks (base piping type)

M

Outlet port female thread F15: Rc1/8

Valve specification

T0: 2-position, for single solenoid only

T1: 2-position, single solenoid specification

T2: 2-position, double solenoid specification

T3: 3-position, closed center

T4: 3-position, exhaust center^{Note6}

T5: 3-position, pressure center^{Note6}

TA: Tandem 3-port (NC and NO)^{Note9}

TB: Tandem 3-port (NO and NO)^{Note9}

TC: Tandem 3-port (NC and NO)^{Note9}

Wiring specifications (wiring block)

(no power supply terminal only)

Flat cable connector (with socket and strain relief)

-F

D-sub connector

-D25

-F150N: 10-pin
-F151N: 10-pin
-F200N: 20-pin
-F201N: 20-pin
-F260N: 26-pin
For details, see p. 47.

(M2.6 mounting screws)
-D250N: 25-pin^{Note15}
-D251N: 25-pin^{Note15}

(4-40UNC mounting screws)
-D250NU: 25-pin^{Note16}
-D251NU: 25-pin^{Note16}
For details, see p. 47.

Valve size

F15 Standard type

F15L Low-current type

Wiring connection specification

Blank Packed wiring: Wired to match the specifications of the mounted valve.

-W Double wiring: Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

Pilot specification

Blank Internal pilot manifold

G External pilot manifold

Manifold fitting specification

5-port specification

-J5 With single use fitting block (base piping type) F15: $\phi 6$

-J6 With single use fitting block (base piping type) F15: $\phi 8$

-M With female thread block (base piping type) F15: Rc1/8

-MH With female thread block^{Note16} (base piping type) F15: NPT1/8

3-port specification

-J5A With single use fitting block, normally closed (NC) (base piping type) F15: $\phi 6$

-J5B With single use fitting block, normally open (NO) (base piping type) F15: $\phi 6$

-J6A With single use fitting block, normally closed (NC) (base piping type) F15: $\phi 8$

-J6B With single use fitting block, normally open (NO) (base piping type) F15: $\phi 8$

-MA With female thread block, normally closed (NC) (base piping type) F15: Rc1/8

-MAH With female thread block, normally closed (NC)^{Note16} (base piping type) F15: NPT1/8

-MB With female thread block, normally open (NO)^{Note15} (base piping type) F15: Rc1/8

-MBH With female thread block, normally open (NO)^{Note16} (base piping type) F15: NPT1/8

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Back pressure prevention valve

Blank No back pressure prevention valve

-E1 With back pressure prevention valve^{Note10}

Valve size

Valve units

Manifold type

Manifold outlet specification

Pilot specification

Wiring specifications

Wiring connection specification

Station

Valve size

Valve specification

Operation type

Manual override

Valve outlet type

Wiring specification

Manifold fitting specification

Back pressure prevention valve

Individual air supply and exhaust spacer, stop valve

Voltage

Manifold model

Mounting valve model

F15M	2 ⋮ □ ^{Note1}	A	J	Blank	Blank	Blank	strn. 1 ⋮ strn. □ ^{Note2}	F15	F15L	T0	T1	T2	T3	T4 ^{Note8}	T5 ^{Note8}	Blank ^{Note5}	G ^{Note6}	Blank	-A1	-PN	Blank	Blank	Blank	Blank	DC24V	DC12V ^{Note11}	AC100V ^{Note14}	AC120V ^{Note14}	
		AH	L	Blank	Blank	Blank	strn. 1 ⋮ strn. □ ^{Note2}	F15	F15L	T0	T1	T2	T3	T4 ^{Note8}	T5 ^{Note8}	Blank ^{Note5}	G ^{Note6}	Blank	-A1	-PN	Blank	Blank	Blank	Blank	Blank	DC24V	DC12V ^{Note11}	AC100V ^{Note14}	AC120V ^{Note14}

Notes: 1. For the maximum number of units, see the table for maximum number of valve units by wiring specification, on p. 175.

2. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.

3. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.

4. Always enter -A1 and -PN.

5. Cannot be mounted on the external pilot manifold.

6. Cannot be mounted on the internal pilot manifold.

7. Caution should be exercised that the block-off plate wiring is always double wiring (allocated 2 control pins at 1 strn.), regardless of the wiring connection specification. For single wiring, see p. 175.

8. Not available in the vacuum valves.

9. Not available in external pilot type and vacuum valves.

10. Not available with the individual exhaust spacer and vacuum valve.

11. Not available in low-current type.

12. Not available in low-current type and tandem 3-port valves. In addition, only available when the wiring specification is a D-sub connector.

13. 3 port type is only supported by the T0, T1, and T2 valve type.

14. Not available in low-current type and tandem 3-port valves. In addition, only available when the wiring specification is a D-sub connector.

15. Can be selected only when the manifold type is A.

16. Can be selected only when the manifold type is AH.

Gasket (gasket and exhaust valve)

F15Z - GS1

Valve size
15: 15 mm [0.591 in.] width

Block-off plate (block-off plate and 2 mounting screws)

F15BP

Valve size
15: 15 mm [0.591 in.] width

Back pressure prevention valve
(for monoblock type, 2 pieces)

F15Z - E1

Valve size
15: 15 mm [0.591 in.] width

Individual air supply and exhaust spacer (Spacer for non-plug-in type, gasket, exhaust valve, and 2 mounting screws)

F15Z -

Valve size
15: 15 mm [0.591 in.] width


Specification
NP6: Single intake spacer (with $\phi 6$ joint for F15)
NP8: Single intake spacer (with $\phi 8$ joint for F15)
NR6: Single exhaust spacer (with $\phi 6$ joint for F15)
NR8: Single exhaust spacer (with $\phi 8$ joint for F15)

※ For details, see p. 27.

Muffler

KM - J

Fitting size
6: Outer diameter $\phi 6$ (for individual exhaust spacer)
8: Outer diameter $\phi 8$ (for individual exhaust spacer)
(Sales unit: Set of 10 mufflers)

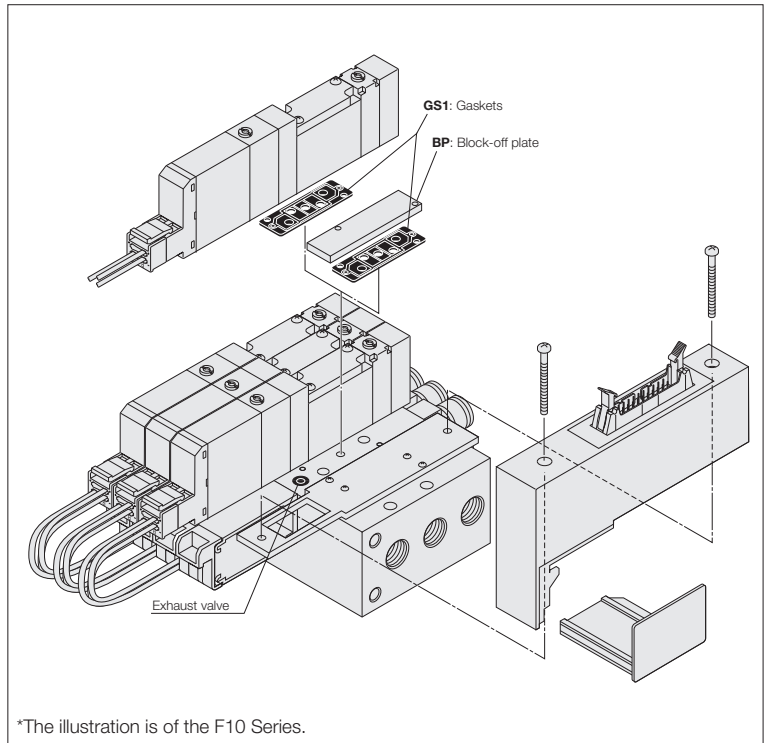

*The illustration is of the F10 Series.

Manifold Order Code Example

(6 units of F15 Series)

F15M6AL-F201N

stn.1 ~ 2 F15T0-A1-PN-J5 DC24V
stn.3 ~ 5 F15T2-A1-PN-J6 DC24V
stn.6 F15BP-J6

Note: This order code example has no relationship to the illustration at upper right.

Table for maximum number of valve units by wiring specification

Wiring specification	Max. outputs	Maximum number of units	
		Wiring connection specification	
		Packed wiring (Blank)	Double wiring (-W)
F100N Flat cable (10P)	8	Varies depending on the number of mounted single solenoids, double solenoids, and block-off plates. The number of controlled solenoids should be designated as the maximum number of outputs or less.	4 units
F101N Flat cable (10P)	8		4 units
F200N Flat cable (20P)	16		8 units
F201N Flat cable (20P)	16		8 units
F260N Flat cable (26P)	20		10 units
D250ND-sub connector (25P)	16		8 units
D251ND-sub connector (25P)	20	10 units	

Precautions for Order Codes

- **Manifold outlet specification**
Select from among "dual use fitting blocks", "with female thread blocks" or "with selectable fittings." For repair or replacement, purchase the single valve unit additional parts, **F** **Z-J** (single use fitting block), or **F** **Z-M** (female thread block), on p. 163.
- **Orders for valves only**
Place orders from "Single Valve Unit Order Codes" on p. 162. Note, however, that the only available valve outlet type is **A1**.
- **Wiring connection specification**
Blank (packed wiring): Wired to match the specifications of the mounted valve.
-W (double wiring): Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

Caution

Caution should be exercised that the block-off plate wiring is always double wiring (allocated 2 control pins at 1 stn.), regardless of the wiring connection specification. The block-off plate wiring can be made as wiring for a single solenoid. Add **-1W** to the end of the block-off plate order code in the case. For details, consult us.

F15 Series Monoblock Manifold F Type, Wire-Saving Type (Direct Piping Type) Order Codes


Valve size


F15M
15 mm [0.591 in.] width

Valve specification

T0 : 2-position, for single solenoid only
T1 : 2-position, single solenoid specification
T2 : 2-position, double solenoid specification
T3 : 3-position, closed center
T4 : 3-position, exhaust center
T5 : 3-position, pressure center
TA : Tandem 3-port (NC and NC)
TB : Tandem 3-port (NO and NO)
TC : Tandem 3-port (NC and NO)

Manual override

Manual override button

Blank

Manual override lever^{Note3}

-R

Valve outlet type

5-port specification


-FJ With dual use fitting block (direct piping type) F15: φ 6, φ 8
-FJ5 With single use fitting block (direct piping type) F15: φ 6
-FJ6 With single use fitting block (direct piping type) F15: φ 8
-FM With female thread block (direct piping type) F15: Rc1/8
-FMH With female thread^{Note11} block (direct piping type) F15: NPT1/8


3-port specification

-FJ5A With single use fitting block, normally closed (NC) (direct piping type) F15: φ 6
-FJ5B With single use fitting block, normally open (NO) (direct piping type) F15: φ 6
-FJ6A With single use fitting block, normally closed (NC) (direct piping type) F15: φ 8
-FJ6B With single use fitting block, normally open (NO) (direct piping type) F15: φ 8
-FMA With female thread block, normally closed (NC) (direct piping type) F15: Rc1/8
-FMAH With female thread block, normally closed (NC)^{Note11} (direct piping type) F15: φ 8 NPT1/8
-FMB With female thread block, normally open (NO) (direct piping type) F15: Rc1/8
-FMBH With female thread block, normally open (NO)^{Note11} (direct piping type) F15: φ 8 NPT1/8

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Wiring specification (wiring block)
(no power supply terminal only)

Flat cable connector (with socket and strain relief)

-F

D-sub connector

-D25

(M2.6 mounting screws)
-D250N: 25-pin^{Note10}
-D251N: 25-pin^{Note10}
(4-40UNC mounting screws)
-D250NU: 25-pin^{Note11}
-D251NU: 25-pin^{Note11}
For details, see p. 47.

Wiring connection specification

Blank
Packed wiring: Wired to match the specifications of the mounted valve.

-W
Double wiring: Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

Valve size

F15 Standard type
F15L Low-current type

Individual air supply and exhaust spacer, stop valve

Blank: No spacer and no stop valve
-NP6: Single intake spacer (with φ6 joint for F15)
-NR6: Single intake spacer (with φ8 joint for F15)
-NR8: Single exhaust spacer (with φ6 joint for F15)
-NR6: Single exhaust spacer (with φ8 joint for F15)
-STP: With stop valve
For details, see p. 27.

Back pressure prevention valve

Blank No back pressure prevention valve
-E1 With back pressure prevention valve^{Note6}

Wiring specification

-PN
S type plug connector^{Note4}

Valve size

Valve units

Manifold type

Wiring specification

Wiring connection specification

Station

Valve size

Valve specification

Manual override

Valve outlet type

Wiring specification

Back pressure prevention valve

Individual air supply and exhaust spacer, stop valve

Voltage

Manifold model

Mounting valve model

Notes: 1. For the maximum number of units, see the table for maximum number of valve units by wiring specification, on p. 53.
2. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
3. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
4. Always enter -PN.
5. Caution should be exercised that the block-off plate wiring is always double wiring (allocated 2 control pins at 1 stn.), regardless of the wiring connection specification. For single wiring, see p. 177.
6. Not available with the individual exhaust spacer.
7. Not available in low-current type.
8. Not available in low-current type and tandem 3-port valves. In addition, only available when the wiring specification is a D-sub connector.
9. 3 port type is only supported by the T0, T1, and T2 valve type.
10. Can be selected only when the manifold type is F.
11. Can be selected only when the manifold type is FH.

Remark: The external pilot type valve cannot be mounted on the F type manifold.

Gasket (gasket and exhaust valve)

F15Z - GS1

Valve size
15: 15 mm [0.591 in.] width

Block-off plate (block-off plate and 2 mounting screws)

F15BP

Valve size
15: 15 mm [0.591 in.] width

Back pressure prevention valve
(for monoblock type, 2 pieces)

F15Z - E1

Valve size
15: 15 mm [0.591 in.] width

Individual air supply and exhaust spacer (Spacer for non-plug-in type, gasket, exhaust valve, and 2 mounting screws)

F15Z -

Valve size
15: 15 mm [0.591 in.] width


Specification
NP6: Single intake spacer (with $\phi 6$ joint for F15)
NP8: Single intake spacer (with $\phi 8$ joint for F15)
NR6: Single exhaust spacer (with $\phi 6$ joint for F15)
NR8: Single exhaust spacer (with $\phi 8$ joint for F15)

※ For details, see p. 25.

Muffler

KM - J

Fitting size
6: Outer diameter $\phi 6$ (for individual exhaust spacer)
8: Outer diameter $\phi 8$ (for individual exhaust spacer)
(Sales unit: Set of 10 mufflers)

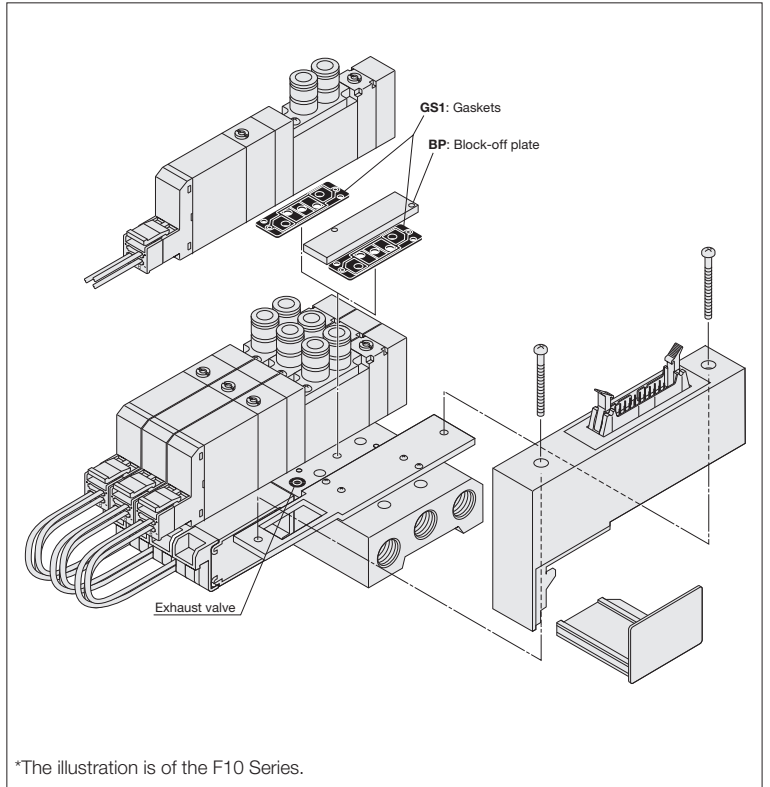

*The illustration is of the F10 Series.

Manifold Order Code Example

(4 units of F15 Series)

F15M4F-F201

stn.1~2 F15T0-FJ5-PN DC24V
stn.3 F15T2-FJ6-PN DC24V
stn.4 F15BP

Note: This order code example has no relationship to the illustration at upper right.

■ Table for maximum number of valve units by wiring specification

Wiring specification		Maximum number of units	
		Packed wiring (Blank)	Double wiring (-W)
F150N Flat cable (10P)	8	Varies depending on the number of mounted single solenoids, double solenoids, and block-off plates. The number of controlled solenoids should be designated as the maximum number of outputs or less.	4 units
F151N Flat cable (10P)	8		4 units
F200N Flat cable (20P)	16		8 units
F201N Flat cable (20P)	16		8 units
F260N Flat cable (26P)	20		10 units
D250N D-sub connector (25P)	16		8 units
D251ND-sub connector (25P)	20		10 units


Precautions for Order Codes

- **Orders for valves only**
Place orders from "Single Valve Unit Order Codes" on p. 162.
Select from valve outlet types -FJ, -FJ5, -FJ6, -FM, -FJ5A, -FJ5B, -FJ6A, -FJ6B, -FMA or -FMB
- **Wiring connection specification**
Blank (packed wiring): Wired to match the specifications of the mounted valve.
-W (double wiring): Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

Caution


Caution should be exercised that the block-off plate wiring is always double wiring (allocated 2 control pins at 1 stn.), regardless of the wiring connection specification. The block-off plate wiring can be made as wiring for a single solenoid. Add **-1W** to the end of the block-off plate order code in the case. For details, consult us.

F15 Series PC Board Manifold A Type (Base Piping Type) Order Codes

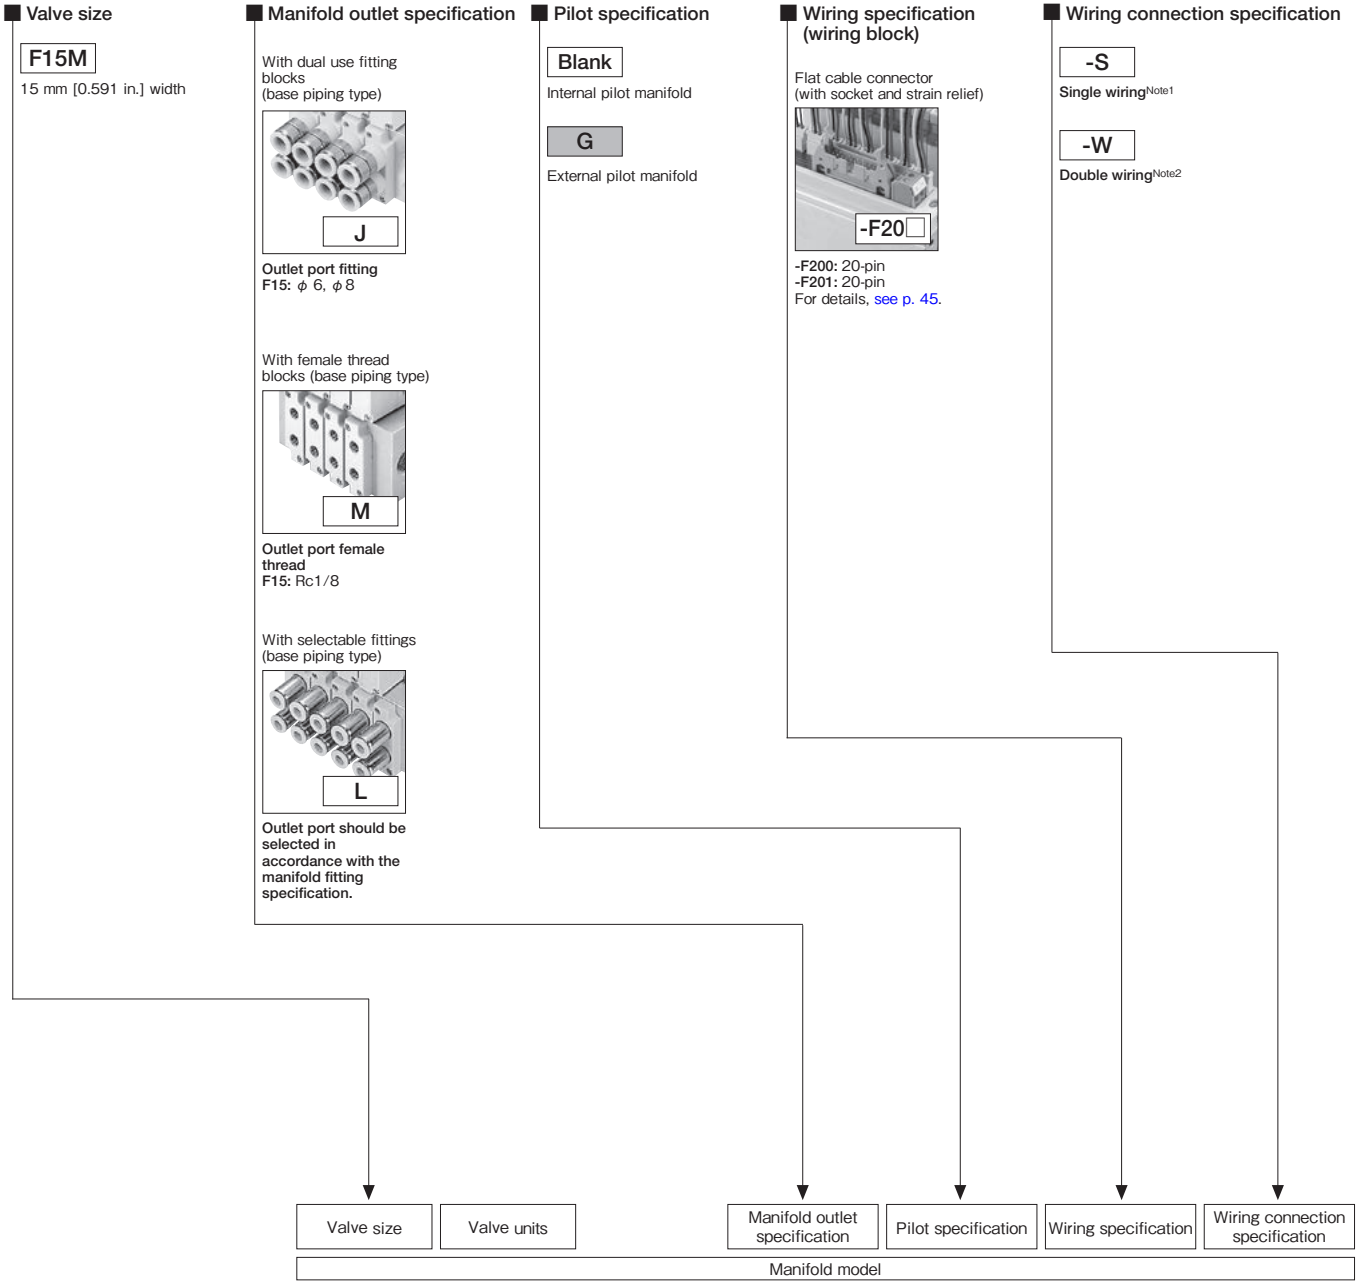

		Manifold model					
	Valve size	Valve units	Manifold outlet specification	Pilot specification	Wiring specification	Wiring connection specification	
Single wiring type ^{Note1}	F15M	6 8 10 12 14 16 Note3	AP	J M	Blank G	-F200 -F201	-S
				L	Blank G	-F200 -F201	-S
Double wiring type ^{Note2}	F15M	6 8 Note3	AP	J M	Blank G	-F200 -F201	-W
				L	Blank G	-F200 -F201	-W

Notes: 1. Wiring is for the single solenoid only. Note that this is not the same as packed wiring. The mounting valves are limited to single solenoid only (T0, T1 specifications). Therefore, even if the T1 specification valve is switched over to a double solenoid, no power will be applied to the B side solenoid.
 2. Wiring is always for the double solenoid, regardless of the specifications of the mounted valves.
 3. In terms of wiring connection specifications, the number of units for single wiring is 6-16 (even numbers only) and for double wiring is 6 or 8.

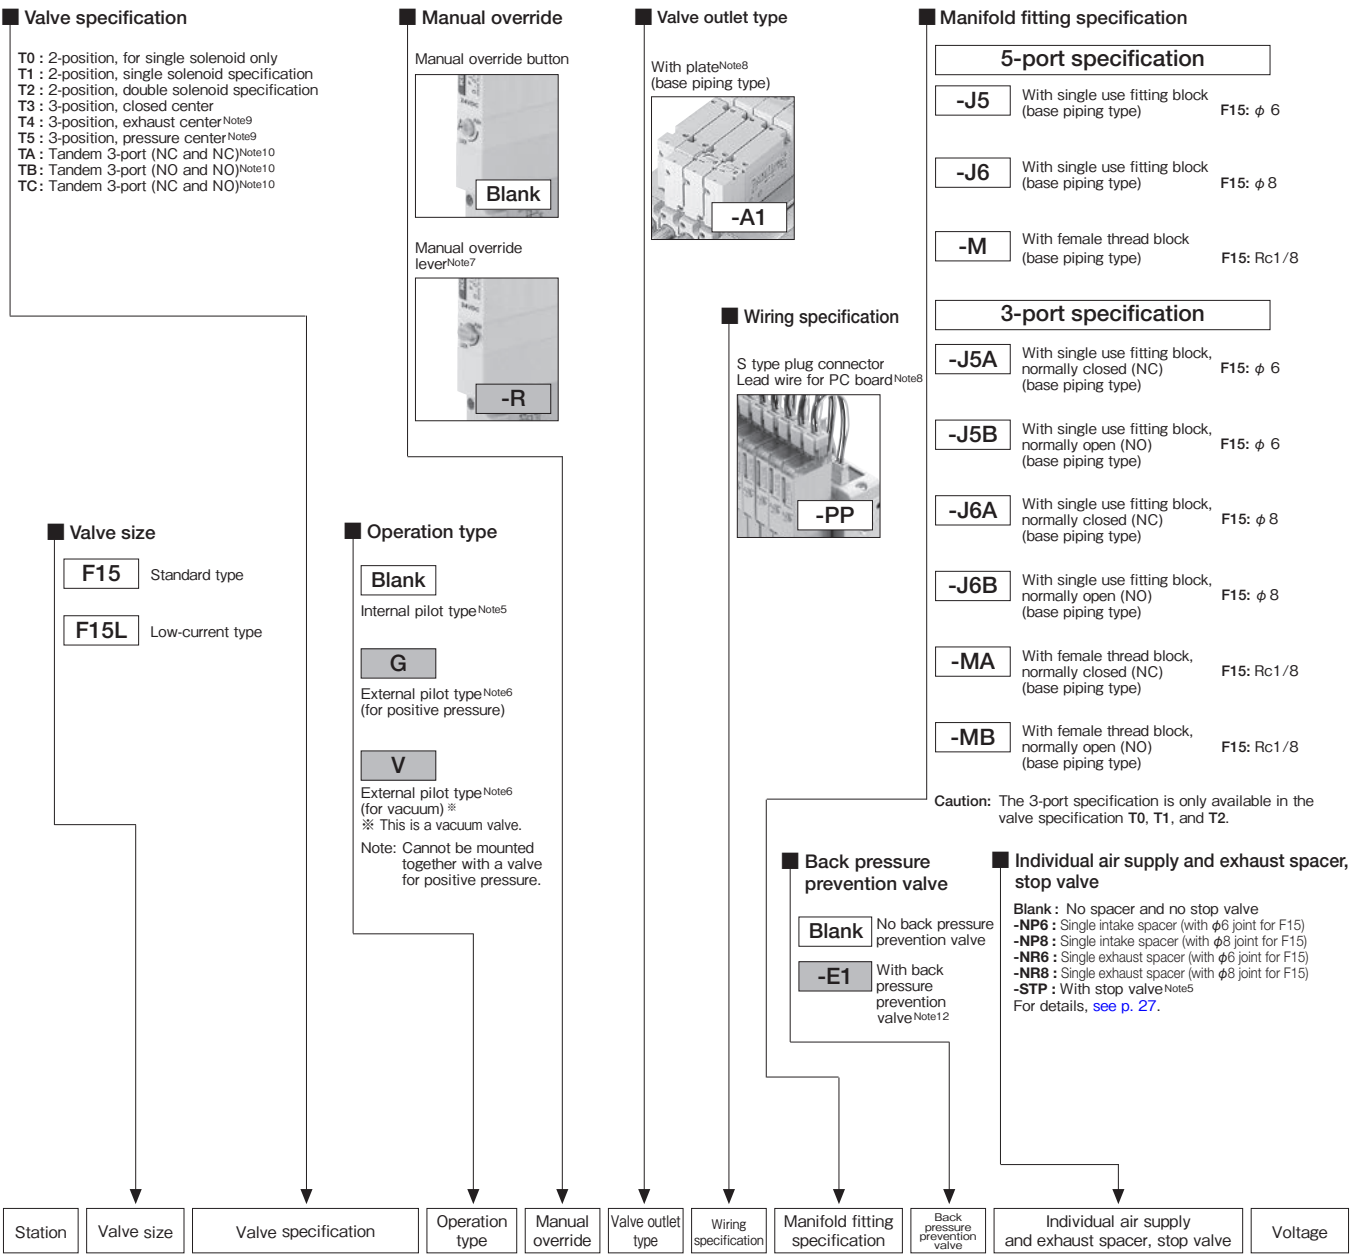

Station	Valve size	Valve specification	Operation type	Manual override	Valve outlet type	Wiring specification	Manifold fitting specification	Back pressure prevention valve	Individual air supply and exhaust spacer, stop valve	Voltage
Mounting valve model										
stn. 1 ⋮ stn. □ Note4	F15 F15L	T0 T1 Note1	Blank ^{Note5} G ^{Note6} V ^{Note6}	Blank -R ^{Note7}	-A1 Note8	-PP Note8		Blank -E1 ^{Note12}	Blank -NP6 -NP8 -NR6 -NR8 -STP Note5	DC24V DC12V ^{Note13}
	F15	BPC (for block-off plate)							Blank -STP ^{Note5}	
stn. 1 ⋮ stn. □ Note4	F15 F15L	T0 T1 Note1	Blank ^{Note5} G ^{Note6} V ^{Note6}	Blank -R ^{Note7}	-A1 Note8	-PP Note8	-J5 -J6A -J6 -J6B -M -MA -J5A -MB -J5B	Blank -E1 ^{Note12}	Blank -NP6 -NP8 -NR6 -NR8 -STP Note5	DC24V DC12V ^{Note13}
	F15	BPC (for block-off plate)							Blank -STP ^{Note5}	
stn. 1 ⋮ stn. □ Note4	F15 F15L	T0 T3 TA ^{Note10} T1 T4 ^{Note9} TB ^{Note10} T2 T5 ^{Note9} TC ^{Note10}	Blank ^{Note5} G ^{Note6} V ^{Note6}	Blank -R ^{Note7}	-A1 Note8	-PP Note8 Note11		Blank -E1 ^{Note12}	Blank -NP6 -NP8 -NR6 -NR8 -STP Note5	DC24V DC12V ^{Note13}
	F15	BPC (for block-off plate)							Blank -STP ^{Note5}	
stn. 1 ⋮ stn. □ Note4	F15 F15L	T0 T3 TA ^{Note10} T1 T4 ^{Note9} TB ^{Note10} T2 T5 ^{Note9} TC ^{Note10}	Blank ^{Note5} G ^{Note6} V ^{Note6}	Blank -R ^{Note7}	-A1 Note8	-PP Note8 Note11	-J5 -J6A -J6 -J6B -M -MA -J5A -MB -J5B	Blank -E1 ^{Note12}	Blank -NP6 -NP8 -NR6 -NR8 -STP Note5	DC24V DC12V ^{Note13}
	F15	BPC (for block-off plate)							Blank -STP ^{Note5}	

Notes: 4. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
 5. Cannot be mounted on the external pilot manifold.
 6. Cannot be mounted on the internal pilot manifold.
 7. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
 8. Always enter -A1 and -PP.
 9. Not available in the vacuum valves.
 10. Not available in external pilot type and vacuum valves.
 11. The lead wire on the solenoid B side (white) is not available in valve specification T0.
 12. Not available with the individual exhaust spacer and vacuum valve.
 13. Not available in low-current type.

Gasket (gasket and exhaust valve)

F15Z - GS1

Valve size
15: 15 mm [0.591 in.] width

Block-off plate

(block-off plate, 2 mounting screws, and housing)

F15BPC


Valve size
15: 15 mm [0.591 in.] width

Connector-related order codes

JAZ□ - P15

Valve specification
Blank: For T1, T2, T3, T4, T5, TA, TB, TC
0: For T0

Connector specification
P15: For F15 series
Connector lead wire for PC board manifold

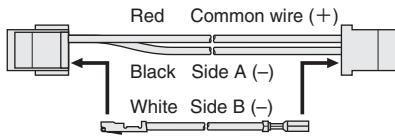

(Insert when using as a double solenoid)^{Note}


Note: White lead wire is not available for JAZ0-P□.

Back pressure prevention valve

(for monoblock type, 2 pieces)

F15Z - E1

Valve size
15: 15 mm [0.591 in.] width

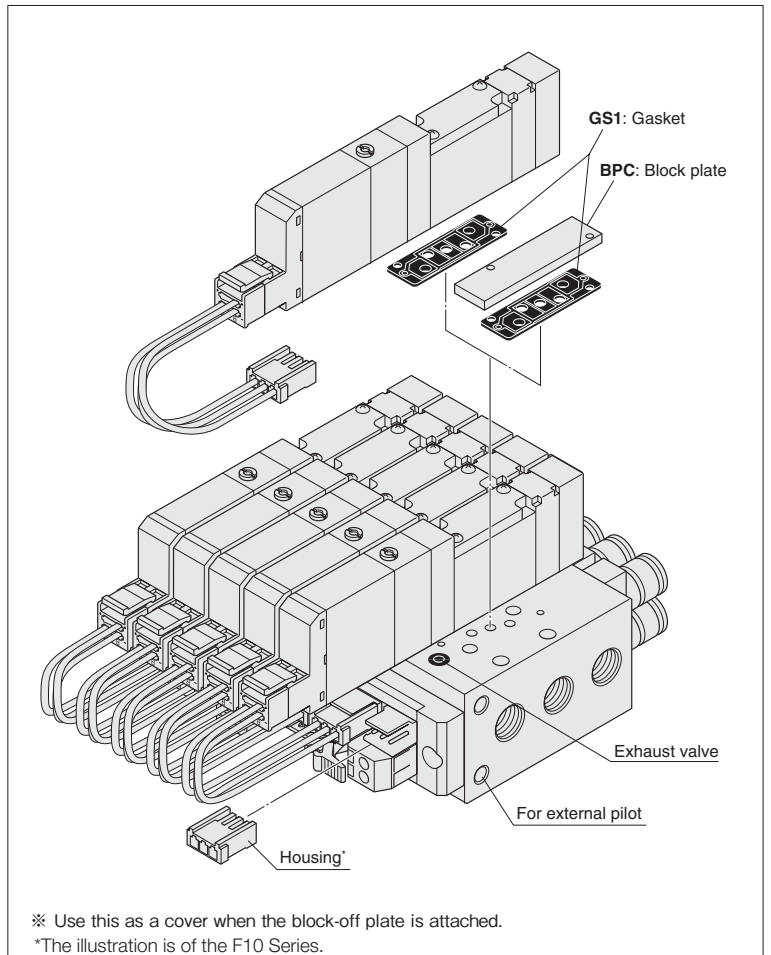

※ Use this as a cover when the block-off plate is attached.
*The illustration is of the F10 Series.

Individual air supply and exhaust spacer (Spacer for non-plug-in type, gasket, exhaust valve, and 2 mounting screws)

F15Z - □

Valve size
15: 15 mm [0.591 in.] width

Specification
NP6: Single intake spacer (with $\phi 6$ joint for F15)
NP8: Single intake spacer (with $\phi 8$ joint for F15)
NR6: Single exhaust spacer (with $\phi 6$ joint for F15)
NR8: Single exhaust spacer (with $\phi 8$ joint for F15)

※ For details, see p. 27.

Manifold Order Code Example

(8 units of F15 Series)

F15M8APL-F201-W

stn.1~4 F15T0-A1-PP-J5 DC24V
stn.5~7 F15T2-A1-PP-J6 DC24V
stn.8 F15BPC-J6

Note: This order code example has no relationship to the illustration at upper right.

Muffler

KM - J□

Fitting size
6: Outer diameter $\phi 6$ (for individual exhaust spacer)
8: Outer diameter $\phi 8$ (for individual exhaust spacer)
(Sales unit: Set of 10 mufflers)

Precautions for Order Codes

● Orders for valves only

Enter the code [Valve size] [Valve specification] [Pilot specification] [Manual override] - [Valve outlet type] - PP [Voltage] to order.

● Wiring connection specification

-S (single wiring): Wiring for single solenoid only.

-W (double wiring): Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

When the lead wire for the PC board is not required, enter -PN.

F15 Series PC Board Manifold F Type (Direct Piping Type) Order Codes


Valve size

F15M

15 mm [0.591 in.] width

Wiring specification (wiring block)

Flat cable connector (with socket and strain relief)



-F200: 20-pin
-F201: 20-pin
For details, see p. 90.

Wiring connection specification

- S Single wiring^{Note1}
- W Double wiring^{Note2}

Valve size

- F15 Standard type
- F15L Low-current type

Manual override

Manual override button



Manual override lever^{Note5}



Valve outlet type

5-port specification

- FJ With dual use fitting block (direct piping type) F15: φ 6, φ 8
- FJ5 With single use fitting block (direct piping type) F15: φ 6
- FJ6 With single use fitting block (direct piping type) F15: φ 8
- FM With female thread block (direct piping type) F15: Rc1/8


3-port specification

- FJ5A With single use fitting block, normally closed (NC) F15: φ 6 (direct piping type)
- FJ5B With single use fitting block, normally open (NO) F15: φ 6 (direct piping type)
- FJ6A With single use fitting block, normally closed (NC) F15: φ 8 (direct piping type)
- FJ6B With single use fitting block, normally open (NO) F15: φ 8 (direct piping type)
- FMA With female thread block, normally closed (NC) F15: Rc1/8 (direct piping type)
- FMB With female thread block, normally open (NO) F15: Rc1/8 (direct piping type)

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Wiring specification

S type plug connector
Lead wire for PC board



Individual air supply and exhaust spacer, stop valve

Blank : No spacer and no stop valve
-NP6 : Single intake spacer (with φ6 joint for F15)
-NP8 : Single intake spacer (with φ8 joint for F15)
-NR6 : Single exhaust spacer (with φ6 joint for F15)
-NR8 : Single exhaust spacer (with φ8 joint for F15)
-STP : With stop valve
For details, see p. 27.

Back pressure prevention valve

- Blank No back pressure prevention valve
- E1 With back pressure prevention valve^{Note8}

Valve size	Valve units	Wiring specification	Wiring connection specification	Station	Valve size	Valve specification	Manual override	Valve outlet type	Wiring specification	Back pressure prevention valve	Individual air supply and exhaust spacer, stop valve	Voltage
Manifold model				Mounting valve model								

Single wiring type ^{Note1}	6 8 10 12 14 16 Note3	FP	-F200 -F201	-S	stn. 1 : stn. □ Note4	F15 F15L	T0 T1 Note1	Blank -R ^{Note5}	^{Note10} -FJ -FJ5B -FJ5 -FJ6A -FJ6 -FJ6B -FM -FMA -FJ5A -FMB	-PP Note6	Blank -E1 ^{Note8}	Blank -NP6 -NR8 -NP8 -STP -NR6	DC24V DC12V ^{Note9}
	F15M												
Double wiring type ^{Note2}	6 8 Note3	FP	-F200 -F201	-W	stn. 1 : stn. □ Note4	F15 F15L	T0 T3 TA T1 T4 TB T2 T5 TC	Blank -R ^{Note5}	^{Note10} -FJ -FJ5B -FJ5 -FJ6A -FJ6 -FJ6B -FM -FMA -FJ5A -FMB	-PP Note6 Note7	Blank -E1 ^{Note8}	Blank -NP6 -NR8 -NP8 -STP -NR6	DC24V DC12V ^{Note9}
	F15M												

- Notes: 1. Wiring is for the single solenoid only. Note that this is not the same as packed wiring. The mounting valves are limited to single solenoid only (T0, T1 specifications). Therefore, even if the T1 specification valve is switched over to a double solenoid, no power will be applied to the B side solenoid.
2. Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.
3. In terms of wiring connection specifications, the number of units for single wiring is 6-16 (even numbers only) and for double wiring is 6 or 8.
4. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
5. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
6. Always enter -PP.
7. The lead wire on the solenoid B side (white) is not available in valve specification T0.
8. Not available with the individual exhaust spacer.
9. Not available in low-current type.
10. The 3-port specifications are only available in the valve specification T0, T1, and T2.

Gasket (gasket and exhaust valve)

F15Z - GS1

Valve size
15: 15 mm [0.591 in.] width

Block-off plate (block-off plate, 2 mounting screws, and housing)

F15BPC


Valve size
15: 15 mm [0.591 in.] width

Connector-related order code

JAZ □ - P15

Valve specification
Blank: For T1, T2, T3, T4, T5, TA, TB, TC
0: For T0

Connector specification
P15: For F15 series
Connector lead wire for PC board manifold

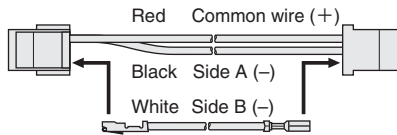


Note: White lead wire is not available for JAZ0-P□.

Back pressure prevention valve (for monoblock type, 2 pieces)

F15Z - E1

Valve size
15: 15 mm [0.591 in.] width

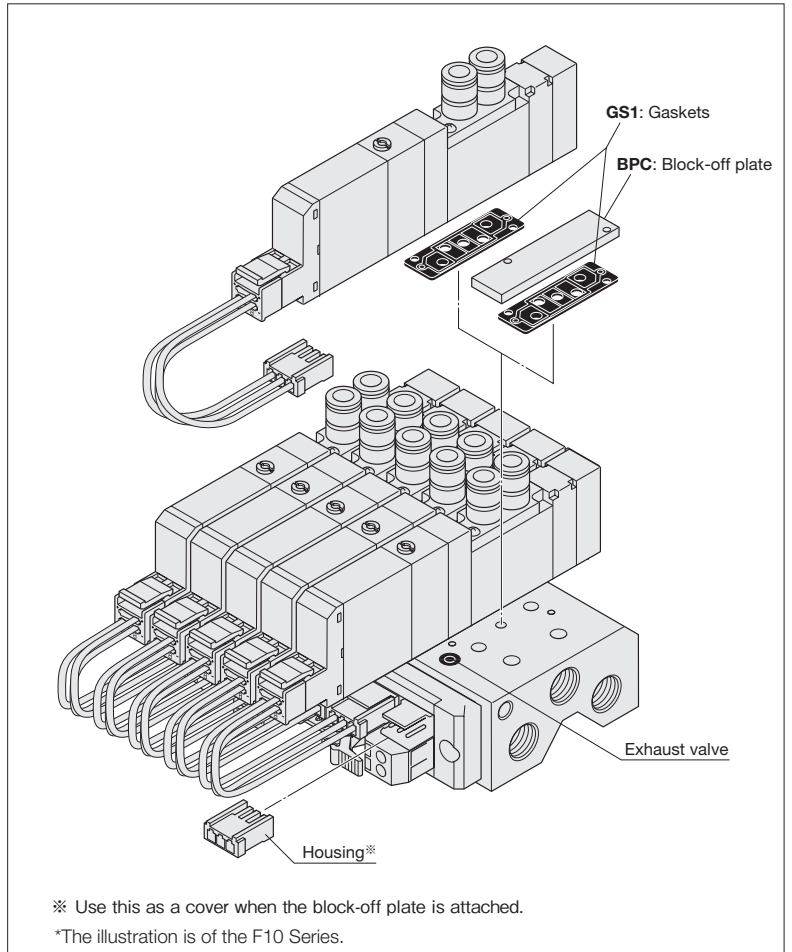

Individual air supply and exhaust spacer (Spacer for non-plug-in type, gasket, exhaust valve, and 2 mounting screws)

F15Z - □

Valve size
15: 15 mm [0.591 in.] width

Specification
NP6: Single intake spacer (with φ 6 joint for F15)
NP8: Single intake spacer (with φ 8 joint for F15)
NR6: Single exhaust spacer (with φ 6 joint for F15)
NR8: Single exhaust spacer (with φ 8 joint for F15)

* For details, see p. 27.

Manifold Order Code Example

(8 units of F15 Series)

F15M8FP-F201-W

stn.1~4 F15T0-FJ5-PP DC24V
stn.5~7 F15T2-FJ6-PP DC24V
stn.8 F15BPC

Note: This order code example has no relationship to the illustration at upper right.

Muffler

KM - J □

Fitting size
6: Outer diameter φ 6 (for individual exhaust spacer)
8: Outer diameter φ 8 (for individual exhaust spacer)
(Sales unit: Set of 10 mufflers)

Precautions for Order Codes


● Orders for valves only

Enter the code [Valve size] [Valve specification] [Manual override] - [Valve outlet type] - PP [Voltage] to order.

● Wiring connection specification

-S (single wiring): Wiring for single solenoid only.
-W (double wiring): Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

When the lead wire for the PC board is not required, enter -PN.

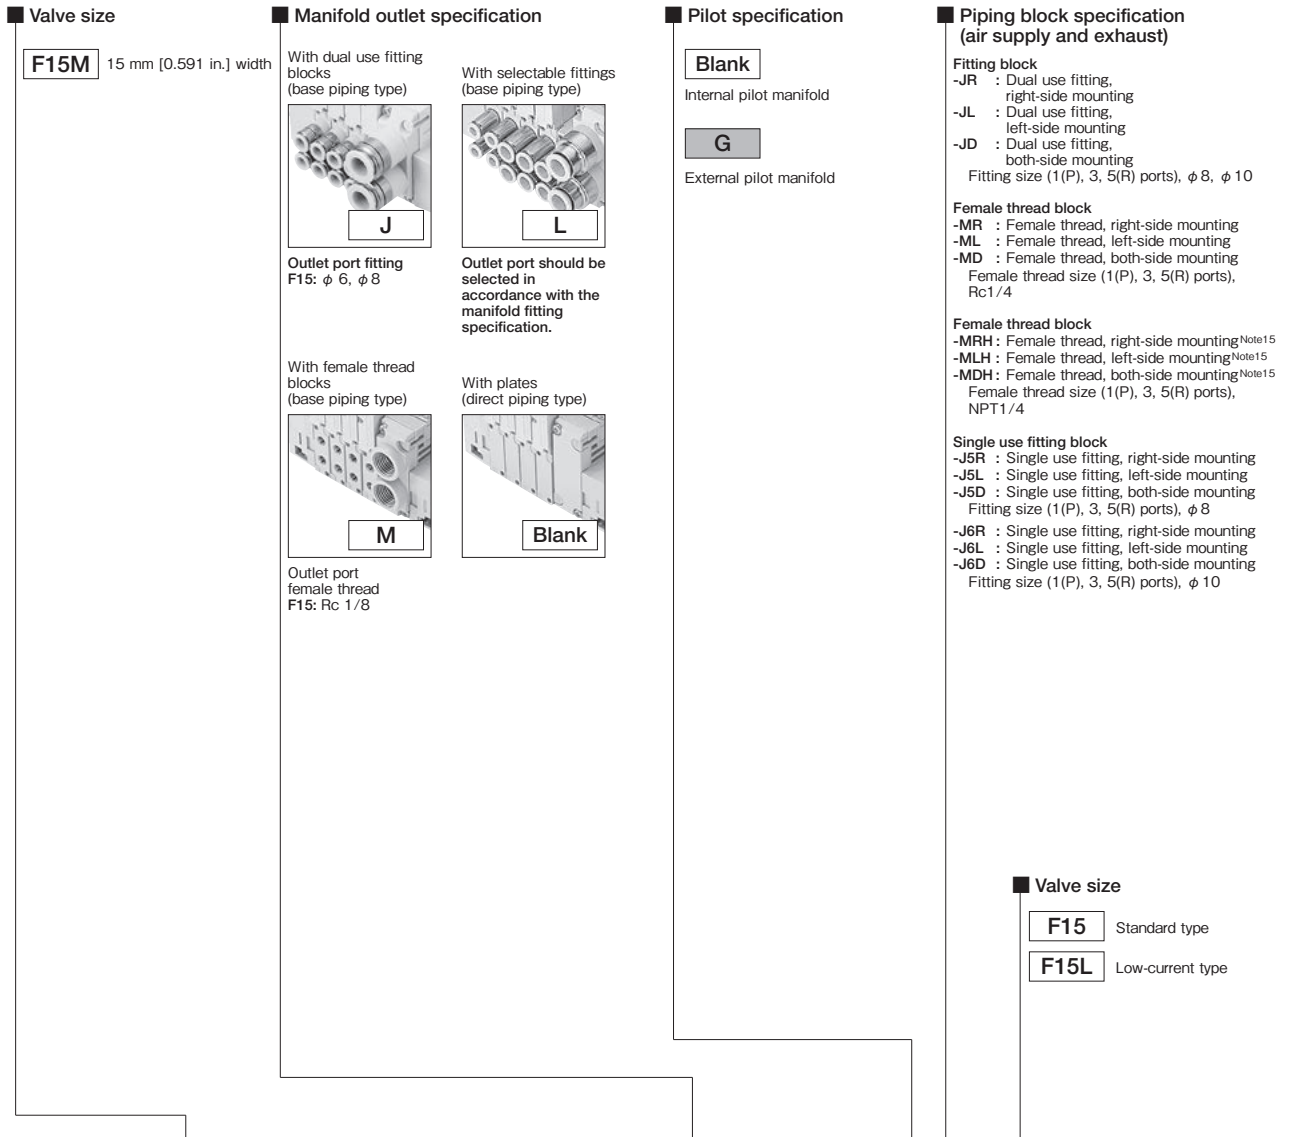

Valve size	Valve units	Manifold type	Manifold outlet specification	Pilot specification	Piping block specification
Manifold model					

Base piping type	F15M	2 ⋮ 20	N	J M	Blank G	-JR -JL -JD -MR -ML -MD	-J5R -J6R -J5L -J6L -J5D -J6D
Base piping type selectable fitting			N	L	Blank G	-JR ^{Note14} -JL ^{Note14} -JD ^{Note14} -MR ^{Note14} -ML ^{Note14} -MD ^{Note14} -MRH ^{Note15} -MLH ^{Note15}	-MDH ^{Note15} -J5R ^{Note14} -J6R ^{Note14} -J5L ^{Note14} -J6L ^{Note14} -J5D ^{Note14} -J6D ^{Note14}
Direct piping type			NH	Blank	Blank G	-JR ^{Note14} -JL ^{Note14} -JD ^{Note14} -MR ^{Note14} -ML ^{Note14} -MD ^{Note14} -MRH ^{Note15} -MLH ^{Note15}	-MDH ^{Note15} -J5R ^{Note14} -J6R ^{Note14} -J5L ^{Note14} -J6L ^{Note14} -J5D ^{Note14} -J6D ^{Note14}

Remark: Negative common specifications are also available as made to order products (add -129W to the ends of the valve and manifold model order codes). For details, consult us.

Valve specification

T0 : 2-position, for single solenoid only
 T1 : 2-position, single solenoid specification
 T2 : 2-position, double solenoid specification
 T3 : 3-position, closed center
 T4 : 3-position, exhaust center
 T5 : 3-position, pressure center
 TA : Tandem 3-port (NC and NC)^{Note7}
 TB : Tandem 3-port (NO and NO)^{Note7}
 TC : Tandem 3-port (NC and NO)^{Note7}

Operation type

Blank
Internal pilot type^{Note5}

G
External pilot type^{Note6}
(for positive pressure)
※ No vacuum valve can be mounted.

Manual override

Manual override button
Blank

Manual override lever^{Note2}
-R

Valve outlet type

-A1 With plate^{Note3}
(base piping type)

5-port specification

-FJ With dual use fitting block^{Note14} F15: φ 6, φ 8 (direct piping type)
-FJ5 With single use fitting block^{Note14} F15: φ 6 (direct piping type)
-FJ6 With single use fitting block^{Note14} F15: φ 8 (direct piping type)
-FM With female thread block^{Note14} F15: Rc1/8 (direct piping type)

3-port specification

-FJ5A With single use fitting block, normally closed (NC)^{Note14} F15: φ 6 (direct piping type)
-FJ5B With single use fitting block, normally open (NO)^{Note14} F15: φ 6 (direct piping type)
-FJ6A With single use fitting block, normally closed (NC)^{Note14} F15: φ 8 (direct piping type)
-FJ6B With single use fitting block, normally open (NO)^{Note14} F15: φ 8 (direct piping type)
-FMA With female thread block, normally closed (NC)^{Note14} F15: Rc1/8 (direct piping type)
-FMAH With female thread block, normally closed (NC)^{Note15} F15: NPT1/8 (direct piping type)
-FMB With female thread block, normally open (NO)^{Note14} F15: Rc1/8 (direct piping type)
-FMBH With female thread block, normally open (NO)^{Note15} F15: NPT1/8 (direct piping type)

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Wiring specification ^{Note11}

S type plug connector
Without connector
-PN

S type plug connector
Lead wire 3000 mm [11.8 in.]
-PS

S type plug connector
Lead wire 300 mm [11.8 in.]
-PS3

Pre-wired positive common terminal
S type plug connector
Lead wire 300 mm [11.8 in.]
-CPS

Pre-wired positive common terminal
S type plug connector
Lead wire 3000 mm [11.8 in.]
-CPS3

Manifold fitting specification

5-port specification

-J5 With single use fitting block (base piping type) F15: φ 6
-J6 With single use fitting block (base piping type) F15: φ 8
-M With female thread block (base piping type) F15: Rc1/8
-MH With female thread block^{Note14} (base piping type) F15: NPT1/8

3-port specification

-J5A With single use fitting block, normally closed (NC) F15: φ 6 (base piping type)
-J5B With single use fitting block, normally open (NO) F15: φ 6 (base piping type)
-J6A With single use fitting block, normally closed (NC) F15: φ 8 (base piping type)
-J6B With single use fitting block, normally open (NO) F15: φ 8 (base piping type)
-MA With female thread block, normally closed (NC) F15: Rc1/8 (base piping type)
-MAH With female thread block, normally closed (NC)^{Note15} F15: NPT1/8 (base piping type)
-MB With female thread block, normally open (NO)^{Note14} F15: Rc1/8 (base piping type)
-MBH With female thread block, normally open (NO)^{Note15} F15: NPT1/8 (base piping type)

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Port isolator

Blank : No port isolator
-SP : For 1(P) port^{Note4}
-SR : For 3(R2), 5(R1) ports^{Note4}
-SA : For 1(P), 3(R2), and 5(R1) ports^{Note4}

Back pressure prevention valve

Blank
No back pressure prevention valve
-E2
With back pressure prevention valve^{Note8}

Individual air supply and exhaust spacer

Blank : No spacer
-NP6 : Single intake spacer (with φ 6 joint for F15)
-NP8 : Single intake spacer (with φ 8 joint for F15)
-NR6 : Single exhaust spacer (with φ 6 joint for F15)
-NR8 : Single exhaust spacer (with φ 8 joint for F15)

For details, see p. 27.

Station

Valve size

Valve specifications

Operation type

IP Specifications

Manual override

Valve outlet type

Wiring specification

Manifold fitting specification

Back pressure prevention valve

Individual air supply and exhaust spacer

Port isolator

Voltage

Mounting valve model												
Station	Valve size	Valve specifications	Operation type	IP Specifications	Manual override	Valve outlet type	Wiring specification	Manifold fitting specification	Back pressure prevention valve	Individual air supply and exhaust spacer	Port isolator	Voltage
strn. 1 : : strn. □ <small>Note1</small>	F15 F15L	T0 TA ^{Note7} T1 TB ^{Note7} T2 TC ^{Note7} T3 T4 T5	Blank ^{Note5} G ^{Note6}	Blank -p <small>Note12</small>	Blank -R ^{Note2}	-A1 ^{Note3}	-PN -PS ^{Note11} -PS3 -CPS -CPS3	-J5 ^{Note14} -J6 ^{Note14} -M ^{Note14} -MH ^{Note14} -J5A ^{Note14} -J5B ^{Note14} -J6A ^{Note14} -J6B ^{Note14} -MA ^{Note14} -MAH ^{Note15} -MB ^{Note14} -MBH ^{Note15}	Blank -E2 ^{Note8}	Blank -NP6 -NP8 -NR6 -NR8	Blank -SP ^{Note4} -SR ^{Note4} -SA ^{Note4}	DC24V DC12V ^{Note9} AC100V ^{Note10} AC120V ^{Note10}
strn. 1 : : strn. □ <small>Note1</small>	F15 F15L	T0 TA ^{Note7} T1 TB ^{Note7} T2 TC ^{Note7} T3 T4 T5	Blank ^{Note5} G ^{Note6}	Blank -p <small>Note12</small>	Blank -R ^{Note2}	-A1 ^{Note3}	-PN -PS ^{Note11} -PS3 -CPS -CPS3	-J5 ^{Note14} -J6 ^{Note14} -M ^{Note14} -MH ^{Note14} -J5A ^{Note14} -J5B ^{Note14} -J6A ^{Note14} -J6B ^{Note14} -MA ^{Note14} -MAH ^{Note15} -MB ^{Note14} -MBH ^{Note15}	Blank -E2 ^{Note8}	Blank -NP6 -NP8 -NR6 -NR8	Blank -SP ^{Note4} -SR ^{Note4} -SA ^{Note4}	DC24V DC12V ^{Note9} AC100V ^{Note10} AC120V ^{Note10}
strn. 1 : : strn. □ <small>Note1</small>	F15 F15L	T0 TA ^{Note7} T1 TB ^{Note7} T2 TC ^{Note7} T3 T4 T5	Blank ^{Note5} G ^{Note6}	Blank -p <small>Note12</small>	Blank -R ^{Note2}	Note13 -FJ -FJ5 -FJ6 -FM -FJ5A -FJ5B -FJ6A -FJ6B -FMA -FMAH -FMB -FMBH	-PN -PS ^{Note11} -PS3 -CPS -CPS3	-J5 ^{Note14} -J6 ^{Note14} -M ^{Note14} -MH ^{Note14} -J5A ^{Note14} -J5B ^{Note14} -J6A ^{Note14} -J6B ^{Note14} -MA ^{Note14} -MAH ^{Note15} -MB ^{Note14} -MBH ^{Note15}	Blank -E2 ^{Note8}	Blank -NP6 -NP8 -NR6 -NR8	Blank -SP ^{Note4} -SR ^{Note4} -SA ^{Note4}	DC24V DC12V ^{Note9} AC100V ^{Note10} AC120V ^{Note10}

Notes: 1. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
 2. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
 3. When selecting J, M, or L (base piping type) for the manifold outlet specification, always enter -A1 (with plate) for the valve outlet type.
 4. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for -SA, or 1 each port isolator for -SP and -SR for a total of 2 locations. When shipping, the designated port isolators are mounted between the designated station and the station to its immediate left (the next smaller strn. No.).
 5. Cannot be mounted on the external pilot manifold.
 6. Cannot be mounted on the internal pilot manifold.
 7. Not available in external pilot type.
 8. Not available with the individual exhaust spacer.
 9. Not available in low-current type.
 10. Not available in low-current type and tandem 3-port valves.
 11. Wiring specifications of -P □ and -CP □ cannot be mounted together.
 12. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.
 13. The 3-port specifications are only available in the valve specification T0, T1, and T2.
 14. Can be selected only when the manifold type is N.
 15. Can be selected only when the manifold type is NH.

Parts for manifold

F15Z -

Valve size
15: 15 mm [0.591 in.] width

Parts content
GS2 : Gasket (gasket and exhaust valve)
SP : Port isolator (for 1(P) port)
SR : Port isolator (for 3(R2), 5(R1) ports)
SA : Port isolator (for 1(P), 3(R2), 5(R1) ports)

Block-off plate (block-off plate, 2 mounting screws, and plug)

F15BP N

Valve size
15: 15 mm [0.591 in.] width

For non-plug-in type

Connector-related order codes ※ For details, see p. 22.

JAZ -

Valve specification

Blank: For T1, T2, T3, T4, T5, TA, TB, TC
0: For T0

Connector specification

CP : Connector, lead wire length 300 mm
CP3 : Connector, lead wire length 3000 mm
CPN : Connector without lead wire (short bar, contacts included)
PA : Positive common A type, lead wire length 300 mm *
PA3 : Positive common A type, lead wire length 3000 mm *
PB : Positive common B type, lead wire length 300 mm *
PB3 : Positive common B type, lead wire length 3000 mm *
PC : Positive common C type, lead wire length 300 mm *
PC3 : Positive common C type, lead wire length 3000 mm *

300 mm = 11.8 in.
1500 mm = 59 in.
3000 mm = 118 in.

FZ -


Valve specification
For T1, T2, T3, T4, T5, TA, TB, TC

Connector specification


CC1.5 : Cabtyre cable, length 1500 mm *
CC3 : Cabtyre cable, length 3000 mm *

Common connector assembly


A Type: JAZ-PA ※



B Type: JAZ-PB ※



C Type: JAZ-PC ※



※ Lead wire length Blank: 300 mm [11.8 in.] Note: White lead wire is not available with JAZO-P .
3: 3000 mm [118 in.]

Remark: Connector for negative common type also available. For details, see p. 22.

Valve base assembly (valve base and gasket)

F15Z -

Valve size
15: 15 mm [0.591 in.] width

Piping specification

VJ : Dual use fitting valve base
VJ5 : Single use fitting valve base F15: φ 6
VJ6 : Single use fitting valve base F15: φ 8
VJ5A : 3-port specification normally closed, single use fitting valve base F15: φ 6
VJ5B : 3-port specification normally open, single use fitting valve base F15: φ 6
VJ6A : 3-port specification normally closed, single use fitting valve base F15: φ 8
VJ6B : 3-port specification normally open, single use fitting valve base F15: φ 8
VM : Female thread valve base
VMA : 3-port specification normally closed, female thread valve base
VMB : 3-port specification normally open, female thread valve base
VP : Valve base plate

Pilot specification
Blank : Internal pilot
G : External pilot

Piping block assembly

F15Z -

Valve size
15: 15 mm [0.591 in.] width

Piping specification

PJ : Dual use fitting piping block
PJ5 : Single use fitting piping block φ 8
PJ6 : Single use fitting piping block φ 10
PM : Female thread piping block
PMH : Female thread piping block NPT1/4

Pilot specification
Blank : Internal pilot
G : External pilot

End blocks (one set of left and right)

F15Z - E

Valve size
15: 15 mm [0.591 in.] width

Pilot specification
Blank : Internal pilot
G : External pilot

Back pressure prevention valve (2 pieces for split type, with dedicated gasket)

F15Z - E2

Valve size
15: 15 mm [0.591 in.] width

Individual air supply and exhaust spacer (Spacer for non-plug-in type, gasket, exhaust valve, and 2 mounting screws)

F15Z -

Valve size
15: 15 mm [0.591 in.] width

Specification

NP6: Single intake spacer (with φ 6 joint for F15)
NP8: Single intake spacer (with φ 8 joint for F15)
NR6: Single exhaust spacer (with φ 6 joint for F15)
NR8: Single exhaust spacer (with φ 8 joint for F15)

※ For details, see p. 27.

Muffler

KM - J

Fitting size

6: Outer diameter φ 6 (for individual exhaust spacer)
8: Outer diameter φ 8 (for individual exhaust spacer)
10: Outer diameter φ 10


(Sales unit: Set of 10 mufflers)

DIN rail

DIN - (Unit: 1)

Rail length

125: 125mm [4.921 in.]
: (25 mm [0.984 in.] pitch)
525: 525mm [20.669 in.]

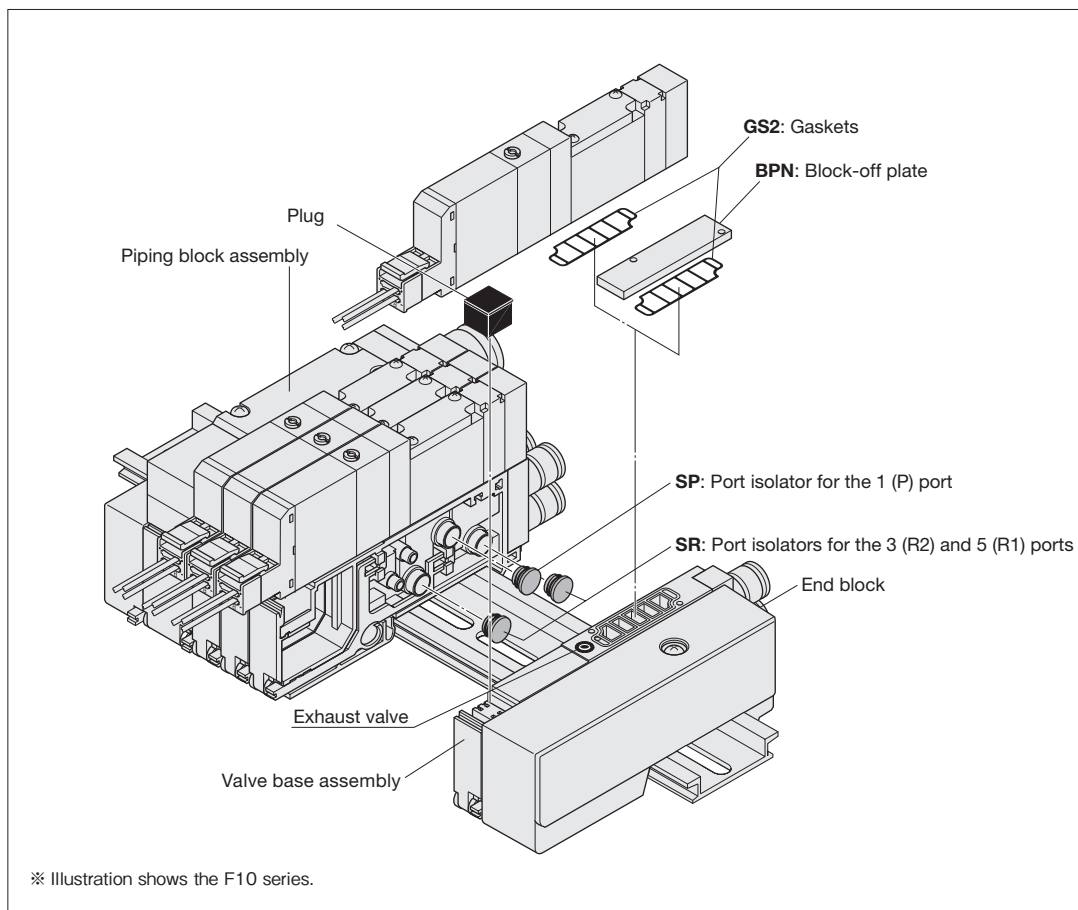

Manifold Order Code Example

(4 units of F15 Series)

F15M4NL-J5R

- stn.1~2 F15T0-A1-PS-J5 DC24V
- stn.3 F15T2-A1-PS-J6 DC24V
- stn.4 F15BPN-J6

Note: This order code example has no relationship to the illustration above.

Precautions for Order Codes

● Orders for valves only

Place orders from "Single Valve Unit Order Codes" on p. 162.

However, Blank, A2, F3, F4, F5, F6, F4A, F4B, F5A, F5B, F6A, and F6B cannot be selected for the valve outlet type. And for the wiring specification, Blank, PL, and PL3 cannot be selected. In addition, for common terminal wiring connections, separately order the common connector assemblies listed on the previous page.

Connector-related order codes

JAZ - P - (for double use only)

Valve

specification
For **T2, T3, T4,**
T5, TA, TB, or
TC

Connector specification

CP : Connector, lead wire length 300 mm [11.8 in.] (black, red, white, for total of 3 lead wires)
CP3: Connector, lead wire length 3000 mm [118 in.] (black, red, white, for total of 3 lead wires)
PA : Positive common A type, lead wire length 300 mm [11.8 in.]*
PA3 : Positive common A type, lead wire length 3000 mm [118 in.]*
PB : Positive common B type, lead wire length 300 mm [11.8 in.]*
PB3 : Positive common B type, lead wire length 3000 mm [118 in.]*
PC : Positive common C type, lead wire length 300 mm [11.8 in.]*
PC3 : Positive common C type, lead wire length 3000 mm [118 in.]*
※A common connector assembly.

JAZ0 - P - (for single use only)

Valve

specification
For **T0/T1**

Connector specification

CP : Connector, lead wire length 300 mm [11.8 in.] (black, red, for total of 2 lead wires)
CP3: Connector, lead wire length 3000 mm [118 in.] (black, red, for total of 2 lead wires)
PA : Positive common A type, lead wire length 300 mm [11.8 in.]*
PA3 : Positive common A type, lead wire length 3000 mm [118 in.]*
PB : Positive common B type, lead wire length 300 mm [11.8 in.]*
PB3 : Positive common B type, lead wire length 3000 mm [118 in.]*
PC : Positive common C type, lead wire length 300 mm [11.8 in.]*
PC3 : Positive common C type, lead wire length 3000 mm [118 in.]*
※A common connector assembly.

- Notes:
1. When the valve specification is **T1**, select the **JAZ0-P-** single dedicated type.
 2. When switching between the single and double type (**T1/T2**), purchase and use a dedicated connector for single or double use (the number of seal holes in the lead wire differs for the single and double type).
 3. There is no white lead wire for the **JAZ0-P-** .
 4. It is necessary to disassemble the connector to add a common connector assembly. Contact your nearest KOGANEI sales office.
 5. For information on use in locations/atmospheres subject to substances other than water, such as organic solvents, cutting oil, or reagents, contact your nearest KOGANEI sales office.
 6. For information on replacing the waterproof seal, contact your nearest KOGANEI sales office.

Manifold outlet specification

With dual use fitting blocks (base piping type) **J**

With selectable fittings (base piping type) **L**

With female thread blocks (base piping type) **M**

With plates (direct piping type) **Blank**

Outlet port fitting F15: φ 6, φ 8

Outlet port should be selected in accordance with the manifold fitting specification.

Outlet port female thread F15: Rc1/8

Pilot specification

Blank
Internal pilot manifold

G
External pilot manifold

Piping block specification (air supply and exhaust)

- Fitting block**
- JR : Dual use fitting, right-side mounting^{Note15}
 - JL : Dual use fitting, left-side mounting^{Note15}
 - JD : Dual use fitting, both-side mounting^{Note15}
- Fitting size (1(P), 3, 5(R) ports), φ 8, φ 10
- Female thread block**
- MR : Female thread, right-side mounting^{Note15}
 - ML : Female thread, left-side mounting^{Note15}
 - MD : Female thread, both-side mounting^{Note15}
- Female thread size (1(P), 3, 5(R) ports), Rc1/4
- Female thread block**
- MRH : Female thread, right-side mounting^{Note16}
 - MLH : Female thread, left-side mounting^{Note16}
 - MDH : Female thread, both-side mounting^{Note16}
- Female thread size (1(P), 3, 5(R) ports), NPT1/4
- Single size fitting block**
- J5R : Single use fitting, right-side mounting^{Note15}
 - J5L : Single use fitting, left-side mounting^{Note15}
 - J5D : Single use fitting, both-side mounting^{Note15}
 - J6R : Single use fitting, right-side mounting^{Note15}
 - J6L : Single use fitting, left-side mounting^{Note15}
 - J6D : Single use fitting, both-side mounting^{Note15}
- Fitting size (1(P), 3, 5(R) ports), φ 8
- J5R : Single use fitting, right-side mounting^{Note15}
 - J5L : Single use fitting, left-side mounting^{Note15}
 - J5D : Single use fitting, both-side mounting^{Note15}
 - J6R : Single use fitting, right-side mounting^{Note15}
 - J6L : Single use fitting, left-side mounting^{Note15}
 - J6D : Single use fitting, both-side mounting^{Note15}
- Fitting size (1(P), 3, 5(R) ports), φ 10

Wiring specification (wiring block)

Flat cable connector (with socket and strain relief)

-F

<Connector top surface wiring>

- F100 : 10-pin
- F100N : 10-pin without power terminal
- F101 : 10-pin
- F101N : 10-pin without power terminal
- F200 : 20-pin
- F200N : 20-pin without power terminal
- F201 : 20-pin
- F201N : 20-pin without power terminal
- F260 : 26-pin
- F260N : 26-pin without power terminal

<Connector side surface wiring>

- F100E : 10-pin
- F100EN : 10-pin without power terminal
- F101E : 10-pin
- F101EN : 10-pin without power terminal
- F200E : 20-pin
- F200EN : 20-pin without power terminal
- F201E : 20-pin
- F201EN : 20-pin without power terminal
- F260E : 26-pin
- F260EN : 26-pin without power terminal

For details, see p. 47.

D-sub connector

-D25

<Connector top surface wiring>

(M2.6 mounting screws)

- D250 : 25-pin^{Note15}
- D250N : 25-pin without power terminal^{Note15}
- D251 : 25-pin^{Note15}
- D251N : 25-pin without power terminal^{Note15}

(4-40 UNC mounting screws)

- D250U : 25-pin^{Note16}
- D251U : 25-pin^{Note16}
- D370NU : 37-pin without power terminal^{Note16}

<Connector side surface wiring>

(M2.6 mounting screws)

- D250E : 25-pin^{Note15}
- D250EN : 25-pin without power terminal^{Note15}
- D251E : 25-pin^{Note15}
- D251EN : 25-pin without power terminal^{Note15}

(4-40 UNC mounting screws)

- D250EU : 25-pin^{Note15}
- D251EU : 25-pin^{Note15}

For details, see p. 47.

Terminal block (19 terminals, M3 screws)

-T200

Also can provide the terminal block with cover,^{Note4}

For details, see p. 47.

Wiring connection specification

Blank

Packed wiring:
Wiring is made in accordance with the mounted valve specifications.

-W

Double wiring:
Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

Wiring position (wiring block)

- Blank : Left-side mounting
- R : Right-side mounting


Valve size

F15M 15 mm [0.591 in.] width

Valve size

F15 Standard type

F15L Low-current type



Base piping type	Valve units	Manifold type	Manifold outlet specification	Pilot specification	Piping block specification					Wiring specification		Wiring connection specification	Wiring position	Voltage
					-JR	-J5R	-F100	-F201	-D251	-F200E	-D250E			
Base piping type selectable fitting	2 : : : □ Note1	P	J	Blank	-JR	-J5R	-F100	-F201	-D251	-F200E	-D250E	Blank	Blank	DC24V
			M	G	-JL	-J6R	-F100N	-F201N	-D251N	-F200EN	-D250EN			
			Blank	G	-JD	-J5L	-F101	-F260	-F100E	-F201E	-D251E			
Direct piping type		PH	Blank	Blank	-MR	-J6L	-F101N	-F260N	-F100EN	-F201EN	-D251EN	Blank	Blank	DC24V
			Blank	G	-ML	-J5D	-F200	-D250	-F101E	-F260E	-T200			
			Blank	G	-MD	-J6D	-F200N	-D250N	-F101EN	-F260EN				

Notes: 1. For the maximum number of units, see the table for maximum number of valve units by wiring specification, on p. 192.
 2. Not available in low-current type.
 3. AC100V, AC120V is available only for the -D250□, -D251□ (D-sub connector) and -T200 (terminal block) wiring specifications. In addition, not available in low-current type and tandem 3-port valves.
 4. The terminal block with cover is also available as a made to order product (add -139W to the end of the manifold model order code). For details, consult us.

Remark: Negative common specifications are also available as made to order products (add -129W to the ends of the valve and manifold model order codes). For details, consult us.


Valve specification

T0 : 2-position, for single solenoid only
 T1 : 2-position, single solenoid specification
 T2 : 2-position, double solenoid specification
 T3 : 3-position, closed center
 T4 : 3-position, exhaust center
 T5 : 3-position, pressure center
 TA : Tandem 3-port (NC and NO)^{Note12}
 TB : Tandem 3-port (NO and NO)^{Note12}
 TC : Tandem 3-port (NC and NO)^{Note12}

Operation type

Blank
 Internal pilot type^{Note10}

G
 External pilot type^{Note11}
 (for positive pressure)
 ※ No vacuum valve can be mounted.

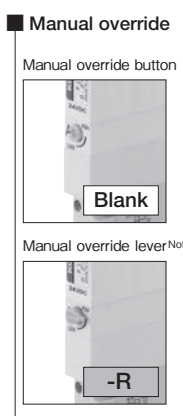

Valve outlet type

-A1 With plate^{Note6}
 (base piping type)

5-port specification

-FJ With dual use fitting block^{Note15}
 (direct piping type) F15: φ 6, φ 8

-FJ5 With single use fitting block^{Note15}
 (direct piping type) F15: φ 6

-FJ6 With single use fitting block^{Note15}
 (direct piping type) F15: φ 8

-FM With female thread block^{Note15}
 (direct piping type) F15: Rc1/8

-FMH With female thread block^{Note16}
 (direct piping type) F15: NPT1/8

3-port specification

-FJ5A With single use fitting block, normally closed (NC)^{Note15}
 (direct piping type) F15: φ 6

-FJ5B With single use fitting block, normally open (NO)^{Note15}
 (direct piping type) F15: φ 6

-FJ6A With single use fitting block, normally closed (NC)^{Note15}
 (direct piping type) F15: φ 8

-FJ6B With single use fitting block, normally open (NO)^{Note15}
 (direct piping type) F15: φ 8

-FMA With female thread block, normally closed (NC)^{Note15}
 (direct piping type) F15: Rc1/8

-FMAH With female thread block, normally closed (NC)^{Note16}
 (direct piping type) F15: NPT1/8

-FMB With female thread block, normally open (NO)^{Note15}
 (direct piping type) F15: Rc1/8

-FMBH With female thread block, normally open (NO)^{Note16}
 (direct piping type) F15: NPT1/8

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Manifold fitting specification

5-port specification

-J5 With single use fitting block (base piping type) F15: φ 6

-J6 With single use fitting block (base piping type) F15: φ 8

-M With female thread block (base piping type) F15: Rc1/8

-MH With female thread^{Note16} block (base piping type) F15: NPT1/8

3-port specification

-J5A With single use fitting block, normally closed (NC) (base piping type) F15: φ 6

-J5B With single use fitting block, normally open (NO) (base piping type) F15: φ 6

-J6A With single use fitting block, normally closed (NC) (base piping type) F15: φ 8

-J6B With single use fitting block, normally open (NO) (base piping type) F15: φ 8

-MA With female thread block, normally closed (NC) (base piping type) F15: Rc1/8

-MAH With female thread block, normally closed (NC)^{Note16} (base piping type) F15: 10-32UNF

-MB With female thread block, normally open (NO)^{Note15} (base piping type) F15: Rc1/8

-MBH With female thread block, normally open (NO)^{Note16} (base piping type) F15: NPT1/8

Port isolator

Blank : No port isolator
 -SP : For 1(P) port^{Note9}
 -SR : For 3(R2), 5(R1) ports^{Note9}
 -SA : For 1(P), 3(R2), and 5(R1) ports^{Note9}

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Back pressure prevention valve

Blank
 No back pressure prevention valve

-E2
 With back pressure prevention valve^{Note13}

Individual air supply and exhaust spacer


Blank : No spacer
 -PP6 : Single intake spacer (with φ 6 joint for F15)
 -PP8 : Single intake spacer (with φ 8 joint for F15)
 -PR6 : Single exhaust spacer (with φ 6 joint for F15)
 -PR8 : Single exhaust spacer (with φ 8 joint for F15)
 For details, see p. 27.

Station	Valve size	Valve specification	Operation type	Manual override	Valve outlet type	Manifold fitting specification	Back pressure prevention valve	Individual air supply and exhaust spacer	Port isolator	Voltage
---------	------------	---------------------	----------------	-----------------	-------------------	--------------------------------	--------------------------------	--	---------------	---------


Mounting valve model										
strn. 1 . . strn. □ Note5	F15 F15L F15	T0 T3 TA ^{Note12} T1 T4 TB ^{Note12} T2 T5 TC ^{Note12}	Blank ^{Note10} G ^{Note11}	Blank -R ^{Note8}	-A1 ^{Note6}		Blank -E2 ^{Note13}	Blank -PP6 -PR6 -PP8 -PR8	Blank -SP ^{Note9} -SR ^{Note9} -SA ^{Note9}	DC24V DC12V ^{Note2} AC100V ^{Note3} AC120V ^{Note3}
strn. 1 . . strn. □ Note5	F15 F15L F15	T0 T3 TA ^{Note12} T1 T4 TB ^{Note12} T2 T5 TC ^{Note12}	Blank ^{Note10} G ^{Note11}	Blank -R ^{Note8}	-A1 ^{Note6}	-J5 ^{Note15} -J6A ^{Note15} -J6 ^{Note15} -J6B ^{Note15} -M ^{Note15} -MA ^{Note15} -MH ^{Note16} -MAH ^{Note16} -J5A ^{Note15} -MB ^{Note15} -J5B ^{Note15} -MBH ^{Note16}	Blank -E2 ^{Note13}	Blank -PP6 -PR6 -PP8 -PR8	Blank -SP ^{Note9} -SR ^{Note9} -SA ^{Note9}	DC24V DC12V ^{Note2} AC100V ^{Note3} AC120V ^{Note3}
						BPP (for block-off plate) ^{Note7}				
strn. 1 . . strn. □ Note5	F15 F15L F15	T0 T3 TA ^{Note12} T1 T4 TB ^{Note12} T2 T5 TC ^{Note12}	Blank ^{Note10} G ^{Note11}	Blank -R ^{Note8}	-A1 ^{Note6}	-FJ ^{Note15} -FJ6A ^{Note15} -FJ5 ^{Note15} -FJ6B ^{Note15} -FJ6 ^{Note15} -FMA ^{Note15} -FM ^{Note15} -FMAH ^{Note16} -FMH ^{Note16} -FMB ^{Note15} -FJ5A ^{Note15} -FMBH ^{Note16} -FJ5B ^{Note15}	Blank -E2 ^{Note13}	Blank -PP6 -PR6 -PP8 -PR8	Blank -SP ^{Note9} -SR ^{Note9} -SA ^{Note9}	DC24V DC12V ^{Note2} AC100V ^{Note3} AC120V ^{Note3}
						BPP (for block-off plate) ^{Note7}				

Notes: 5 Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
 6 When selecting J, M, or L (base piping type) for the manifold outlet specification, always enter -A1 (with plate) for the valve outlet type.
 7 Caution should be exercised that the block-off plate wiring is always double wiring (allocated 2 control pins at 1 strn.), regardless of the wiring connection specification. For wiring for a single solenoid, see p. 71.
 8 When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
 9 Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for -SA, or 1 each port isolator for -SP and -SR for a total of 2 locations. When shipping, the designated port isolators are mounted between the designated station and the station to its immediate left (the next smaller strn. No.).
 10. Cannot be mounted on the external pilot manifold.
 11. Cannot be mounted on the internal pilot manifold.
 12. Not available in external pilot type.
 13. Not available with the individual exhaust spacer.
 14. The 3-port specifications are only available in the valve specification T0, T1, and T2.
 15. Can be selected only when the manifold type is P.
 16. Can be selected only when the manifold type is PH.


Parts for manifold

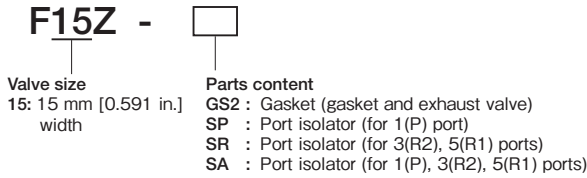


Wiring block assembly (one set)

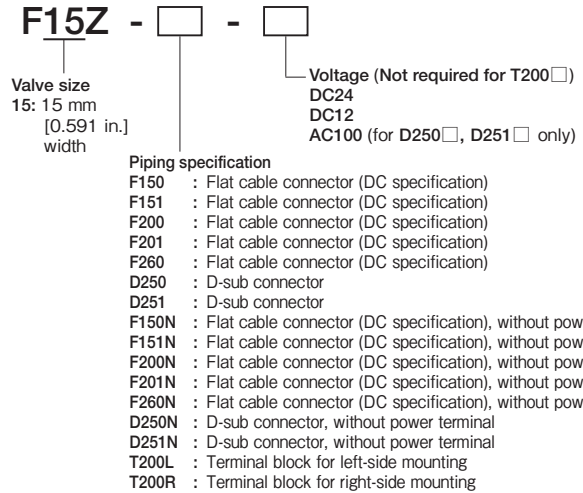

Block-off plate (block-off plate, 2 mounting screws, and plug)




Valve base assembly (valve base, gasket, lead wire, and plug-in connector)

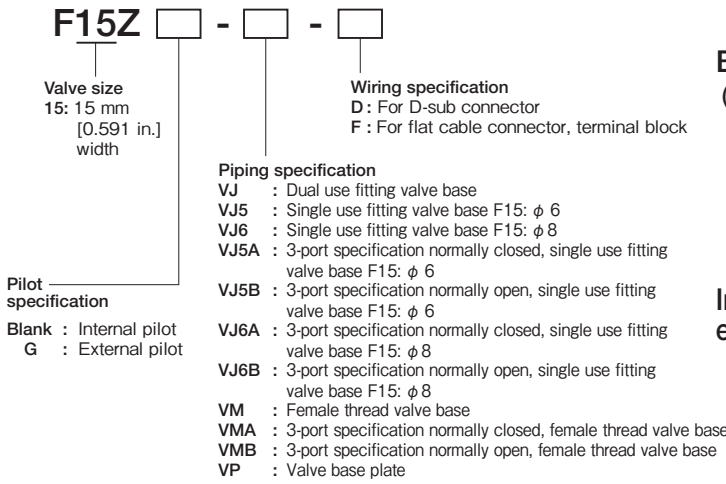

Back pressure prevention valve
(2 pieces for split type, with dedicated gasket)




Individual air supply and exhaust spacer (Spacer for plug-in type, gasket, exhaust valve, and 2 mounting screws)

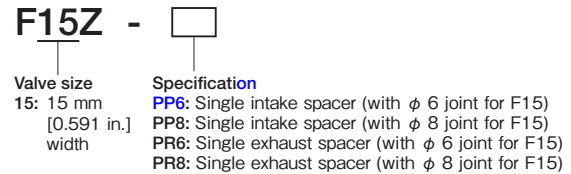

※ For details, see p. 27.

Piping block assembly

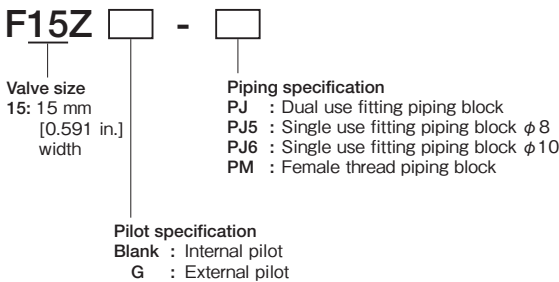

End blocks (one set of left and right)

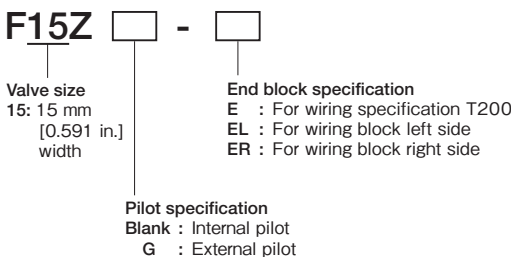


Table for maximum number of valve units by wiring specification

Wiring specification	Max. outputs	Maximum number of units	
		Wiring connection specification	
		Packed wiring (Blank)	Double wiring (-W)
F100 <input type="checkbox"/> Flat cable (10P)	8	Varies depending on the number of mounted single solenoids, double solenoids, and block-off plates. The number of controlled solenoids should be designated as the maximum number of outputs or less.	4 units
F101 <input type="checkbox"/> Flat cable (10P)	8		4 units
F200 <input type="checkbox"/> Flat cable (20P)	16		8 units
F201 <input type="checkbox"/> Flat cable (20P)	16		8 units
F260 <input type="checkbox"/> Flat cable (26P)	20		10 units
D250 <input type="checkbox"/> D-sub connector (25P)	16		8 units
D251 <input type="checkbox"/> D-sub connector (25P)	20		10 units
T200 Terminal block (19 terminals)	18		9 units

Muffler

KM - J

Fitting size

- 6: Outer diameter $\phi 6$ (for individual exhaust spacer)
- 8: Outer diameter $\phi 8$ (for individual exhaust spacer)
- 10: Outer diameter $\phi 10$


(Sales unit: Set of 10 mufflers)

DIN rail

DIN - (Unit:1)

Rail length

- 125: 125mm [4.921 in.]
- : (25 mm [0.984 in.] pitch)
- 525: 525mm [20.669 in.]

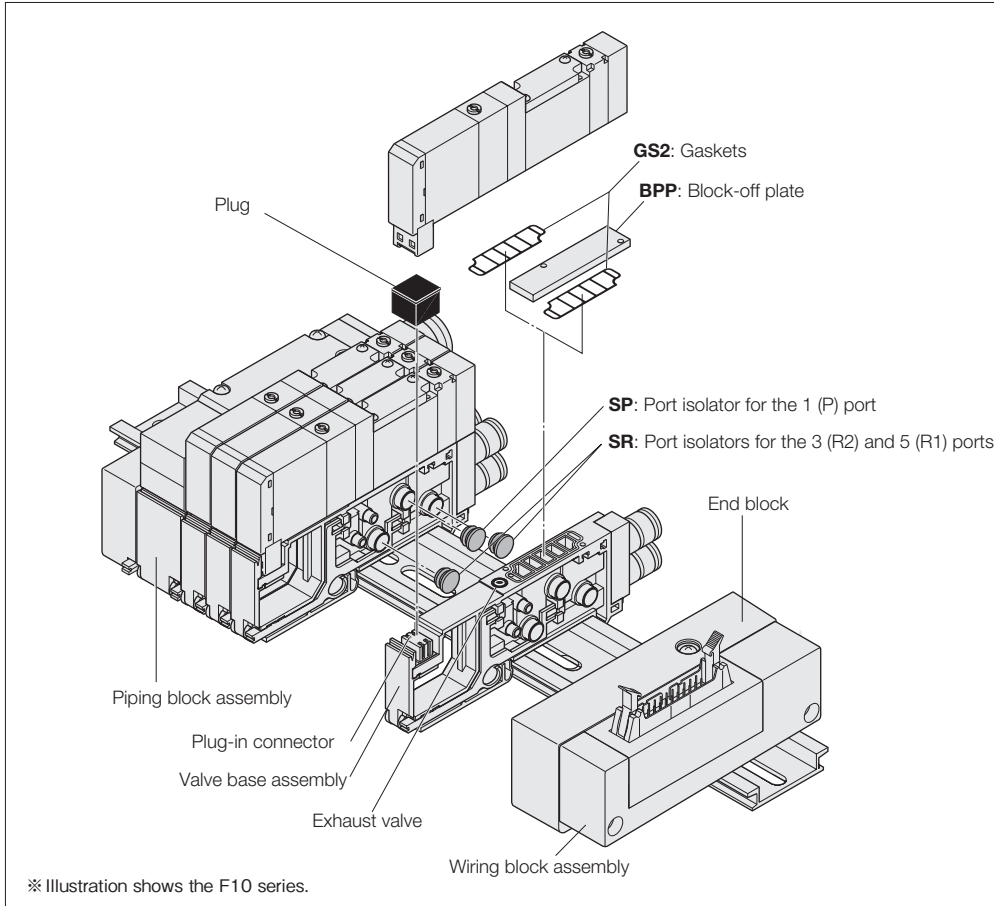

Manifold Order Code Example

(12 units of F15 Series)

F15M12PL-J5R-F201 DC24V

- stn.1~8 F15T0-A1-J5 DC24V
- stn.9~11 F15T2-A1-J6 DC24V
- stn.12 F15BPP-J6

Note: This order code example has no relationship to the illustration above.

Precautions for Order Codes

- **Orders for valves only**
Place orders from "Single Valve Unit Order Codes" on p. 162.
However, **Blank**, **A2**, **F3**, **F4**, **F5**, **F6**, **F4A**, **F4B**, **F5A**, **F5B**, **F6A**, and **F6B** cannot be selected for the valve outlet type. For the wiring specification, **Blank** is the only selection.
- **Wiring connection specification**
Blank (packed wiring): Wiring is made in accordance with the mounted valve specifications.
-W (double wiring): Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.


Caution

Caution should be exercised that the block-off plate wiring is always double wiring (allocated 2 control pins at 1 stn.), regardless of the wiring connection specification. The block-off plate wiring can be made as wiring for a single solenoid. Add **-1W** to the end of the block-off plate order code in the case. For details, consult us.


F15 Series Split Manifold Serial Transmission Type Order Codes

Manifold outlet specification

With dual use fitting blocks (base piping type)




With selectable fittings (base piping type)



Outlet port fitting F15: φ 6, φ 8


Outlet port should be selected in accordance with the manifold fitting specification.

With female thread blocks (base piping type)



Outlet port female thread F15: Rc1/8

With plates (direct piping type)



Valve size

F15M 15 mm [0.591 in.] width

Pilot specification

Blank

Internal pilot manifold

G

External pilot manifold

Piping block specification (air supply and exhaust)

Fitting block

- JR : Dual use fitting, right-side mounting^{Note13}
 - JL : Dual use fitting, left-side mounting^{Note13}
 - JD : Dual use fitting, both-side mounting^{Note13}
- Fitting size (1(P), 3, 5(R) ports), φ 8, φ 10

Female thread block

- MR : Female thread, right-side mounting^{Note13}
 - ML : Female thread, left-side mounting^{Note13}
 - MD : Female thread, both-side mounting^{Note13}
- Female thread size (1(P), 3, 5(R) ports), Rc1/4

Female thread block



- MRH : Female thread, right-side mounting^{Note14}
 - MLH : Female thread, left-side mounting^{Note14}
 - MDH : Female thread, both-side mounting^{Note14}
- Female thread size (1(P), 3, 5(R) ports), NPT1/4

Single use fitting block

- J5R : Single use fitting, right-side mounting^{Note13}
 - J5L : Single use fitting, left-side mounting^{Note13}
 - J5D : Single use fitting, both-side mounting^{Note13}
- Fitting size (1(P), 3, 5(R) ports), φ 8
- J6R : Single use fitting, right-side mounting^{Note13}
 - J6L : Single use fitting, left-side mounting^{Note13}
 - J6D : Single use fitting, both-side mounting^{Note13}
- Fitting size (1(P), 3, 5(R) ports), φ 10

Transmission block specification

※ These are the serial transmission block specifications compatible with each system.



● Block on the right photo is the case of B7A Link Terminal. For details, see p. 41-44.

Integrated type

- B1 : For CC-Link (16 outputs)^{Note2}
- B3 : For CC-Link (32 outputs)^{Note2}
- D3 : For DeviceNet (32 outputs)
- H1 : For CompoNet (16 outputs)
- K1 : For EtherCAT (16 outputs)
- K3 : For EtherCAT (32 outputs)
- M1 : For EtherNet/IP (16 outputs)^{Note2}
- M3 : For EtherNet/IP (32 outputs)^{Note2}

Stand-alone type

- 31 : For OMRON B7A Link Terminal (standard)
- 32 : For OMRON B7A Link Terminal (high speed)

Wiring connection specification

Blank

Packed wiring: Wiring is made in accordance with the mounted valve specifications.

-W

Double wiring: Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

Wiring position (transmission block)

Blank : Left-side mounting
-R : Right-side mounting

Valve size

F15 Standard type

F15L Low-current type

Valve size	Valve units	Manifold type	Manifold outlet specification	Pilot specification	Piping block specification	Transmission block specification	Wiring connection specification	Wiring position
Manifold model								

Base piping type	S	J M	Blank G	-JR	-J5R	-31	-D1	-K3	Blank -W	Blank -R		
				-JL	-J6R	-32	-D3	-M1 ^{Note2}				
				-JD	-J5L	-B1 ^{Note2}	-H1	-M3 ^{Note2}				
Base piping type selectable fitting	F15M	2 ⋮ □ ^{Note1}	S	L	Blank G	-JR ^{Note13}	-J5R ^{Note13}	-31	-D1	-K3	Blank -W	Blank -R
						-JL ^{Note13}	-J6R ^{Note13}	-32	-D3	-M1 ^{Note2}		
						-JD ^{Note13}	-J5L ^{Note13}	-B1 ^{Note2}	-H1	-M3 ^{Note2}		
Direct piping type	SH	Blank	Blank G	-JR ^{Note13}	-MDH ^{Note14}	-31	-D1	-K3	Blank -W	Blank -R		
				-JL ^{Note13}	-J5R ^{Note13}	-32	-D3	-M1 ^{Note2}				
				-JD ^{Note13}	-J6R ^{Note13}	-B1 ^{Note2}	-H1	-M3 ^{Note2}				
						-ML ^{Note13}	-J6L ^{Note13}	-B1 ^{Note2}	-H1	-M3 ^{Note2}		
						-MD ^{Note13}	-J5D ^{Note13}	-B3 ^{Note2}	-K1			
						-MRH ^{Note14}	-J6D ^{Note13}					
						-MLH ^{Note14}						

Notes: 1. To determine the maximum number of units, see the table for maximum number of valve units by transmission block specification, on p. 196.
2. Complies with the CE marking regulation.

Valve specification

- T0 : 2-position, for single solenoid only
- T1 : 2-position, single solenoid specification
- T2 : 2-position, double solenoid specification
- T3 : 3-position, closed center
- T4 : 3-position, exhaust center
- T5 : 3-position, pressure center
- TA : Tandem 3-port (NC and NO)^{Note10}
- TB : Tandem 3-port (NO and NO)^{Note10}
- TC : Tandem 3-port (NC and NO)^{Note10}

Operation type

Blank

Internal pilot type^{Note8}

G

External pilot type^{Note9}
(for positive pressure)

※ No vacuum valve can be mounted.


Manual override

Manual override button



Blank

Manual override lever^{Note6}



-R

Valve outlet type

-A1 With plate^{Note4}
(base piping type)

5-port specification

-FJ With dual use fitting block^{Note13} F15: φ 6, φ 8
(direct piping type)

-FJ5 With single use fitting block^{Note13} F15: φ 6
(direct piping type)

-FJ6 With single use fitting block^{Note13} F15: φ 8
(direct piping type)

-FM With female thread block^{Note13} F15: Rc1/8
(direct piping type)

-FMH With female thread block^{Note14} F15: NPT1/8
(direct piping type)

3-port specification

-FJ5A With single use fitting block, normally closed (NC)^{Note13} F15: φ 6
(direct piping type)

-FJ5B With single use fitting block, normally open (NO)^{Note13} F15: φ 6
(direct piping type)

-FJ6A With single use fitting block, normally closed (NC)^{Note13} F15: φ 8
(direct piping type)

-FJ6B With single use fitting block, normally open (NO)^{Note13} F15: φ 8
(direct piping type)

-FMA With female thread block, normally closed (NC)^{Note13} F15: Rc1/8
(direct piping type)

-FMAH With female thread block, normally closed (NC)^{Note14} F15: NPT1/8
(direct piping type)

-FMB With female thread block, normally open (NO)^{Note13} F15: Rc1/8
(direct piping type)

-FMBH With female thread block, normally open (NO)^{Note14} F15: NPT1/8
(direct piping type)

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Manifold fitting specification

5-port specification

-J5 With single use fitting block (base piping type) F15: φ 6

-J6 With single use fitting block (base piping type) F15: φ 8

-M With female thread block (base piping type) F15: Rc1/8

-MH With female thread^{Note14} block (base piping type) F15: NPT1/8

3-port specification

-J5A With single use fitting block, normally closed (NC) (base piping type) F15: φ 6

-J5B With single use fitting block, normally open (NO) (base piping type) F15: φ 6

-J6A With single use fitting block, normally closed (NC) (base piping type) F15: φ 8

-J6B With single use fitting block, normally open (NO) (base piping type) F15: φ 8

-MA With female thread block, normally closed (NC) (base piping type) F15: Rc1/8

-MAH With female thread block, normally closed (NC)^{Note14} (base piping type) F15: NPT1/8

-MB With female thread block, normally open (NO)^{Note13} (base piping type) F15: Rc1/8

-MBH With female thread block, normally open (NO)^{Note14} (base piping type) F15: NPT1/8

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Back pressure prevention valve

Blank

No back pressure prevention valve

-E2

With back pressure prevention valve^{Note11}

Individual air supply and exhaust spacer

Blank : No spacer

-PP6 : Single intake spacer (with φ 6 joint for F15)

-PP8 : Single intake spacer (with φ 8 joint for F15)

-PR6 : Single exhaust spacer (with φ 6 joint for F15)

-PR8 : Single exhaust spacer (with φ 8 joint for F15)

For details, see p. 27.

Station	Valve size	Valve specification	Operation type	Manual override	Valve outlet type	Manifold fitting specification	Back pressure prevention valve	Individual air supply and exhaust spacer	Port isolator	Voltage
Mounting valve model										
stn. 1 ⋮ stn. □ <small>Note3</small>	F15 F15L	T0 T3 TA ^{Note10} T1 T4 TB ^{Note10} T2 T5 TC ^{Note10}	Blank ^{Note8} G ^{Note9}	Blank -R ^{Note6}	-A1 ^{Note4}		Blank -E2 ^{Note11}	Blank -PP6 -PR6 -PP8 -PR8	Blank -SP ^{Note7} -SR ^{Note7} -SA ^{Note7}	DC24V
BPP (for block-off plate) ^{Note3}										
stn. 1 ⋮ stn. □ <small>Note3</small>	F15 F15L	T0 T3 TA ^{Note10} T1 T4 TB ^{Note10} T2 T5 TC ^{Note10}	Blank ^{Note8} G ^{Note9}	Blank -R ^{Note6}	-A1 ^{Note4}	-J5 ^{Note13} -J6A ^{Note13} -J6 ^{Note13} -J6B ^{Note13} -M ^{Note13} -MA ^{Note13} -MH ^{Note13} -MAH ^{Note14} -J5A ^{Note13} -MB ^{Note13} -J5B ^{Note13} -MBH ^{Note14}	Blank -E2 ^{Note11}	Blank -PP6 -PR6 -PP8 -PR8	Blank -SP ^{Note7} -SR ^{Note7} -SA ^{Note7}	DC24V
BPP (for block-off plate) ^{Note3}										
stn. 1 ⋮ stn. □ <small>Note3</small>	F15 F15L	T0 T3 TA ^{Note10} T1 T4 TB ^{Note10} T2 T5 TC ^{Note10}	Blank ^{Note8} G ^{Note9}	Blank -R ^{Note6}	-A1 ^{Note4}	-FJ ^{Note13} -FJ6A ^{Note13} -FJ5 ^{Note13} -FJ6B ^{Note13} -FJ6 ^{Note13} -FMA ^{Note13} -FM ^{Note13} -FMAH ^{Note14} -FMH ^{Note14} -FMB ^{Note13} -FJ5A ^{Note13} -FMBH ^{Note12} -FJ5B ^{Note13}	Blank -E2 ^{Note11}	Blank -PP6 -PR6 -PP8 -PR8	Blank -SP ^{Note7} -SR ^{Note7} -SA ^{Note7}	DC24V
BPP (for block-off plate) ^{Note5}										

Notes: 3. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.

4. When selecting J, M, or L (base piping type) for the manifold outlet specifications, always enter -A1 (with plate) for the valve outlet type.

5. Caution should be exercised that the block-off plate wiring is always double wiring (allocated 2 control pins at 1 stn.), regardless of the wiring connection specification. The block-off plate wiring can be made as wiring for a single solenoid. Add -1W to the end of the block-off plate order code in the case.

6. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.

7. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for -SA, or 1 each

port isolator for -SP and -SR for a total of 2 locations. When shipping, the designated port isolators are mounted between the designated station and the station to its immediate left (the next smaller stn. No.).

8. Cannot be mounted on the external pilot manifold.

9. Cannot be mounted on the internal pilot manifold.

10. Not available in external pilot type.

11. Not available with the individual exhaust spacer.

12. The 3-port specifications are only available in the valve specification T0, T1, and T2.

13. Can be selected only when the manifold type is S.

14. Can be selected only when the manifold type is SH.

Parts for manifold

F15Z -

Valve size
15: 15 mm [0.591 in.] width

Parts content
GS2 : Gasket (gasket and exhaust valve)
SP : Port isolator (for 1(P) port)
SR : Port isolator (for 3(R2), 5(R1) ports)
SA : Port isolator (for 1(P), 3(R2), 5(R1) ports)

Block-off plate (block-off plate, 2 mounting screws, and plug)

F15BPP

Valve size
15: 15 mm [0.591 in.] width

Valve base assembly

(valve base, gasket, lead wire, and plug-in connector)

F15Z - - **F**

Valve size
15: 15 mm [0.591 in.] width

Piping specification
VJ : Dual use fitting valve base
VJ5 : Single use fitting valve base F15: ϕ 6
VJ6 : Single use fitting valve base F15: ϕ 8
VJ5A : 3-port specification normally closed, single use fitting valve base F15: ϕ 6
VJ5B : 3-port specification normally open, single use fitting valve base F15: ϕ 6
VJ6A : 3-port specification normally closed, single use fitting valve base F15: ϕ 8
VJ6B : 3-port specification normally open, single use fitting valve base F15: ϕ 8
VM : Female thread valve base
VMA : 3-port specification normally closed, female thread valve base
VMB : 3-port specification normally open, female thread valve base
VP : Valve base plate

Pilot specification
Blank : Internal pilot
G : External pilot

Piping block assembly

F15Z -

Valve size
15: 15 mm [0.591 in.] width

Piping specification
PJ : Dual use fitting piping block
PJ5 : Single use fitting piping block ϕ 8
PJ6 : Single use fitting piping block ϕ 10
PM : Female thread piping block Rc1/4

Pilot specification
Blank : Internal pilot
G : External pilot

End blocks (one set of left and right)

F15Z -

Valve size
15: 15 mm [0.591 in.] width

End block specification
EL : For left side
ER : For right side

Pilot specification
Blank : Internal pilot
G : External pilot

Wiring block assembly [※]

F15Z - **F201N** - **DC24**

Valve size
15: 15 mm [0.591 in.] width

[※] Use this when the transmission block specification is -01, -02, -31, -32, -51, -52.

Back pressure prevention valve

(2 units for split type, with dedicated gasket)

F15Z - **E2**

Valve size
15: 15 mm [0.591 in.] width

Individual air supply and exhaust spacer ^(Spacer for plug-in type, gasket, exhaust valve, and 2 mounting screws)

F15Z -

Valve size
15: 15 mm [0.591 in.] width

Specification
PP6: Single intake spacer (with ϕ 6 joint for F15)
PP8: Single intake spacer (with ϕ 8 joint for F15)
PR6: Single exhaust spacer (with ϕ 6 joint for F15)
PR8: Single exhaust spacer (with ϕ 8 joint for F15)

[※] For details, see p. 27.

Serial transmission block (single unit)

YS2

Transmission block specification
31: For OMRON B7A Link Terminal (standard)
32: For OMRON B7A Link Terminal (high speed)

Wiring position
L : For stand-alone type, left-side mounting [※]
R : For stand-alone type, right-side mounting [※]
[※] DIN rail included (length 75 mm [2.95 in.])

YS6 (Dedicated for manifold mounting)

Transmission block specification
A1 : For OMRON CompoBus/S (16 outputs)
B1 : For CC-Link (16 outputs)
B3 : For CC-Link (32 outputs)
D1 : For DeviceNet (16 outputs)
D3 : For DeviceNet (32 outputs)
H1 : For CompoNet (16 outputs)

YS7 (Dedicated for manifold mounting)

Transmission block specification
K1 : For EtherCAT (16 outputs)
K3 : For EtherCAT (32 outputs)
M1 : For EtherNet/IP (16 outputs)
M3 : For EtherNet/IP (32 outputs)

Wiring position
L : Left-side mounting
R : Right-side mounting

Table for maximum number of valve units by transmission block specification

Transmission block specifications	Max. outputs	Maximum number of units	
		Wiring connection specification	
		Packed wiring (Blank)	Double wiring (-W)
-31: For Omron B7A Link Terminal (standard)	16	Varies depending on the number of mounted single solenoids, double solenoids, and block-off plates.	8 units
-32: For Omron B7A Link Terminal (high speed)	16		8 units
-A1: For Omron CompoBus/S (16 outputs)	16		8 units
-B1: For CC-Link (16 outputs)	16	The number of controlled solenoids should be designated as the maximum number of outputs or less. -B3, -D3, and -K3 are a maximum of 20 units.	8 units
-B3: For CC-Link (32 outputs)	32		16 units
-D1: For DeviceNet (16 outputs)	16	The number of controlled solenoids should be designated as the maximum number of outputs or less. -B3, -D3, and -K3 are a maximum of 20 units.	8 units
-D3: For DeviceNet (32 outputs)	32		16 units
-H1: For CompoNet (16 outputs)	16		8 units
-K1: For EtherCAT (16 outputs)	16	The number of controlled solenoids should be designated as the maximum number of outputs or less. -B3, -D3, and -K3 are a maximum of 20 units.	8 units
-K3: For EtherCAT (32 outputs)	32		16 units
-M1: For EtherNet/IP (16 outputs)	16		8 units
-M3: For EtherNet/IP (32 outputs)	32		16 units

Muffler

KM - J

Fitting size


- 6: Outer diameter $\phi 6$ (for individual exhaust spacer)
 - 8: Outer diameter $\phi 8$ (for individual exhaust spacer)
 - 10: Outer diameter $\phi 10$
- (Sales unit: Set of 10 mufflers)

DIN rail

DIN - (Unit:1)

Rail length

- 125: 125mm [4.921 in.]
- : (25 mm [0.984 in.] pitch)
- 525: 525mm [20.669 in.]

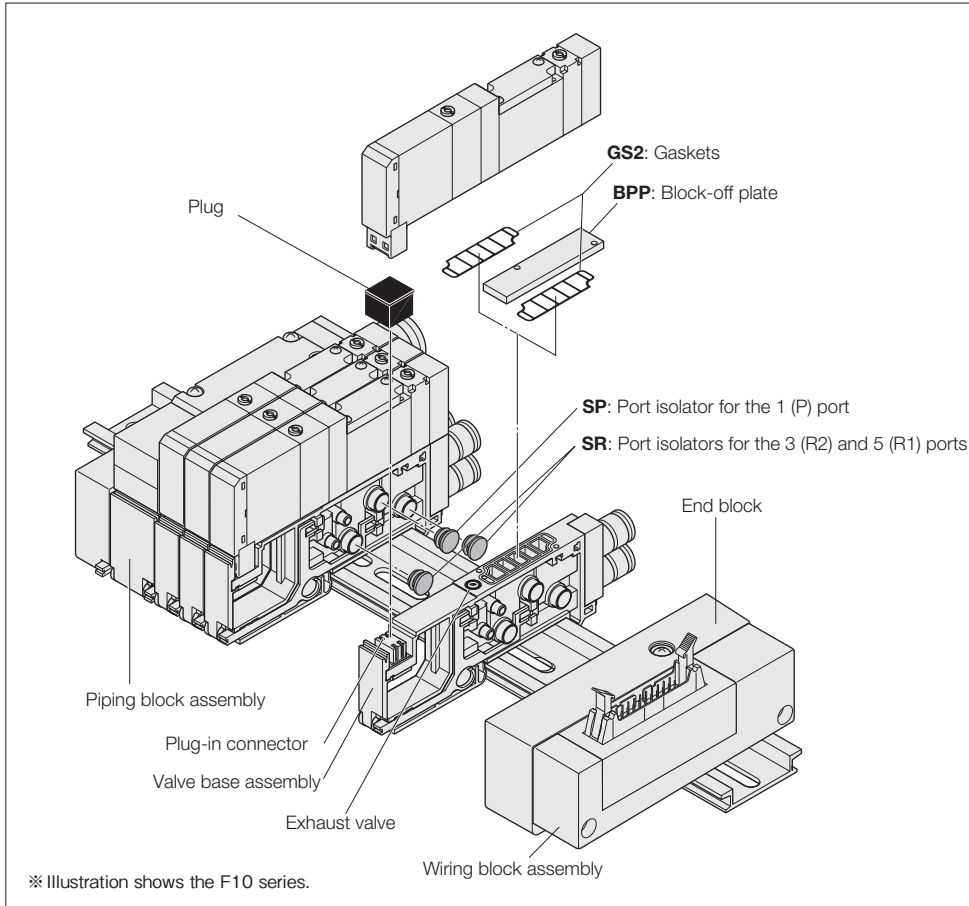

Manifold Order Code Example

(8 units of F15 Series)

F15M8SL-J5R-B1-W

- stn.1~5 F15T0-A1-J5 DC24V
- stn.6~7 F15T2-A1-J6 DC24V
- stn.8 F15BPP-J6

Note: This order code example has no relationship to the illustration above.

Precautions for Order Codes

- **Orders for valves only**
Place orders from "Single Valve Unit Order Codes" on p. 162.
However, Blank, A2, F3, F4, F5, F6, F4A, F4B, F5A, F5B, F6A, and F6B cannot be selected for the valve outlet type. For the wiring specification, Blank is the only selection.
- **Wiring connection specification**
Blank (packed wiring): Wiring is made in accordance with the mounted valve specifications.
-W (double wiring): Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

Caution

Caution should be exercised that the block-off plate wiring is always double wiring (allocated 2 control pins at 1 stn.), regardless of the wiring connection specification. The block-off plate wiring can be made as wiring for a single solenoid. Add -1W to the end of the block-off plate order code in the case. For details, consult us.


F15 Series Easy Assembly Type Manifold Non-Plug-in Type Order Codes

Valve size

F15M
15 mm [0.591 in.] width

Manifold outlet specification


With dual use fitting blocks (base piping type)



J

Outlet port fitting
F15: φ6, φ8


With selectable fittings (base piping type)



L

Outlet port should be selected in accordance with the manifold fitting specification.


With female thread blocks (base piping type)



M

Outlet port female thread
F15: Rc1/8

With plates (direct piping type)



Blank

Pilot specification

Blank
Internal pilot manifold

G
External pilot manifold

Piping block specification (air supply, exhaust and intermediate)

Fitting block
-JR: Dual use fitting, right-side mounting
-JL: Dual use fitting, left-side mounting
-JD: Dual use fitting, both-side mounting
 Fitting size (1(P), 3, 5(R) ports), φ8, φ10

Female thread block
-MR: Female thread, right-side mounting
-ML: Female thread, left-side mounting
-MD: Female thread, both-side mounting
 Female thread size (1(P), 3, 5(R) ports), Rc1/4

Female thread block
-MRH: Female thread, right-side mounting^{Note15}
-MLH: Female thread, left-side mounting^{Note15}
-MDH: Female thread, both-side mounting^{Note15}
 Female thread size (1(P), 3, 5(R) ports), NPT1/4

Single use fitting block
-J5R: Single use fitting, right-side mounting
-J5L: Single use fitting, left-side mounting
-J5D: Single use fitting, both-side mounting
 Fitting size (1(P), 3, 5(R) ports), φ8
-J6R: Single use fitting, right-side mounting
-J6L: Single use fitting, left-side mounting
-J6D: Single use fitting, both-side mounting
 Fitting size (1(P), 3, 5(R) ports), φ10


Intermediate piping block
-JT : Dual use fitting, both-side mounting, intermediate piping block, φ8, φ10
-J5T: Single use fitting, both-side mounting, intermediate piping block, φ8
-J6T: Single use fitting, both-side mounting, intermediate piping block, φ10
-MT : Female thread, both-side mounting, intermediate piping block mounting, Rc1/4
-MTH: Female thread, both-side mounting, intermediate piping block NPT1/4^{Note15}

Mounting specification

Blank
Direct mounting

-DN
With DIN bracket (no rail)

-DR
With DIN bracket, with rail
Caution: For information on rails assembled and shipped, see p. 242 and 243.



		Valve size	Valve units	Manifold type	Manifold outlet specification	Pilot specification	Piping block specification	Mounting specification
		Manifold model						
Base piping type				XN (※Rc)	J M	Blank G	-JR -J5R -JT -JL -J5L -J5T -JD -J5D -J6T -MR -J6R -MT -ML -J6L -MD -J6D	Blank -DN -DR
Base piping type selectable fitting	F15M	2 : : : 21 ^{Note1}		XN (※Rc) XNH (※NPT)	L	Blank G	-JR -MLH ^{Note15} -J6D -JL -MDH ^{Note15} -JT -JD -J5R -J5T -MR -J5L -J6T -ML -J5D -MT -MD -J6R -MTH ^{Note15} -MRH ^{Note15} -J6L	Blank -DN -DR
Direct piping type				Only L or Blank is available in the inch female thread specification and the manifold outlet specification.	Blank	Blank G	-JR -MLH ^{Note15} -J6D -JL -MDH ^{Note15} -JT -JD -J5R -J5T -MR -J5L -J6T -ML -J5D -MT -MD -J6R -MTH ^{Note15} -MRH ^{Note15} -J6L	Blank -DN -DR

Notes: 1. Up to 20 valves, with one intermediate piping block.
 2. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
 3. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
 4. When selecting J, M, or L (base piping type) for the manifold outlet specification, always enter -A1 (with plate) for the valve outlet type.

Valve type

- T0:** 2-position, for single solenoid only
- T1:** 2-position, single solenoid specification
- T2:** 2-position, double solenoid specification
- T3:** 3-position, closed center
- T4:** 3-position, exhaust center
- T5:** 3-position, pressure center
- TA:** Tandem 3-port (NC and NO)^{Note8}
- TB:** Tandem 3-port (NO and NO)^{Note8}
- TC:** Tandem 3-port (NC and NO)^{Note8}

Operation type

Blank

Internal pilot type^{Note6}

G

External pilot type^{Note7} (for positive pressure)

※No vacuum valve can be mounted.

Manual override

Manual override button



Blank

Manual override lever^{Note3}



-R

Valve size

F15 Standard type

F15L Low-current type

Valve outlet type

-A1 With plate^{Note4}
(base piping type)

5-port specification

-FJ With dual use fitting block **F15:** φ6, φ8
(direct piping type)

-FJ5 With single use fitting block **F15:** φ6
(direct piping type)

-FJ6 With single use fitting block **F15:** φ8
(direct piping type)

-FM With female thread block **F15:** Rc1/8
(direct piping type)

-FMH With female thread block^{Note15}
(direct piping type) **F15:** NPT1/8

3-port specification

-FJ5A With single use fitting block, normally closed (NC)
(direct piping type) **F15:** φ6

-FJ5B With single use fitting block, normally open (NO)
(direct piping type) **F15:** φ6

-FJ6A With single use fitting block, normally closed (NC)
(direct piping type) **F15:** φ8

-FJ6B With single use fitting block, normally open (NO)
(direct piping type) **F15:** φ8

-FMA With female thread block, normally closed (NC)
(direct piping type) **F15:** Rc1/8

-FMAH With female thread block, normally closed (NC)
^{Note15}(direct piping type) **F15:** NPT1/8

-FMB With female thread block, normally open (NO)
(direct piping type) **F15:** Rc1/8

-FMBH With female thread block, normally open (NO)
^{Note15}(direct piping type) **F15:** NPT1/8

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Wiring specification^{Note12}

S type plug connector
Without connector



-PN


S type plug connector
Lead wire 300 mm [11.8 in.]



-PS

S type plug connector
Lead wire 3000 mm [118 in.]

Pre-wired positive common terminal
S type plug connector



-CPS3

Pre-wired positive common terminal
S type plug connector

Lead wire 3000 mm [118 in.]

-MS

Pre-wired negative common terminal
S type plug connector

Lead wire 300 mm [11.8 in.]

-MS3

Pre-wired negative common terminal
S type plug connector

Lead wire 3000 mm [118 in.]

-CMS

Pre-wired negative common terminal
S type plug connector

Lead wire 300 mm [11.8 in.]

-CMS3

Manifold fitting specification

5-port specification

-J5 With single use fitting block **F15:** φ6
(base piping type)

-J6 With single use fitting block **F15:** φ8
(base piping type)

-M With female thread block **F15:** Rc1/8
(base piping type)

-MH With female thread block^{Note15}
(base piping type) **F15:** NPT1/8

3-port specification

-J5A With single use fitting block, normally closed (NC)
(base piping type) **F15:** φ6

-J5B With single use fitting block, normally open (NO)
(base piping type) **F15:** φ6

-J6A With single use fitting block, normally closed (NC)
(base piping type) **F15:** φ8

-J6B With single use fitting block, normally open (NO)
(base piping type) **F15:** φ8

-MA With female thread block, normally closed (NC)
(base piping type) **F15:** Rc1/8

-MAH With female thread block, normally closed (NC)
^{Note15}(base piping type) **F15:** NPT1/8

-MB With female thread block, normally open (NO)
(base piping type) **F15:** Rc1/8

-MBH With female thread block, normally open (NO)
^{Note15}(base piping type) **F15:** NPT1/8

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Port isolator

- Blank:** No port isolator
- XSP:** For 1 (P) port^{Note5}
- XSR:** For 3 (R2), 5 (R1) ports^{Note5}
- XSA:** For 1 (P), 3 (R2), and 5(R1) ports^{Note5}

Back pressure prevention valve

- Blank:** No back pressure prevention valve
- E2:** With back pressure prevention valve^{Note9}

Individual air supply and exhaust spacer

- Blank:** No spacer
 - XNP6:** Single intake spacer (with φ6 joint for F15)
 - XNP8:** Single intake spacer (with φ8 joint for F15)
 - XNR6:** Single exhaust spacer (with φ6 joint for F15)
 - XNR8:** Single exhaust spacer (with φ8 joint for F15)
 - STP:** With stop valve^{Note6}
- See page 27 for details.

Station	Valve size	Valve specification	Operation type	IP Specifications	Manual override	Valve outlet type	Wiring specification	Manifold fitting specification	Back pressure prevention valve	Individual air supply, exhaust spacer and stop valve	Port isolator	Voltage
---------	------------	---------------------	----------------	-------------------	-----------------	-------------------	----------------------	--------------------------------	--------------------------------	--	---------------	---------

Mounting valve model

stn. 1 . . . stn. □ Note2	F15 F15L	T0 ^{Note8} T1 ^{Note8} T2 ^{Note8} T3 ^{Note8} T4 ^{Note8} T5 ^{Note8}	Blank ^{Note6} G ^{Note7}	Blank -P Note13	Blank -R ^{Note3}	-A1 ^{Note4}	-PN -MS -PS ^{Note12} -MS3 -PS3 -CMS -CPS -CMS3 -CPS3		Blank -E2 ^{Note9}	Blank -XNP6 -XNR8 -XNP8 -STP ^{Note6} -XNR6	Blank -XSP ^{Note5} -XSR ^{Note5} -XSA ^{Note5}	DC24V DC12V ^{Note10} AC100V ^{Note11}	
	F15	XBPN (for block-off plate)											
	When selecting the intermediate piping block, see page 100 when specifying it.												
stn. 1 . . . stn. □ Note2	F15 F15L	T0 ^{Note8} T1 ^{Note8} T2 ^{Note8} T3 ^{Note8} T4 ^{Note8} T5 ^{Note8}	Blank ^{Note6} G ^{Note7}	Blank -P Note13	Blank -R ^{Note3}	-A1 ^{Note4}	-PN -MS -PS ^{Note12} -MS3 -PS3 -CMS -CPS -CMS3 -CPS3	-J5 ^{Note14} -J6 ^{Note14} -M ^{Note14} -MH ^{Note15} -J5A ^{Note14} -J6A ^{Note14} -MA ^{Note14} -MAH ^{Note15} -MB ^{Note14} -MBH ^{Note15}		Blank -E2 ^{Note9}	Blank -XNP6 -XNR8 -XNP8 -STP ^{Note6} -XNR6	Blank -XSP ^{Note5} -XSR ^{Note5} -XSA ^{Note5}	DC24V DC12V ^{Note10} AC100V ^{Note11}
	F15	XBPN (for block-off plate)											
	When selecting the intermediate piping block, see page 100 when specifying it.												
stn. 1 . . . stn. □ Note2	F15 F15L	T0 ^{Note8} T1 ^{Note8} T2 ^{Note8} T3 ^{Note8} T4 ^{Note8} T5 ^{Note8}	Blank ^{Note6} G ^{Note7}	Blank -P Note13	Blank -R ^{Note3}	-A1 ^{Note4}	-FJ ^{Note14} -FJ6A ^{Note14} -FJ5 ^{Note14} -FJ6B ^{Note14} -FJ6 ^{Note14} -FMA ^{Note14} -FM ^{Note14} -FMAH ^{Note15} -FMH ^{Note15} -FMB ^{Note14} -FJ5A ^{Note14} -FMBH ^{Note15} -FJ5B ^{Note14}	-PN -MS -PS ^{Note12} -MS3 -PS3 -CMS -CPS -CMS3 -CPS3		Blank -E2 ^{Note9}	Blank -XNP6 -XNR8 -XNP8 -STP ^{Note6} -XNR6	Blank -XSP ^{Note5} -XSR ^{Note5} -XSA ^{Note5}	DC24V DC12V ^{Note10} AC100V ^{Note11}
	F15	XBPN (for block-off plate)											
	When selecting the intermediate piping block, see page 200 when specifying it.												

Notes: 5. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for -XSA, or 1 each port isolator for -XSP and -XSR for a total of 2 locations. When shipping, the designated port isolators are mounted between the designated station and the station to its immediate left (the next smaller stn. No.).

6. Cannot be mounted on the external pilot manifold. Only direct mounting is available.

7. Cannot be mounted on the internal pilot manifold.

8. Not available in external pilot type.

9. Not available with the individual exhaust spacer.

10. Not available in low-current type.

11. Not available in low-current type and tandem 3-port valves.

12. Wiring specifications of -P□ and -CP□, the -M□ and -CM□, positive common and negative common cannot be mounted together.

13. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.


14. The 3-port specifications are only available in the valve specification T0, T1, and T2.

15. Can be selected only when the manifold type is XNH. **KOGANEI 199**

F15 Series Easy Assembly Type Manifold Non-Plug-in Type Order Codes

Intermediate piping block

(When mounting an intermediate piping block to the manifold, complete the following type and specify the station specified [on page 199](#).)

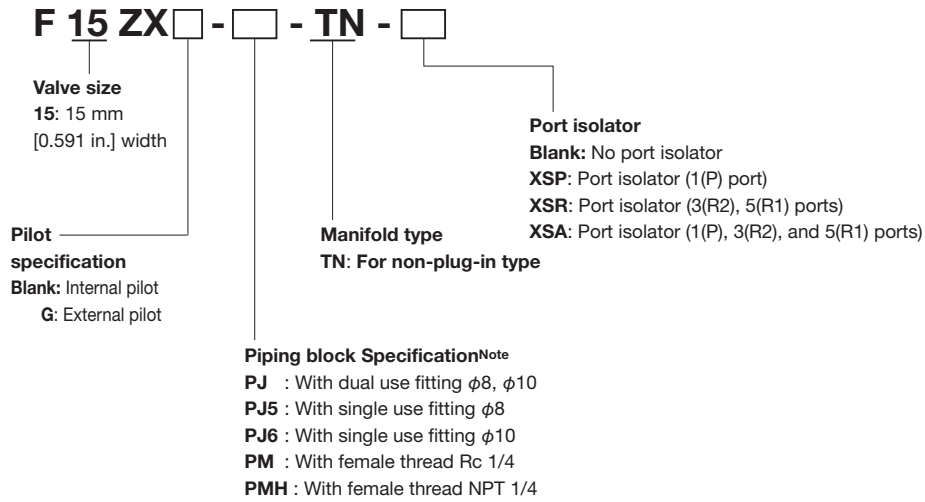

Note: See the following table for combinations of intermediate piping block port specifications and manifold piping block specifications.

Manifold piping specifications	Intermediate piping block
JT	PJ
J5T	PJ5
J6T	PJ6
MT	PM
MTH	PMH

F15 Series Easy Assembly Type Manifold Non-Plug-in Type Additional Parts Order Codes

Parts for manifold

F 15 ZX -

Valve size

15: 15 mm [0.591 in.] width

Parts content

GS2: Gasket (gasket and exhaust valve)
GS3: Gasket (valve base side)
XSP: Port isolator (for 1(P) port)
XSR: Port isolator (for 3(R2), 5(R1) ports)
XSA: Port isolator (for 1(P), 3(R2), 5(R1) ports)
DN: DIN mounting bracket (one set of two)

Back pressure prevention valve (for divided type, two, with dedicated gasket)

F 15 Z - E2

Valve size

15: 15 mm [0.591 in.] width

Individual air supply and exhaust spacer (Spacer for non-plug-in type, gasket, exhaust valve, and 2 mounting screws)

F 15 ZX -

Valve size

15: 15 mm [0.591 in.] width

Specification

XNPM: Individual air supply spacer (with M5 female thread for F15)
XNRM: Individual exhaust spacer (with M5 female thread for F15)

※For details, see p.27.

Block-off plate (block-off plate, 2 mounting screws, and plug)

F 15 XBP N

Valve size

15: 15 mm [0.591 in.] width

For non-plug-in type

Valve base assembly (valve base, gasket, and 2 connecting rods for adding)

F 15 ZX -

*For use with both internal pilot and external pilot

Valve size

15: 15 mm [0.591 in.] width

Piping specifications

VJ: Dual use fitting valve base
VJ5: Single use fitting valve base F15: φ6
VJ6: Single diameter fitting valve base F15: φ8
VJ5A: 3-port specification normally closed, single use fitting valve base F15: φ6
VJ5B: 3-port specification normally open, single use fitting valve base F15: φ6
VJ6A: 3-port specification normally closed, single use fitting valve base F15: φ8
VJ6B: 3-port specification normally open, single use fitting valve base F15: φ8
VM: Female thread valve base F15: Rc1/8
VMA: 3-port specification normally closed, female thread valve base F15: Rc1/8
VMB: 3-port specification normally open, female thread valve base F15: Rc1/8
VMH: Female thread valve base F15: NPT1/8
VMAH: 3-port specification normally closed, female thread valve base F15: NPT1/8
VMBH: 3-port specification normally open, female thread valve base F15: NPT1/8
VP: Valve base plate

Piping block assembly (non-plug-in)

F 15 ZX - - - -

Valve size

15: 15 mm [0.591 in.] width

Port isolator^{Note2}

Blank: No port isolator
XSP: Port isolator (1(P) port)
XSR: Port isolator (3(R2), 5(R1) ports)
XSA: Port isolator (1(P), 3(R2), and 5(R1) ports)

Mounting specification^{Note3}

Blank: Without DIN bracket
DN: With DIN bracket

Pilot specification

Blank: Internal pilot
G: External pilot

Manifold type

LN: Left side piping block (for non-plug-in type) without circuit board (with end lid)
RN: Right piping block, without circuit board
TN: Intermediate piping block (for non-plug-in type) without circuit board

Piping block Specification^{Note1}

PJ: With dual use fitting φ8, φ10
PJ5: With single use fitting φ8
PJ6: With single use fitting φ10
PM: With female thread Rc 1/4
PMH: With female thread NPT 1/4
PP: Plate (without fitting)

Notes:1.The fitting of the piping block is included. One set of two connecting rods is also included for a LN and TN type manifold.

2.Port isolator selection only available when the piping block name is TN.

3.Only when the manifold type is LN or RN.

F15 Series Easy Assembly Type Manifold Non-Plug-in Type Additional Parts Order Codes

Muffler

KM - J 

Fitting size

- 6: Outer diameter $\phi 6$ (for piping block)
 - 8: Outer diameter $\phi 8$ (for piping block, for single exhaust spacer)
 - 10: Outer diameter $\phi 6$ (for single exhaust spacer)
- (Sales unit: Set of 10 mufflers)

Connecting rod (1 set of 2)

F 15 ZX -  - 

Valve size
15: 15 mm
[0.591 in.]
width

Number of units

- 01 ~ 20: When type for valve base (RV) is selected
- 01 : When type for left side piping block (RH) is selected
- 01 : When type for intermediate piping block (RC) is selected

Specification

- RV : For valve base
- RH : For left piping block
- RC : For intermediate piping block

DIN rail

DIN -  (Unit:1)

Rail length

- 125: 125mm [4.921 in.]
- : (25 mm [0.984 in.] pitch)
- 525: 525mm [20.669 in.]

Connector-related order codes


JAZ - P -  (for double use only)

Valve specification
T2, T3, T4,
T5, TA, TB,
For TC
IP Specification

Connector specification

- CP : Positive common, connector, lead wire length 300 mm [11.8 in.] (black, red, white, for total of 3 lead wires)
- CP3 : Positive common, connector, lead wire length 3000 mm [118 in.] (black, red, white, for total of 3 lead wires)
- PA : Positive common A type, lead wire length 300 mm [11.8 in.]**
- PA3 : Positive common A type, lead wire length 3000 mm [118 in.]**
- PB : Positive common B type, lead wire length 300 mm [11.8 in.]**
- PB3 : Positive common B type, lead wire length 3000 mm [118 in.]**
- PC : Positive common C type, lead wire length 300 mm [11.8 in.]**
- PC3 : Positive common C type, lead wire length 3000 mm [118 in.]**
- CM : Negative common, connector lead wire length 300 mm [11.8 in.]**
- CM3 : Negative common, connector lead wire length 3000 mm [118 in.]**
- MA : Negative common A type, lead wire length 300 mm [11.8 in.]**
- MA3 : Negative common A type, lead wire length 3000 mm [118 in.]**
- MB : Negative common B type, lead wire length 300 mm [11.8 in.]**
- MB3 : Negative common B type, lead wire length 3000 mm [118 in.]**
- MC : Negative common C type, lead wire length 300 mm [11.8 in.]**
- MC3 : Negative common C type, lead wire length 3000 mm [118 in.]**

**A common connector assembly.

JAZO - P -  (for single use only)

Valve specification
For T0/T1

IP Specification

Connector specification

- CP : Positive common, connector, lead wire length 300 mm [11.8 in.] (black, red, for total of 2 lead wires)
- CP3 : Positive common, connector, lead wire length 3000 mm [118 in.] (black, red, for total of 2 lead wires)
- PA : Positive common A type, lead wire length 300 mm [11.8 in.]**
- PA3 : Positive common A type, lead wire length 3000 mm [118 in.]**
- PB : Positive common B type, lead wire length 300 mm [11.8 in.]**
- PB3 : Positive common B type, lead wire length 3000 mm [118 in.]**
- PC : Positive common C type, lead wire length 300 mm [11.8 in.]**
- PC3 : Positive common C type, lead wire length 3000 mm [118 in.]**
- CM : Negative common, connector lead wire length 300 mm [11.8 in.]**
- CM3 : Negative common, connector lead wire length 3000 mm [118 in.]**
- MA : Negative common A type, lead wire length 300 mm [11.8 in.]**
- MA3 : Negative common A type, lead wire length 3000 mm [118 in.]**
- MB : Negative common B type, lead wire length 300 mm [11.8 in.]**
- MB3 : Negative common B type, lead wire length 3000 mm [118 in.]**
- MC : Negative common C type, lead wire length 300 mm [11.8 in.]**
- MC3 : Negative common C type, lead wire length 3000 mm [118 in.]**

**A common connector assembly.

Connector-related order codes

**For details, see p. 22.

JAZ  - 

Valve specification


- Blank:
- T1, T2, T3
- T4, T5, TA,
- For TB/TC
- 0: For T0

Connector type

- CP : Positive common/connector, lead wire length 300 mm [11.8 in.]
- CP3 : Positive common/connector, lead wire length 3000 mm [118 in.]
- CPN : Positive common/connector, no lead wire (with shorting bar and contact)
- PA : Positive common A type, lead wire length 300 mm [11.8 in.]**
- PA3 : Positive common A type, lead wire length 3000 mm [118 in.]**
- PB : Positive common B type, lead wire length 300 mm [11.8 in.]**
- PB3 : Positive common B type, lead wire length 3000 mm [118 in.]**
- PC : Positive common C type, lead wire length 300 mm [11.8 in.]**
- PC3 : Positive common C type, lead wire length 3000 mm [118 in.]**
- CMN : Negative common/connector, no lead wire (with shorting bar and contact)
- CM : Negative common, connector lead wire length 300 mm [11.8 in.]**
- CM3 : Negative common, connector lead wire length 3000 mm [118 in.]**
- MA : Negative common A type, lead wire length 300 mm [11.8 in.]**
- MA3 : Negative common A type, lead wire length 3000 mm [118 in.]**
- MB : Negative common B type, lead wire length 300 mm [11.8 in.]**
- MB3 : Negative common B type, lead wire length 3000 mm [118 in.]**
- MC : Negative common C type, lead wire length 300 mm [11.8 in.]**
- MC3 : Negative common C type, lead wire length 3000 mm [118 in.]**


Common connector assembly

A type: **JAZ-PA** 




- Red common wire (+)
- Black A side (-)
- White B side (-) (Insert when using as double solenoid)^{Note}

B type: **JAZ-PB** 




- Red common wire (+)
- Black A side (-)
- White B side (-) (Insert when using as double solenoid)^{Note}

C type: **JAZ-PC** 




- Red common wire (+)
- Black A side (-)
- White B side (-) (Insert when using as double solenoid)^{Note}
- Red common wire (+)

** Lead wire length **Blank**: 300 mm [11.8 in.]
3: 3000 mm [118 in.]

Note: White lead wire is not available for **JAZO-P** .


For negative common

A type: **JAZ-MA** 




- Black common wire (-)
- Red A side (+)
- White B side (+) (Insert when using as double solenoid)

B type: **JAZ-MB** 



- Black common wire (-)
- Red A side (+)
- White B side (+) (Insert when using as double solenoid)

C type: **JAZ-MC** 



- Black common wire (-)
- Red A side (+)
- White B side (+) (Insert when using as double solenoid)
- Black common wire (-)

Single negative common plug connector unit

Type: **JAZ-CM** 

** Lead wire length **Blank**: 300 mm [11.8 in.]
3: 3000 mm [118 in.]



FZ - 


Valve specification

- T1, T2, T3
- T4, T5, TA
- For TB/TC

Connector specification

- CC1.5 : Cabtyre cable, length 1500 mm [59 in.]**
- CC3 : Cabtyre cable, length 3000 mm [118 in.]**

- Notes:
1. When the valve specification is T1, select the **JAZO-P**  single dedicated type.
 2. When switching between the single and double type (T1/T2), purchase and use a dedicated connector for single or double use (the number of seal holes in the lead wire differs for the single and double type).
 3. There is no white lead wire for the **JAZO-P** .
 4. It is necessary to disassemble the connector to add a common connector assembly. Contact your nearest KOGANEI sales office.
 5. For information on use in locations/atmospheres subject to substances other than water, such as organic solvents, cutting oil, or reagents, contact your nearest KOGANEI sales office.
 6. For information on replacing the waterproof seal, contact your nearest KOGANEI sales office.

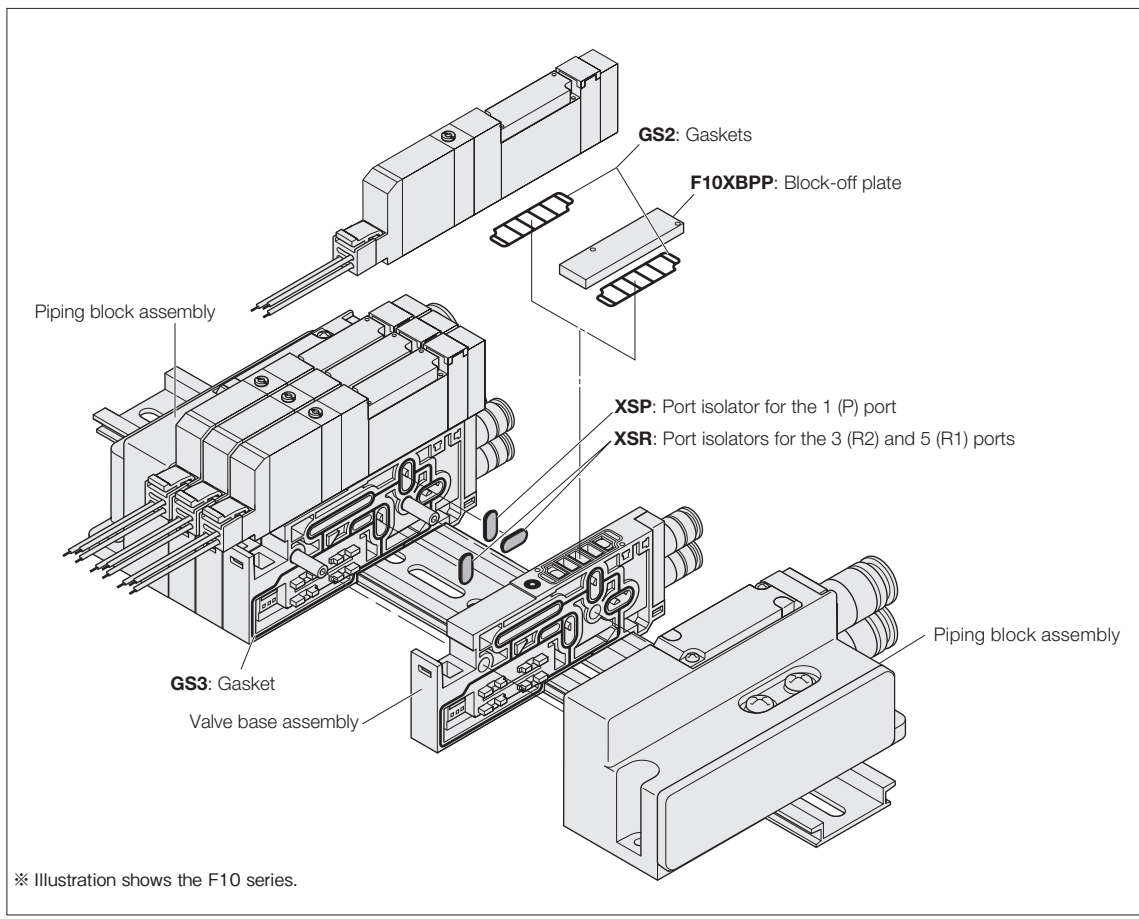

Manifold Order Code Example
 (4 units of F15 Series)

F15M4XNJ-J6T-DR

stn.1 ~ 2 F15T0-A1-PS DC24V
 stn.3 F15ZX-PJ6-TN
 stn.4 F15T0-A1-PS DC24V

Note: This order code example has no relationship to the illustration above.

Precautions for Order Codes

● **Orders for valves only**


Place orders from "Single Valve Unit Order Codes" on p. 162.

However, Blank, A2□, F3, F4□, F5, F6, F4A□, F4B□, F5A, F5B, F6A, and F6B cannot be selected for the valve outlet type. And for the wiring specification, Blank, PL, and PL3 cannot be selected. In addition, for common terminal wiring connections, separately order the common connector assemblies listed on the left.


F15 Series Easy Assembly Type Manifold Plug-in Type Order Codes

Manifold outlet specification

With dual use fitting blocks (base piping type)




With selectable fittings (base piping type)



Outlet port fitting
F15: φ6, φ8

Outlet port should be selected in accordance with the manifold fitting specification.

With female thread blocks (base piping type)



Outlet port female thread
F15: Rc1/8

With plates (direct piping type)



Valve size

F15M 15 mm [0.591 in.] width

Pilot type

Blank

Internal pilot manifold

G

External pilot manifold

Piping block specification (air supply and exhaust)

Fitting block

- JR: Dual use fitting, right-side mounting
 - JL: Dual use fitting, left-side mounting
 - JD: Dual use fitting, both-side mounting
- Fitting size (1(P), 3, 5(R) ports), φ8, φ10

Female thread block

- MR: Female thread, right-side mounting
 - ML: Female thread, left-side mounting
 - MD: Female thread, both-side mounting
- Female thread size (1(P), 3, 5(R) ports), Rc1/4

Female thread block

- MRH: Female thread, right-side mounting^{Note15}
 - MLH: Female thread, left-side mounting^{Note15}
 - MDH: Female thread, both-side mounting^{Note15}
- Female thread size (1(P), 3, 5(R) ports), NPT1/4

Single size fitting block

- J5R: Single use fitting, right-side mounting
 - J5L: Single use fitting, left-side mounting
 - J5D: Single use fitting, both-side mounting
 - J6R: Single use fitting, right-side mounting
 - J6L: Single use fitting, left-side mounting
 - J6D: Single use fitting, both-side mounting
- Fitting size (1(P), 3, 5(R) ports), φ10



Intermediate piping block

- JT: Dual use fitting, both-side mounting, intermediate piping block φ8, φ10
- J5T: Single use fitting, both-side mounting, intermediate piping block φ8
- J6T: Single use fitting, both-side mounting, intermediate piping block φ10
- MT: Female thread, both-side mounting, intermediate piping block Rc1/4
- MTH: Female thread, both-side mounting, intermediate piping block NPT1/4^{Note15}

Wiring specification (wiring block)

※ All wiring blocks are mounted on the left.

Flat cable connector (with socket and strain relief)




<Connector top surface wiring>

- F100: 10-pin
- F100N: 10-pin without power terminal
- F101: 10-pin
- F101N: 10-pin without power terminal
- F200: 20-pin
- F200N: 20-pin without power terminal
- F201: 20-pin
- F201N: 20-pin without power terminal
- F260: 26-pin
- F260N: 26-pin without power terminal

<Connector side surface wiring>

- F100E: 10-pin
- F100EN: 10-pin without power terminal
- F101E: 10-pin
- F101EN: 10-pin without power terminal
- F200E: 20-pin
- F200EN: 20-pin without power terminal
- F201E: 20-pin
- F201EN: 20-pin without power terminal
- F260E: 26-pin
- F260EN: 26-pin without power terminal

D-sub connector



<Connector top surface wiring> (M2.6 mounting screws)


- D250: 25-pin^{Note14}
- D250N: 25-pin without power terminal^{Note14}
- D251: 25-pin^{Note14}
- D251N: 25-pin without power terminal^{Note14}
- D250U: 25-pin^{Note15}
- D251U: 25-pin^{Note15}
- D370NU: 37-pin without power terminal^{Note15}

<Connector side surface wiring> (M2.6 mounting screws)

- D250E: 25-pin^{Note14}
- D250EN: 25-pin without power terminal^{Note14}
- D251E: 25-pin^{Note14}
- D251EN: 25-pin without power terminal^{Note14}
- D250EU: 25-pin^{Note15}
- D251EU: 25-pin^{Note15}

For details, see p. 47.

Terminal block (19 terminals, M3 screws)



For details, see p. 47.

Wiring connection specification

Blank

Packed wiring:

Specification of the valve base is always in accordance with the mounted valve specifications.

-W

Double wiring:

Valve base is always double wiring, regardless of the specifications of the mounted valve.

Common specification

Blank: Positive common
-CM: Negative common

Mounting specification

Blank

Direct mounting

-DN

With DIN bracket (no rail)


-DR

With DIN bracket, with rail
Caution: For information on rails assembled and shipped, see p. 132 and 136.

Valve size

F15 Standard type

F15L Low-current type



		Manifold model													
Base piping type	Valve units	Manifold type	Manifold outlet specification	Pilot specification	Piping block specification	Wiring specification				Wiring connection specification	Common specification	Mounting specification	Voltage		
Base piping type		XP (※Rc)	J M	Blank G	-JR -JL -JD -MR -ML -MD	-J5R -J5L -J5D -J6R -J6L -J6D	-JT -J5T -J6T -MT -MTH	-F100 -F100N -F101 -F101N -F200 -F200N -F201 -F201N -F260	-F260 -F260N -D250 -D250N -D251 -D251N -D370NU -F100E	-F101E -F101EN -F200E -F200EN -F201E -F201EN -F260E -F260EN	-D250E -D250EN -D251E -D251EN -T200	Blank -W	Blank -CM	Blank -DN -DR	DC24V DC12V ^{Note2}
Base piping type selectable fitting	F15M	2 · □ Note1	L	Blank G	-JR ^{Note14} -JL ^{Note14} -JD ^{Note14} -MR ^{Note14} -ML ^{Note14} -MD ^{Note14}	-MRH ^{Note15} -MLH ^{Note15} -MDH ^{Note15} -J5R ^{Note14} -J5L ^{Note14} -J6R ^{Note14} -J6L ^{Note14} -J5D ^{Note14} -J6D ^{Note14} -MTH ^{Note15}		-F100 -F100N -F101 -F101N -F200 -F200N -F201 -F201N -F260	-D250 ^{Note14} -D250N ^{Note14} -D251 ^{Note14} -D251N ^{Note14} -D250U ^{Note15} -D251U ^{Note15} -D370NU ^{Note15} -F100E	-F101E -F101EN -F200E -F200EN -F201E -F201EN -F260E -F260EN	-D250E ^{Note14} -D250EN ^{Note14} -D251E ^{Note14} -D251EN ^{Note14} -D250EU ^{Note15} -D251EU ^{Note15} -T200	Blank -W	Blank -CM	Blank -DN -DR	DC24V DC12V ^{Note2}
Direct piping type		XPH (※NPT) Note13	Blank	Blank G	-JR ^{Note14} -JL ^{Note14} -JD ^{Note14} -MR ^{Note14} -ML ^{Note14} -MD ^{Note14}	-MRH ^{Note15} -MLH ^{Note15} -MDH ^{Note15} -J5R ^{Note14} -J5L ^{Note14} -J6R ^{Note14} -J6L ^{Note14} -J5D ^{Note14} -J6D ^{Note14} -MTH ^{Note15}		-F100 -F100N -F101 -F101N -F200 -F200N -F201 -F201N -F260	-D250 ^{Note14} -D250N ^{Note14} -D251 ^{Note14} -D251N ^{Note14} -D250U ^{Note15} -D251U ^{Note15} -D370NU ^{Note15} -F100E	-F101E -F101EN -F200E -F200EN -F201E -F201EN -F260E -F260EN	-D250E ^{Note14} -D250EN ^{Note14} -D251E ^{Note14} -D251EN ^{Note14} -D250EU ^{Note15} -D251EU ^{Note15} -T200	Blank -W	Blank -CM	Blank -DN -DR	DC24V DC12V ^{Note2}

Notes: 1. For the maximum number of units, see the table for maximum number of valve units by wiring specification, on p. 208.
2. Not available in low-current type.
3. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
4. When selecting J, M, or L (base piping type) for the manifold outlet specification, always enter -A1 (with plate) for the valve outlet type.

Valve type

- T0:** 2-position, for single solenoid only
- T1:** 2-position, single solenoid specification
- T2:** 2-position, double solenoid specification
- T3:** 3-position, closed center
- T4:** 3-position, exhaust center
- T5:** 3-position, pressure center
- TA:** Tandem 3-port (NC and NO)^{Note10}
- TB:** Tandem 3-port (NO and NO)^{Note10}
- TC:** Tandem 3-port (NC and NO)^{Note10}

Operation type

Blank

Internal pilot type^{Note8}

G

External pilot type^{Note9}
(for positive pressure)

* No vacuum valve can be mounted.

Manual override

Manual override button



Manual override lever^{Note6}



Valve type

-A1 With plate^{Note4}
(base piping type)

5-port specification

-FJ With dual use fitting block **F15:** $\phi 6/\phi 8$
for different diameter sizes
(direct piping type)

-FJ5 With single use fitting block **F15:** $\phi 6$
(direct piping type)

-FJ6 With single use fitting block **F15:** $\phi 8$
(direct piping type)

-FM With female thread block **F15:** Rc1/8
(direct piping type)

-FMH With female thread block^{Note15}
(direct piping type) **F15:** NPT1/8

3-port specification

-FJ5A With single use fitting block, normally closed (NC)
(direct piping type) **F15:** $\phi 6$

-FJ5B With single use fitting block, normally open (NO)
(direct piping type) **F15:** $\phi 6$

-FJ6A With single use fitting block, normally closed (NC)
(direct piping type) **F15:** $\phi 8$

-FJ6B With single use fitting block, normally open (NO)
(direct piping type) **F15:** $\phi 8$

-FMA With female thread block, normally closed (NC)
(direct piping type) **F15:** Rc1/8

-FMAH With female thread block, normally closed
(NC)^{Note15}
(direct piping type) **F15:** NPT1/8

-FMB With female thread block, normally open (NO)
(direct piping type) **F15:** Rc1/8

-FMBH With female thread block, normally open
(NO)^{Note15}
(direct piping type) **F15:** NPT1/8

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Manifold fitting specification

5-port specification

-J5 With single use fitting block **F15:** $\phi 6$
(base piping type)

-J6 With single use fitting block **F15:** $\phi 8$
(base piping type)

-M With female thread block **F15:** Rc1/8
(base piping type)

-MH With female thread block^{Note15}
(base piping type) **F15:** NPT1/8

3-port specification

-J5A With single use fitting block, normally closed (NC)
(base piping type) **F15:** $\phi 6$

-J5B With single use fitting block, normally open (NO)
(base piping type) **F15:** $\phi 6$

-J6A With single use fitting block, normally closed (NC)
(base piping type) **F15:** $\phi 8$

-J6B With single use fitting block, normally open (NO)
(base piping type) **F15:** $\phi 8$

-MA With female thread block, normally closed (NC)
(base piping type) **F15:** Rc1/8

-MAH With female thread block, normally closed (NC)^{Note15}
(base piping type) **F15:** NPT1/8

-MB With female thread block, normally open (NO)
(base piping type) **F15:** Rc1/8

-MBH With female thread block, normally open (NO)^{Note15}
(base piping type) **F15:** NPT1/8

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Back pressure prevention valve

Blank

No back pressure prevention valve

-E2

With back pressure prevention valve^{Note11}

Individual air supply and exhaust spacer

Blank: No spacer

-XPP6: Single intake spacer
(with $\phi 6$ joint for F15)

-XPP8: Single intake spacer
(with $\phi 8$ joint for F15)

-XPR6: Single exhaust spacer
(with $\phi 6$ joint for F15)

-XPR8: Single exhaust spacer
(with $\phi 8$ joint for F15)

For details, see p.27.

Block-off plate wiring specification

Blank: Double wiring
-S: Single wiring

Station	Valve size	Valve specifications	Operation type	Manual override	Valve outlet type	Manifold fitting specification	Back pressure prevention valve	Individual air supply and exhaust spacer	Port isolator	Block-off plate wiring specification	Voltage
Valve type included											

stn. 1 . stn. □ Note3	F15 F15L	T0	T3	TA ^{Note10}	Blank ^{Note8} G ^{Note9}	Blank -R ^{Note6}	-A1 ^{Note4}	Blank -E2 ^{Note11}	Blank	-XPP6	-XPR6	Blank -XSP ^{Note7} -XSR ^{Note7} -XSA ^{Note7}	DC24V DC12V ^{Note2}
		T1	T4	TB ^{Note10}					-XPP8	-XPR8	Blank-S		
When selecting the intermediate piping block, see page 106 when specifying it.													

stn. 1 . stn. □ Note3	F15 F15L	T0	T3	TA ^{Note10}	Blank ^{Note8} G ^{Note9}	Blank -R ^{Note6}	-A1 ^{Note4}	Blank -E2 ^{Note11}	-J5 ^{Note12}	-J6A ^{Note12}	Blank -XPP6	-XPR6	Blank -XSP ^{Note7} -XSR ^{Note7} -XSA ^{Note7}	DC24V DC12V ^{Note2}
		T1	T4	TB ^{Note10}					-J6	-J6B		-XPP8		
When selecting the intermediate piping block, see page 106 when specifying it.														

stn. 1 . stn. □ Note3	F15 F15L	T0	T3	TA ^{Note10}	Blank ^{Note8} G ^{Note9}	Blank -R ^{Note6}	-A1 ^{Note4}	Blank -E2 ^{Note11}	-FJ ^{Note12}	-FJ6A ^{Note12}	Blank -XPP6	-XPR6	Blank -XSP ^{Note7} -XSR ^{Note7} -XSA ^{Note7}	DC24V DC12V ^{Note2}
		T1	T4	TB ^{Note10}					-FJ5	-FJ6B		-XPP8		
When selecting the intermediate piping block, see page 206 when specifying it.														

- Notes: 5. Select the block-off plate wiring in the block-off plate wiring connection specification.
- 6. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
- 7. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for -XSA, or 1 each port isolator for -XSP and -XSR for a total of 2 locations. When shipping, the designated port isolators are mounted between the designated station and the station to its immediate left (the next smaller stn. No.).
- 8. Cannot be mounted on the external pilot manifold.
- 9. Cannot be mounted on the internal pilot manifold.
- 10. Not available in external pilot type.
- 11. Not available with the individual exhaust spacer.
- 12. The 3-port specifications are only available in the valve specification T0, T1, and T2.
- 13. Only L or Blank is available in the inch female thread specification and the manifold outlet specification.
- 14. Can be selected only when the manifold type is XP.
- 15. Can be selected only when the manifold type is XPH.

F15 Series Easy Assembly Type Manifold Plug-in Type Order Codes

Intermediate piping block

(When mounting an intermediate piping block to the manifold, complete the following type and specify the station specified [on page 205](#).)

F 15 ZX - - **TK** -

Valve size
15: 15 mm
 [0.591 in.]
 width

Pilot specification
Blank: Internal pilot
G: External pilot

Manifold type
TK: For plug-in type

Port isolator
Blank: Internal pilot
XSP: Port isolator (1(P) port)
XSR: Port isolator (3(R2), 5(R1) ports)
XSA: Port isolator (1(P), 3(R2), and 5(R1) ports)

Piping block Specification^{Note}
PJ : With dual use fitting $\phi 8$, $\phi 10$
PJ5 : With single use fitting $\phi 8$
PJ6 : With single use fitting $\phi 10$
PM : With female thread Rc 1/4
PMH : With female thread NPT 1/4

Note: See the following table for combinations of intermediate piping block port specifications and manifold piping block specifications.

Manifold piping specifications	Intermediate piping block
JT	PJ
J5T	PJ5
J6T	PJ6
MT	PM
MTH	PMH

F15 Series Easy Assembly Type Manifold Plug-in Type Additional Parts Order Codes

Parts for manifold

F 15 ZX - 

Valve size
15: 15 mm
[0.591 in.]
width

Parts content
GS2: Gasket (gasket and exhaust valve)
GS3: Gasket (valve base side)
XSP: Port isolator (for 1(P) port)
XSR: Port isolator (for 3(R2), 5(R1) ports)
XSA: Port isolator (for 1(P), 3(R2), 5(R1) ports)
DN: DIN mounting bracket (one set of two)

Back pressure prevention valve (2 pieces for split type, with dedicated gasket)

F 15 Z - E2

Valve size
15: 15 mm [0.591 in.] width

Individual air supply and exhaust spacer (Spacer for plug-in type, gasket, exhaust valve, and 2 mounting screws)

F 15 ZX - 

Valve size
15: 15 mm [0.591 in.]
width

Specification
XPP6: Single intake spacer (with $\phi 6$ joint for F15)
XPP8: Single intake spacer (with $\phi 8$ joint for F15)
XPR6: Single exhaust spacer (with $\phi 6$ joint for F15)
XPR8: Single exhaust spacer (with $\phi 8$ joint for F15)

※For details, see p.27.

Block-off plate (block-off plate, 2 mounting screws, and plug)

F 15 XBP P

Valve size
15: 15 mm [0.591 in.]
width

For plug-in type

Muffler

KM - J 

Fitting size
6: Outer diameter $\phi 6$ (for piping block)
8: Outer diameter $\phi 8$ (for piping block)
10: Outer diameter $\phi 10$ (for piping block)
(Sales unit: Set of 10 mufflers)

Valve base assembly (valve base, gasket, and 2 connecting rods for adding)

F 15 ZX -  -  - 

*For use with both internal pilot and external pilot

Valve size
15: 15 mm [0.591 in.]
width

Common specification
Blank: For positive common
CM: For negative common

Wiring specification
S: For single wiring
W: For double wiring

Piping specifications

- VJ**: Dual use fitting valve base
- VJ5**: Single use fitting valve base F15: $\phi 6$
- VJ6**: Single diameter fitting valve base F15: $\phi 8$
- VJ5A**: 3-port specification normally closed, single use fitting valve base F15: $\phi 6$
- VJ5B**: 3-port specification normally open, single use fitting valve base F15: $\phi 6$
- VJ6A**: 3-port specification normally closed, single use fitting valve base F15: $\phi 8$
- VJ6B**: 3-port specification normally open, single use fitting valve base F15: $\phi 8$
- VM**: Female thread valve base F15: Rc1/8
- VMA**: 3-port specification normally closed, female thread valve base F15: Rc1/8
- VMB**: 3-port specification normally open, female thread valve base F15: Rc1/8
- VMH**: Female thread valve base F15: NPT1/8
- VMAH**: 3-port specification normally closed, female thread valve base F15: NPT1/8
- VMBH**: 3-port specification normally open, female thread valve base F15: NPT1/8
- VP**: Valve base plate

DIN rail

DIN -  (Unit:1)

Rail length
125: 125mm [4.921 in.]
: (25 mm [0.984 in.] pitch)
525: 525mm [20.669 in.]

Piping block assembly (plug-in)

F 15 ZX  -  -  -  - 

Valve size
15: 15 mm
[0.591 in.]
width

Port isolator^{Note2}
Blank: No port isolator
XSP: Port isolator (1(P) port)
XSR: Port isolator (3(R2), 5(R1) ports)
XSA: Port isolator (1(P), 3(R2), and 5(R1) ports)

Mounting specification^{Note3}

Blank: Without DIN bracket
DN: With DIN bracket

Pilot specification

Blank: Internal pilot
G: External pilot

Manifold type

LK: Left side piping block (for plug-in type) with circuit board
RN: Right piping block, without circuit board
TK: Intermediate piping block (for plug-in type) with circuit board

Piping block Specification^{Note1}

PJ: With dual use fitting $\phi 8$, $\phi 10$
PJ5: With single use fitting $\phi 8$
PJ6: With single use fitting $\phi 10$
PM: With female thread Rc 1/4
PMH: With female thread NPT 1/4
PP: Plate (without fitting)

Notes: 1. The fitting of the piping block is included. One set of two connecting rods is also included for a LN and TN type manifold.
2. Port isolator selection only available when the piping block name is TK.
3. Only when the manifold type is LK or RN.

F15 Series Easy Assembly Type Manifold Plug-in Type Additional Parts Order Codes

Connecting rod (1 set of 2)

F 15 ZX - -

Valve size
15: 15 mm
 [0.591 in.]
 width

Number of units

- 01 ~ 20:** When type for valve base (RV) is selected
- 01 :** When type for left side piping block (RH) is selected
- 01 :** When type for intermediate piping block (RC) is selected

Specification

- RV :** For valve base
- RH :** For left piping block
- RC :** For intermediate piping block

Wiring block assembly (1 set)

FZX - -

Common specification

- Blank:** Positive common
- CM:** Negative common

Wiring specification


- F100 :** Flat cable connector (DC specification)
- F101 :** Flat cable connector (DC specification)
- F200 :** Flat cable connector (DC specification)
- F201 :** Flat cable connector (DC specification)
- F260 :** Flat cable connector (DC specification)
- D250 :** D-sub connector (M2.6 screws)
- D251 :** D-sub connector (M2.6 screws)
- F100N :** Flat cable connector (DC specification), without power terminal
- F101N :** Flat cable connector (DC specification), without power terminal
- F200N :** Flat cable connector (DC specification), without power terminal
- F201N :** Flat cable connector (DC specification), without power terminal
- F260N :** Flat cable connector (DC specification), without power terminal
- D250N :** D-sub connector, without power terminal (M2.6 screws)
- D251N :** D-sub connector, without power terminal (M2.6 screws)
- D250U :** D-sub connector, (4-40UNC screws)
- D250NU :** D-sub connector, without power terminal (4-40UNC screws)
- D251U :** D-sub connector, (4-40UNC screws)
- D251NU :** D-sub connector, without power terminal (4-40UNC screws)
- D370NU :** D-sub connector, without power terminal (4-40UNC screws)
- T200 :** Terminal block, for left-side mounting

※ The above flat cable connectors and D-sub connectors can be switched between the top and side type.

■ Table for maximum number of valve units by wiring specification

Wiring specification		Maximum number of units ※	
		Wiring connection specification	
Wiring specification	Max. outputs	Packed wiring (Blank)	Double wiring (-W)
F100 <input type="checkbox"/> Flat cable (10P)	8	Varies depending on the number of mounted single solenoids, double solenoids, and block-off plates. The number of controlled solenoids should be designated as the maximum number of outputs or less. D370NU is a maximum of 20 units.	4 units
F101 <input type="checkbox"/> Flat cable (10P)	8		4 units
F200 <input type="checkbox"/> Flat cable (20P)	16		8 units
F201 <input type="checkbox"/> Flat cable (20P)	16		8 units
F260 <input type="checkbox"/> Flat cable (26P)	20		10 units
D250 <input type="checkbox"/> D-sub connector (25P)	16		8 units
D251 <input type="checkbox"/> D-sub connector (25P)	20		10 units
D370NU D-sub connector (37P)	32		16 units
T200 Terminal block (19 terminals)	18		9 units

※Note : When the intermediate piping block is selected, the maximum number of units will be added +1.

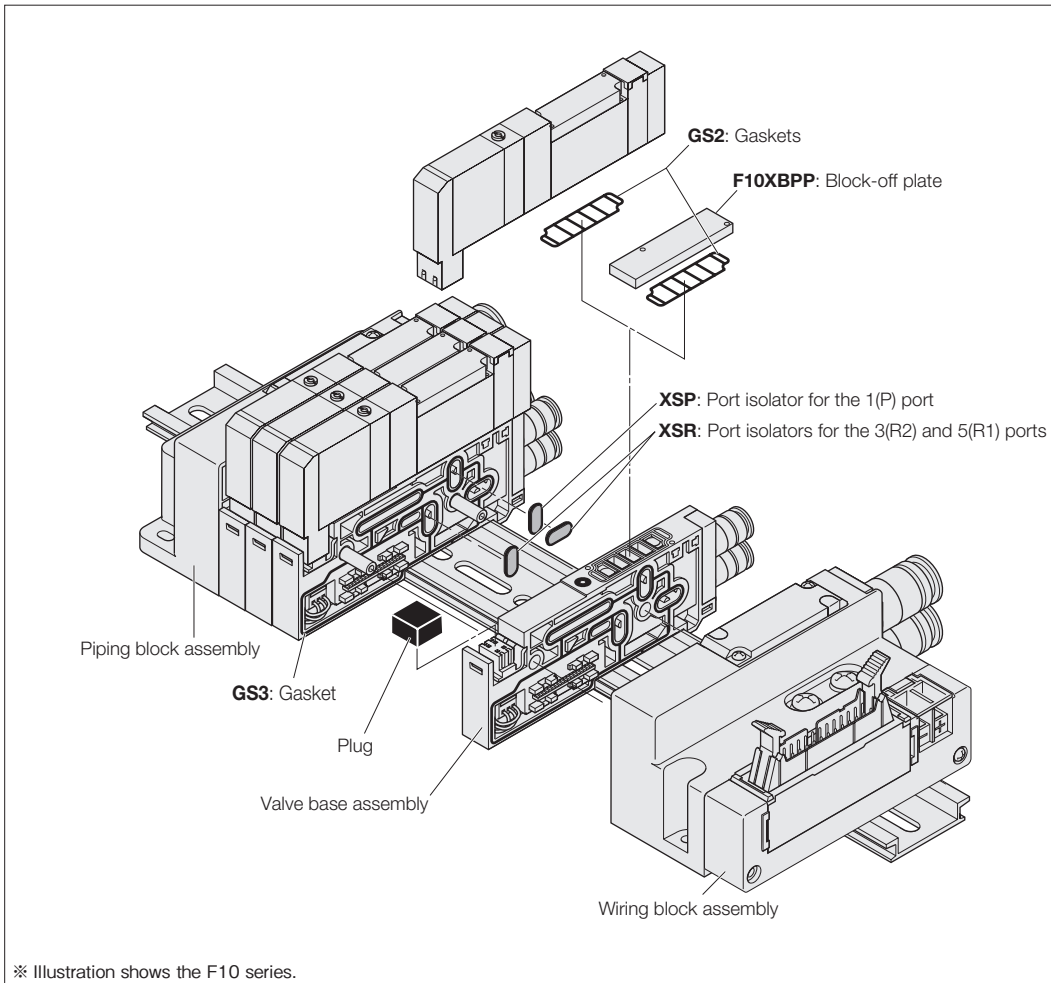

Manifold Order Code Example
 (12 units of F15 Series)
F15M12XPL-J6T-F201-DR DC24V
 stn.1 ~ 8 F15T1-A1-J5 DC24V
 stn.9 F15ZX-PJ6-TK
 stn.10 ~ 12 F15T1-A1-J5 DC24V
 Note: This order code example has no relationship to the illustration above.

Precautions for Order Codes

● **Orders for valves only**

Place orders from “Single Valve Unit Order Codes” on p. 162.

However, **Blank**, **A2**, **F3**, **F4**, **F5**, **F6**, **F4A**, **F4B**, **F5A**, **F5B**, **F6A**, or **F6B** cannot be selected for the valve outlet type. For the wiring specification, **Blank** is the only selection.

● **Wiring connection specification**

Blank (packed wiring): Wiring is made in accordance with the mounted valve specifications.

-W (double wiring): Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.


Caution

Single or double can also be selected as the block-off plate wiring specification separately from the manifold (valve) wiring specification.

F15 Series Easy Assembly Type Manifold Serial Transmission Type Order Codes

Manifold outlet specification


With dual use fitting blocks (base piping type)



J

Outlet port fitting
F15: φ6/φ8


With selectable fittings (base piping type)



L

Outlet port should be selected in accordance with the manifold fitting specification.


With female thread blocks (base piping type)



M

Outlet port female thread
F15: Rc1/8

With plates (direct piping type)



Blank

Valve size

F15M

15 mm [0.591 in.] width

Pilot specification

Blank

Internal pilot manifold

G

External pilot manifold

Piping block specification (air supply and exhaust)

Fitting block

- JR: Dual use fitting, right-side mounting
- JL: Dual use fitting, left-side mounting
- JD: Dual use fitting, both-side mounting
- Fitting size (1(P), 3, 5(R) ports), φ8, φ10

Female thread block

- MR: Female thread, right-side mounting
- ML: Female thread, left-side mounting
- MD: Female thread, both-side mounting
- Female thread size (1(P), 3, 5(R) ports), Rc1/4

Female thread block

- MRH: Female thread, right-side mounting^{Note13}
- MLH: Female thread, left-side mounting^{Note13}
- MDH: Female thread, both-side mounting^{Note13}
- Female thread size (1(P), 3, 5(R) ports), NPT1/4

Single use fitting block



- J5R: Single use fitting, right-side mounting
- J5L: Single use fitting, left-side mounting
- J5D: Single use fitting, both-side mounting
- Fitting size (1(P), 3, 5(R) ports), φ8
- J6R: Single use fitting, right-side mounting
- J6L: Single use fitting, left-side mounting
- J6D: Single use fitting, both-side mounting
- Fitting size (1(P), 3, 5(R) ports), φ10

Intermediate piping block

- JT: Dual use fitting, both-side mounting, intermediate piping block φ8, φ10
- J5T: Single use fitting, both-side mounting, intermediate piping block φ8
- J6T: Single use fitting, both-side mounting, intermediate piping block φ10
- MT: Female thread, both-side mounting, intermediate piping block Rc1/4
- MTH: Female thread, both-side mounting, intermediate piping block NPT1/4^{Note13}

Transmission block specification

- ※ All transmission blocks are left-side mounting
- ※ These are the serial transmission block specifications compatible with each system.



● Block on the right photo is the case of B7A Link Terminal.
For details, see p. 41-44.

Integrated type

- A1: For OMRON CompoBus/S (16 outputs)
- B1: For CC-Link (16 outputs)^{Note2}
- B3: For CC-Link (32 outputs)^{Note2}
- D1: For DeviceNet (16 outputs)
- D3: For DeviceNet (32 outputs)
- H1: For CompoNet (16 outputs)
- K1: For EtherCAT (16 outputs)
- K3: For EtherCAT (32 outputs)
- M1: For EtherNet/IP (16 outputs)^{Note2}
- M3: For EtherNet/IP (32 outputs)^{Note2}

Wiring connection specification

Blank

Packed wiring: Specification of the valve base is always in accordance with the mounted valve specifications.

-W

Double wiring: Valve base is always double wiring, regardless of the specifications of the mounted valve.

Mounting specification

Blank

Direct mounting

-DN

With DIN bracket (no rail)

-DR

With DIN bracket, with rail
Caution: For information on rails assembled and shipped, see p. 249 and 250.

Valve size

F15

Standard type

F15L

Low-current type

Valve size	Valve units	Manifold type	Manifold outlet specification	Pilot specification	Piping block specification	Transmission block specification	Wiring connection specification	Mounting specification
------------	-------------	---------------	-------------------------------	---------------------	----------------------------	----------------------------------	---------------------------------	------------------------

		Manifold type		Pilot specification		Piping block specification			Transmission block specification			Wiring connection specification		Mounting specification	
Base piping type	F15M	XS (※Rc)	J	Blank	-JR	-J5R	-JT	-A1	-D3	-M1 ^{Note2}	Blank -W	Blank -DN -DR			
			M	G	-JL	-J5L	-J5T	-B1 ^{Note2}	-H1	-M3 ^{Note2}					
					-JD	-J5D	-J6T	-B3 ^{Note2}	-K1						
Base piping type selectable fitting	F15M	XS (※Rc)	L	Blank	-JR	-MLH ^{Note13}	-J6D	-A1	-D3	-M1 ^{Note2}	Blank -W	Blank -DN -DR			
						G	-JL	-MDH ^{Note13}	-JT	-B1 ^{Note2}			-H1	-M3 ^{Note2}	
							-JD	-J5R	-J5T	-B3 ^{Note2}			-K1		
Direct piping type	F15M	XSH (※NPT)	Blank	Blank	-MR	-J5L	-J6T	-A1	-D3	-M1 ^{Note2}	Blank -W	Blank -DN -DR			
						G	-ML	-J5D	-MT	-B1 ^{Note2}			-H1	-M3 ^{Note2}	
							-MD	-J6R	-MTH ^{Note13}	-B3 ^{Note2}			-K1		
					-MRH ^{Note13}	-J6L									

Notes 1. To determine the maximum number of units, see the table for maximum number of valve units by transmission block specification, on p. 214.

2. Complies with the CE marking regulation.

Valve specification

- T0 : 2-position, for single solenoid only
- T1 : 2-position, single solenoid specification
- T2 : 2-position, double solenoid specification
- T3 : 3-position, closed center
- T4 : 3-position, exhaust center
- T5 : 3-position, pressure center
- TA : Tandem 3-port (NC and NO)^{Note10}
- TB : Tandem 3-port (NO and NO)^{Note10}
- TC : Tandem 3-port (NC and NO)^{Note10}

Operation type

Blank

Internal pilot type^{Note8}


G

External pilot type^{Note9}
(for positive pressure)


※ No vacuum valve can be mounted.

Manual override

Manual override button



Manual override lever^{Note6}



Valve outlet type

-A1 With plate^{Note4}
(base piping type)

5-port specification

-FJ With dual use fitting block
(direct piping type) **F15:** φ6, φ8

-FJ5 With single use fitting block **F15:** φ6
(direct piping type)

-FJ6 With single use fitting block **F15:** φ8
(direct piping type)

-FM With female thread block **F15:** Rc1/8
(direct piping type)

-FMH With female thread block^{Note13}
(direct piping type) **F15:** NPT1/8

3-port specification

-FJ5A With single use fitting block, normally closed (NC)
(direct piping type) **F15:** φ6

-FJ5B With single use fitting block, normally open (NO)
(direct piping type) **F15:** φ6

-FJ6A With single use fitting block, normally closed (NC)
(direct piping type) **F15:** φ8

-FJ6B With single use fitting block, normally open (NO)
(direct piping type) **F15:** φ8

-FMA With female thread block, normally closed (NC)
(direct piping type) **F15:** Rc1/8

-FMAH With female thread block, normally closed (NC)^{Note13}
(direct piping type) **F15:** NPT1/8

-FMB With female thread block, normally open (NO)
(direct piping type) **F15:** Rc1/8

-FMBH With female thread block, normally open (NO)^{Note13}
(direct piping type) **F15:** NPT1/8

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Manifold fitting specification

5-port specification

-J5 With single use fitting block (base piping type) **F15:** φ6

-J6 With single use fitting block (base piping type) **F15:** φ8

-M With female thread block (base piping type) **F15:** Rc1/8

-MH With female thread block^{Note13} (base piping type) **F15:** NPT1/8

3-port specification

-J5A With single use fitting block, normally closed (NC) (base piping type) **F15:** φ6

-J5B With single use fitting block, normally open (NO) (base piping type) **F15:** φ6

-J6A With single use fitting block, normally closed (NC) (base piping type) **F15:** φ8

-J6B With single use fitting block, normally open (NO) (base piping type) **F15:** φ8

-MA With female thread block, normally closed (NC) (base piping type) **F15:** Rc1/8

-MAH With female thread block, normally closed (NC)^{Note13} (base piping type) **F15:** NPT1/8

-MB With female thread block, normally open (NO) (base piping type) **F15:** Rc1/8

-MBH With female thread block, normally open (NO)^{Note13} (base piping type) **F15:** NPT1/8

Caution: The 3-port specifications are only available in the valve specification T0, T1, and T2.

Back pressure prevention valve

Blank

No back pressure prevention valve

-E2

With back pressure prevention valve^{Note11}

Individual air supply and exhaust spacer

Blank: Without spacer

-XPP6 : Single intake spacer (with 6 joint for F15)

-XPP8 : Single intake spacer (with 8 joint for F15)

-XPR6 : Single exhaust spacer (with 6 joint for F15)


-XPR8 : Single exhaust spacer (with 8 joint for F15)

For details, see p.27.

Block-off plate wiring specification

Blank: Double wiring

-S: Single wiring

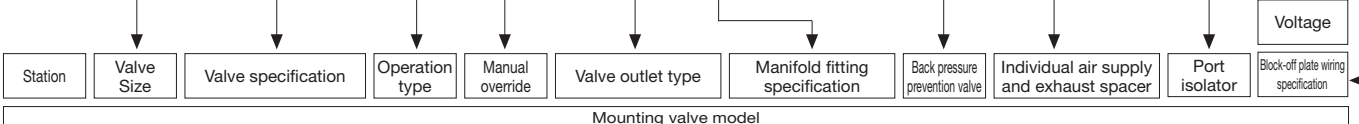

Station	Valve Size	Valve specification	Operation type	Manual override	Valve outlet type	Manifold fitting specification	Back pressure prevention valve	Individual air supply and exhaust spacer	Port isolator	Block-off plate wiring specification
stn. 1 . . stn. □ Note3	F15 F15L	T0 T3 TA ^{Note10} T1 T4 TB ^{Note10} T2 T5 TC ^{Note10}	Blank ^{Note8} G ^{Note9}	Blank -R ^{Note6}	-A1 ^{Note4}		Blank -E2 ^{Note11}	Blank -XPP6 -XPR6 -XPP8 -XPR8	Blank -XSP ^{Note7} -XSR ^{Note7} -XSA ^{Note7}	DC24V Blank -S
When selecting the intermediate piping block, see page 112 when specifying it.										
stn. 1 . . stn. □ Note3	F15 F15L	T0 T3 TA ^{Note10} T1 T4 TB ^{Note10} T2 T5 TC ^{Note10}	Blank ^{Note8} G ^{Note9}	Blank -R ^{Note6}	-A1 ^{Note4}	-J5 ^{Note12} -J6 ^{Note12} -J5A ^{Note12} -J6A ^{Note12} -J5B ^{Note12} -J6B ^{Note12} -M -MA -MH ^{Note13} -MAH ^{Note13} -J5A ^{Note12} -MB ^{Note12} -J5B ^{Note12} -MBH ^{Note13}	Blank -E2 ^{Note11}	Blank -XPP6 -XPR6 -XPP8 -XPR8	Blank -XSP ^{Note7} -XSR ^{Note7} -XSA ^{Note7}	DC24V Blank -S
When selecting the intermediate piping block, see page 112 when specifying it.										
stn. 1 . . stn. □ Note3	F15 F15L	T0 T3 TA ^{Note10} T1 T4 TB ^{Note10} T2 T5 TC ^{Note10}	Blank ^{Note8} G ^{Note9}	Blank -R ^{Note6}	-A1 ^{Note4}	-FJ ^{Note12} -FJ6A ^{Note12} -FJ5 ^{Note12} -FJ6B ^{Note12} -FJ6 ^{Note12} -FMA ^{Note12} -FM ^{Note12} -FMAH ^{Note13} -FMH ^{Note13} -FMB ^{Note12} -FJ5A ^{Note12} -FMBH ^{Note13} -FJ5B ^{Note12}	Blank -E2 ^{Note11}	Blank -XPP6 -XPR6 -XPP8 -XPR8	Blank -XSP ^{Note7} -XSR ^{Note7} -XSA ^{Note7}	DC24V Blank -S
When selecting the intermediate piping block, see page 212 when specifying it.										


Notes: 3. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
 4. When selecting J, M, or L (base piping type) for the manifold outlet specifications, always enter -A1 (with plate) for the valve outlet type.
 5. Single or double can also be selected as the block-off plate wiring specification separately from the manifold (valve) wiring specification.
 6. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
 7. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for -XSA, or 1 each port isolator for -XSP and -XSR for a total of 2 locations. When shipping, the designated port isolators are mounted between the designated station and the station to its immediate left (the next smaller stn. No.).
 8. Cannot be mounted on the external pilot manifold.
 9. Cannot be mounted on the internal pilot manifold.
 10. Not available in external pilot type.
 11. Not available with the individual exhaust spacer.
 12. The 3-port specifications are only available in the valve specification T0, T1, and T2.
 13. Can be selected only when the manifold type is XSH.

F15 ORDER CODES

F15 Series Easy Assembly Type Manifold Serial Transmission Type Order Codes

Intermediate piping block

(When mounting an intermediate piping block to the manifold, complete the following type and specify the station specified [on page 211](#).)

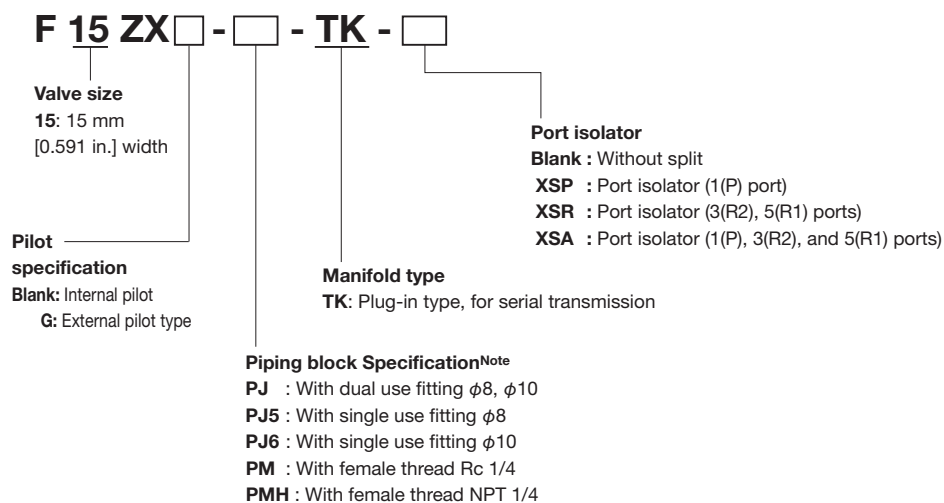

Note: See the following table for combinations of intermediate piping block port specifications and manifold piping block specifications.

Manifold piping specifications	Intermediate piping block
JT	PJ
J5T	PJ5
J6T	PJ6
MT	PM
MTH	PMH

F15 Series Easy Assembly Type Manifold Serial Transmission Type Additional Parts Order Codes

Parts for manifold

F 15 ZX -

Valve size

15: 15 mm [0.591 in.] width

Parts content

- GS2** : Gasket (gasket and exhaust valve)
- GS3** : Gasket (valve base side)
- XSP** : Port isolator (for 1(P) port)
- XSR** : Port isolator (for 3(R2), 5(R1) ports)
- XSA** : Port isolator (for 1(P), 3(R2), 5(R1) ports)
- DN** : DIN mounting bracket (one set of two)

Block-off plate (block-off plate, 2 mounting screws, and plug)

F 15 XBPP

Valve size

15: 15 mm [0.591 in.] width

Back pressure prevention valve (2 units for split type, with dedicated gasket)

F 15 Z - E2

Valve size

15: 15 mm [0.591 in.] width

Individual air supply and exhaust spacer (Spacer for plug-in type, gasket, exhaust valve, and 2 mounting screws)

F 15 ZX -

Valve size

15: 15 mm [0.591 in.] width

Specifications

- XPP6**: Single intake spacer (with $\phi 6$ joint for F15)
- XPP8**: Single intake spacer (with $\phi 8$ joint for F15)
- XPR6**: Single exhaust spacer (with $\phi 6$ joint for F15)
- XPR8**: Single exhaust spacer (with $\phi 8$ joint for F15)

※For details, see p.27.

Valve base assembly (valve base, gasket, and 2 connecting rods for adding)

F 15 ZX - - - ※For use with both internal pilot and external pilot

Valve size

15: 15 mm [0.591 in.] width

Wiring specification

- S** : For single wiring
- W** : For double wiring

Common specification

Blank: For positive common

Piping specification

- VJ** : Dual use fitting valve base
- VJ5** : Single use fitting valve base F15: $\phi 6$
- VJ6** : Single diameter fitting valve base F15: $\phi 8$
- VJ5A** : 3-port specification normally closed, single use fitting valve base F15: $\phi 6$
- VJ5B** : 3-port specification normally open, single use fitting valve base F15: $\phi 6$
- VJ6A** : 3-port specification normally closed, single use fitting valve base F15: $\phi 8$
- VJ6B** : 3-port specification normally open, single use fitting valve base F15: $\phi 8$
- VM** : Female thread valve base F15: Rc1/8
- VMA** : 3-port specification normally closed, female thread valve base F15: Rc1/8
- VMB** : 3-port specification normally open, female thread valve base F15: Rc1/8
- VMH** : Female thread valve base F15: NPT1/8
- VMAH** : 3-port specification normally closed, female thread valve base F15: NPT1/8
- VMBH** : 3-port specification normally open, female thread valve base F15: NPT1/8
- VP** : Valve base plate

Muffler

KM - J

Fitting size

- 6**: Outer diameter $\phi 6$ (for piping block)
 - 8**: Outer diameter $\phi 8$ (for piping block)
 - 10**: Outer diameter $\phi 10$ (for piping block)
- (Sales unit: Set of 10 mufflers)

Connecting rod (1 set of 2)

F 15 ZX - -

Valve size

15: 15 mm [0.591 in.] width

Number of units

- 01 ~ 20**: When type for valve base (RV) is selected
- 01** : When type for left side piping block (RH) is selected
- 01** : When type for intermediate piping block (RC) is selected

Specification

- RV** : For valve base
- RH** : For left piping block
- RC** : For intermediate piping block

Piping block assembly (plug-in)

F 15 ZX - - - -

Valve size

15: 15 mm [0.591 in.] width

Port isolator^{Note2}

- Blank**: No port isolator
- XSP**: Port isolator (1(P) port)
- XSR**: Port isolator (3(R2), 5(R1) ports)
- XSA**: Port isolator (1(P), 3(R2), and 5(R1) ports)

Mounting specification^{Note3}

- Blank**: Without DIN bracket
- DN**: With DIN bracket

Pilot specification

- Blank**: Internal pilot
- G**: External pilot

Manifold type

- LK** : Left side piping block (for plug-in type) with circuit board
- RN** : Right piping block, without circuit board
- TK** : Intermediate piping block (for plug-in type) with circuit board

Piping block Specification^{Note1}

- PJ** : With dual use fitting $\phi 8$, $\phi 10$
- PJ5**: With single use fitting $\phi 8$
- PJ6**: With single use fitting $\phi 10$
- PM** : With female thread Rc 1/4
- PMH** : With female thread NPT 1/4
- PP** : Plate (without fitting)

DIN rail

DIN - (Unit:1)

Rail length

- 125**: 125mm [4.921 in.]
- :** (25 mm [0.984 in.] pitch)
- 525**: 525mm [20.669 in.]

Notes: 1. The fitting of the piping block is included. One set of two connecting rods is also included for a LN and TN type manifold.
 2. Port isolator selection only available when the piping block name is TK.
 3. Only when the manifold type is LK or RN.

Serial transmission block (single unit)

YS6  (dedicated for manifold mounting)

Transmission block specification

- B1:** For CC-Link (16 outputs)
- B3:** For CC-Link (32 outputs)
- D1:** For DeviceNet (16 outputs)
- D3:** For DeviceNet (32 outputs)
- H1:** For CompoNet (16 outputs)

YS7  **L** (dedicated for manifold mounting)

Wiring position

L: Left-side mounting


Transmission block specification

- K1:** For EtherCAT (16 outputs)
- K3:** For EtherCAT (32 outputs)
- M1:** For EtherNet/IP (16 outputs)
- M3:** For EtherNet/IP (32 outputs)

■ **Table for maximum number of valve units by transmission block specification**

Transmission block specifications		Maximum number of units ※	
		Wiring connection specification	
	Max. outputs	Packed wiring (Blank)	Double wiring (-W)
-B1: For CC-Link (16 outputs)	16	Varies depending on the number of mounted single solenoids, double solenoids, and block-off plates. The number of controlled solenoids should be designated as the maximum number of outputs or less. -B3, -D3, -K3, and -M3 are a maximum of 20 units.	8 units
-B3: For CC-Link (32 outputs)	32		16 units
-D1: For DeviceNet (16 outputs)	16		8 units
-D3: For DeviceNet (32 outputs)	32		16 units
-H1: For CompoNet (16 outputs)	16		8 units
-K1: For EtherCAT (16 outputs)	16		8 units
-K3: For EtherCAT (32 outputs)	32		16 units
-M1: For EtherNet/IP (16 outputs)	16		8 units
-M3: For EtherNet/IP (32 outputs)	32		16 units

※Note : When the intermediate piping block is selected, the maximum number of units will be added +1.

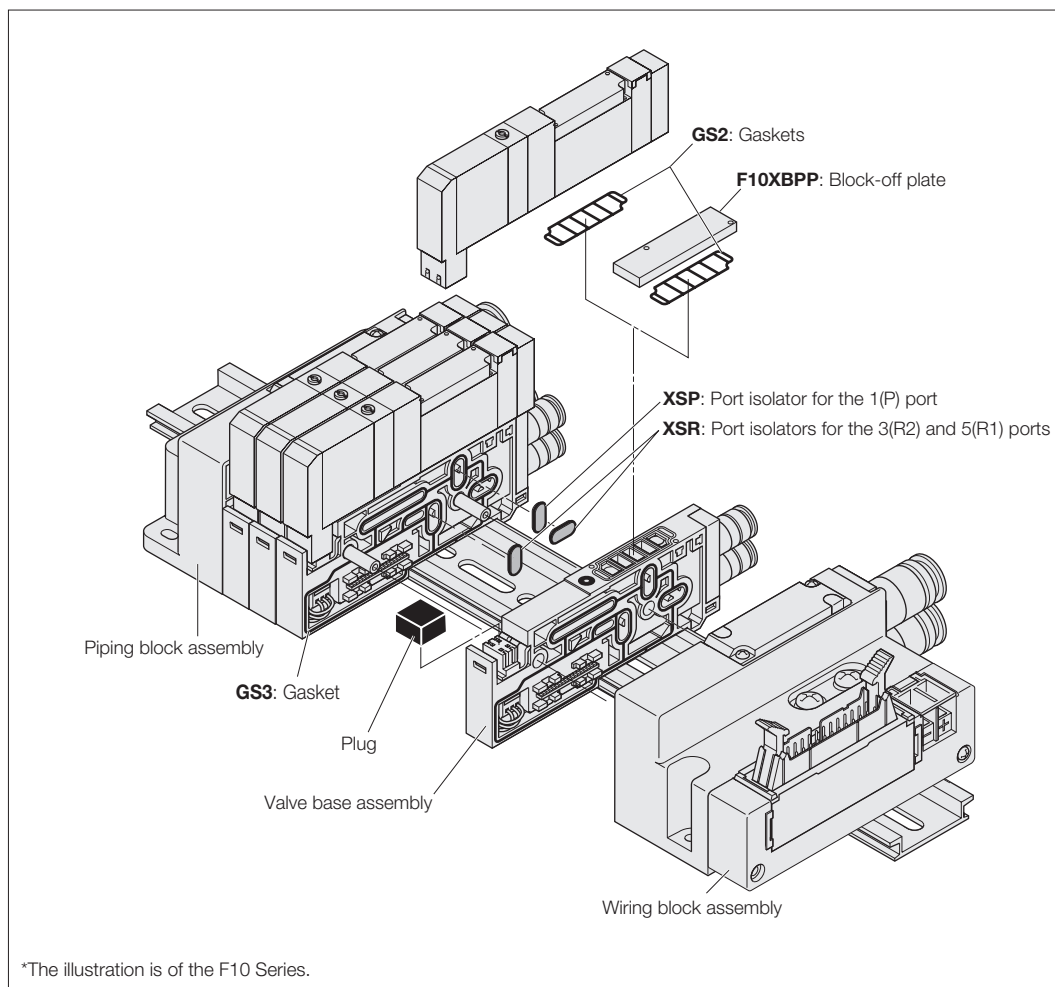

Manifold Order Code Example

(8 units of F15 Series)

F15M8XSL-J5R-B1-W

stn.1 ~ 5 F15T0-A1-J5 DC24V

stn.6 ~ 7 F15T2-A1-J6 DC24V

stn.8 F15XBPP-J6

Note: This order code example has no relationship to the illustration above.

Precautions for Order Codes

● Orders for valves only

Place orders from "Single Valve Unit Order Codes" on p. 162.

However, **Blank**, **A2**, **F3**, **F4**, **F5**, **F6**, **F4A**, **F4B**, **F5A**, **F5B**, **F6A**, or **F6B** cannot be selected for the valve outlet type. For the wiring specification, Blank is the only selection.

● Wiring connection specification

Blank (packed wiring): Wiring is made in accordance with the mounted valve specifications.

-W (double wiring): Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.


Caution

Single or double can also be selected as the block-off plate wiring specification separately from the manifold (valve) wiring specification.

F15T Valve specifications **-F3-PS**

With outlet port dual use fitting block
 With inlet port female thread block
 S type plug connector

* For T0 Type dimensions, see p. 217.

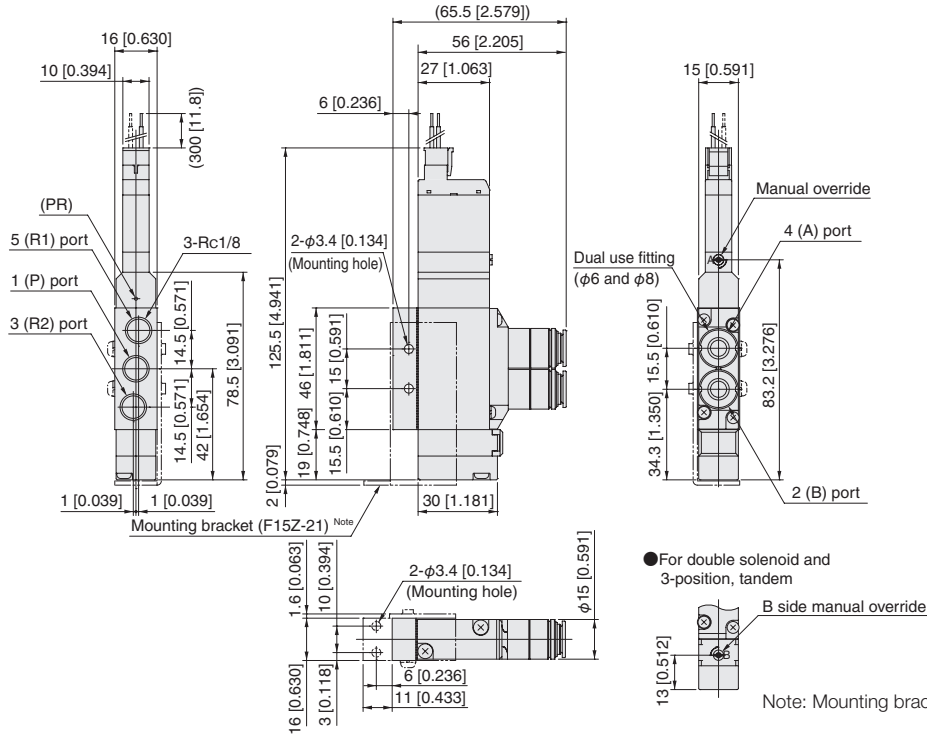


● For double solenoid and 3-position, tandem
 B side manual override
 Note: Mounting brackets are additional parts (options).

F15T Valve specifications **-F4-PS**

F15T Valve specifications **-F4H-PS**

With outlet port female thread block
 With inlet port female thread block
 S type plug connector


* For T0 Type dimensions, see p. 217.

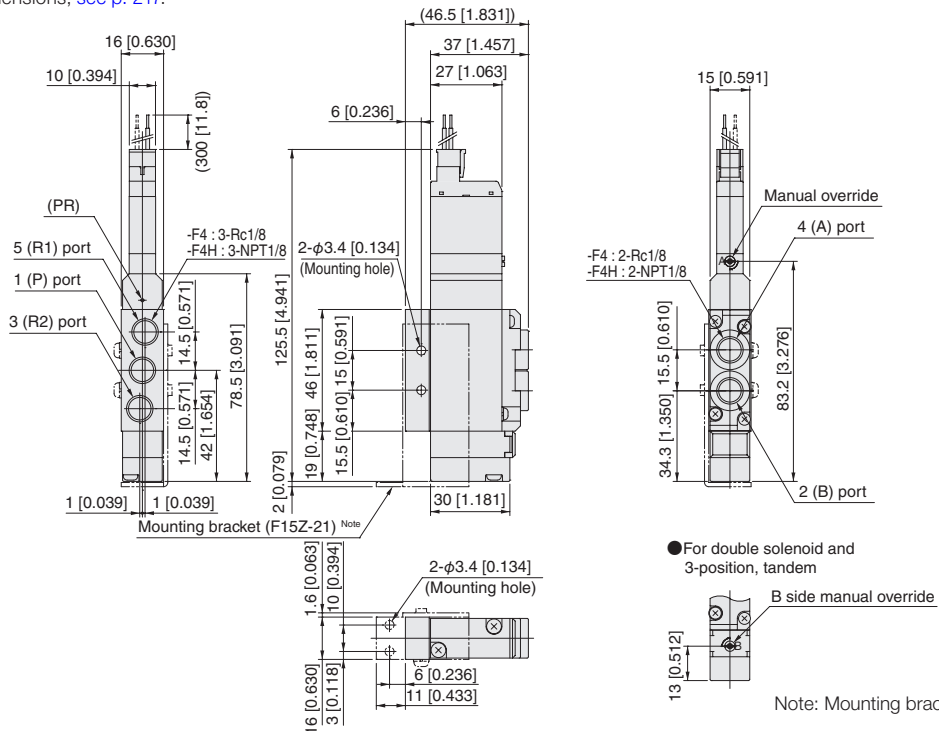

● For double solenoid and 3-position, tandem
 B side manual override
 Note: Mounting brackets are additional parts (options).

F15T0-F □ -PS


With outlet port single use fitting block
 With inlet port female thread block
 S type plug connector

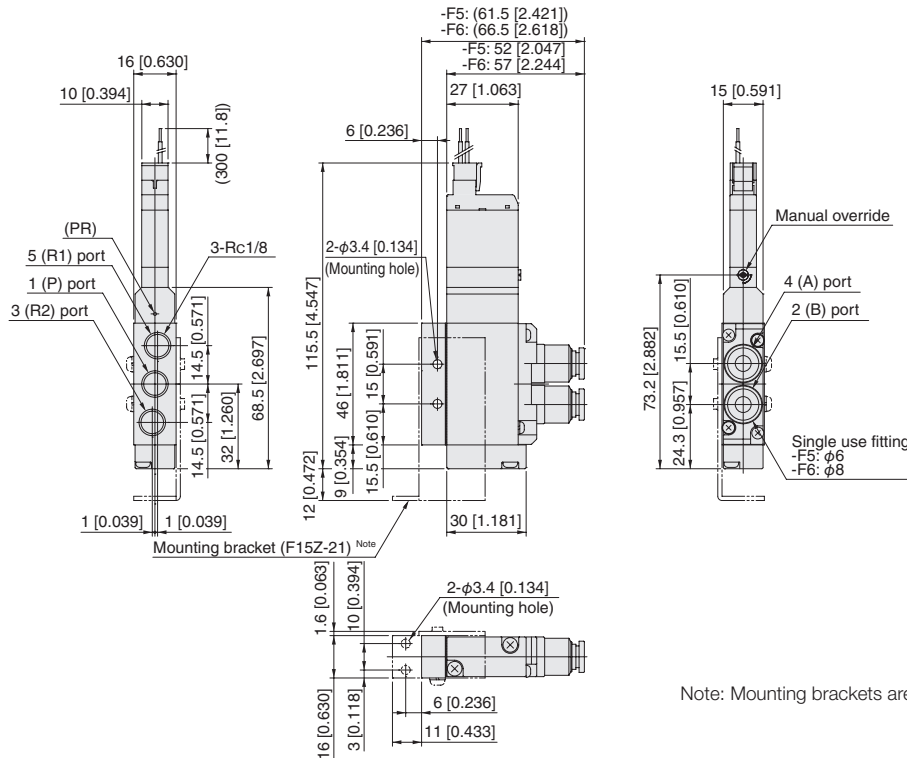

Note: Mounting brackets are additional parts (options).

IP Specifications


F15T Valve specifications Operation system -P-A2-PS

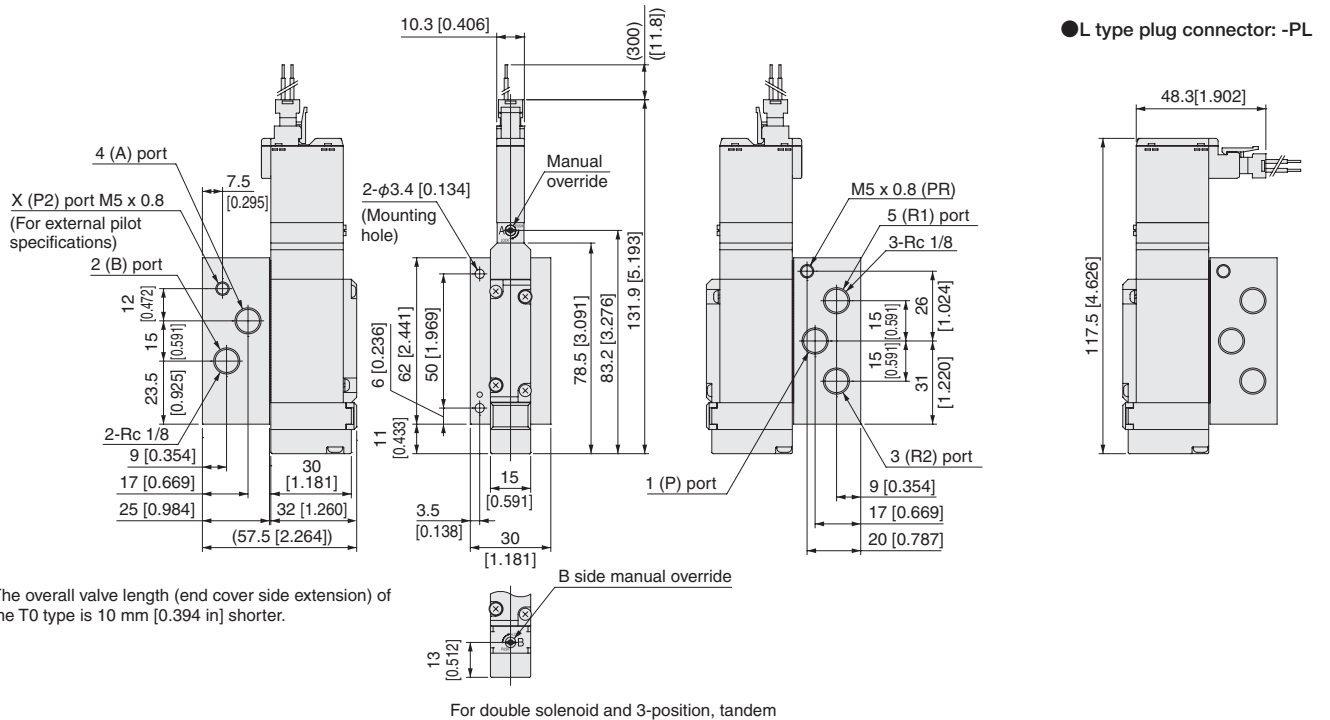

Note: The overall valve length (end cover side extension) of the T0 type is 10 mm [0.394 in] shorter.

For double solenoid and 3-position, tandem


● L type plug connector: -PL

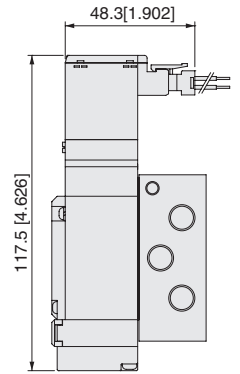

F15T Valve specifications Operation system **-A2-PS**

F15T Valve specifications Operation system **-A2H-PS**


With A-type sub-base
S type plug connector

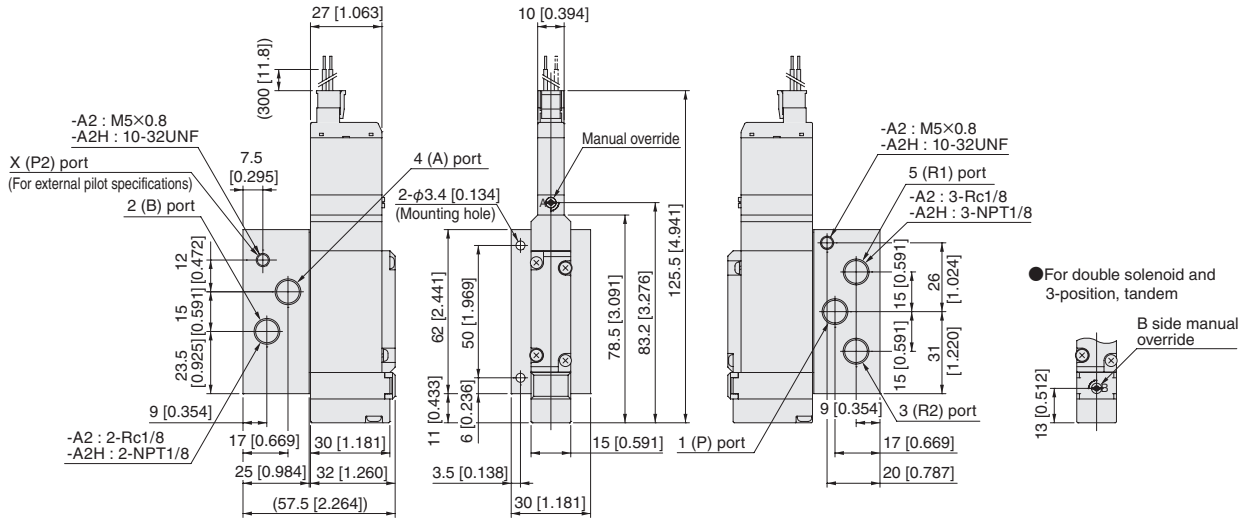


Note: The overall valve length of the T0 type is 10 mm [0.394 in] shorter (end cover side extension is 10 mm [0.394 in] less).

Options

● L-type plug connector: **-PL**

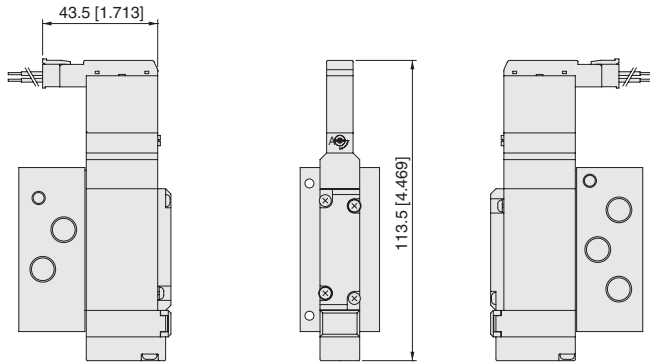


● Manual lever: **-R**

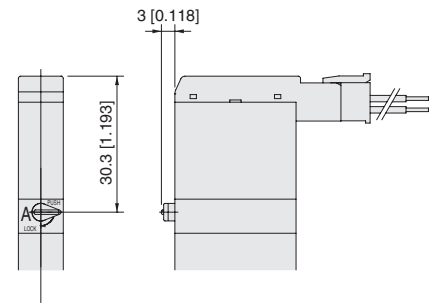


Note: The overall valve length of the T0 type is 10 mm [0.394 in] shorter (end cover side extension is 10 mm [0.394 in] less).

● Solenoid with DIN type connector: **-39** □

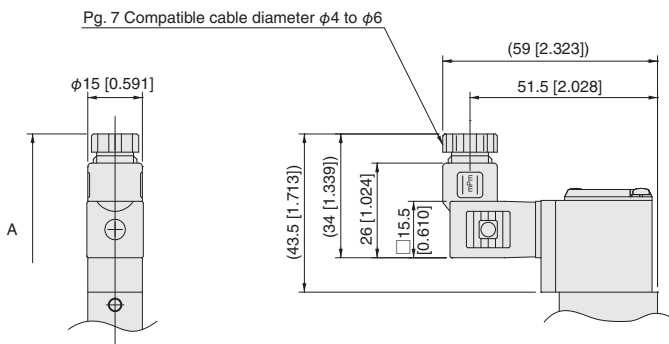

● Protruding lock type manual override: **-83**



Model	Symbol	A (Full length)
F15T0		117.2 [4.614]
F15T2		170.4 [6.709]
F15T3 to T5		180.4 [7.102]





F15M Number of valves **A M** Pilot specifications (Base piping type)

Monoblock manifold A type
 With manifold outlet port dual use fitting block
 S type plug connector

● Internal pilot specifications

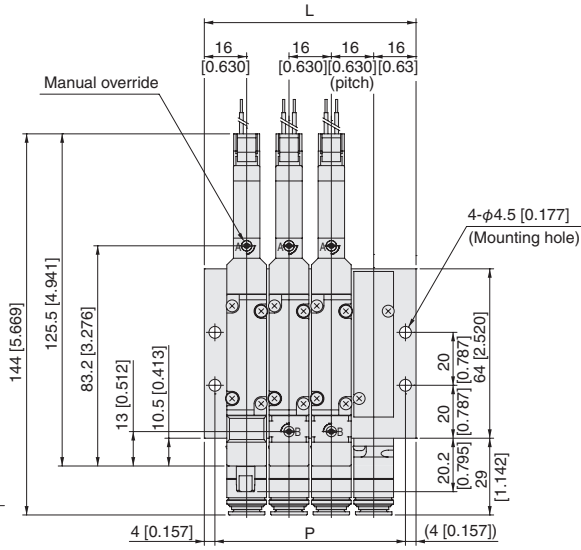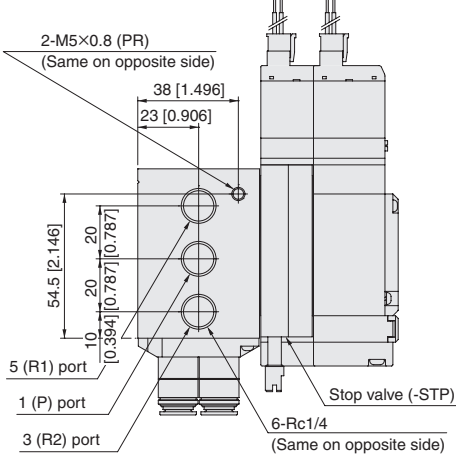


● External pilot specifications

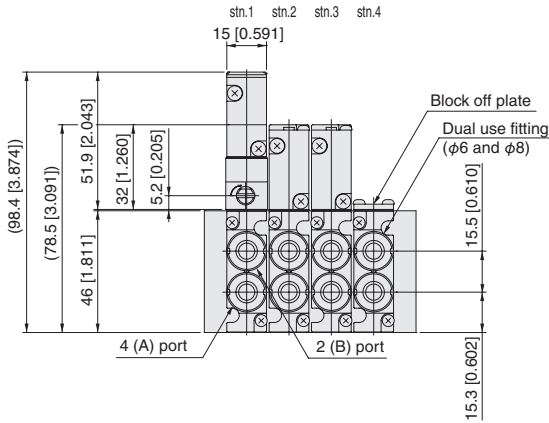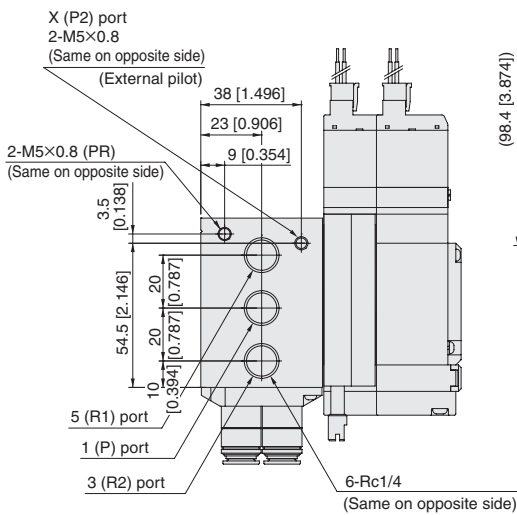

Unit dimensions

Number of units	L	P
2	48 [1.890]	40 [1.575]
3	64 [2.520]	56 [2.205]
4	80 [3.150]	72 [2.835]
5	96 [3.780]	88 [3.465]
6	112 [4.409]	104 [4.094]
7	128 [5.039]	120 [4.724]
8	144 [5.669]	136 [5.354]
9	160 [6.299]	152 [5.984]
10	176 [6.929]	168 [6.614]
11	192 [7.559]	184 [7.244]
12	208 [8.189]	200 [7.874]
13	224 [8.819]	216 [8.504]
14	240 [9.449]	232 [9.134]
15	256 [10.079]	248 [9.764]
16	272 [10.709]	264 [10.394]
17	288 [11.339]	280 [11.024]
18	304 [11.969]	296 [11.654]
19	320 [12.599]	312 [12.283]
20	336 [13.228]	328 [12.913]


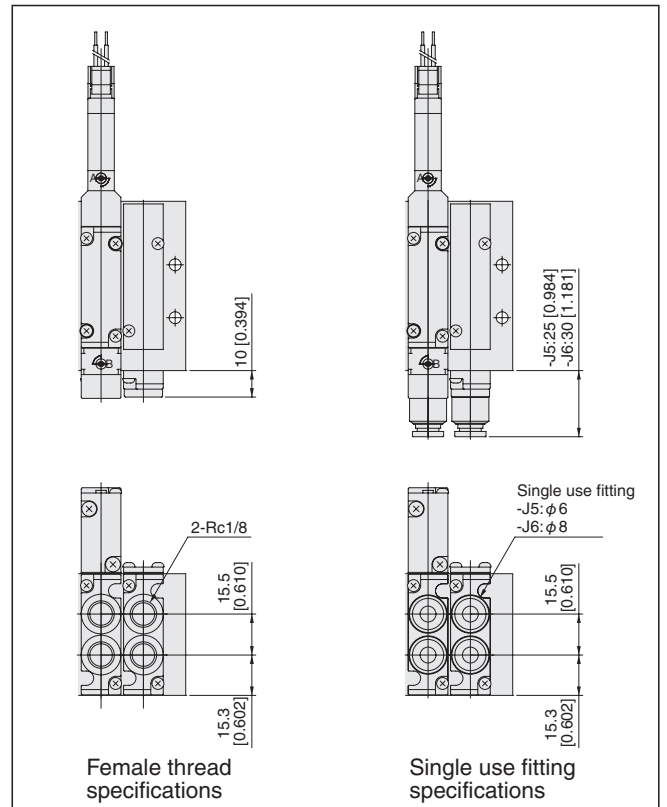


F15 DIMENSIONS



F15M [Number of valves] **AHL** [Pilot specifications] (Base piping type)

Monoblock manifold A type
 With manifold outlet port female thread block
 S type plug connector

● **Internal pilot specifications**

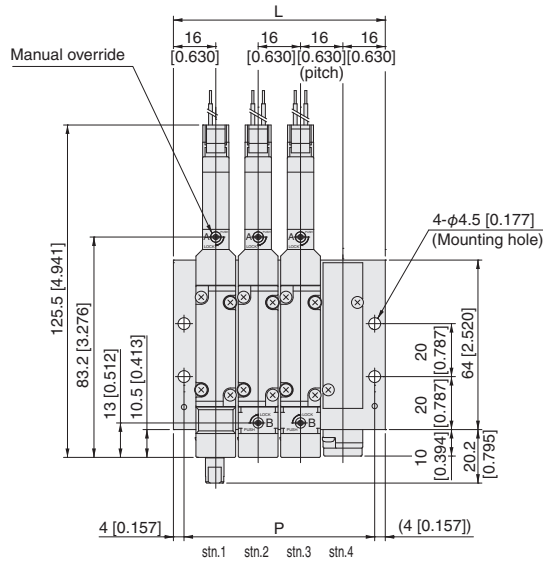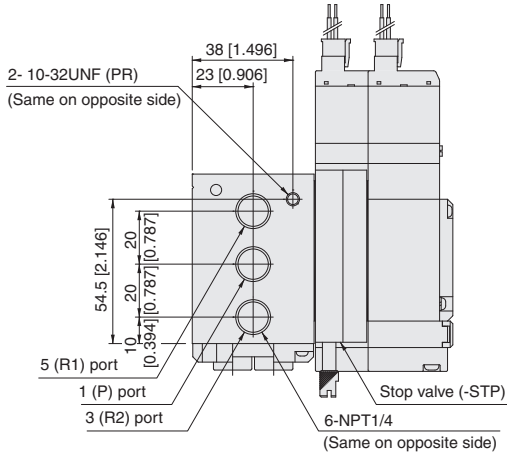

● **External pilot specifications**

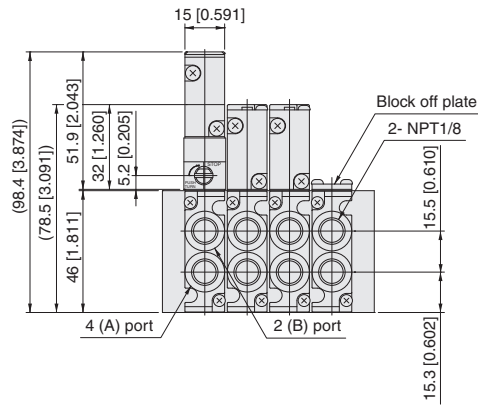
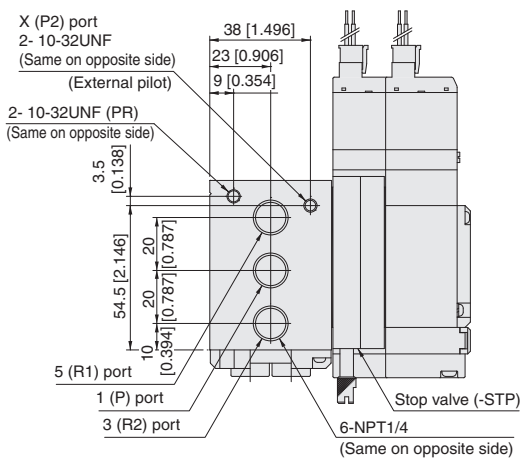


Unit dimensions

Number of units	L	P
2	48 [1.890]	40 [1.575]
3	64 [2.520]	56 [2.205]
4	80 [3.150]	72 [2.835]
5	96 [3.780]	88 [3.465]
6	112 [4.409]	104 [4.094]
7	128 [5.039]	120 [4.724]
8	144 [5.669]	136 [5.354]
9	160 [6.299]	152 [5.984]
10	176 [6.929]	168 [6.614]
11	192 [7.559]	184 [7.244]
12	208 [8.189]	200 [7.874]
13	224 [8.819]	216 [8.504]
14	240 [9.449]	232 [9.134]
15	256 [10.079]	248 [9.764]
16	272 [10.709]	264 [10.394]
17	288 [11.339]	280 [11.024]
18	304 [11.969]	296 [11.654]
19	320 [12.599]	312 [12.283]
20	336 [13.228]	328 [12.913]

F15M Number of valves **F** (Direct piping type)

Monoblock manifold F type
With valve outlet port dual use fitting block
S type plug connector

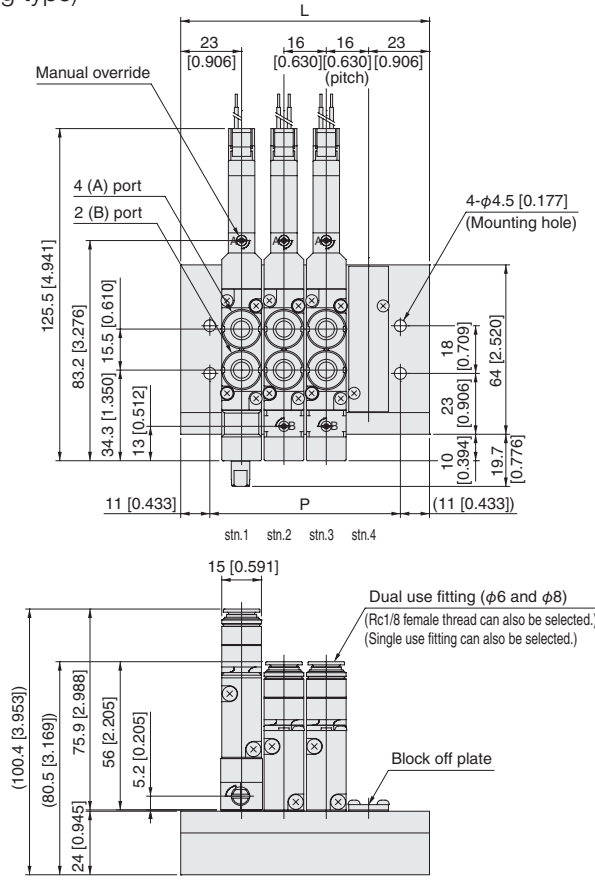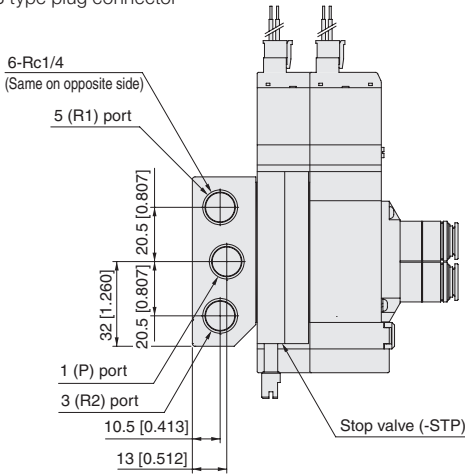



Note: The overall valve length of the T0 type is 10 mm [0.394 in] shorter (end cover side protrusion is 10 mm [0.394 in] less).

Unit dimensions

Number of units	L	P
2	62 [2.441]	40 [1.575]
3	78 [3.071]	56 [2.205]
4	94 [3.701]	72 [2.835]
5	110 [4.331]	88 [3.465]
6	126 [4.961]	104 [4.094]
7	142 [5.591]	120 [4.724]
8	158 [6.220]	136 [5.354]
9	174 [6.850]	152 [5.984]
10	190 [7.480]	168 [6.614]
11	206 [8.110]	184 [7.244]
12	222 [8.740]	200 [7.874]
13	238 [9.370]	216 [8.504]
14	254 [10.000]	232 [9.134]
15	270 [10.630]	248 [9.764]
16	286 [11.260]	264 [10.394]
17	302 [11.890]	280 [11.024]
18	318 [12.520]	296 [11.654]
19	334 [13.150]	312 [12.283]
20	350 [13.780]	328 [12.913]

F15M Number of valves **FH** (Direct piping type)

Monoblock manifold F type
With valve outlet port female thread block
S type plug connector

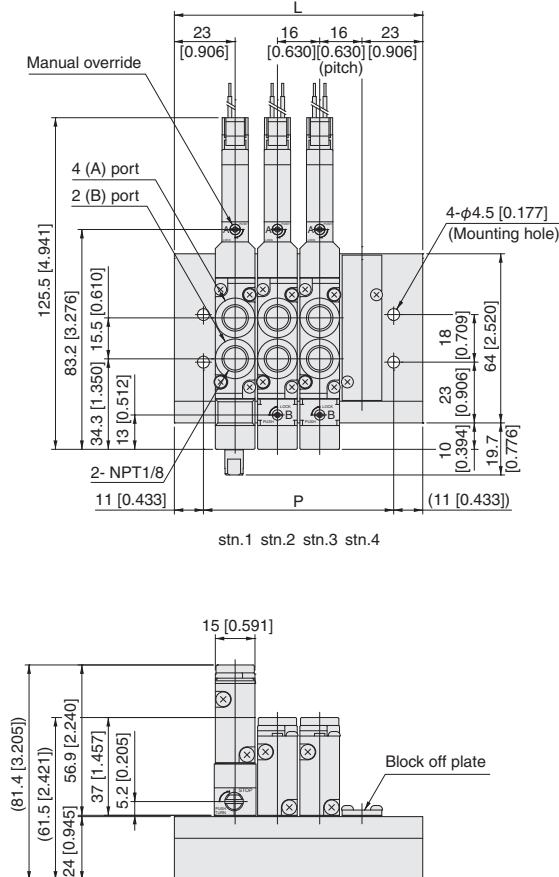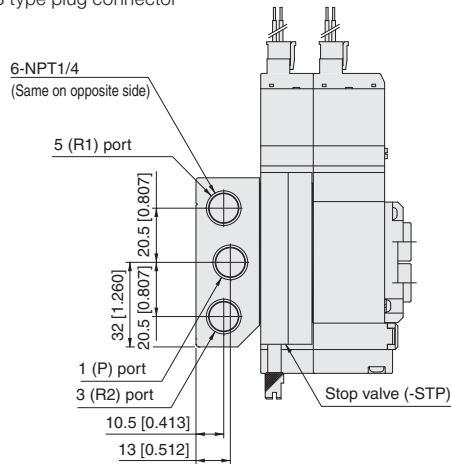



Unit dimensions

Number of units	L	P
2	62 [2.441]	40 [1.575]
3	78 [3.071]	56 [2.205]
4	94 [3.701]	72 [2.835]
5	110 [4.331]	88 [3.465]
6	126 [4.961]	104 [4.094]
7	142 [5.591]	120 [4.724]
8	158 [6.220]	136 [5.354]
9	174 [6.850]	152 [5.984]
10	190 [7.480]	168 [6.614]
11	206 [8.110]	184 [7.244]
12	222 [8.740]	200 [7.874]
13	238 [9.370]	216 [8.504]
14	254 [10.000]	232 [9.134]
15	270 [10.630]	248 [9.764]
16	286 [11.260]	264 [10.394]
17	302 [11.890]	280 [11.024]
18	318 [12.520]	296 [11.654]
19	334 [13.150]	312 [12.283]
20	350 [13.780]	328 [12.913]



F15M Number of valves **A M** Pilot specifications (Base piping type)

Monoblock manifold A type, wire saving type
 With manifold outlet port dual use fitting block
 Dimensions show flat cable connector 20-pin specifications

● **Internal pilot specifications**

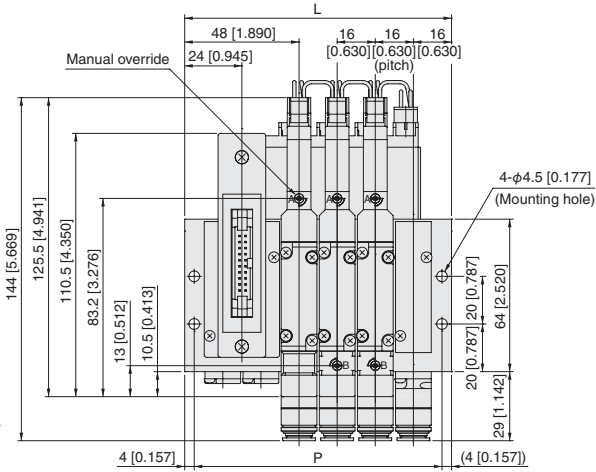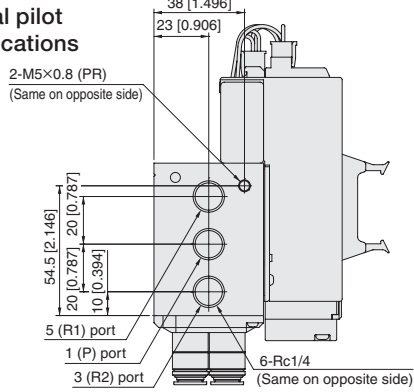

● **External pilot specifications**

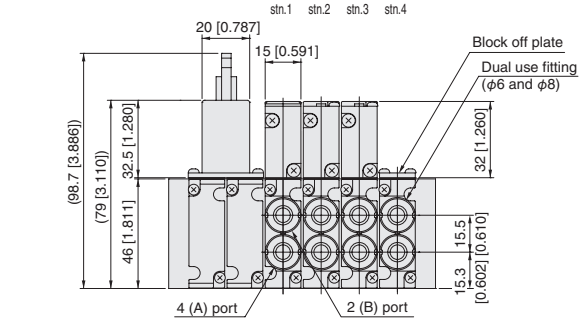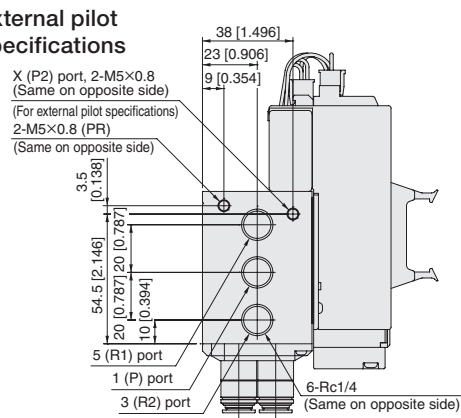



Unit dimensions

Number of units	L	P
2	80 [3.150]	72 [2.835]
3	96 [3.780]	88 [3.465]
4	112 [4.409]	104 [4.094]
5	128 [5.039]	120 [4.724]
6	144 [5.669]	136 [5.354]
7	160 [6.299]	152 [5.984]
8	176 [6.929]	168 [6.614]
9	192 [7.559]	184 [7.244]
10	208 [8.189]	200 [7.874]
11	224 [8.819]	216 [8.504]
12	240 [9.449]	232 [9.134]
13	256 [10.079]	248 [9.764]
14	272 [10.709]	264 [10.394]
15	288 [11.339]	280 [11.024]
16	304 [11.969]	296 [11.654]
17	320 [12.599]	312 [12.283]
18	336 [13.228]	328 [12.913]
19	352 [13.858]	344 [13.543]
20	368 [14.488]	360 [14.173]



F15M Number of valves **AHL** Pilot specifications (Base piping type)

Monoblock manifold A type, wire saving type
 With manifold outlet port female thread block
 Dimensions show flat cable connector 20-pin specifications

● **Internal pilot specifications**

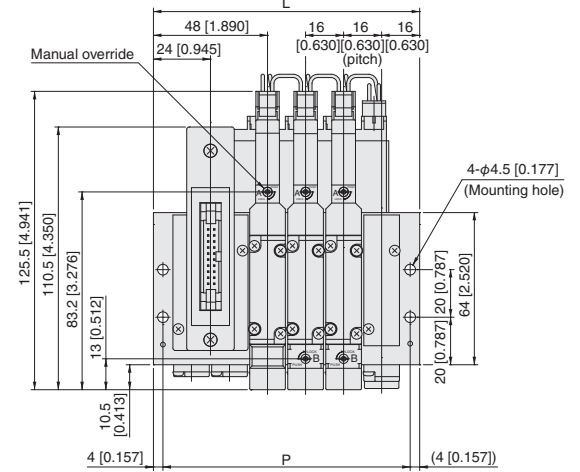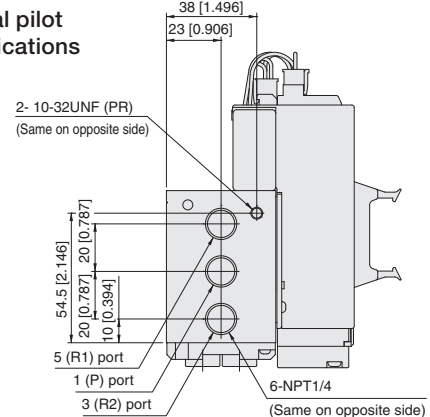

● **External pilot specifications**

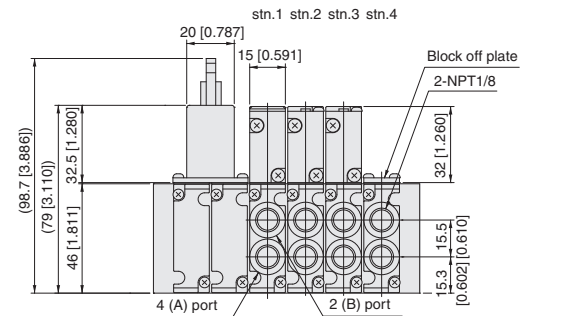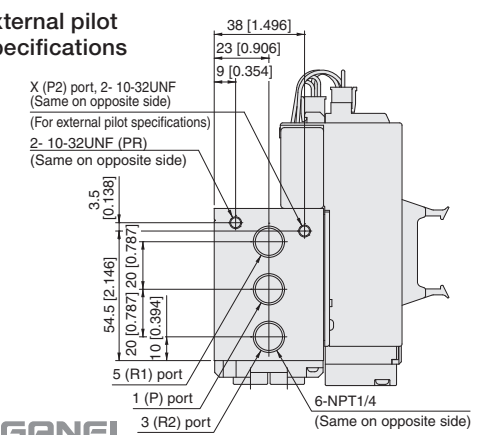


Unit dimensions

Number of units	L	P
2	80 [3.150]	72 [2.835]
3	96 [3.780]	88 [3.465]
4	112 [4.409]	104 [4.094]
5	128 [5.039]	120 [4.724]
6	144 [5.669]	136 [5.354]
7	160 [6.299]	152 [5.984]
8	176 [6.929]	168 [6.614]
9	192 [7.559]	184 [7.244]
10	208 [8.189]	200 [7.874]
11	224 [8.819]	216 [8.504]
12	240 [9.449]	232 [9.134]
13	256 [10.079]	248 [9.764]
14	272 [10.709]	264 [10.394]
15	288 [11.339]	280 [11.024]
16	304 [11.969]	296 [11.654]
17	320 [12.599]	312 [12.283]
18	336 [13.228]	328 [12.913]
19	352 [13.858]	344 [13.543]
20	368 [14.488]	360 [14.173]

F15M Number of valves **F** (Direct piping type)

Monoblock manifold F type, wire saving type
 With valve outlet port dual use fitting block
 Dimensions show flat cable connector 20-pin specifications

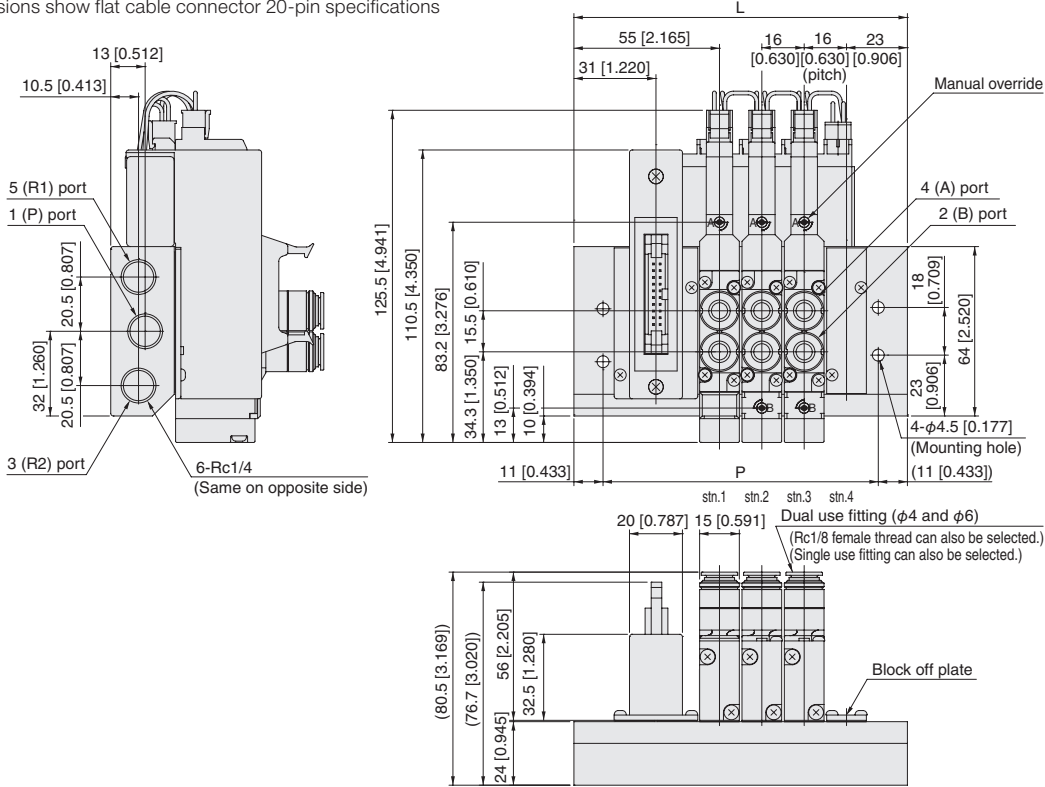


Unit dimensions

Number of units	L	P
2	94 [3.701]	72 [2.835]
3	110 [4.331]	88 [3.465]
4	126 [4.961]	104 [4.094]
5	142 [5.591]	120 [4.724]
6	158 [6.220]	136 [5.354]
7	174 [6.850]	152 [5.984]
8	190 [7.480]	168 [6.614]
9	206 [8.110]	184 [7.244]
10	222 [8.740]	200 [7.874]
11	238 [9.370]	216 [8.504]
12	254 [10.000]	232 [9.134]
13	270 [10.630]	248 [9.764]
14	286 [11.260]	264 [10.394]
15	302 [11.890]	280 [11.024]
16	318 [12.520]	296 [11.654]
17	334 [13.150]	312 [12.283]
18	350 [13.780]	328 [12.913]
19	366 [14.409]	344 [13.543]
20	382 [15.039]	360 [14.173]

F15M Number of valves **FH** (Direct piping type)

Monoblock manifold F type, wire saving type
 With valve outlet port female thread block
 Dimensions show flat cable connector 20-pin specifications

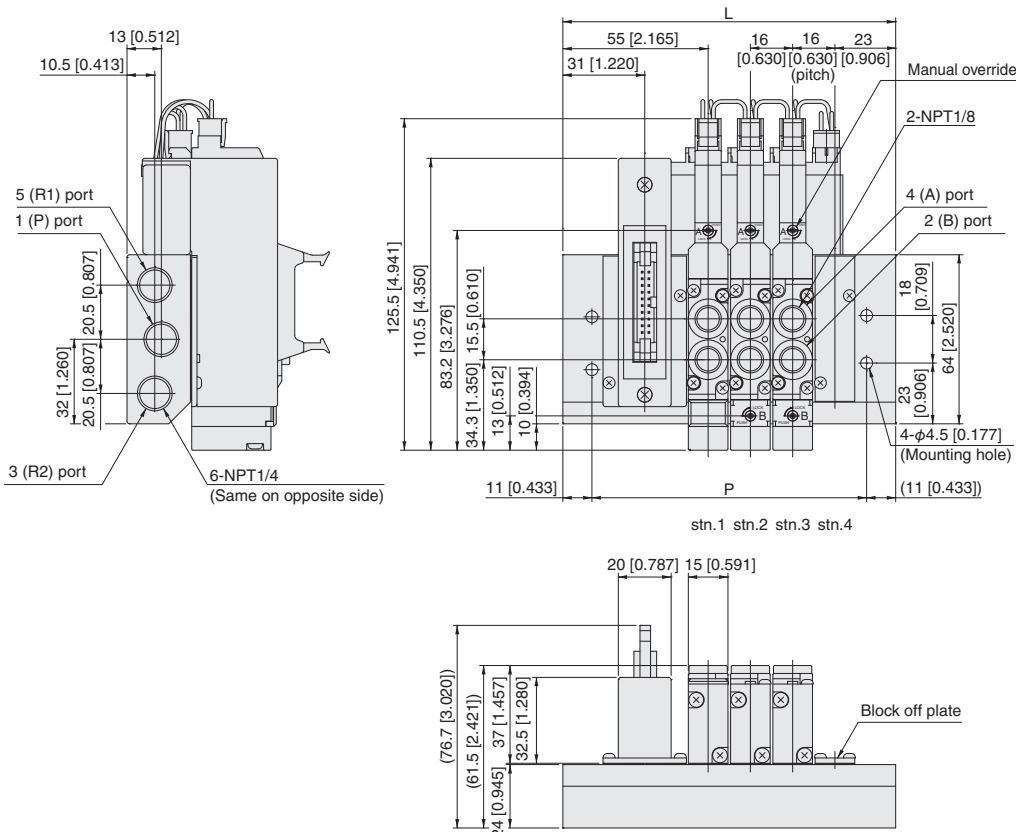

Unit dimensions



Number of units	L	P
2	94 [3.701]	72 [2.835]
3	110 [4.331]	88 [3.465]
4	126 [4.961]	104 [4.094]
5	142 [5.591]	120 [4.724]
6	158 [6.220]	136 [5.354]
7	174 [6.850]	152 [5.984]
8	190 [7.480]	168 [6.614]
9	206 [8.110]	184 [7.244]
10	222 [8.740]	200 [7.874]
11	238 [9.370]	216 [8.504]
12	254 [10.000]	232 [9.134]
13	270 [10.630]	248 [9.764]
14	286 [11.260]	264 [10.394]
15	302 [11.890]	280 [11.024]
16	318 [12.520]	296 [11.654]
17	334 [13.150]	312 [12.283]
18	350 [13.780]	328 [12.913]
19	366 [14.409]	344 [13.543]
20	382 [15.039]	360 [14.173]

F15M Number of valves **AP^JM^L** Pilot specifications (Base piping type)

PC board manifold A type
With manifold outlet port dual use fitting block



Note: Mounted valve example shows -W wiring specifications.
In the case of -S wiring specifications, the mounted valve becomes T0 or T1 type.

● Internal pilot specifications

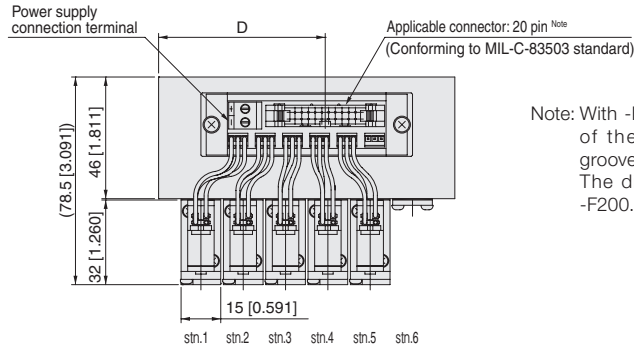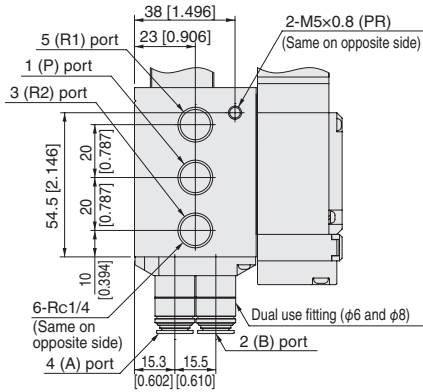

Note: With -F200 and -F201, the positions of the mis-insertion prevention grooves are reversed. The dimensions show the case of -F200.

● External pilot specifications

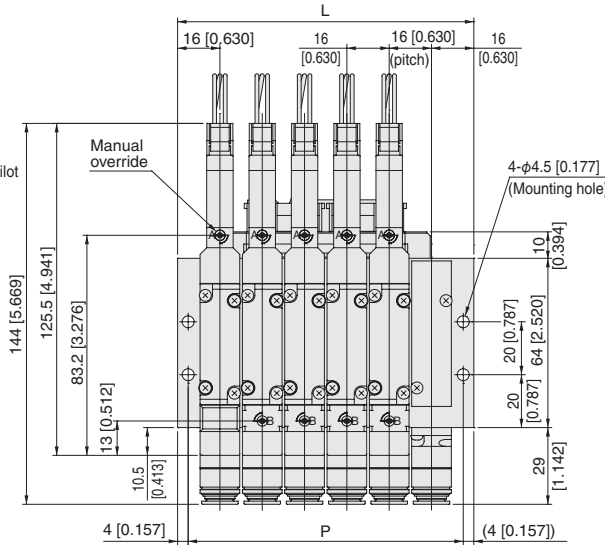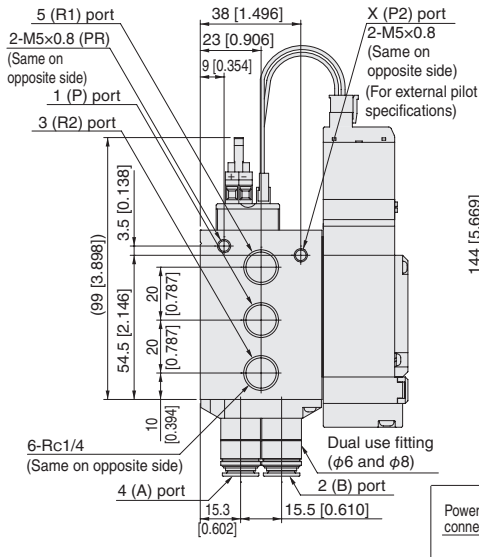

Unit dimensions



Number of units	L	P	D
6	112 [4.409]	104 [4.094]	63 [2.480]
8	144 [5.669]	136 [5.354]	68.5 [2.697]
10	176 [6.929]	168 [6.614]	68.5 [2.697]
12	208 [8.189]	200 [7.874]	79.5 [3.130]
14	240 [9.449]	232 [9.134]	90 [3.543]
16	272 [10.709]	264 [10.394]	90 [3.543]

Note: Wiring specifications
For -S: 6, 8, 10, 12, 14, 16 units
For -W: Only 6 and 8 units selectable

F15M Number of valves **FP** (Direct piping type)

PC board manifold F type
With valve outlet port dual use fitting block

Note: Mounted valve example shows -W wiring specifications.
In the case of -S wiring specifications, the mounted valve becomes T0 or T1 type.

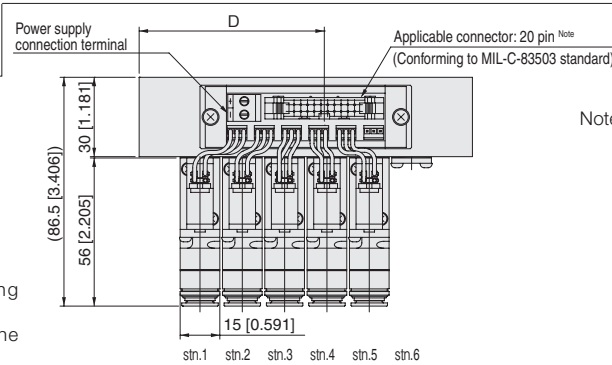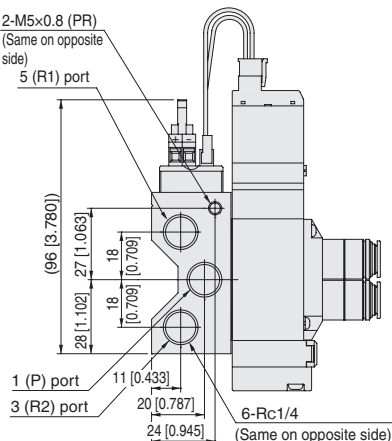

Note: With -F200 and -F201, the positions of the mis-insertion prevention grooves are reversed. The dimensions show the case of -F200.

Unit dimensions

Number of units	L	P	D
6	126 [4.961]	104 [4.094]	70 [2.756]
8	158 [6.220]	136 [5.354]	75.5 [2.972]
10	190 [7.480]	168 [6.614]	75.5 [2.972]
12	222 [8.740]	200 [7.874]	86.5 [3.406]
14	254 [10.000]	232 [9.134]	92 [3.622]
16	286 [11.260]	264 [10.394]	92 [3.622]


Note: Wiring specifications
For -S: 6, 8, 10, 12, 14, 16 units
For -W: Only 6 and 8 units selectable

Note: The overall valve length of the T0 type is 10 mm [0.394 in] shorter (end cover side protrusion is 10 mm [0.394 in] less).

Dimensions of F15 series split manifold non-plug-in type mm [in]

F15M Number of valves N M Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
S type plug connector

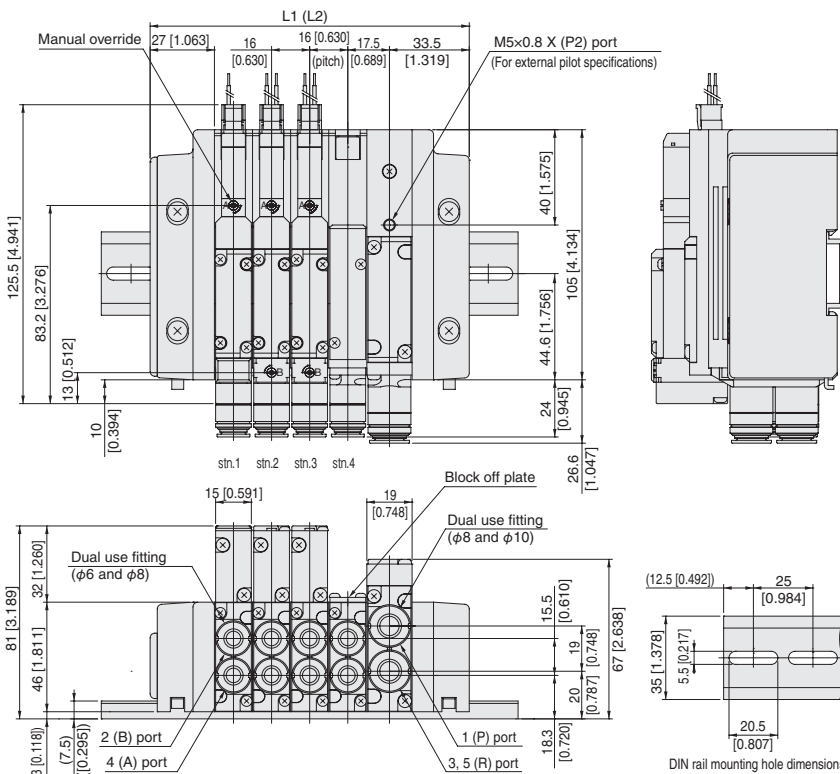


Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	102 [4.016]	150 [5.906]	121 [4.764]	150 [5.906]
3	118 [4.646]	150 [5.906]	137 [5.394]	175 [6.890]
4	134 [5.276]	175 [6.890]	153 [6.024]	200 [7.874]
5	150 [5.906]	175 [6.890]	169 [6.654]	200 [7.874]
6	166 [6.535]	200 [7.874]	185 [7.283]	225 [8.858]
7	182 [7.165]	225 [8.858]	201 [7.913]	250 [9.843]
8	198 [7.795]	225 [8.858]	217 [8.543]	250 [9.843]
9	214 [8.425]	250 [9.843]	233 [9.173]	275 [10.827]
10	230 [9.055]	275 [10.827]	249 [9.803]	275 [10.827]
11	246 [9.685]	275 [10.827]	265 [10.433]	300 [11.811]
12	262 [10.315]	300 [11.811]	281 [11.063]	325 [12.795]
13	278 [10.945]	325 [12.795]	297 [11.693]	325 [12.795]
14	294 [11.575]	325 [12.795]	313 [12.323]	350 [13.780]
15	310 [12.205]	350 [13.780]	329 [12.953]	375 [14.764]
16	326 [12.835]	375 [14.764]	345 [13.583]	375 [14.764]
17	342 [13.465]	375 [14.764]	361 [14.213]	400 [15.748]
18	358 [14.094]	400 [15.748]	377 [14.843]	425 [16.732]
19	374 [14.724]	400 [15.748]	393 [15.472]	425 [16.732]
20	390 [15.354]	425 [16.732]	409 [16.102]	450 [17.717]

Note: When two piping blocks are used.

F15M Number of valves N Pilot specifications (Direct piping type)

With valve outlet port dual use fitting block
S type plug connector

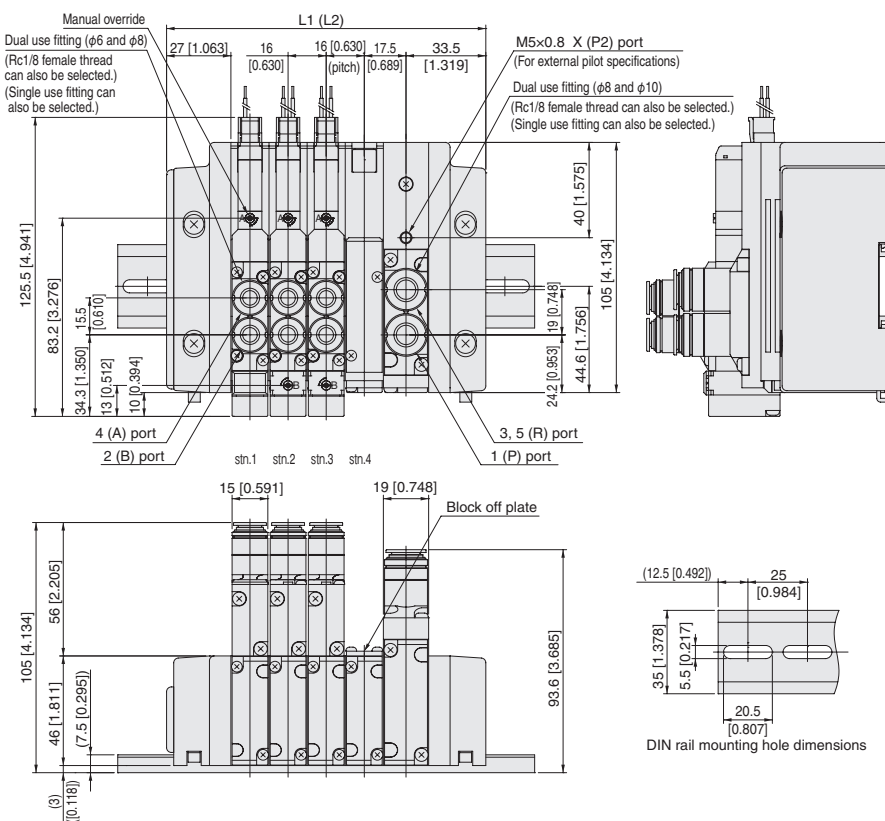

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	102 [4.016]	150 [5.906]	121 [4.764]	150 [5.906]
3	118 [4.646]	150 [5.906]	137 [5.394]	175 [6.890]
4	134 [5.276]	175 [6.890]	153 [6.024]	200 [7.874]
5	150 [5.906]	175 [6.890]	169 [6.654]	200 [7.874]
6	166 [6.535]	200 [7.874]	185 [7.283]	225 [8.858]
7	182 [7.165]	225 [8.858]	201 [7.913]	250 [9.843]
8	198 [7.795]	225 [8.858]	217 [8.543]	250 [9.843]
9	214 [8.425]	250 [9.843]	233 [9.173]	275 [10.827]
10	230 [9.055]	275 [10.827]	249 [9.803]	275 [10.827]
11	246 [9.685]	275 [10.827]	265 [10.433]	300 [11.811]
12	262 [10.315]	300 [11.811]	281 [11.063]	325 [12.795]
13	278 [10.945]	325 [12.795]	297 [11.693]	325 [12.795]
14	294 [11.575]	325 [12.795]	313 [12.323]	350 [13.780]
15	310 [12.205]	350 [13.780]	329 [12.953]	375 [14.764]
16	326 [12.835]	375 [14.764]	345 [13.583]	375 [14.764]
17	342 [13.465]	375 [14.764]	361 [14.213]	400 [15.748]
18	358 [14.094]	400 [15.748]	377 [14.843]	425 [16.732]
19	374 [14.724]	400 [15.748]	393 [15.472]	425 [16.732]
20	390 [15.354]	425 [16.732]	409 [16.102]	450 [17.717]


Note: When two piping blocks are used.

Note: The overall valve length of the T0 type is 10 mm [0.394 in] shorter (end cover side protrusion is 10 mm [0.394 in] less).

Dimensions of F15 series split manifold non-plug-in type mm [in]

F15M Number of valves NHL Pilot specifications (Base piping type)

With manifold outlet port female thread block
S type plug connector

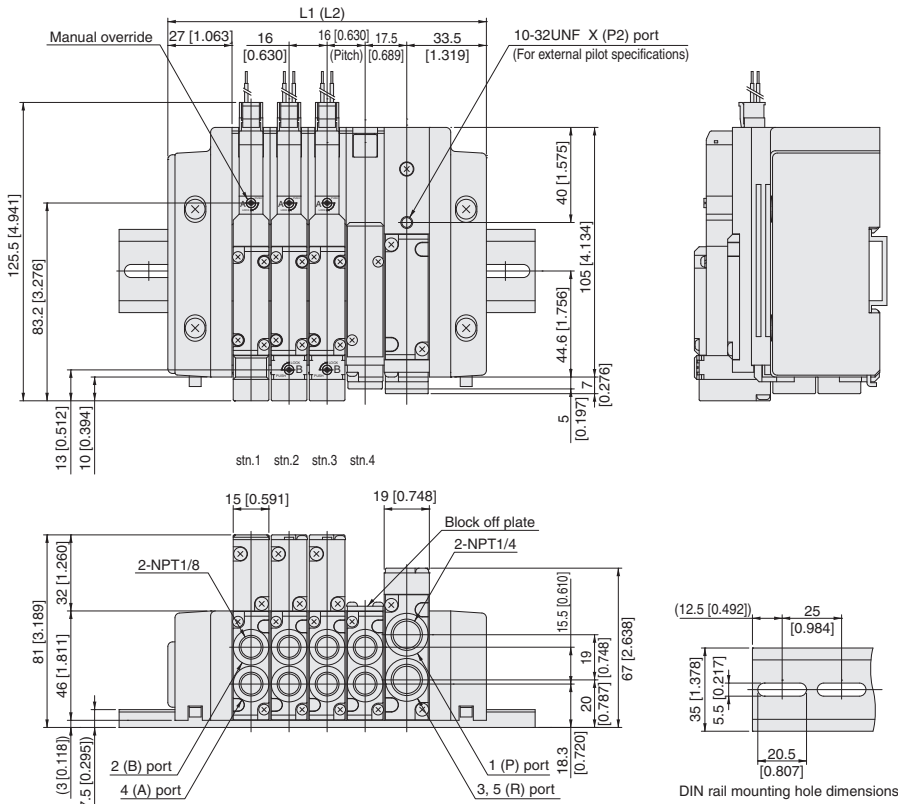


Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	102 [4.016]	150 [5.906]	121 [4.764]	150 [5.906]
3	118 [4.646]	150 [5.906]	137 [5.394]	175 [6.890]
4	134 [5.276]	175 [6.890]	153 [6.024]	200 [7.874]
5	150 [5.906]	175 [6.890]	169 [6.654]	200 [7.874]
6	166 [6.535]	200 [7.874]	185 [7.283]	225 [8.858]
7	182 [7.165]	225 [8.858]	201 [7.913]	250 [9.843]
8	198 [7.795]	225 [8.858]	217 [8.543]	250 [9.843]
9	214 [8.425]	250 [9.843]	233 [9.173]	275 [10.827]
10	230 [9.055]	275 [10.827]	249 [9.803]	275 [10.827]
11	246 [9.685]	275 [10.827]	265 [10.433]	300 [11.811]
12	262 [10.315]	300 [11.811]	281 [11.063]	325 [12.795]
13	278 [10.945]	325 [12.795]	297 [11.693]	325 [12.795]
14	294 [11.575]	325 [12.795]	313 [12.323]	350 [13.780]
15	310 [12.205]	350 [13.780]	329 [12.953]	375 [14.764]
16	326 [12.835]	375 [14.764]	345 [13.583]	375 [14.764]
17	342 [13.465]	375 [14.764]	361 [14.213]	400 [15.748]
18	358 [14.094]	400 [15.748]	377 [14.843]	425 [16.732]
19	374 [14.724]	400 [15.748]	393 [15.472]	425 [16.732]
20	390 [15.354]	425 [16.732]	409 [16.102]	450 [17.717]

Note: When two piping blocks are used.

F15M Number of valves NH Pilot specifications (Direct piping type)

With valve outlet port female thread block
S type plug connector

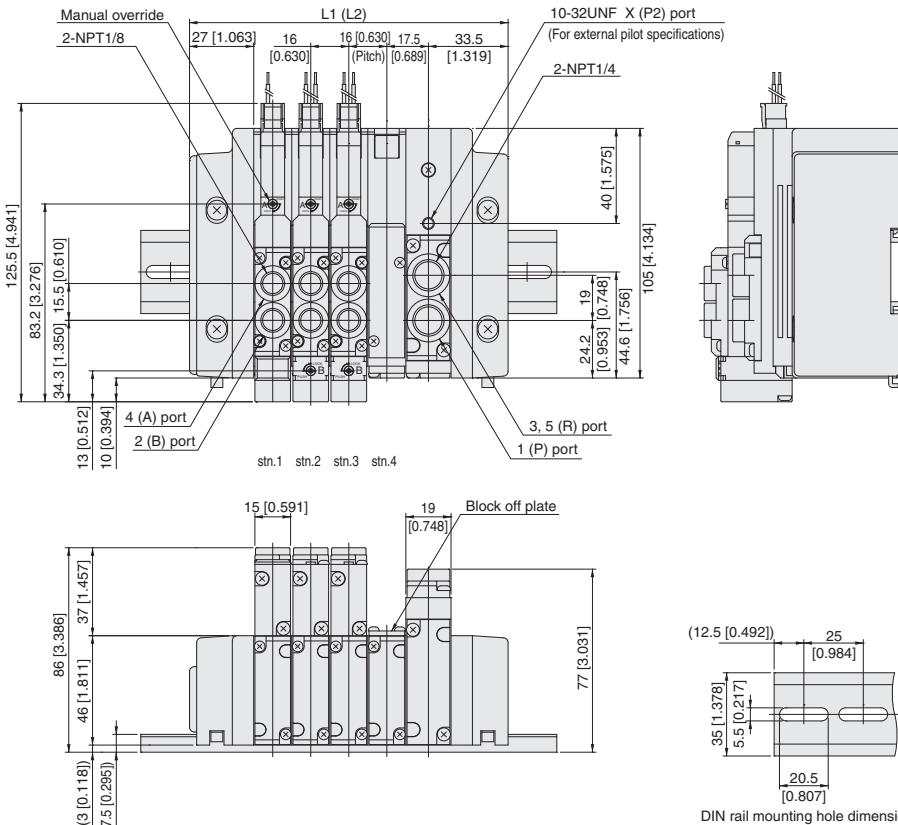

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	102 [4.016]	150 [5.906]	121 [4.764]	150 [5.906]
3	118 [4.646]	150 [5.906]	137 [5.394]	175 [6.890]
4	134 [5.276]	175 [6.890]	153 [6.024]	200 [7.874]
5	150 [5.906]	175 [6.890]	169 [6.654]	200 [7.874]
6	166 [6.535]	200 [7.874]	185 [7.283]	225 [8.858]
7	182 [7.165]	225 [8.858]	201 [7.913]	250 [9.843]
8	198 [7.795]	225 [8.858]	217 [8.543]	250 [9.843]
9	214 [8.425]	250 [9.843]	233 [9.173]	275 [10.827]
10	230 [9.055]	275 [10.827]	249 [9.803]	275 [10.827]
11	246 [9.685]	275 [10.827]	265 [10.433]	300 [11.811]
12	262 [10.315]	300 [11.811]	281 [11.063]	325 [12.795]
13	278 [10.945]	325 [12.795]	297 [11.693]	325 [12.795]
14	294 [11.575]	325 [12.795]	313 [12.323]	350 [13.780]
15	310 [12.205]	350 [13.780]	329 [12.953]	375 [14.764]
16	326 [12.835]	375 [14.764]	345 [13.583]	375 [14.764]
17	342 [13.465]	375 [14.764]	361 [14.213]	400 [15.748]
18	358 [14.094]	400 [15.748]	377 [14.843]	425 [16.732]
19	374 [14.724]	400 [15.748]	393 [15.472]	425 [16.732]
20	390 [15.354]	425 [16.732]	409 [16.102]	450 [17.717]


Note: When two piping blocks are used.

Note: The overall valve length of the T0 type is 10 mm [0.394 in] shorter (end cover side protrusion is 10 mm [0.394 in] less).

Dimensions of F15 series split manifold plug-in type mm [in]

F15M Number of valves P M J Pilot specifications (Base piping type)


With manifold outlet port dual use fitting block
Flat cable connector 10-pin specifications

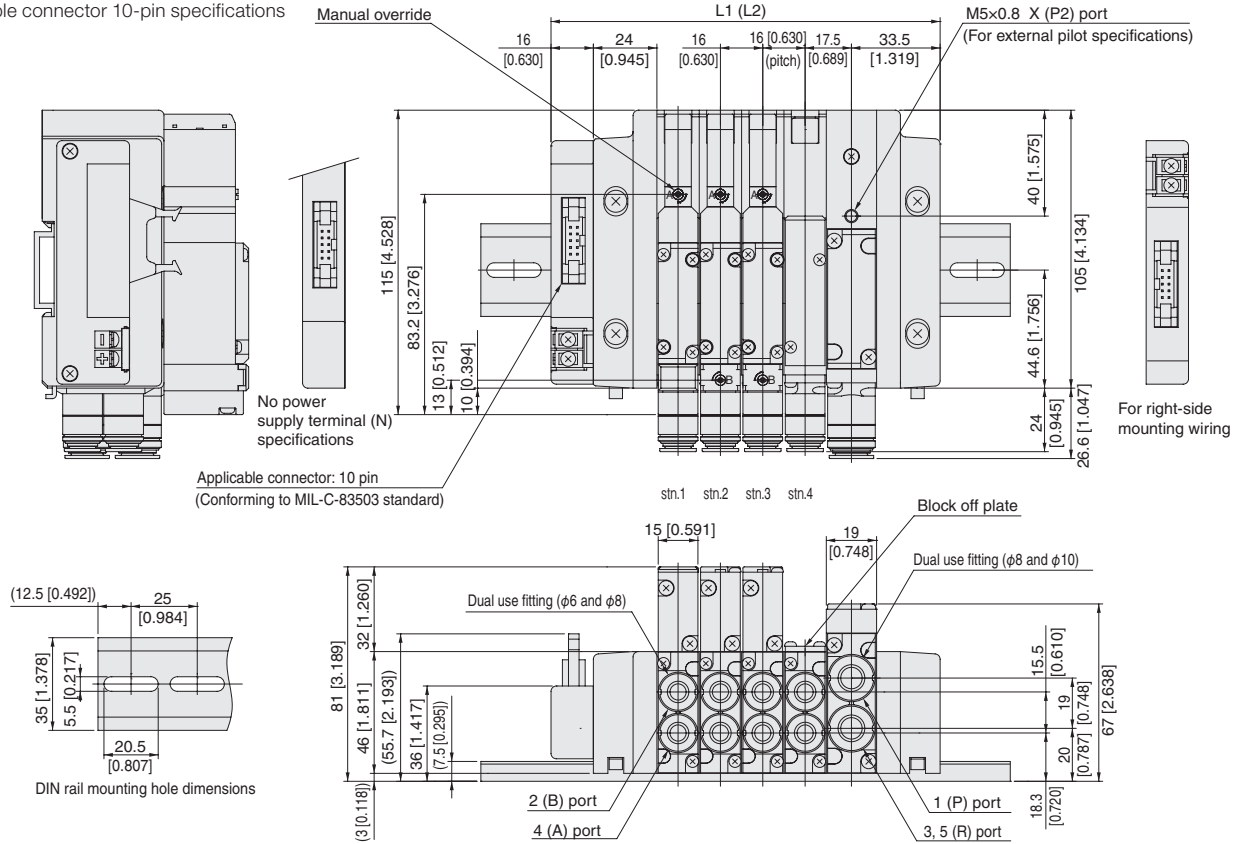

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	115 [4.528]	150 [5.906]	134 [5.276]	175 [6.890]
3	131 [5.157]	175 [6.890]	150 [5.906]	200 [7.874]
4	147 [5.787]	200 [7.874]	166 [6.535]	200 [7.874]
5	163 [6.417]	200 [7.874]	182 [7.165]	225 [8.858]
6	179 [7.047]	225 [8.858]	198 [7.795]	250 [9.843]
7	195 [7.677]	250 [9.843]	214 [8.425]	250 [9.843]
8	211 [8.307]	250 [9.843]	230 [9.055]	275 [10.827]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

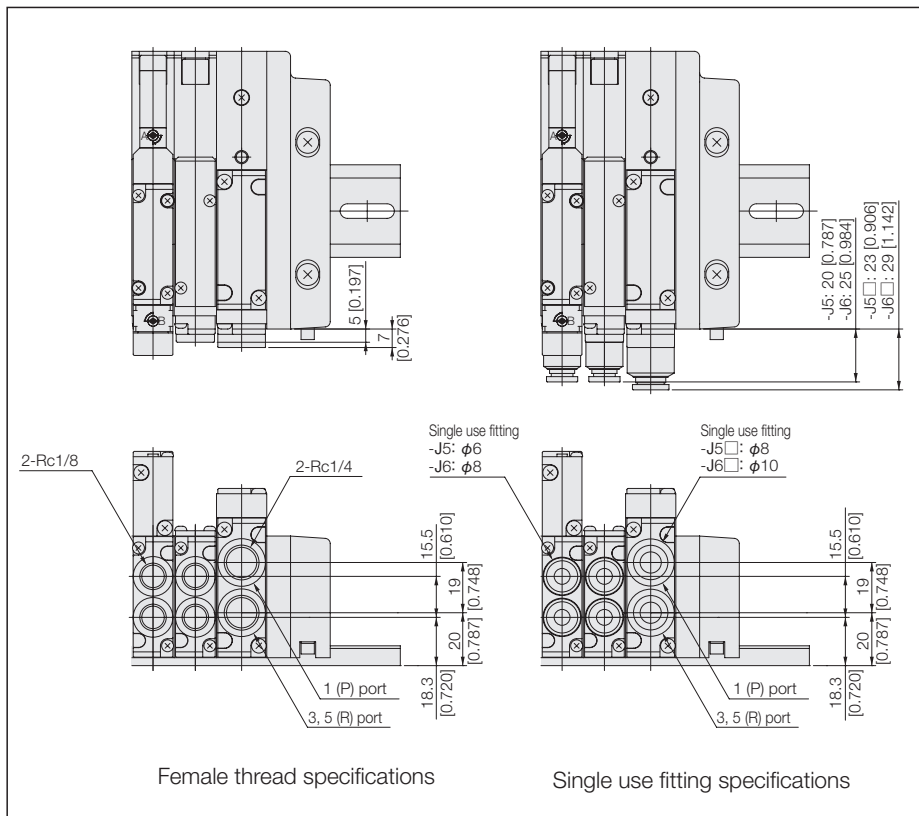


F15 DIMENSIONS

Dimensions of F15 series split manifold plug-in type mm [in]

F15M Number of valves P M L J Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
Flat cable connector 20-pin specifications (side surface wiring)

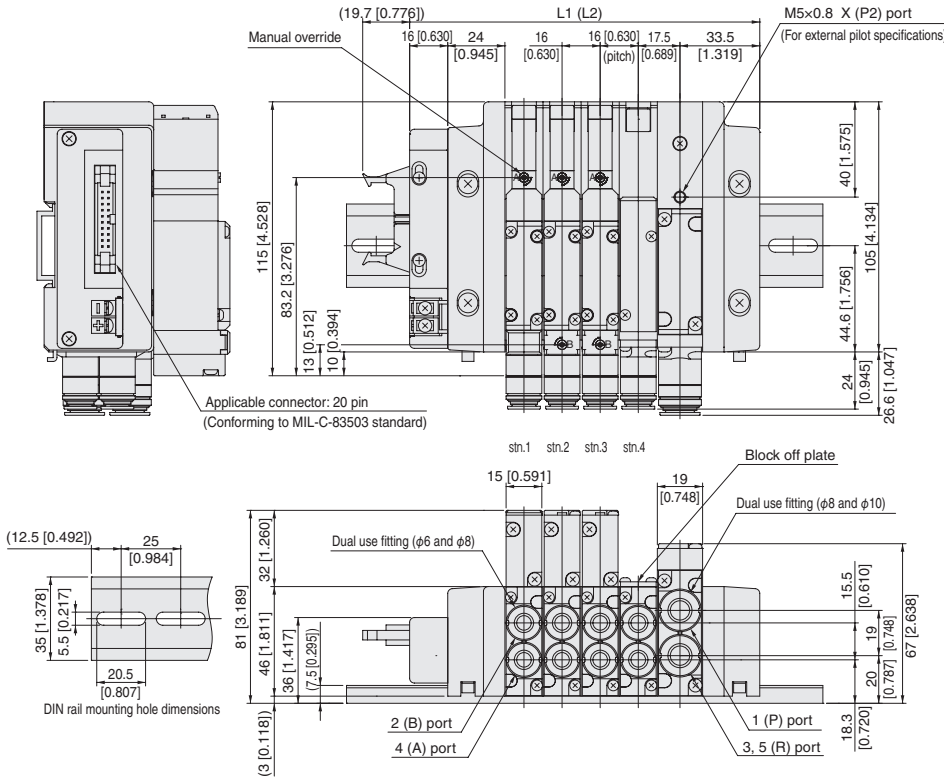


Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	115 [4.528]	150 [5.906]	134 [5.276]	175 [6.890]
3	131 [5.157]	175 [6.890]	150 [5.906]	200 [7.874]
4	147 [5.787]	200 [7.874]	166 [6.535]	200 [7.874]
5	163 [6.417]	200 [7.874]	182 [7.165]	225 [8.858]
6	179 [7.047]	225 [8.858]	198 [7.795]	250 [9.843]
7	195 [7.677]	250 [9.843]	214 [8.425]	250 [9.843]
8	211 [8.307]	250 [9.843]	230 [9.055]	275 [10.827]
9	227 [8.937]	275 [10.827]	246 [9.685]	300 [11.811]
10	243 [9.567]	300 [11.811]	262 [10.315]	300 [11.811]
11	259 [10.197]	300 [11.811]	278 [10.945]	325 [12.795]
12	275 [10.827]	325 [12.795]	294 [11.575]	350 [13.780]
13	291 [11.457]	325 [12.795]	310 [12.205]	350 [13.780]
14	307 [12.087]	350 [13.780]	326 [12.835]	375 [14.764]
15	323 [12.717]	375 [14.764]	342 [13.465]	375 [14.764]
16	339 [13.346]	375 [14.764]	358 [14.094]	400 [15.748]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

F15M Number of valves P M L J Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
Flat cable connector 26-pin specifications

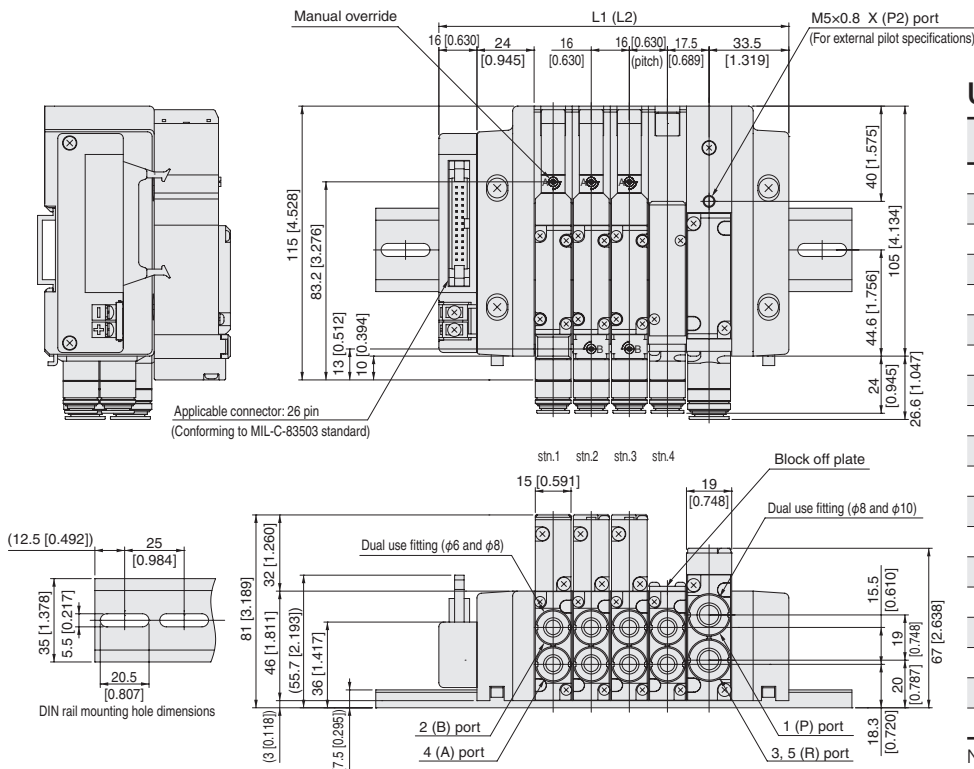

Unit dimensions


Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	115 [4.528]	150 [5.906]	134 [5.276]	175 [6.890]
3	131 [5.157]	175 [6.890]	150 [5.906]	200 [7.874]
4	147 [5.787]	200 [7.874]	166 [6.535]	200 [7.874]
5	163 [6.417]	200 [7.874]	182 [7.165]	225 [8.858]
6	179 [7.047]	225 [8.858]	198 [7.795]	250 [9.843]
7	195 [7.677]	250 [9.843]	214 [8.425]	250 [9.843]
8	211 [8.307]	250 [9.843]	230 [9.055]	275 [10.827]
9	227 [8.937]	275 [10.827]	246 [9.685]	300 [11.811]
10	243 [9.567]	300 [11.811]	262 [10.315]	300 [11.811]
11	259 [10.197]	300 [11.811]	278 [10.945]	325 [12.795]
12	275 [10.827]	325 [12.795]	294 [11.575]	350 [13.780]
13	291 [11.457]	325 [12.795]	310 [12.205]	350 [13.780]
14	307 [12.087]	350 [13.780]	326 [12.835]	375 [14.764]
15	323 [12.717]	375 [14.764]	342 [13.465]	375 [14.764]
16	339 [13.346]	375 [14.764]	358 [14.094]	400 [15.748]
17	355 [13.976]	400 [15.748]	374 [14.724]	425 [16.732]
18	371 [14.606]	425 [16.732]	390 [15.354]	425 [16.732]
19	387 [15.236]	425 [16.732]	406 [15.984]	450 [17.717]
20	403 [15.866]	450 [17.717]	422 [16.614]	475 [18.701]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

Dimensions of F15 series split manifold plug-in type mm [in]

F15M Number of valves P M L Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
D-sub connector 25-pin specifications





DIN rail mounting hole dimensions

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	115 [4.528]	150 [5.906]	134 [5.276]	175 [6.890]
3	131 [5.157]	175 [6.890]	150 [5.906]	200 [7.874]
4	147 [5.787]	200 [7.874]	166 [6.535]	200 [7.874]
5	163 [6.417]	200 [7.874]	182 [7.165]	225 [8.858]
6	179 [7.047]	225 [8.858]	198 [7.795]	250 [9.843]
7	195 [7.677]	250 [9.843]	214 [8.425]	250 [9.843]
8	211 [8.307]	250 [9.843]	230 [9.055]	275 [10.827]
9	227 [8.937]	275 [10.827]	246 [9.685]	300 [11.811]
10	243 [9.567]	300 [11.811]	262 [10.315]	300 [11.811]
11	259 [10.197]	300 [11.811]	278 [10.945]	325 [12.795]
12	275 [10.827]	325 [12.795]	294 [11.575]	350 [13.780]
13	291 [11.457]	325 [12.795]	310 [12.205]	350 [13.780]
14	307 [12.087]	350 [13.780]	326 [12.835]	375 [14.764]
15	323 [12.717]	375 [14.764]	342 [13.465]	375 [14.764]
16	339 [13.346]	375 [14.764]	358 [14.094]	400 [15.748]
17	355 [13.976]	400 [15.748]	374 [14.724]	425 [16.732]
18	371 [14.606]	425 [16.732]	390 [15.354]	425 [16.732]
19	387 [15.236]	425 [16.732]	406 [15.984]	450 [17.717]
20	403 [15.866]	450 [17.717]	422 [16.614]	475 [18.701]


Note: When two piping blocks are used.

* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

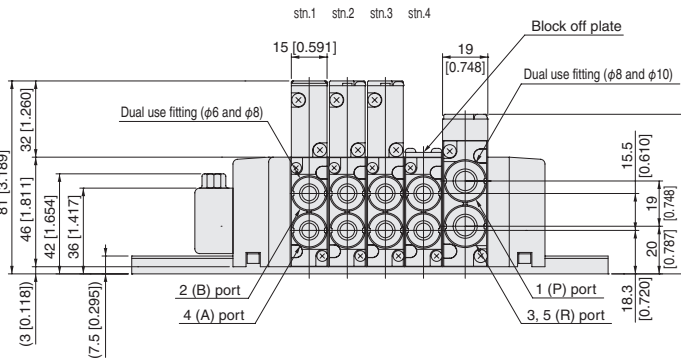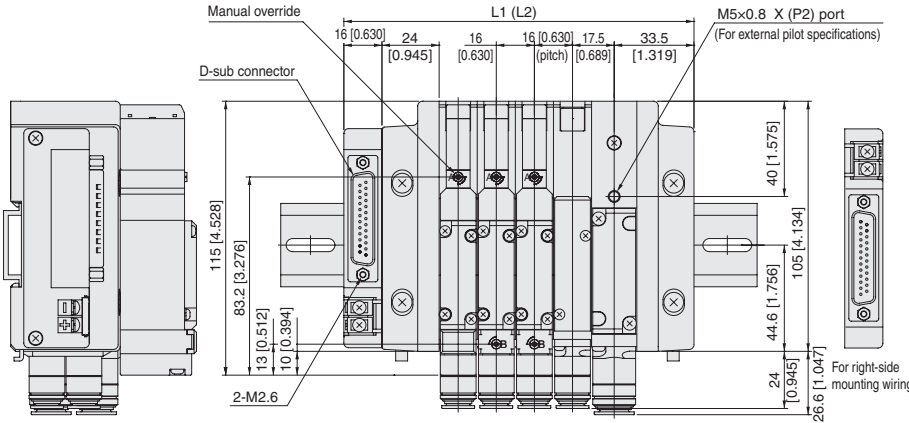

F15M Number of valves P M L Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
Terminal block type




DIN rail mounting hole dimensions

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	144 [5.669]	175 [6.890]	163 [6.417]	200 [7.874]
3	160 [6.299]	200 [7.874]	179 [7.047]	225 [8.858]
4	176 [6.929]	225 [8.858]	195 [7.677]	225 [8.858]
5	192 [7.559]	225 [8.858]	211 [8.307]	250 [9.843]
6	208 [8.189]	250 [9.843]	227 [8.937]	275 [10.827]
7	224 [8.819]	250 [9.843]	243 [9.567]	275 [10.827]
8	240 [9.449]	275 [10.827]	259 [10.197]	300 [11.811]
9	256 [10.079]	300 [11.811]	275 [10.827]	300 [11.811]
10	272 [10.709]	300 [11.811]	291 [11.457]	325 [12.795]
11	288 [11.339]	325 [12.795]	307 [12.087]	350 [13.780]
12	304 [11.969]	350 [13.780]	323 [12.717]	350 [13.780]
13	320 [12.598]	350 [13.780]	339 [13.346]	375 [14.764]
14	336 [13.228]	375 [14.764]	355 [13.976]	400 [15.748]
15	352 [13.858]	400 [15.748]	371 [14.606]	400 [15.748]
16	368 [14.488]	400 [15.748]	387 [15.236]	425 [16.732]
17	384 [15.118]	425 [16.732]	403 [15.866]	450 [17.717]
18	400 [15.748]	425 [16.732]	419 [16.496]	450 [17.717]

Note: When two piping blocks are used.

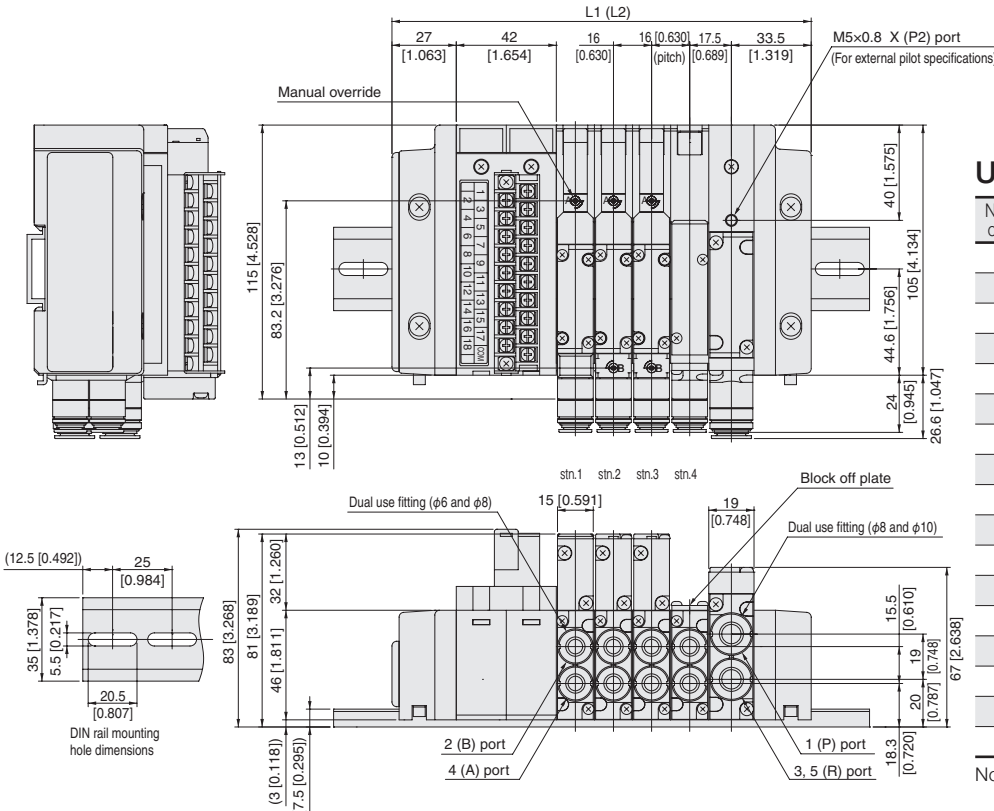


F15 DIMENSIONS

Dimensions of F15 series split manifold plug-in type mm [in]

F15M Number of valves PHL Pilot specifications (Base piping type)

With manifold outlet port female thread block
Flat cable connector 10-pin specifications

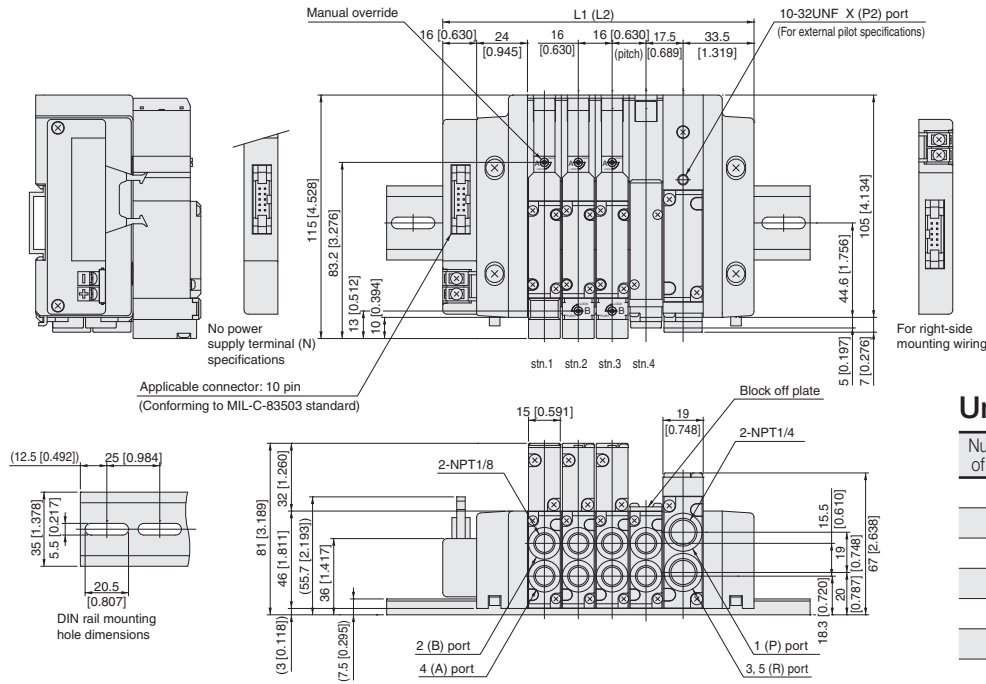


Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	115 [4.528]	150 [5.906]	134 [5.276]	175 [6.890]
3	131 [5.157]	175 [6.890]	150 [5.906]	200 [7.874]
4	147 [5.787]	200 [7.874]	166 [6.535]	200 [7.874]
5	163 [6.417]	200 [7.874]	182 [7.165]	225 [8.858]
6	179 [7.047]	225 [8.858]	198 [7.795]	250 [9.843]
7	195 [7.677]	250 [9.843]	214 [8.425]	250 [9.843]
8	211 [8.307]	250 [9.843]	230 [9.055]	275 [10.827]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

F15M Number of valves PH Pilot specifications (Direct piping type)

With valve outlet port female thread block
Flat cable connector 10-pin specifications

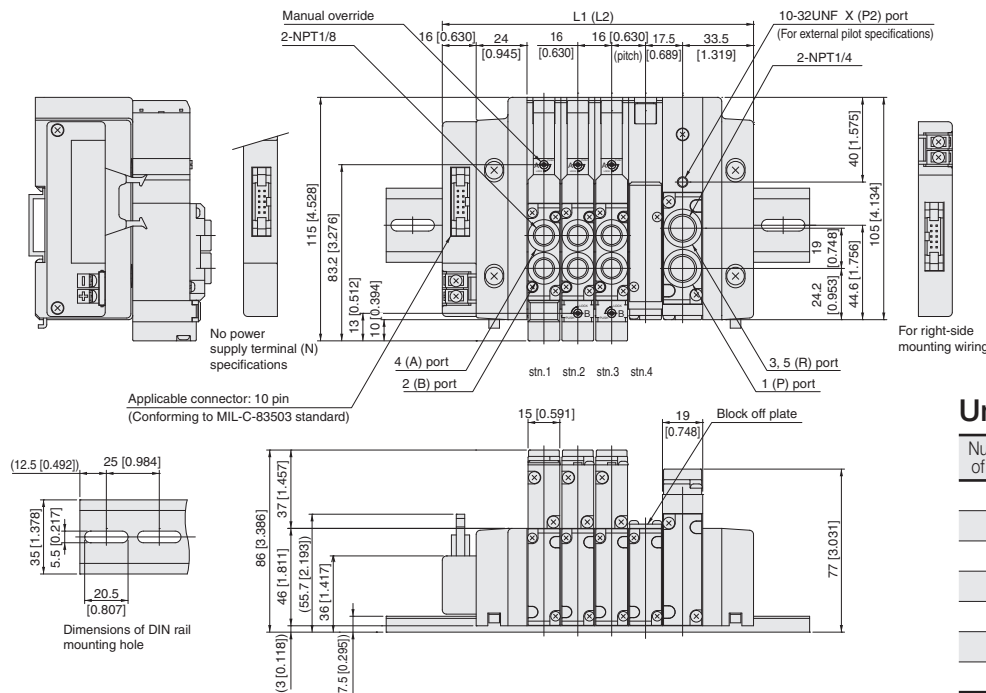

Unit dimensions


Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	115 [4.528]	150 [5.906]	134 [5.276]	175 [6.890]
3	131 [5.157]	175 [6.890]	150 [5.906]	200 [7.874]
4	147 [5.787]	200 [7.874]	166 [6.535]	200 [7.874]
5	163 [6.417]	200 [7.874]	182 [7.165]	225 [8.858]
6	179 [7.047]	225 [8.858]	198 [7.795]	250 [9.843]
7	195 [7.677]	250 [9.843]	214 [8.425]	250 [9.843]
8	211 [8.307]	250 [9.843]	230 [9.055]	275 [10.827]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

Dimensions of F15 series split manifold plug-in type mm [in]

F15M Number of valves PHL Pilot specifications (Base piping type)

With manifold outlet port female thread block
Flat cable connector 20-pin specifications (top surface wiring)

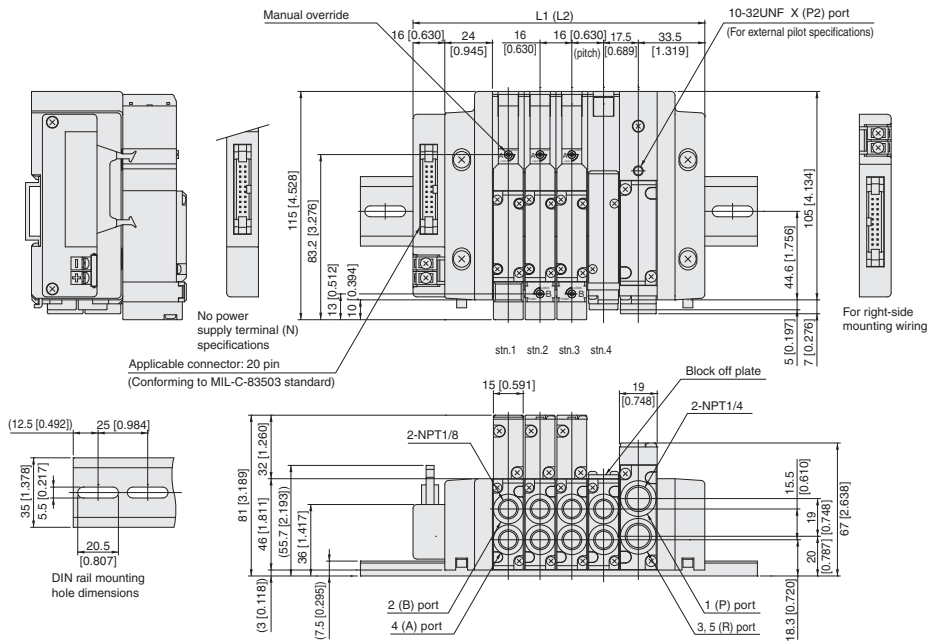


Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	115 [4.528]	150 [5.906]	134 [5.276]	175 [6.890]
3	131 [5.157]	175 [6.890]	150 [5.906]	200 [7.874]
4	147 [5.787]	200 [7.874]	166 [6.535]	200 [7.874]
5	163 [6.417]	200 [7.874]	182 [7.165]	225 [8.858]
6	179 [7.047]	225 [8.858]	198 [7.795]	250 [9.843]
7	195 [7.677]	250 [9.843]	214 [8.425]	250 [9.843]
8	211 [8.307]	250 [9.843]	230 [9.055]	275 [10.827]
9	227 [8.937]	275 [10.827]	246 [9.685]	300 [11.811]
10	243 [9.567]	300 [11.811]	262 [10.315]	300 [11.811]
11	259 [10.197]	300 [11.811]	278 [10.945]	325 [12.795]
12	275 [10.827]	325 [12.795]	294 [11.575]	350 [13.780]
13	291 [11.457]	325 [12.795]	310 [12.205]	350 [13.780]
14	307 [12.087]	350 [13.780]	326 [12.835]	375 [14.764]
15	323 [12.717]	375 [14.764]	342 [13.465]	375 [14.764]
16	339 [13.346]	375 [14.764]	358 [14.094]	400 [15.748]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

F15M Number of valves PH Pilot specifications (Direct piping type)

With valve outlet port female thread block
Flat cable connector 20-pin specifications (top surface wiring)

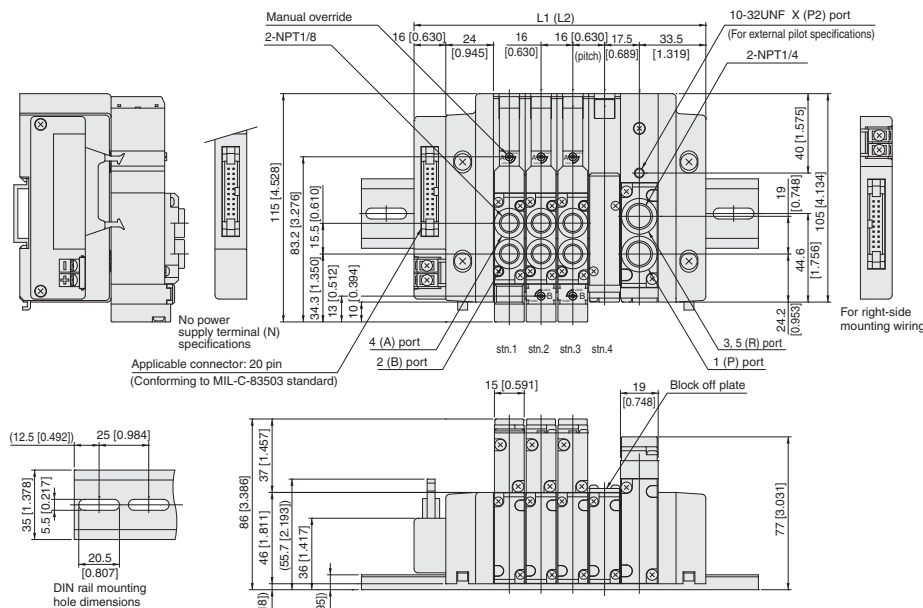

Unit dimensions


Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	115 [4.528]	150 [5.906]	134 [5.276]	175 [6.890]
3	131 [5.157]	175 [6.890]	150 [5.906]	200 [7.874]
4	147 [5.787]	200 [7.874]	166 [6.535]	200 [7.874]
5	163 [6.417]	200 [7.874]	182 [7.165]	225 [8.858]
6	179 [7.047]	225 [8.858]	198 [7.795]	250 [9.843]
7	195 [7.677]	250 [9.843]	214 [8.425]	250 [9.843]
8	211 [8.307]	250 [9.843]	230 [9.055]	275 [10.827]
9	227 [8.937]	275 [10.827]	246 [9.685]	300 [11.811]
10	243 [9.567]	300 [11.811]	262 [10.315]	300 [11.811]
11	259 [10.197]	300 [11.811]	278 [10.945]	325 [12.795]
12	275 [10.827]	325 [12.795]	294 [11.575]	350 [13.780]
13	291 [11.457]	325 [12.795]	310 [12.205]	350 [13.780]
14	307 [12.087]	350 [13.780]	326 [12.835]	375 [14.764]
15	323 [12.717]	375 [14.764]	342 [13.465]	375 [14.764]
16	339 [13.346]	375 [14.764]	358 [14.094]	400 [15.748]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

Dimensions of F15 series split manifold plug-in type mm [in]

F15M Number of valves PHL Pilot specifications (Base piping type)

With manifold outlet port female thread block
Flat cable connector 26-pin specifications

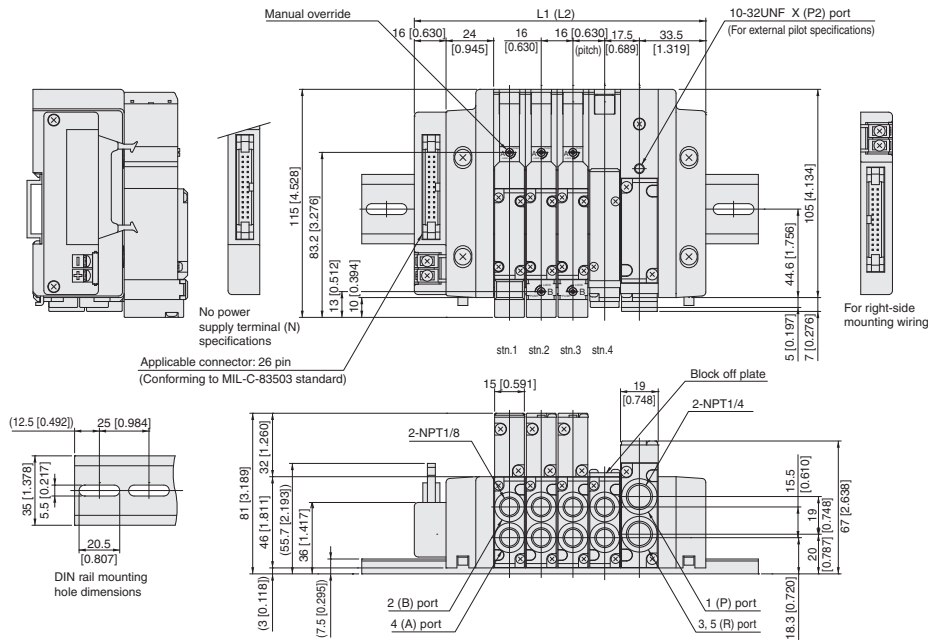

Unit dimensions


Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	115 [4.528]	150 [5.906]	134 [5.276]	175 [6.890]
3	131 [5.157]	175 [6.890]	150 [5.906]	200 [7.874]
4	147 [5.787]	200 [7.874]	166 [6.535]	200 [7.874]
5	163 [6.417]	200 [7.874]	182 [7.165]	225 [8.858]
6	179 [7.047]	225 [8.858]	198 [7.795]	250 [9.843]
7	195 [7.677]	250 [9.843]	214 [8.425]	250 [9.843]
8	211 [8.307]	250 [9.843]	230 [9.055]	275 [10.827]
9	227 [8.937]	275 [10.827]	246 [9.685]	300 [11.811]
10	243 [9.567]	300 [11.811]	262 [10.315]	300 [11.811]
11	259 [10.197]	300 [11.811]	278 [10.945]	325 [12.795]
12	275 [10.827]	325 [12.795]	294 [11.575]	350 [13.780]
13	291 [11.457]	325 [12.795]	310 [12.205]	350 [13.780]
14	307 [12.087]	350 [13.780]	326 [12.835]	375 [14.764]
15	323 [12.717]	375 [14.764]	342 [13.465]	375 [14.764]
16	339 [13.346]	375 [14.764]	358 [14.094]	400 [15.748]
17	355 [13.976]	400 [15.748]	374 [14.724]	425 [16.732]
18	371 [14.606]	425 [16.732]	390 [15.354]	425 [16.732]
19	387 [15.236]	425 [16.732]	406 [15.984]	450 [17.717]
20	403 [15.866]	450 [17.717]	422 [16.614]	475 [18.701]

Note: When two piping blocks are used.

* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

F15M Number of valves PH Pilot specifications (Direct piping type)

With valve outlet port female thread block
Flat cable connector 26-pin specifications

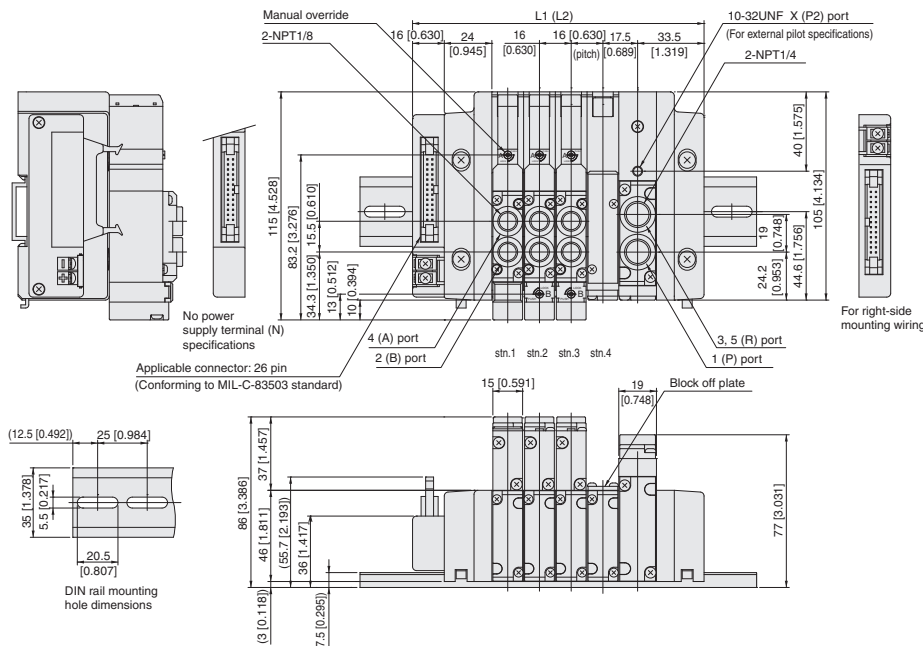

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	115 [4.528]	150 [5.906]	134 [5.276]	175 [6.890]
3	131 [5.157]	175 [6.890]	150 [5.906]	200 [7.874]
4	147 [5.787]	200 [7.874]	166 [6.535]	200 [7.874]
5	163 [6.417]	200 [7.874]	182 [7.165]	225 [8.858]
6	179 [7.047]	225 [8.858]	198 [7.795]	250 [9.843]
7	195 [7.677]	250 [9.843]	214 [8.425]	250 [9.843]
8	211 [8.307]	250 [9.843]	230 [9.055]	275 [10.827]
9	227 [8.937]	275 [10.827]	246 [9.685]	300 [11.811]
10	243 [9.567]	300 [11.811]	262 [10.315]	300 [11.811]
11	259 [10.197]	300 [11.811]	278 [10.945]	325 [12.795]
12	275 [10.827]	325 [12.795]	294 [11.575]	350 [13.780]
13	291 [11.457]	325 [12.795]	310 [12.205]	350 [13.780]
14	307 [12.087]	350 [13.780]	326 [12.835]	375 [14.764]
15	323 [12.717]	375 [14.764]	342 [13.465]	375 [14.764]
16	339 [13.346]	375 [14.764]	358 [14.094]	400 [15.748]
17	355 [13.976]	400 [15.748]	374 [14.724]	425 [16.732]
18	371 [14.606]	425 [16.732]	390 [15.354]	425 [16.732]
19	387 [15.236]	425 [16.732]	406 [15.984]	450 [17.717]
20	403 [15.866]	450 [17.717]	422 [16.614]	475 [18.701]


Note: When two piping blocks are used.

* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

Dimensions of F15 series split manifold plug-in type mm [in]

F15M Number of valves PHL Pilot specifications (Base piping type)

With manifold outlet port female thread block
D-sub connector 25-pin specifications

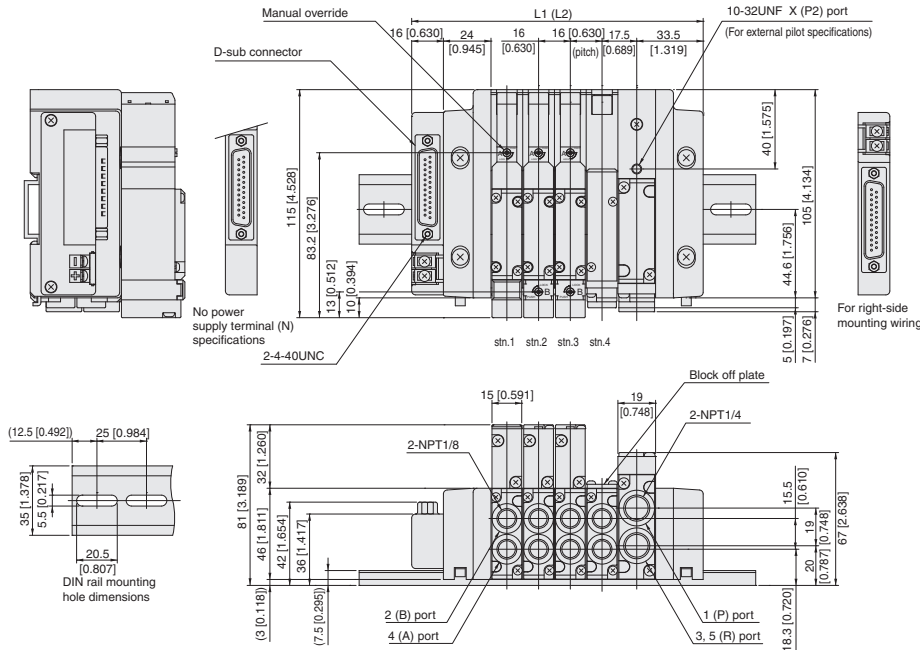

Unit dimensions


Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	115 [4.528]	150 [5.906]	134 [5.276]	175 [6.890]
3	131 [5.157]	175 [6.890]	150 [5.906]	200 [7.874]
4	147 [5.787]	200 [7.874]	166 [6.535]	200 [7.874]
5	163 [6.417]	200 [7.874]	182 [7.165]	225 [8.858]
6	179 [7.047]	225 [8.858]	198 [7.795]	250 [9.843]
7	195 [7.677]	250 [9.843]	214 [8.425]	250 [9.843]
8	211 [8.307]	250 [9.843]	230 [9.055]	275 [10.827]
9	227 [8.937]	275 [10.827]	246 [9.685]	300 [11.811]
10	243 [9.567]	300 [11.811]	262 [10.315]	300 [11.811]
11	259 [10.197]	300 [11.811]	278 [10.945]	325 [12.795]
12	275 [10.827]	325 [12.795]	294 [11.575]	350 [13.780]
13	291 [11.457]	325 [12.795]	310 [12.205]	350 [13.780]
14	307 [12.087]	350 [13.780]	326 [12.835]	375 [14.764]
15	323 [12.717]	375 [14.764]	342 [13.465]	375 [14.764]
16	339 [13.346]	375 [14.764]	358 [14.094]	400 [15.748]
17	355 [13.976]	400 [15.748]	374 [14.724]	425 [16.732]
18	371 [14.606]	425 [16.732]	390 [15.354]	425 [16.732]
19	387 [15.236]	425 [16.732]	406 [15.984]	450 [17.717]
20	403 [15.866]	450 [17.717]	422 [16.614]	475 [18.701]

Note: When two piping blocks are used.

* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

F15M Number of valves PH Pilot specifications (Direct piping type)

With valve outlet port female thread block
D-sub connector 25-pin specifications

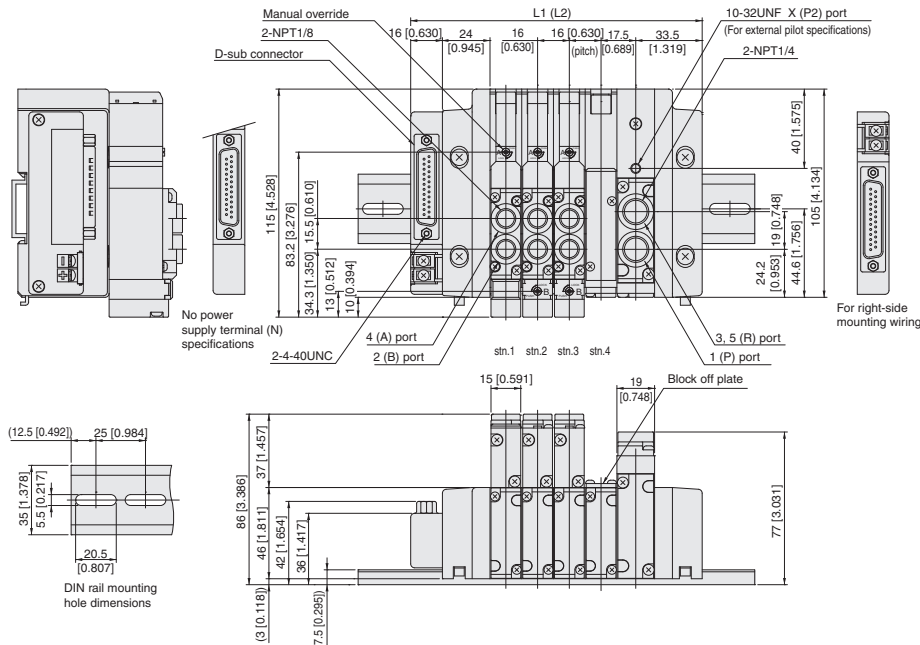

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	115 [4.528]	150 [5.906]	134 [5.276]	175 [6.890]
3	131 [5.157]	175 [6.890]	150 [5.906]	200 [7.874]
4	147 [5.787]	200 [7.874]	166 [6.535]	200 [7.874]
5	163 [6.417]	200 [7.874]	182 [7.165]	225 [8.858]
6	179 [7.047]	225 [8.858]	198 [7.795]	250 [9.843]
7	195 [7.677]	250 [9.843]	214 [8.425]	250 [9.843]
8	211 [8.307]	250 [9.843]	230 [9.055]	275 [10.827]
9	227 [8.937]	275 [10.827]	246 [9.685]	300 [11.811]
10	243 [9.567]	300 [11.811]	262 [10.315]	300 [11.811]
11	259 [10.197]	300 [11.811]	278 [10.945]	325 [12.795]
12	275 [10.827]	325 [12.795]	294 [11.575]	350 [13.780]
13	291 [11.457]	325 [12.795]	310 [12.205]	350 [13.780]
14	307 [12.087]	350 [13.780]	326 [12.835]	375 [14.764]
15	323 [12.717]	375 [14.764]	342 [13.465]	375 [14.764]
16	339 [13.346]	375 [14.764]	358 [14.094]	400 [15.748]
17	355 [13.976]	400 [15.748]	374 [14.724]	425 [16.732]
18	371 [14.606]	425 [16.732]	390 [15.354]	425 [16.732]
19	387 [15.236]	425 [16.732]	406 [15.984]	450 [17.717]
20	403 [15.866]	450 [17.717]	422 [16.614]	475 [18.701]


Note: When two piping blocks are used.

* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

Dimensions of F15 series split manifold plug-in type mm [in]

F15M Number of valves PHL Pilot specifications (Base piping type)

With manifold outlet port female thread block
D-sub connector 37-pin specifications

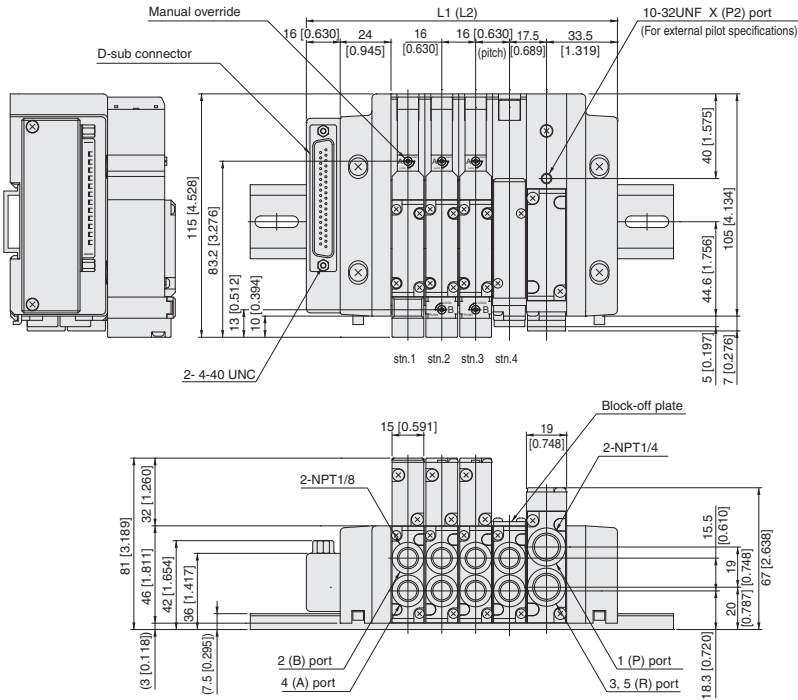


Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	115 [4.528]	150 [5.906]	134 [5.276]	175 [6.890]
3	131 [5.157]	175 [6.890]	150 [5.906]	200 [7.874]
4	147 [5.787]	200 [7.874]	166 [6.535]	200 [7.874]
5	163 [6.417]	200 [7.874]	182 [7.165]	225 [8.858]
6	179 [7.047]	225 [8.858]	198 [7.795]	250 [9.843]
7	195 [7.677]	250 [9.843]	214 [8.425]	250 [9.843]
8	211 [8.307]	250 [9.843]	230 [9.055]	275 [10.827]
9	227 [8.937]	275 [10.827]	246 [9.685]	300 [11.811]
10	243 [9.567]	300 [11.811]	262 [10.315]	300 [11.811]
11	259 [10.197]	300 [11.811]	278 [10.945]	325 [12.795]
12	275 [10.827]	325 [12.795]	294 [11.575]	350 [13.780]
13	291 [11.457]	325 [12.795]	310 [12.205]	350 [13.780]
14	307 [12.087]	350 [13.780]	326 [12.835]	375 [14.764]
15	323 [12.717]	375 [14.764]	342 [13.465]	375 [14.764]
16	339 [13.346]	375 [14.764]	358 [14.094]	400 [15.748]
17	355 [13.976]	400 [15.748]	374 [14.724]	425 [16.732]
18	371 [14.606]	425 [16.732]	390 [15.354]	425 [16.732]
19	387 [15.236]	425 [16.732]	406 [15.984]	450 [17.717]
20	403 [15.866]	450 [17.717]	422 [16.614]	475 [18.701]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

F15M Number of valves PH Pilot specifications (Base piping type)

With valve outlet port female thread block
D-sub connector 37-pin specifications

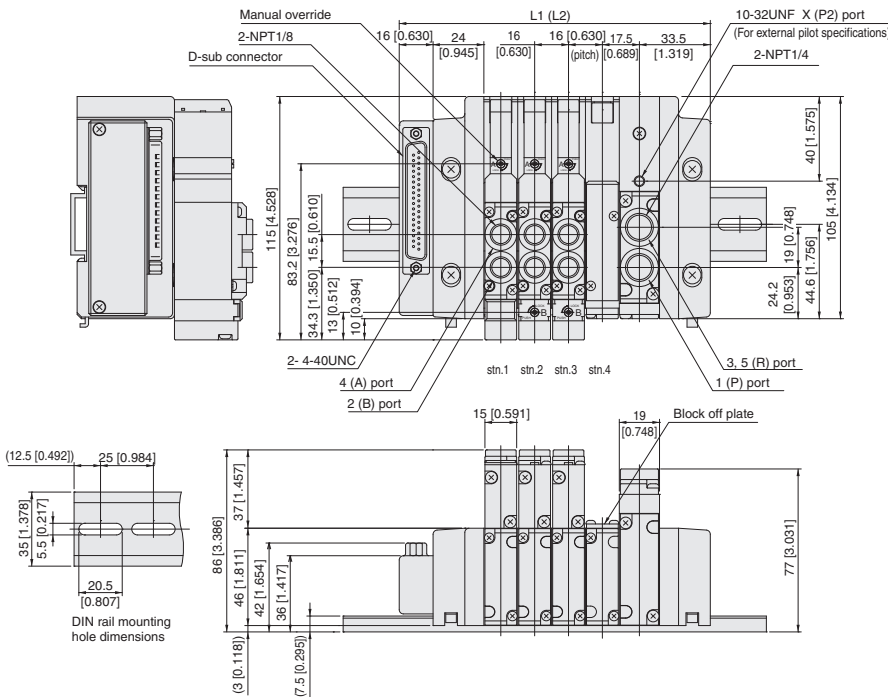

Unit dimensions


Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	115 [4.528]	150 [5.906]	134 [5.276]	175 [6.890]
3	131 [5.157]	175 [6.890]	150 [5.906]	200 [7.874]
4	147 [5.787]	200 [7.874]	166 [6.535]	200 [7.874]
5	163 [6.417]	200 [7.874]	182 [7.165]	225 [8.858]
6	179 [7.047]	225 [8.858]	198 [7.795]	250 [9.843]
7	195 [7.677]	250 [9.843]	214 [8.425]	250 [9.843]
8	211 [8.307]	250 [9.843]	230 [9.055]	275 [10.827]
9	227 [8.937]	275 [10.827]	246 [9.685]	300 [11.811]
10	243 [9.567]	300 [11.811]	262 [10.315]	300 [11.811]
11	259 [10.197]	300 [11.811]	278 [10.945]	325 [12.795]
12	275 [10.827]	325 [12.795]	294 [11.575]	350 [13.780]
13	291 [11.457]	325 [12.795]	310 [12.205]	350 [13.780]
14	307 [12.087]	350 [13.780]	326 [12.835]	375 [14.764]
15	323 [12.717]	375 [14.764]	342 [13.465]	375 [14.764]
16	339 [13.346]	375 [14.764]	358 [14.094]	400 [15.748]
17	355 [13.976]	400 [15.748]	374 [14.724]	425 [16.732]
18	371 [14.606]	425 [16.732]	390 [15.354]	425 [16.732]
19	387 [15.236]	425 [16.732]	406 [15.984]	450 [17.717]
20	403 [15.866]	450 [17.717]	422 [16.614]	475 [18.701]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

Dimensions of F15 series split manifold plug-in type mm [in]

F15M Number of valves PHL Pilot specifications (Base piping type)

With manifold outlet port female thread block
Terminal block type

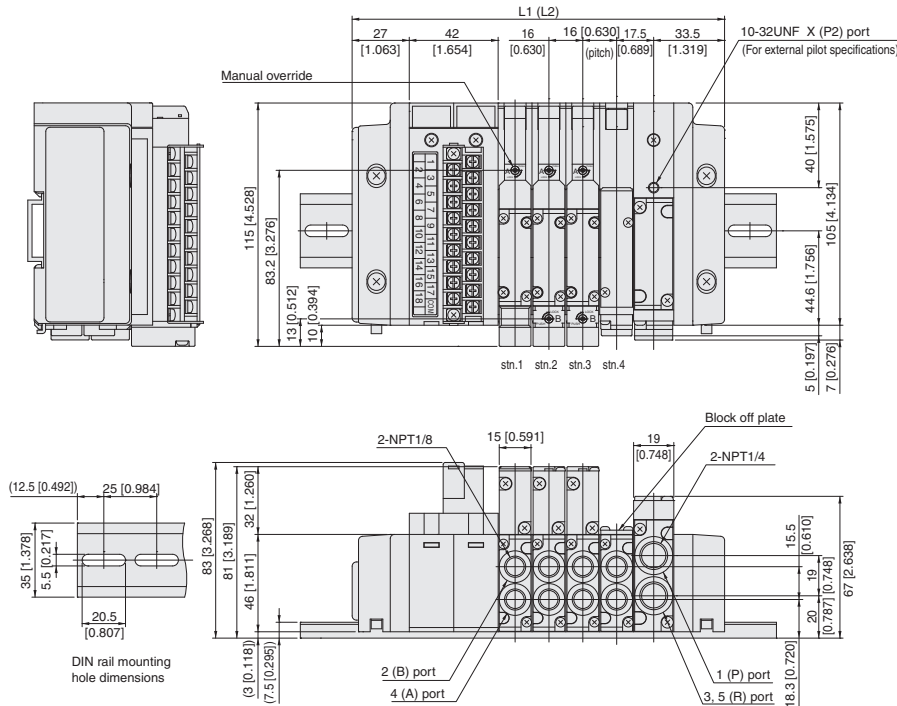


Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	144 [5.669]	175 [6.890]	163 [6.417]	200 [7.874]
3	160 [6.299]	200 [7.874]	179 [7.047]	225 [8.858]
4	176 [6.929]	225 [8.858]	195 [7.677]	225 [8.858]
5	192 [7.559]	225 [8.858]	211 [8.307]	250 [9.843]
6	208 [8.189]	250 [9.843]	227 [8.937]	275 [10.827]
7	224 [8.819]	250 [9.843]	243 [9.567]	275 [10.827]
8	240 [9.449]	275 [10.827]	259 [10.197]	300 [11.811]
9	256 [10.079]	300 [11.811]	275 [10.827]	300 [11.811]
10	272 [10.709]	300 [11.811]	291 [11.457]	325 [12.795]
11	288 [11.339]	325 [12.795]	307 [12.087]	350 [13.780]
12	304 [11.969]	350 [13.780]	323 [12.717]	350 [13.780]
13	320 [12.598]	350 [13.780]	339 [13.346]	375 [14.764]
14	336 [13.228]	375 [14.764]	355 [13.976]	400 [15.748]
15	352 [13.858]	400 [15.748]	371 [14.606]	400 [15.748]
16	368 [14.488]	400 [15.748]	387 [15.236]	425 [16.732]
17	384 [15.118]	425 [16.732]	403 [15.866]	450 [17.717]
18	400 [15.748]	425 [16.732]	419 [16.496]	450 [17.717]

Note: When two piping blocks are used.

F15M Number of valves PH Pilot specifications (Direct piping type)

With valve outlet port female thread block
Terminal block type

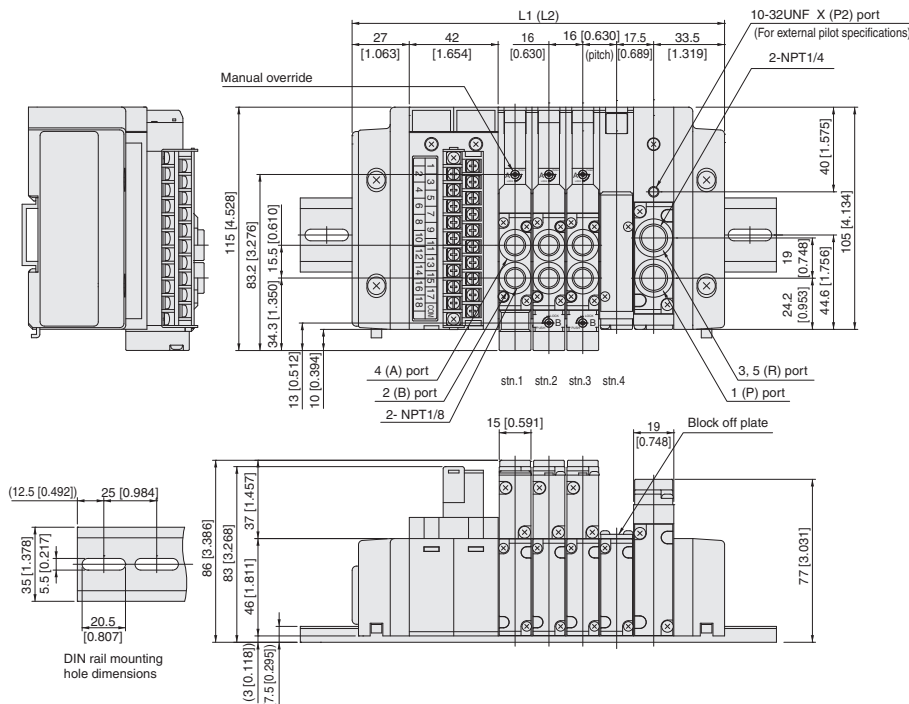

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	144 [5.669]	175 [6.890]	163 [6.417]	200 [7.874]
3	160 [6.299]	200 [7.874]	179 [7.047]	225 [8.858]
4	176 [6.929]	225 [8.858]	195 [7.677]	225 [8.858]
5	192 [7.559]	225 [8.858]	211 [8.307]	250 [9.843]
6	208 [8.189]	250 [9.843]	227 [8.937]	275 [10.827]
7	224 [8.819]	250 [9.843]	243 [9.567]	275 [10.827]
8	240 [9.449]	275 [10.827]	259 [10.197]	300 [11.811]
9	256 [10.079]	300 [11.811]	275 [10.827]	300 [11.811]
10	272 [10.709]	300 [11.811]	291 [11.457]	325 [12.795]
11	288 [11.339]	325 [12.795]	307 [12.087]	350 [13.780]
12	304 [11.969]	350 [13.780]	323 [12.717]	350 [13.780]
13	320 [12.598]	350 [13.780]	339 [13.346]	375 [14.764]
14	336 [13.228]	375 [14.764]	355 [13.976]	400 [15.748]
15	352 [13.858]	400 [15.748]	371 [14.606]	400 [15.748]
16	368 [14.488]	400 [15.748]	387 [15.236]	425 [16.732]
17	384 [15.118]	425 [16.732]	403 [15.866]	450 [17.717]
18	400 [15.748]	425 [16.732]	419 [16.496]	450 [17.717]


Note: When two piping blocks are used.

Dimensions of F15 series split manifold serial transmission type mm [in]

F15M Number of valves S M J Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
(Models that support integrated serial transmission block)

*For dimensions of EtherCAT, see p. 240.

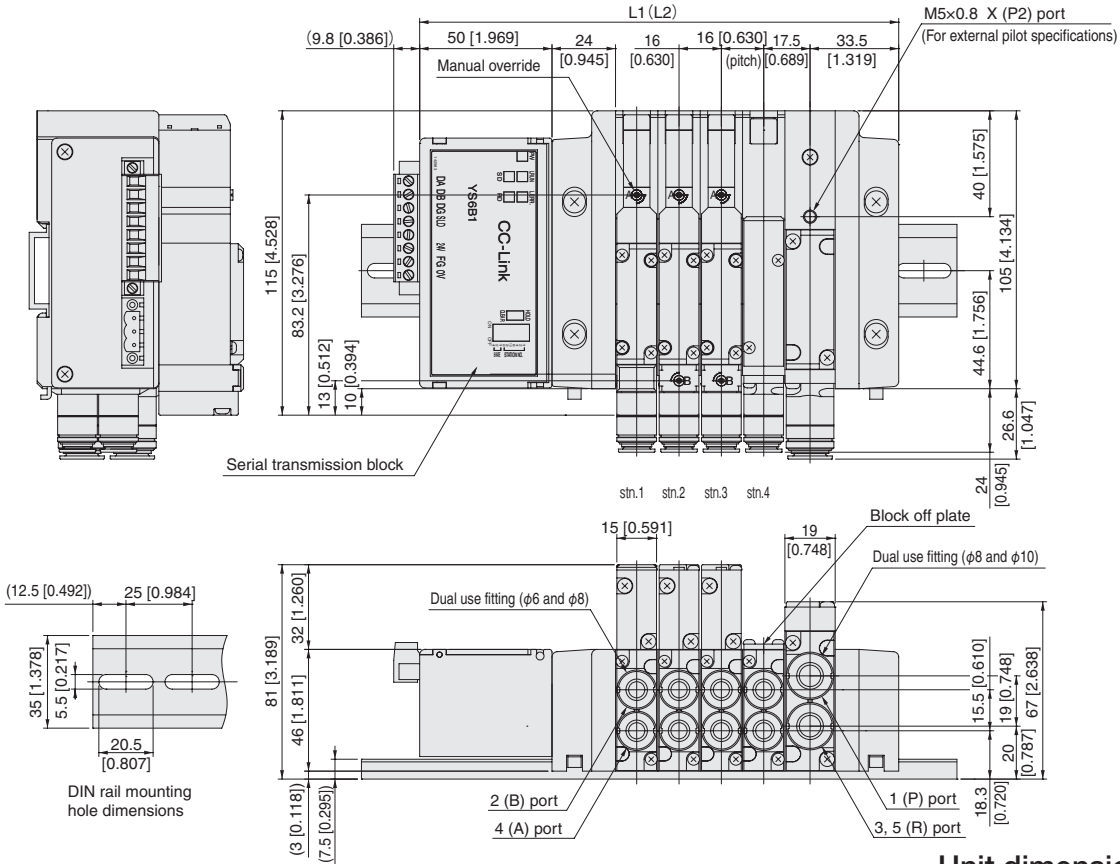

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	149 [5.866]	200 [7.874]	168 [6.614]	225 [8.858]
3	165 [6.496]	225 [8.858]	184 [7.244]	225 [8.858]
4	181 [7.126]	225 [8.858]	200 [7.874]	250 [9.843]
5	197 [7.756]	250 [9.843]	216 [8.504]	275 [10.827]
6	213 [8.386]	275 [10.827]	232 [9.134]	275 [10.827]
7	229 [9.016]	275 [10.827]	248 [9.764]	300 [11.811]
8	245 [9.646]	300 [11.811]	264 [10.394]	325 [12.795]
9	261 [10.276]	325 [12.795]	280 [11.024]	325 [12.795]
10	277 [10.906]	325 [12.795]	296 [11.654]	350 [13.780]
11	293 [11.536]	350 [13.780]	312 [12.283]	375 [14.764]
12	309 [12.165]	350 [13.780]	328 [12.913]	375 [14.764]
13	325 [12.795]	375 [14.764]	344 [13.543]	400 [15.748]
14	341 [13.425]	400 [15.748]	360 [14.173]	400 [15.748]
15	357 [14.055]	400 [15.748]	376 [14.803]	425 [16.732]
16	373 [14.685]	425 [16.732]	392 [15.433]	450 [17.717]
17	389 [15.315]	450 [17.717]	408 [16.063]	475 [18.701]
18	405 [15.945]	450 [17.717]	424 [16.693]	475 [18.701]
19	421 [16.575]	475 [18.701]	440 [17.323]	500 [19.685]
20	437 [17.205]	500 [19.685]	456 [17.953]	500 [19.685]


Note: When two piping blocks are used.

* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

Dimensions of F15 series split manifold serial transmission type mm [in]

F15M Number of valves **SHL** Pilot specifications (Base piping type)

With manifold outlet port female thread block
(Models that support integrated serial transmission block)

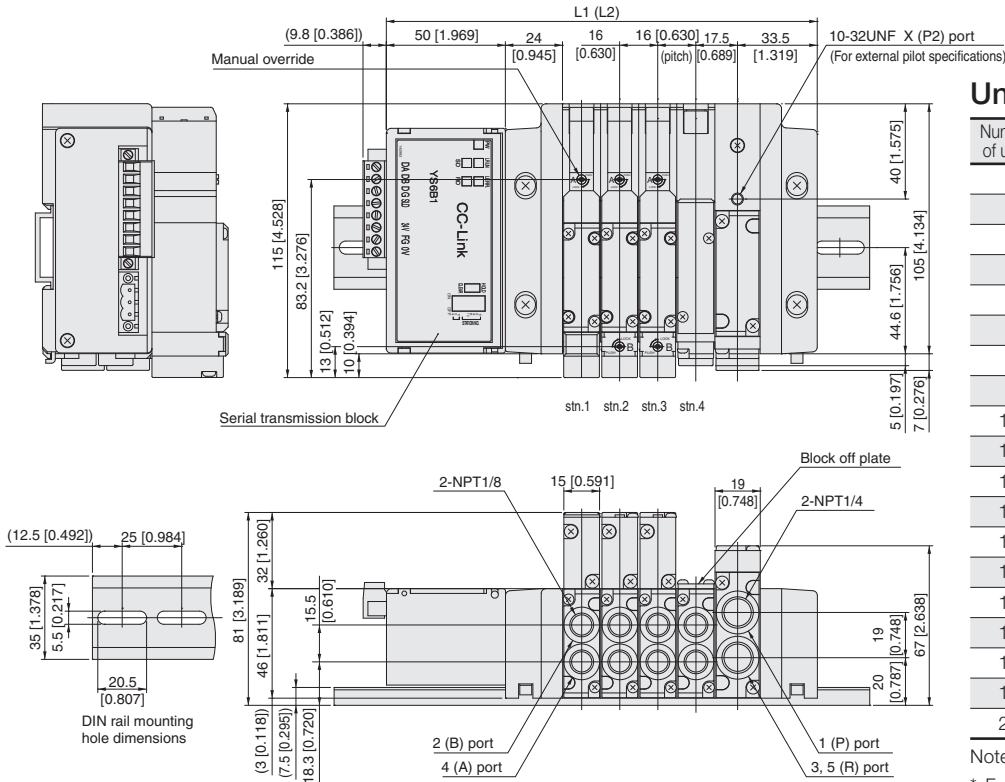


Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	149 [5.866]	200 [7.874]	168 [6.614]	225 [8.858]
3	165 [6.496]	225 [8.858]	184 [7.244]	225 [8.858]
4	181 [7.126]	225 [8.858]	200 [7.874]	250 [9.843]
5	197 [7.756]	250 [9.843]	216 [8.504]	275 [10.827]
6	213 [8.386]	275 [10.827]	232 [9.134]	275 [10.827]
7	229 [9.016]	275 [10.827]	248 [9.764]	300 [11.811]
8	245 [9.646]	300 [11.811]	264 [10.394]	325 [12.795]
9	261 [10.276]	325 [12.795]	280 [11.024]	325 [12.795]
10	277 [10.906]	325 [12.795]	296 [11.654]	350 [13.780]
11	293 [11.535]	350 [13.780]	312 [12.283]	375 [14.764]
12	309 [12.165]	350 [13.780]	328 [12.913]	375 [14.764]
13	325 [12.795]	375 [14.764]	344 [13.543]	400 [15.748]
14	341 [13.425]	400 [15.748]	360 [14.173]	400 [15.748]
15	357 [14.055]	400 [15.748]	376 [14.803]	425 [16.732]
16	373 [14.685]	425 [16.732]	392 [15.433]	450 [17.717]
17	389 [15.315]	450 [17.717]	408 [16.063]	475 [18.701]
18	405 [15.945]	450 [17.717]	424 [16.693]	475 [18.701]
19	421 [16.575]	475 [18.701]	440 [17.323]	500 [19.685]
20	437 [17.205]	500 [19.685]	456 [17.953]	500 [19.685]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

F15M Number of valves **SH** Pilot specifications (Direct piping type)

With valve outlet port female thread block
(Models that support integrated serial transmission block)

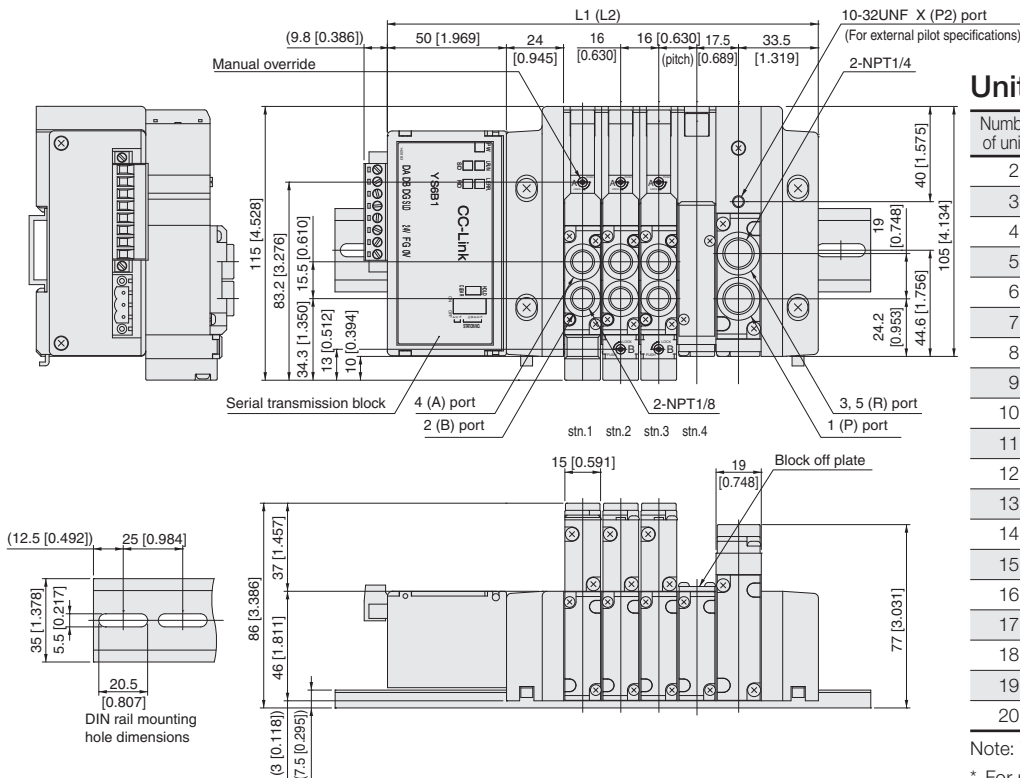


Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	149 [5.866]	200 [7.874]	168 [6.614]	225 [8.858]
3	165 [6.496]	225 [8.858]	184 [7.244]	225 [8.858]
4	181 [7.126]	225 [8.858]	200 [7.874]	250 [9.843]
5	197 [7.756]	250 [9.843]	216 [8.504]	275 [10.827]
6	213 [8.386]	275 [10.827]	232 [9.134]	275 [10.827]
7	229 [9.016]	275 [10.827]	248 [9.764]	300 [11.811]
8	245 [9.646]	300 [11.811]	264 [10.394]	325 [12.795]
9	261 [10.276]	325 [12.795]	280 [11.024]	325 [12.795]
10	277 [10.906]	325 [12.795]	296 [11.654]	350 [13.780]
11	293 [11.535]	350 [13.780]	312 [12.283]	375 [14.764]
12	309 [12.165]	350 [13.780]	328 [12.913]	375 [14.764]
13	325 [12.795]	375 [14.764]	344 [13.543]	400 [15.748]
14	341 [13.425]	400 [15.748]	360 [14.173]	400 [15.748]
15	357 [14.055]	400 [15.748]	376 [14.803]	425 [16.732]
16	373 [14.685]	425 [16.732]	392 [15.433]	450 [17.717]
17	389 [15.315]	450 [17.717]	408 [16.063]	475 [18.701]
18	405 [15.945]	450 [17.717]	424 [16.693]	475 [18.701]
19	421 [16.575]	475 [18.701]	440 [17.323]	500 [19.685]
20	437 [17.205]	500 [19.685]	456 [17.953]	500 [19.685]

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

F15M Number of valves S M Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
(Models that support stand-alone serial transmission block)


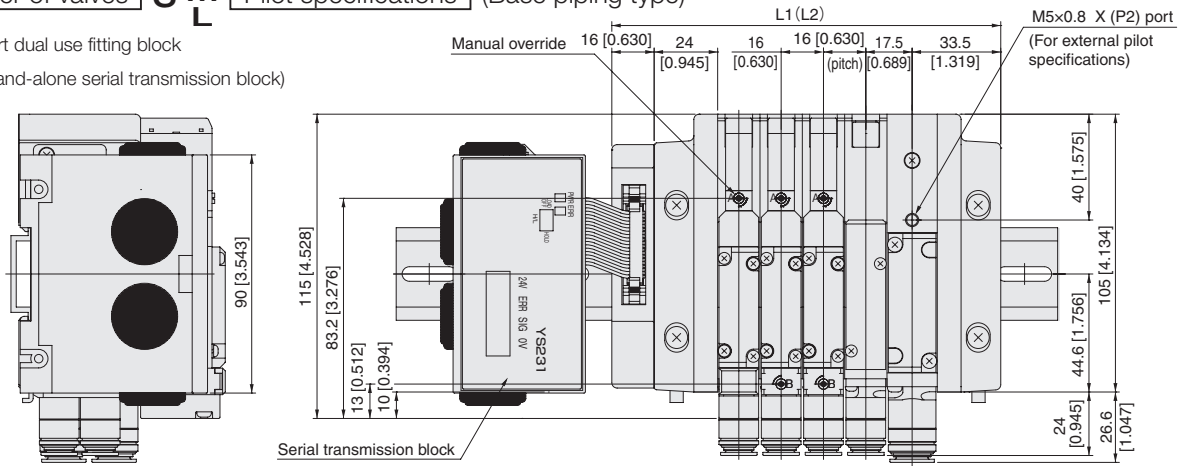


Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	115 [4.528]	225 [8.858]	134 [5.276]	225 [8.858]
3	131 [5.157]	225 [8.858]	150 [5.906]	250 [9.843]
4	147 [5.787]	250 [9.843]	166 [6.535]	275 [10.827]
5	163 [6.417]	275 [10.827]	182 [7.165]	275 [10.827]
6	179 [7.047]	275 [10.827]	198 [7.795]	300 [11.811]
7	195 [7.677]	300 [11.811]	214 [8.425]	325 [12.795]
8	211 [8.307]	300 [11.811]	230 [9.055]	325 [12.795]
9	227 [8.937]	325 [12.795]	246 [9.685]	350 [13.780]
10	243 [9.567]	350 [13.780]	262 [10.315]	375 [14.764]
11	259 [10.197]	350 [13.780]	278 [10.945]	375 [14.764]
12	275 [10.827]	375 [14.764]	294 [11.575]	400 [15.748]
13	291 [11.457]	400 [15.748]	310 [12.205]	400 [15.748]
14	307 [12.087]	400 [15.748]	326 [12.835]	425 [16.732]
15	323 [12.717]	425 [16.732]	342 [13.465]	450 [17.717]
16	339 [13.346]	450 [17.717]	358 [14.094]	450 [17.717]

Note: When two piping blocks are used.


* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

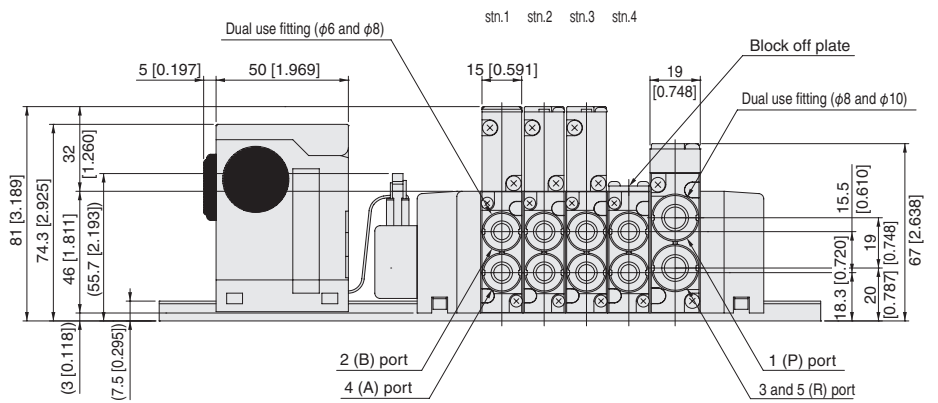


DIN rail mounting hole dimensions

Additional Parts (available separately)



● Muffler: **KM-J10** [for both plug-in and non-plug-in]
73 [2.874]

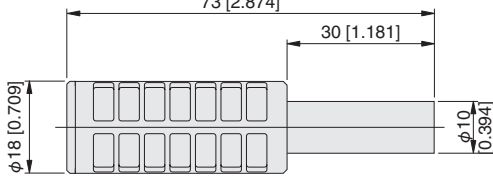

● Muffler: **KM-J6** [for individual exhaust spacer only]




● Muffler: **KM-J8** [for individual exhaust spacer only]

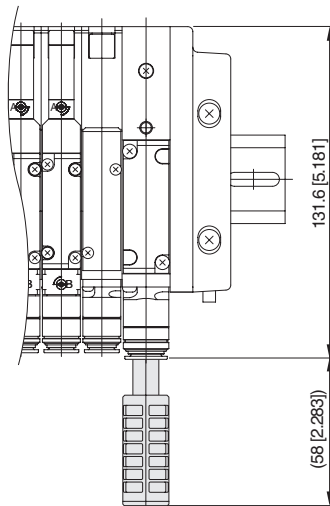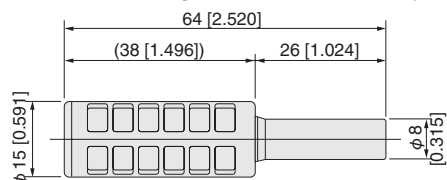


F15M Number of valves **SHL** Pilot specifications (Base piping type)

With manifold outlet port female thread block
(Models that support stand-alone serial transmission block)

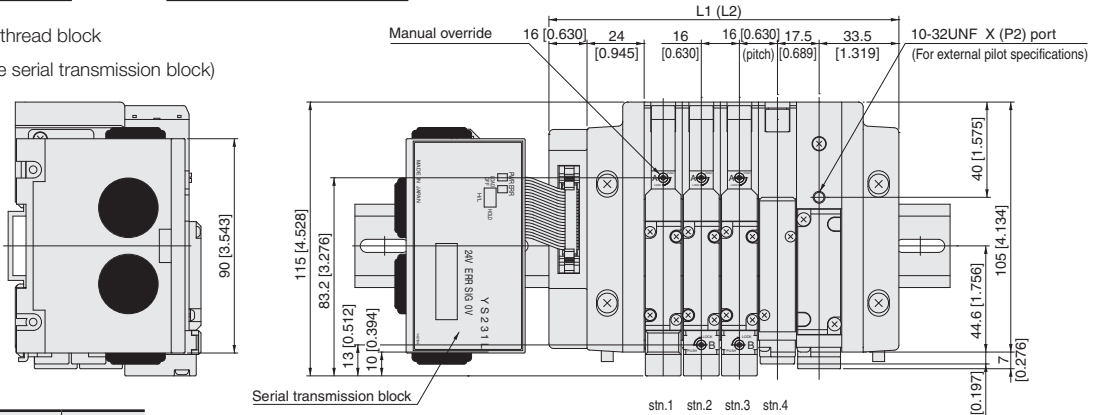

Unit dimensions


Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	115 [4.528]	225 [8.858]	134 [5.276]	225 [8.858]
3	131 [5.157]	225 [8.858]	150 [5.906]	250 [9.843]
4	147 [5.787]	250 [9.843]	166 [6.535]	275 [10.827]
5	163 [6.417]	275 [10.827]	182 [7.165]	275 [10.827]
6	179 [7.047]	275 [10.827]	198 [7.795]	300 [11.811]
7	195 [7.677]	300 [11.811]	214 [8.425]	325 [12.795]
8	211 [8.307]	300 [11.811]	230 [9.055]	325 [12.795]
9	227 [8.937]	325 [12.795]	246 [9.685]	350 [13.780]
10	243 [9.567]	350 [13.780]	262 [10.315]	375 [14.764]
11	259 [10.197]	350 [13.780]	278 [10.945]	375 [14.764]
12	275 [10.827]	375 [14.764]	294 [11.575]	400 [15.748]
13	291 [11.457]	400 [15.748]	310 [12.205]	400 [15.748]
14	307 [12.087]	400 [15.748]	326 [12.835]	425 [16.732]
15	323 [12.717]	425 [16.732]	342 [13.465]	450 [17.717]
16	339 [13.346]	450 [17.717]	358 [14.094]	450 [17.717]

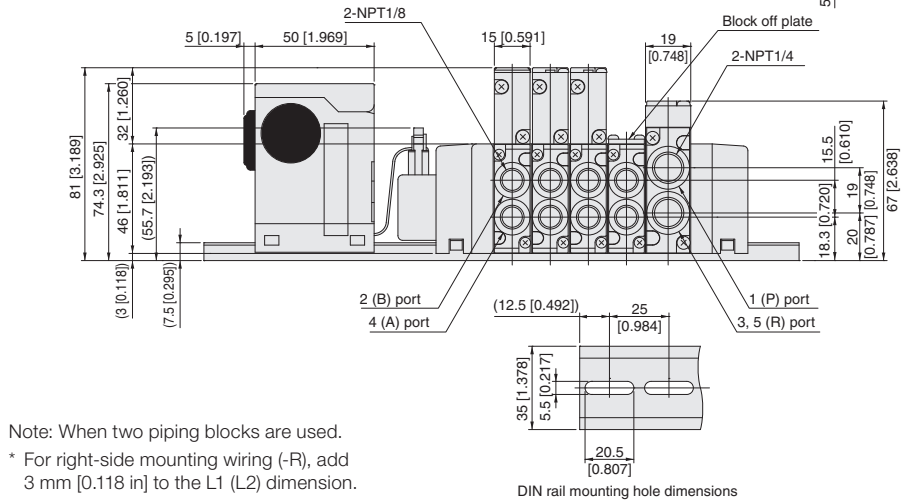

Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.


F15M Number of valves **SH** Pilot specifications (Direct piping type)

With valve outlet port female thread block
(Models that support stand-alone serial transmission block)

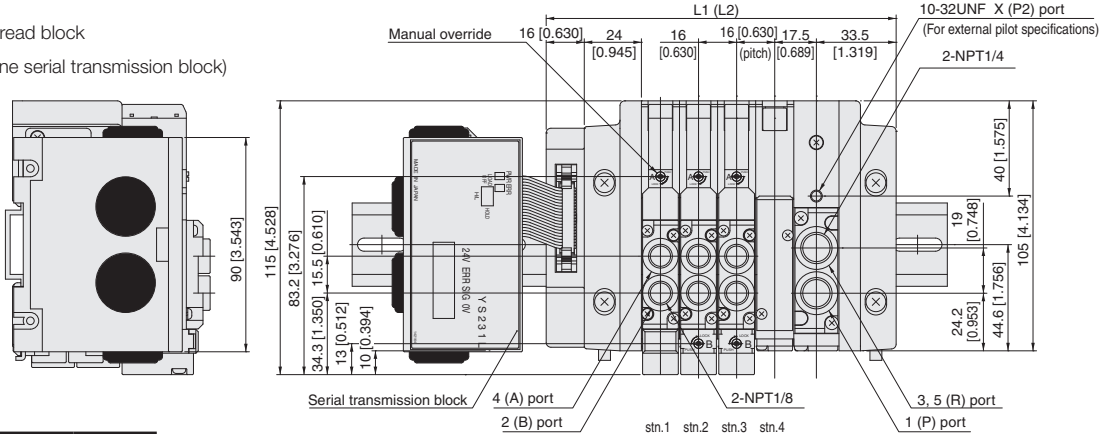

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	115 [4.528]	225 [8.858]	134 [5.276]	225 [8.858]
3	131 [5.157]	225 [8.858]	150 [5.906]	250 [9.843]
4	147 [5.787]	250 [9.843]	166 [6.535]	275 [10.827]
5	163 [6.417]	275 [10.827]	182 [7.165]	275 [10.827]
6	179 [7.047]	275 [10.827]	198 [7.795]	300 [11.811]
7	195 [7.677]	300 [11.811]	214 [8.425]	325 [12.795]
8	211 [8.307]	300 [11.811]	230 [9.055]	325 [12.795]
9	227 [8.937]	325 [12.795]	246 [9.685]	350 [13.780]
10	243 [9.567]	350 [13.780]	262 [10.315]	375 [14.764]
11	259 [10.197]	350 [13.780]	278 [10.945]	375 [14.764]
12	275 [10.827]	375 [14.764]	294 [11.575]	400 [15.748]
13	291 [11.457]	400 [15.748]	310 [12.205]	400 [15.748]
14	307 [12.087]	400 [15.748]	326 [12.835]	425 [16.732]
15	323 [12.717]	425 [16.732]	342 [13.465]	450 [17.717]
16	339 [13.346]	450 [17.717]	358 [14.094]	450 [17.717]

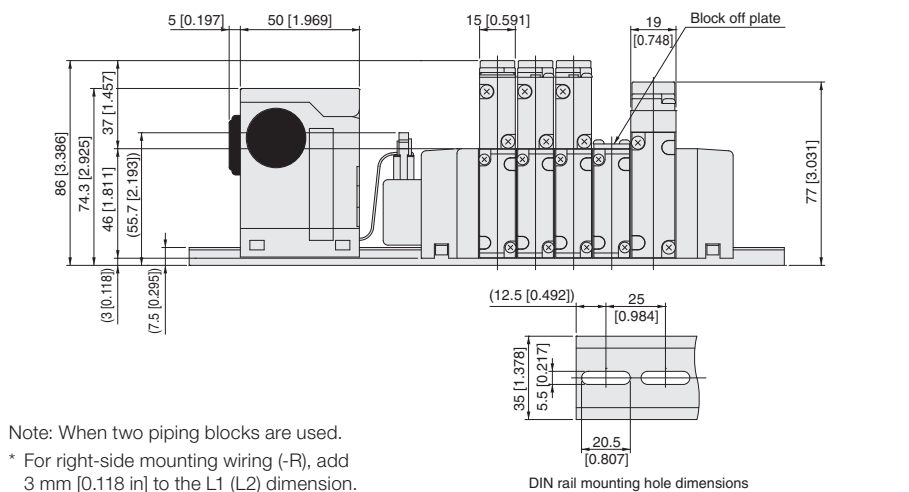


Note: When two piping blocks are used.
* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

F15 DIMENSIONS

Dimensions of F15 series split manifold serial transmission type mm [in]

F15M Number of valves SHL Pilot specifications (Base piping type)

With manifold outlet port female thread block
(Ether CAT)

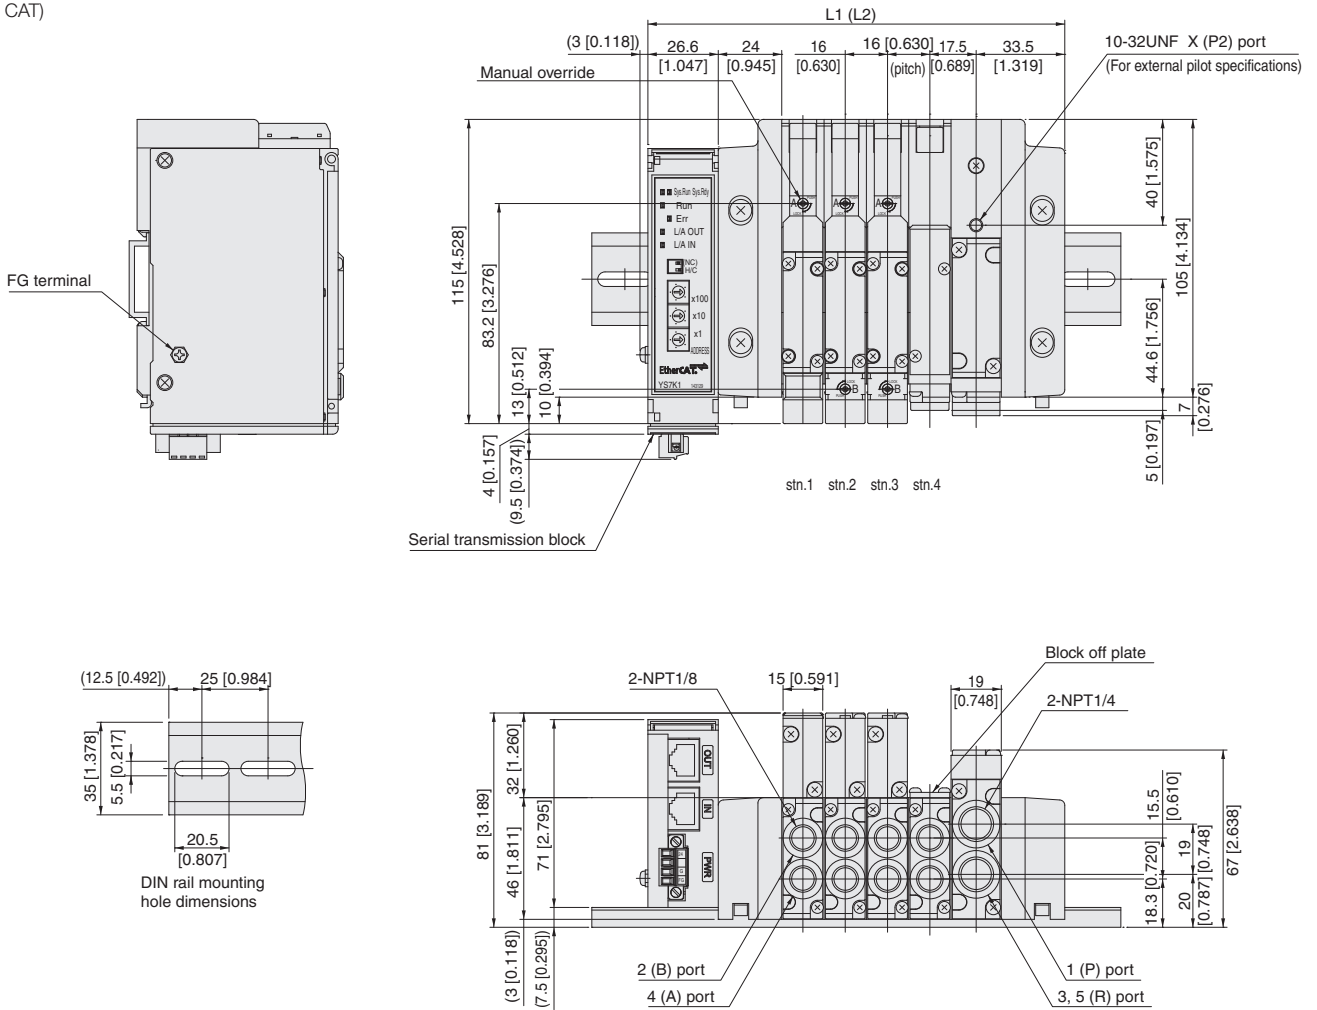

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	125.6 [4.945]	175 [6.890]	144.6 [5.693]	200 [7.874]
3	141.6 [5.575]	200 [7.874]	160.6 [6.323]	200 [7.874]
4	157.6 [6.205]	200 [7.874]	176.6 [6.953]	225 [8.858]
5	173.6 [6.835]	225 [8.858]	192.6 [7.583]	250 [9.843]
6	189.6 [7.465]	250 [9.843]	208.6 [8.213]	250 [9.843]
7	205.6 [8.094]	250 [9.843]	224.6 [8.843]	275 [10.827]
8	221.6 [8.724]	275 [10.827]	240.6 [9.472]	300 [11.811]
9	237.6 [9.354]	300 [11.811]	256.6 [10.102]	300 [11.811]
10	253.6 [9.984]	300 [11.811]	272.6 [10.732]	325 [12.795]
11	269.6 [10.614]	325 [12.795]	288.6 [11.362]	350 [13.780]
12	285.6 [11.244]	325 [12.795]	304.6 [11.992]	350 [13.780]
13	301.6 [11.874]	350 [13.780]	320.6 [12.622]	375 [14.764]
14	317.6 [12.504]	375 [14.764]	336.6 [13.252]	375 [14.764]
15	333.6 [13.134]	375 [14.764]	352.6 [13.882]	400 [15.748]
16	349.6 [13.764]	400 [15.748]	368.6 [14.512]	425 [16.732]
17	365.6 [14.394]	425 [16.732]	384.6 [15.142]	450 [17.717]
18	381.6 [15.024]	425 [16.732]	400.6 [15.772]	450 [17.717]
19	397.6 [15.654]	450 [17.717]	416.6 [16.402]	475 [18.701]
20	413.6 [16.283]	475 [18.701]	432.6 [17.031]	475 [18.701]


Note: When two piping blocks are used.

* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

Dimensions of F15 series split manifold serial transmission type mm [in]

F15M Number of valves SH Pilot specifications (Direct piping type)

With valve outlet port female thread block
(Ether CAT)

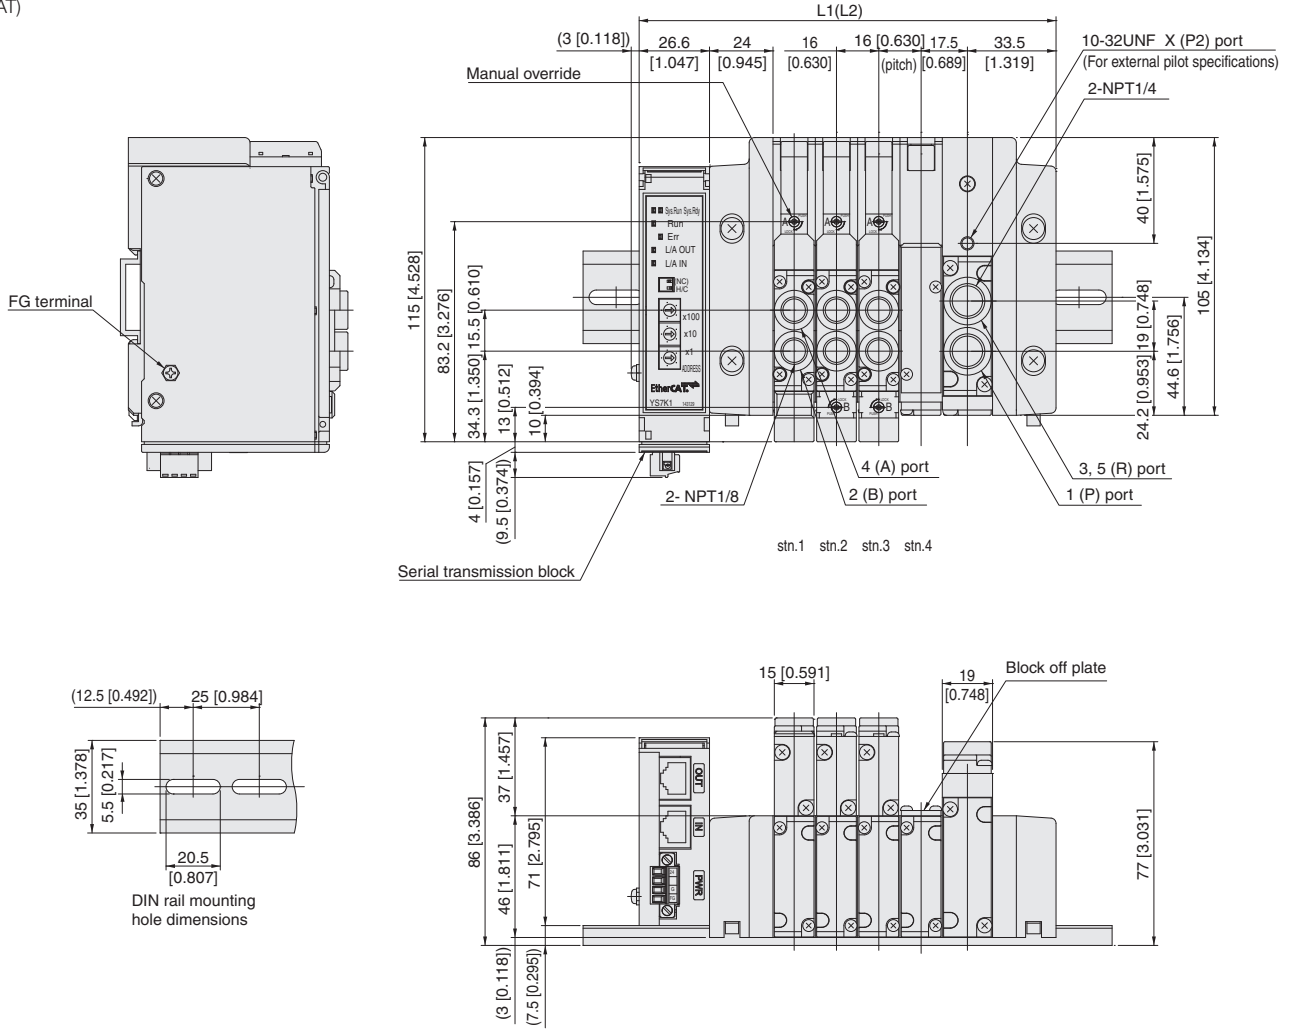

Unit dimensions

Number of units	L1	Length of DIN rail	L2 <small>Note</small>	Length of DIN rail <small>Note</small>
2	125.6 [4.945]	175 [6.890]	144.6 [5.693]	200 [7.874]
3	141.6 [5.575]	200 [7.874]	160.6 [6.323]	200 [7.874]
4	157.6 [6.205]	200 [7.874]	176.6 [6.953]	225 [8.858]
5	173.6 [6.835]	225 [8.858]	192.6 [7.583]	250 [9.843]
6	189.6 [7.465]	250 [9.843]	208.6 [8.213]	250 [9.843]
7	205.6 [8.094]	250 [9.843]	224.6 [8.843]	275 [10.827]
8	221.6 [8.724]	275 [10.827]	240.6 [9.472]	300 [11.811]
9	237.6 [9.354]	300 [11.811]	256.6 [10.102]	300 [11.811]
10	253.6 [9.984]	300 [11.811]	272.6 [10.732]	325 [12.795]
11	269.6 [10.614]	325 [12.795]	288.6 [11.362]	350 [13.780]
12	285.6 [11.244]	325 [12.795]	304.6 [11.992]	350 [13.780]
13	301.6 [11.874]	350 [13.780]	320.6 [12.622]	375 [14.764]
14	317.6 [12.504]	375 [14.764]	336.6 [13.252]	375 [14.764]
15	333.6 [13.134]	375 [14.764]	352.6 [13.882]	400 [15.748]
16	349.6 [13.764]	400 [15.748]	368.6 [14.512]	425 [16.732]
17	365.6 [14.394]	425 [16.732]	384.6 [15.142]	450 [17.717]
18	381.6 [15.024]	425 [16.732]	400.6 [15.772]	450 [17.717]
19	397.6 [15.654]	450 [17.717]	416.6 [16.402]	475 [18.701]
20	413.6 [16.283]	475 [18.701]	432.6 [17.031]	475 [18.701]


Note: When two piping blocks are used.

* For right-side mounting wiring (-R), add 3 mm [0.118 in] to the L1 (L2) dimension.

Dimensions of F15 series easy assembly type manifold non-plug-in type. mm [in]

F15M [Number of units] **XN^J** [Pilot specifications] - [Piping block specifications] (Base piping type)

With manifold outlet port dual use fitting block
S type plug connector

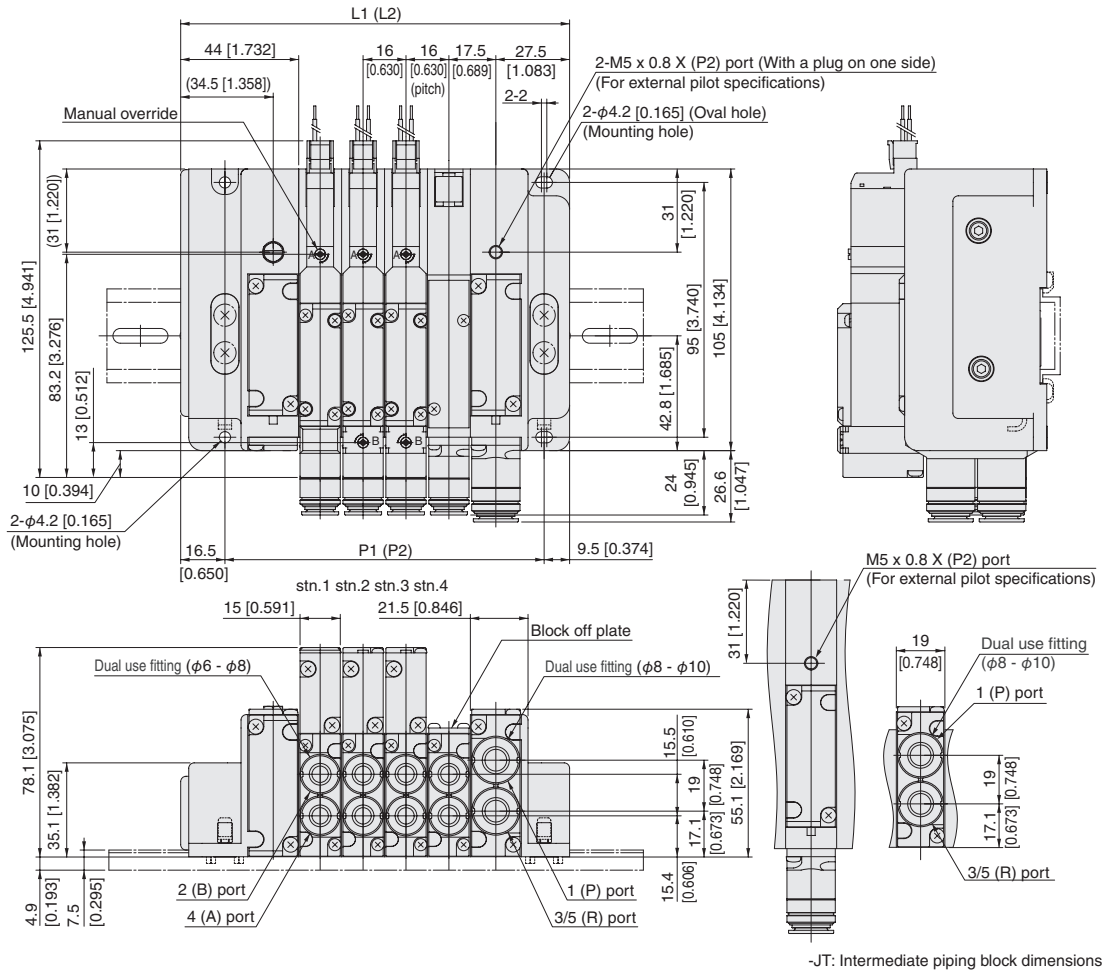

-JT: Intermediate piping block dimensions

Unit dimensions


Number of units	L1	P1	Length of DIN rail	L2*	P2*	Length of DIN rail <small>Note</small>
2	113 [4.448]	87 [3.425]	175 [6.890]	-	-	-
3	129 [5.079]	103 [4.055]	175 [6.890]	148 [5.827]	122 [4.803]	175 [6.890]
4	145 [5.709]	119 [4.685]	200 [7.874]	164 [6.457]	138 [5.433]	200 [7.874]
5	161 [6.339]	135 [5.315]	225 [8.858]	180 [7.087]	154 [6.063]	225 [8.858]
6	177 [6.969]	151 [5.945]	225 [8.858]	196 [7.717]	170 [6.693]	225 [8.858]
7	193 [7.598]	167 [6.575]	250 [9.843]	212 [8.346]	186 [7.323]	250 [9.843]
8	209 [8.228]	183 [7.205]	250 [9.843]	228 [8.976]	202 [7.953]	275 [10.827]
9	225 [8.858]	199 [7.835]	275 [10.827]	244 [9.606]	218 [8.583]	275 [10.827]
10	241 [9.488]	215 [8.465]	300 [11.811]	260 [10.236]	234 [9.213]	300 [11.811]
11	257 [10.118]	231 [9.094]	300 [11.811]	276 [10.866]	250 [9.843]	325 [12.795]
12	273 [10.748]	247 [9.724]	325 [12.795]	292 [11.496]	266 [10.472]	325 [12.795]
13	289 [11.378]	263 [10.354]	350 [13.780]	308 [12.126]	282 [11.102]	350 [13.780]
14	305 [12.008]	279 [10.984]	350 [13.780]	324 [12.756]	298 [11.732]	350 [13.780]
15	321 [12.638]	295 [11.614]	375 [14.764]	340 [13.386]	314 [12.362]	375 [14.764]
16	337 [13.268]	311 [12.244]	400 [15.748]	356 [14.016]	330 [12.992]	400 [15.748]
17	353 [13.898]	327 [12.874]	400 [15.748]	372 [14.646]	346 [13.622]	400 [15.748]
18	369 [14.528]	343 [13.504]	425 [16.732]	388 [15.276]	362 [14.252]	425 [16.732]
19	385 [15.157]	359 [14.134]	450 [17.717]	404 [15.906]	378 [14.882]	450 [17.717]
20	401 [15.787]	375 [14.764]	450 [17.717]	420 [16.536]	394 [15.512]	450 [17.717]
21	-	-	-	436 [17.165]	410 [16.142]	475 [18.701]

Note: When the J□T or MT piping block specifications is selected.

Dimensions of F15 series easy assembly type manifold non-plug-in type. mm [in]

F15M [Number of units] **XN** [Pilot specifications] - [Piping block specifications] (Direct piping type)

With manifold outlet port dual use fitting block
S type plug connector

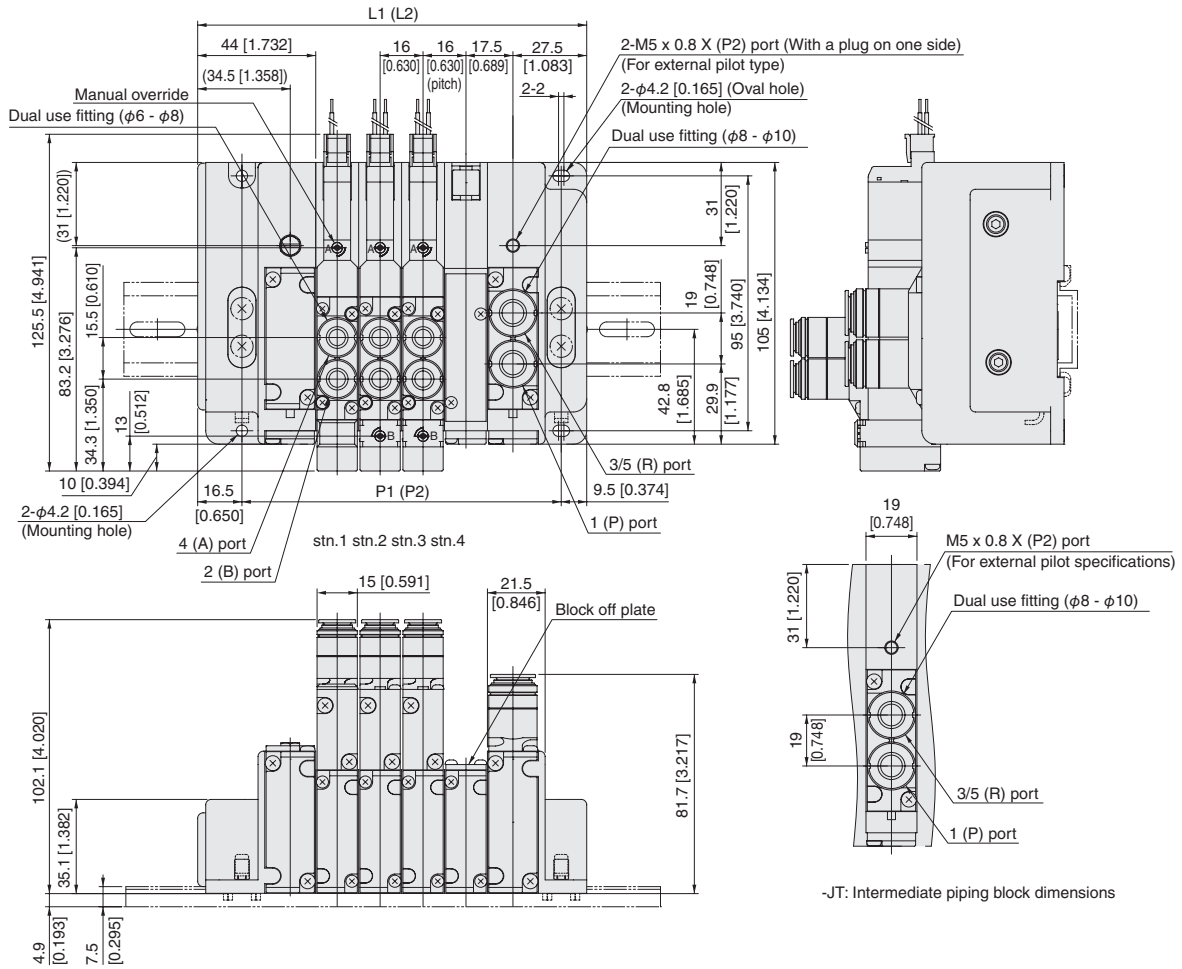

-JT: Intermediate piping block dimensions

F15 DIMENSIONS

Unit dimensions


Number of units	L1	P1	Length of DIN rail	L2*	P2*	Length of DIN rail <small>Note</small>
2	113 [4.448]	87 [3.425]	175 [6.890]	-	-	-
3	129 [5.079]	103 [4.055]	175 [6.890]	148 [5.827]	122 [4.803]	175 [6.890]
4	145 [5.709]	119 [4.685]	200 [7.874]	164 [6.457]	138 [5.433]	200 [7.874]
5	161 [6.339]	135 [5.315]	225 [8.858]	180 [7.087]	154 [6.063]	225 [8.858]
6	177 [6.969]	151 [5.945]	225 [8.858]	196 [7.717]	170 [6.693]	225 [8.858]
7	193 [7.598]	167 [6.575]	250 [9.843]	212 [8.346]	186 [7.323]	250 [9.843]
8	209 [8.228]	183 [7.205]	250 [9.843]	228 [8.976]	202 [7.953]	275 [10.827]
9	225 [8.858]	199 [7.835]	275 [10.827]	244 [9.606]	218 [8.583]	275 [10.827]
10	241 [9.488]	215 [8.465]	300 [11.811]	260 [10.236]	234 [9.213]	300 [11.811]
11	257 [10.118]	231 [9.094]	300 [11.811]	276 [10.866]	250 [9.843]	325 [12.795]
12	273 [10.748]	247 [9.724]	325 [12.795]	292 [11.496]	266 [10.472]	325 [12.795]
13	289 [11.378]	263 [10.354]	350 [13.780]	308 [12.126]	282 [11.102]	350 [13.780]
14	305 [12.008]	279 [10.984]	350 [13.780]	324 [12.756]	298 [11.732]	350 [13.780]
15	321 [12.638]	295 [11.614]	375 [14.764]	340 [13.386]	314 [12.362]	375 [14.764]
16	337 [13.268]	311 [12.244]	400 [15.748]	356 [14.016]	330 [12.992]	400 [15.748]
17	353 [13.898]	327 [12.874]	400 [15.748]	372 [14.646]	346 [13.622]	400 [15.748]
18	369 [14.528]	343 [13.504]	425 [16.732]	388 [15.276]	362 [14.252]	425 [16.732]
19	385 [15.157]	359 [14.134]	450 [17.717]	404 [15.906]	378 [14.882]	450 [17.717]
20	401 [15.787]	375 [14.764]	450 [17.717]	420 [16.536]	394 [15.512]	450 [17.717]
21	-	-	-	436 [17.165]	410 [16.142]	475 [18.701]

Note: When the J□T or MT piping block specifications is selected.

Dimensions of F15 series easy assembly type manifold plug-in type. mm [in]

F15M [Number of units] **XP M** [Pilot specifications] (Base piping specifications)


With manifold outlet port dual use fitting block
Flat cable connector 10-pin specifications

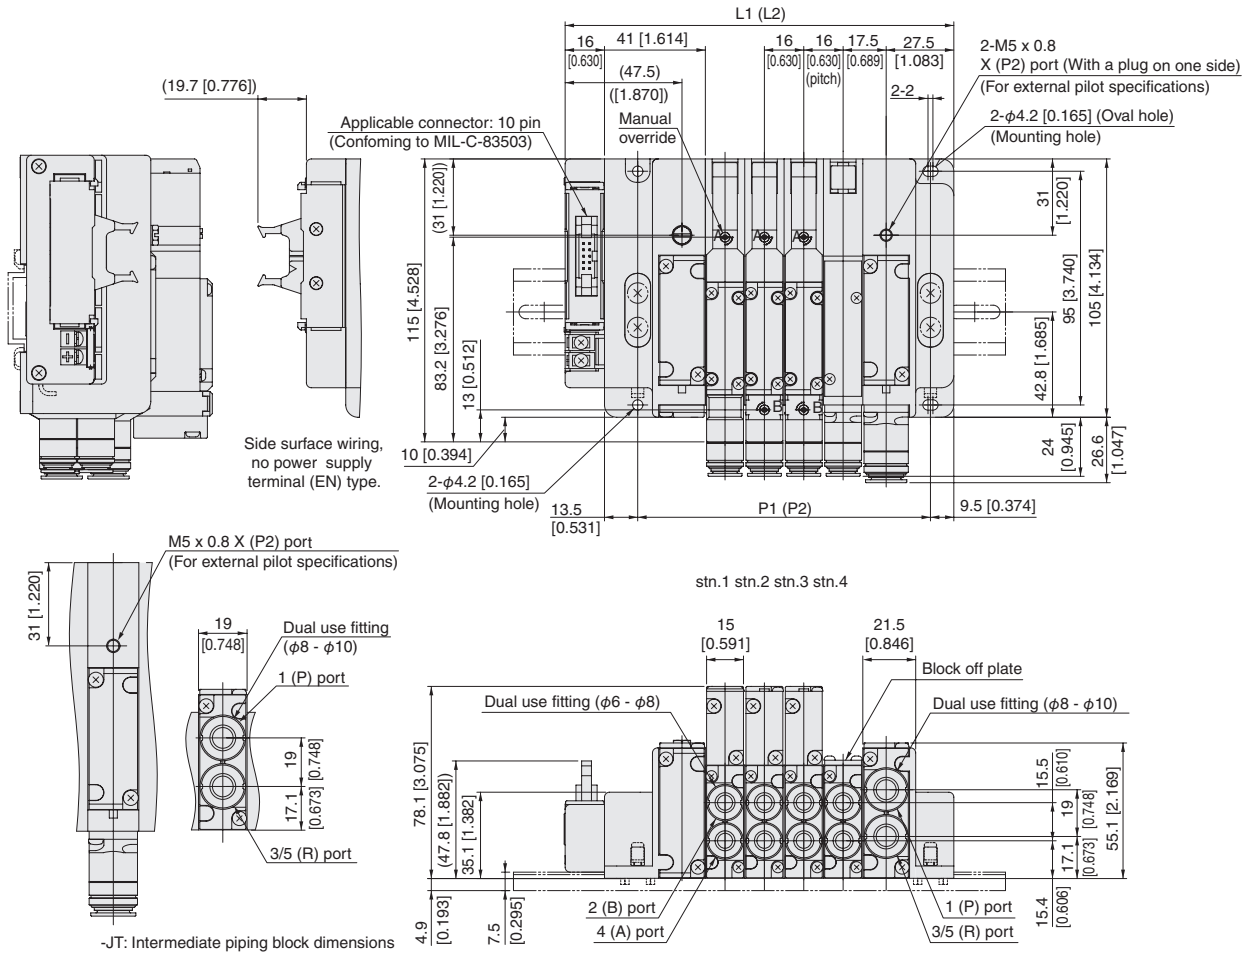

Unit dimensions

Number of units	L1	P1	Length of DIN rail	L2	P2	Length of DIN rail
2	126 [4.961]	87 [3.425]	175 [6.890]	-	-	-
3	142 [5.591]	103 [4.055]	200 [7.874]	161 [6.339]	122 [4.803]	200 [7.874]
4	158 [6.220]	119 [4.685]	200 [7.874]	177 [6.969]	138 [5.433]	225 [8.858]
5	174 [6.850]	135 [5.315]	225 [8.858]	193 [7.598]	154 [6.063]	225 [8.858]
6	190 [7.480]	151 [5.945]	250 [9.843]	209 [8.228]	170 [6.693]	250 [9.843]
7	206 [8.110]	167 [6.575]	250 [9.843]	225 [8.858]	186 [7.323]	250 [9.843]
8	222 [8.740]	183 [7.205]	275 [10.827]	241 [9.488]	202 [7.953]	275 [10.827]
9	-	-	-	257 [10.118]	218 [8.583]	300 [11.811]


Note: When the J□T or MT piping block specifications is selected.

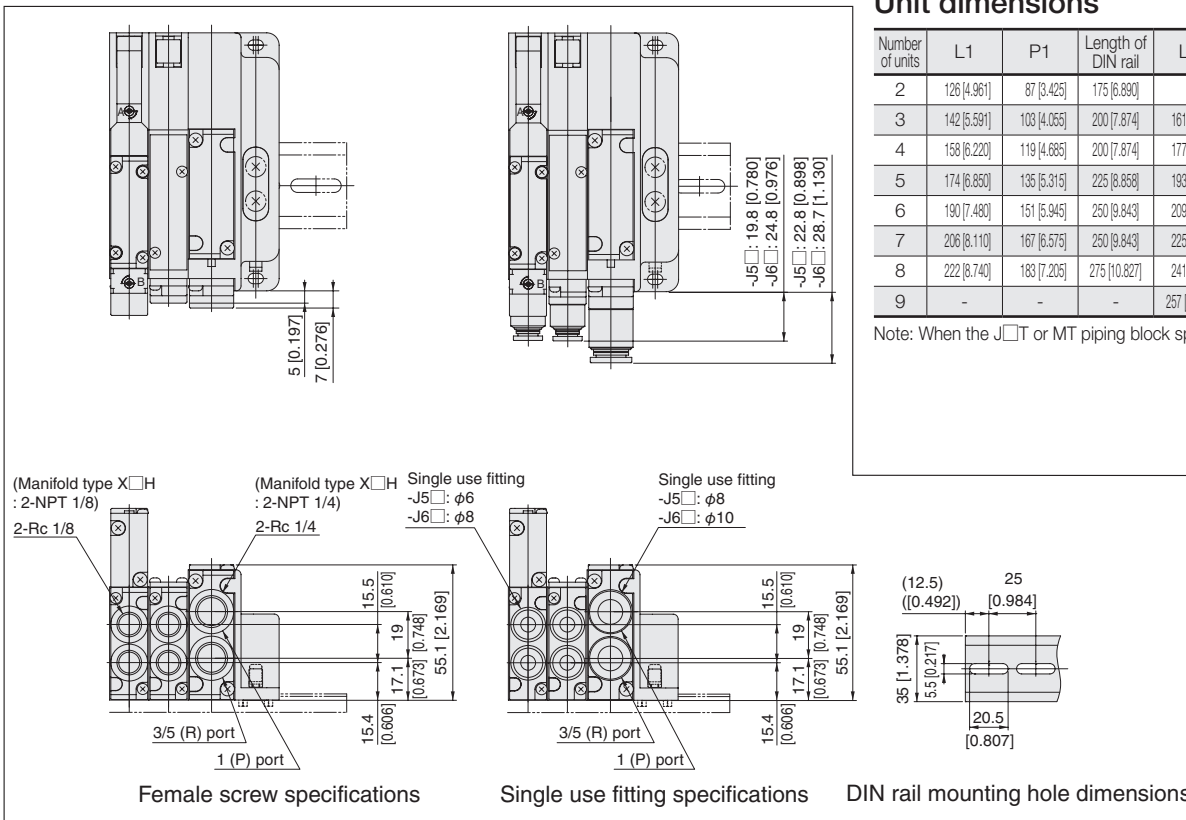

Dimensions of F15 series easy assembly type manifold plug-in type. mm [in]

F15M [Number of units] **XP** **J** [Pilot specifications] (Base piping specifications)

With manifold outlet port dual use fitting block
Flat cable connector 20-pin specifications

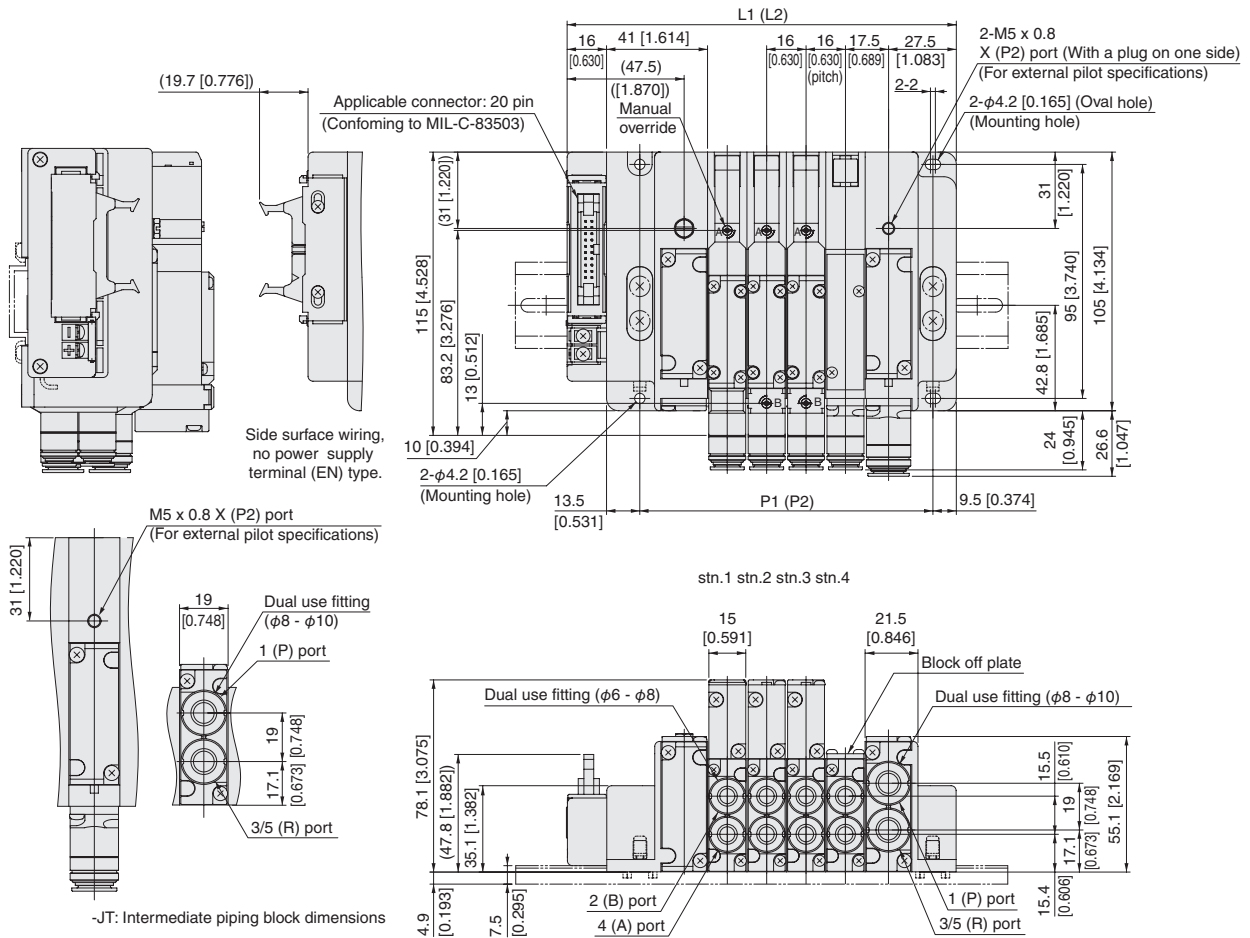

Unit dimensions

Number of units	L1	P1	Length of DIN rail	L2'	P2'	Length of DIN rail <small>Notes</small>
2	126 [4.961]	87 [3.425]	175 [6.890]	-	-	-
3	142 [5.591]	103 [4.055]	200 [7.874]	161 [6.339]	122 [4.803]	200 [7.874]
4	158 [6.220]	119 [4.685]	200 [7.874]	177 [6.969]	138 [5.433]	225 [8.858]
5	174 [6.850]	135 [5.315]	225 [8.858]	193 [7.598]	154 [6.063]	225 [8.858]
6	190 [7.480]	151 [5.945]	250 [9.843]	209 [8.228]	170 [6.693]	250 [9.843]
7	206 [8.110]	167 [6.575]	250 [9.843]	225 [8.858]	186 [7.323]	250 [9.843]
8	222 [8.740]	183 [7.205]	275 [10.827]	241 [9.488]	202 [7.953]	275 [10.827]
9	238 [9.370]	199 [7.835]	300 [11.811]	257 [10.118]	218 [8.583]	300 [11.811]
10	254 [10.000]	215 [8.465]	300 [11.811]	273 [10.748]	234 [9.213]	300 [11.811]
11	270 [10.630]	231 [9.094]	325 [12.795]	289 [11.378]	250 [9.843]	325 [12.795]
12	286 [11.260]	247 [9.724]	350 [13.780]	305 [12.008]	266 [10.472]	350 [13.780]
13	302 [11.890]	263 [10.354]	350 [13.780]	321 [12.638]	282 [11.102]	350 [13.780]
14	318 [12.520]	279 [10.984]	375 [14.764]	337 [13.268]	298 [11.732]	375 [14.764]
15	334 [13.150]	295 [11.614]	375 [14.764]	353 [13.898]	314 [12.362]	400 [15.748]
16	350 [13.780]	311 [12.244]	400 [15.748]	369 [14.528]	330 [12.992]	400 [15.748]
17	-	-	-	385 [15.157]	346 [13.622]	425 [16.732]


Note: When the J□T or MT piping block specifications is selected.

F15 DIMENSIONS

Dimensions of F15 series easy assembly type manifold plug-in type. mm [in]

F15M [Number of units] **XP** **M** [Pilot specifications] (Base piping specifications)

With manifold outlet port dual use fitting block
Flat cable connector 26-pin specifications

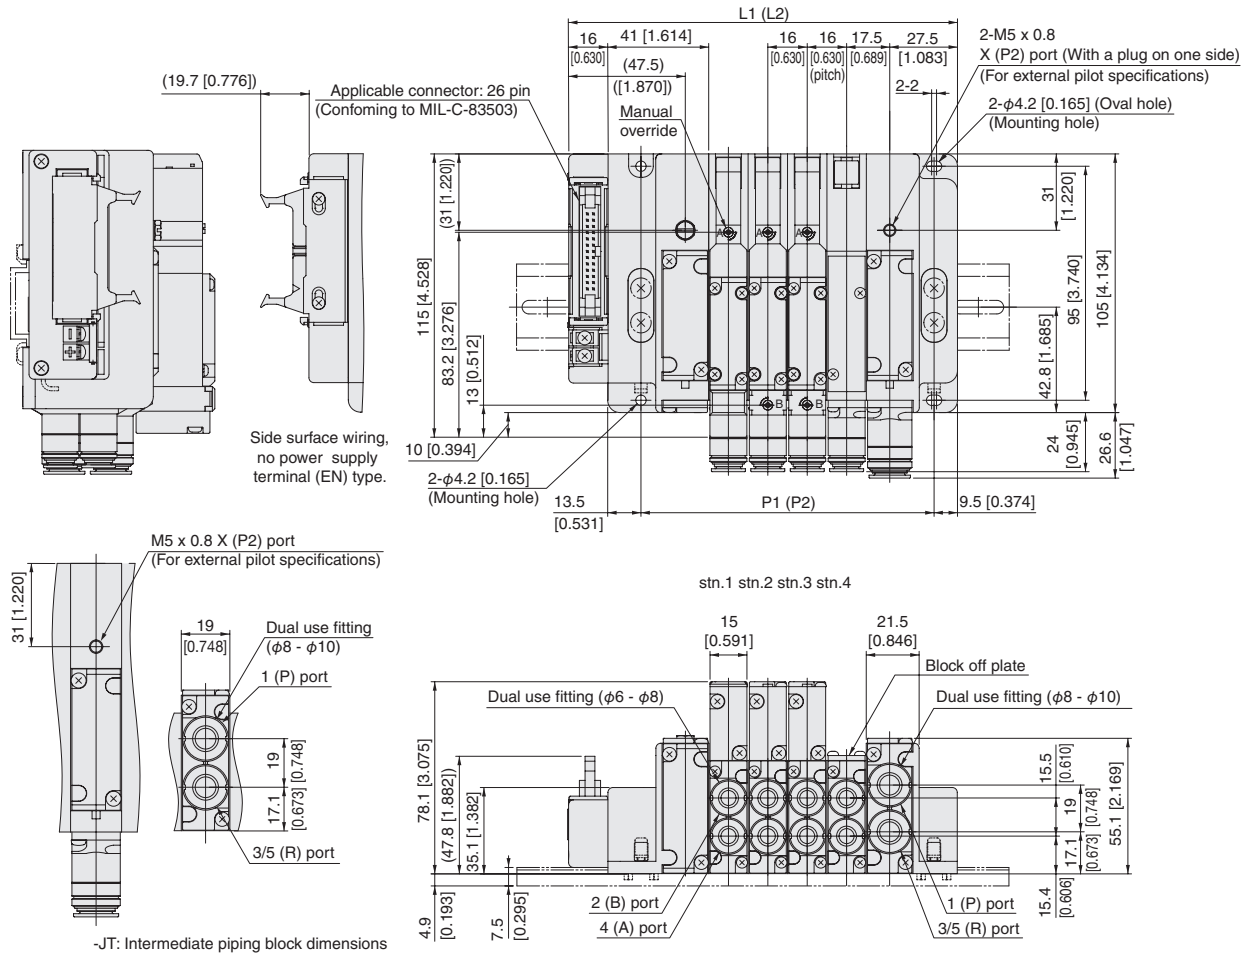

Unit dimensions


Number of units	L1	P1	Length of DIN rail	L2*	P2*	Length of DIN rail <small>Note</small>
2	126 [4.961]	87 [3.425]	175 [6.890]	-	-	-
3	142 [5.591]	103 [4.055]	200 [7.874]	161 [6.339]	122 [4.803]	200 [7.874]
4	158 [6.220]	119 [4.685]	200 [7.874]	177 [6.969]	138 [5.433]	225 [8.858]
5	174 [6.850]	135 [5.315]	225 [8.858]	193 [7.598]	154 [6.063]	225 [8.858]
6	190 [7.480]	151 [5.945]	250 [9.843]	209 [8.228]	170 [6.693]	250 [9.843]
7	206 [8.110]	167 [6.575]	250 [9.843]	225 [8.858]	186 [7.323]	250 [9.843]
8	222 [8.740]	183 [7.205]	275 [10.827]	241 [9.488]	202 [7.953]	275 [10.827]
9	238 [9.370]	199 [7.835]	300 [11.811]	257 [10.118]	218 [8.583]	300 [11.811]
10	254 [10.000]	215 [8.465]	300 [11.811]	273 [10.748]	234 [9.213]	300 [11.811]
11	270 [10.630]	231 [9.094]	325 [12.795]	289 [11.378]	250 [9.843]	325 [12.795]
12	286 [11.260]	247 [9.724]	350 [13.780]	305 [12.008]	266 [10.472]	350 [13.780]
13	302 [11.890]	263 [10.354]	350 [13.780]	321 [12.638]	282 [11.102]	350 [13.780]
14	318 [12.520]	279 [10.984]	375 [14.764]	337 [13.268]	298 [11.732]	375 [14.764]
15	334 [13.150]	295 [11.614]	375 [14.764]	353 [13.898]	314 [12.362]	400 [15.748]
16	350 [13.780]	311 [12.244]	400 [15.748]	369 [14.528]	330 [12.992]	400 [15.748]
17	366 [14.409]	327 [12.874]	425 [16.732]	385 [15.157]	346 [13.622]	425 [16.732]
18	382 [15.039]	343 [13.504]	425 [16.732]	401 [15.787]	362 [14.252]	450 [17.717]
19	398 [15.669]	359 [14.134]	450 [17.717]	417 [16.417]	378 [14.882]	450 [17.717]
20	414 [16.299]	375 [14.764]	475 [18.701]	433 [17.047]	394 [15.512]	475 [18.701]
21	-	-	-	449 [17.677]	410 [16.142]	475 [18.701]

Note: When the J□T or MT piping block specifications is selected.

Dimensions of F15 series easy assembly type manifold plug-in type. mm [in]

F15M Number of units **XP** Pilot specifications (Base piping specifications)

With manifold outlet port dual use fitting block
Flat cable connector 26-pin specifications

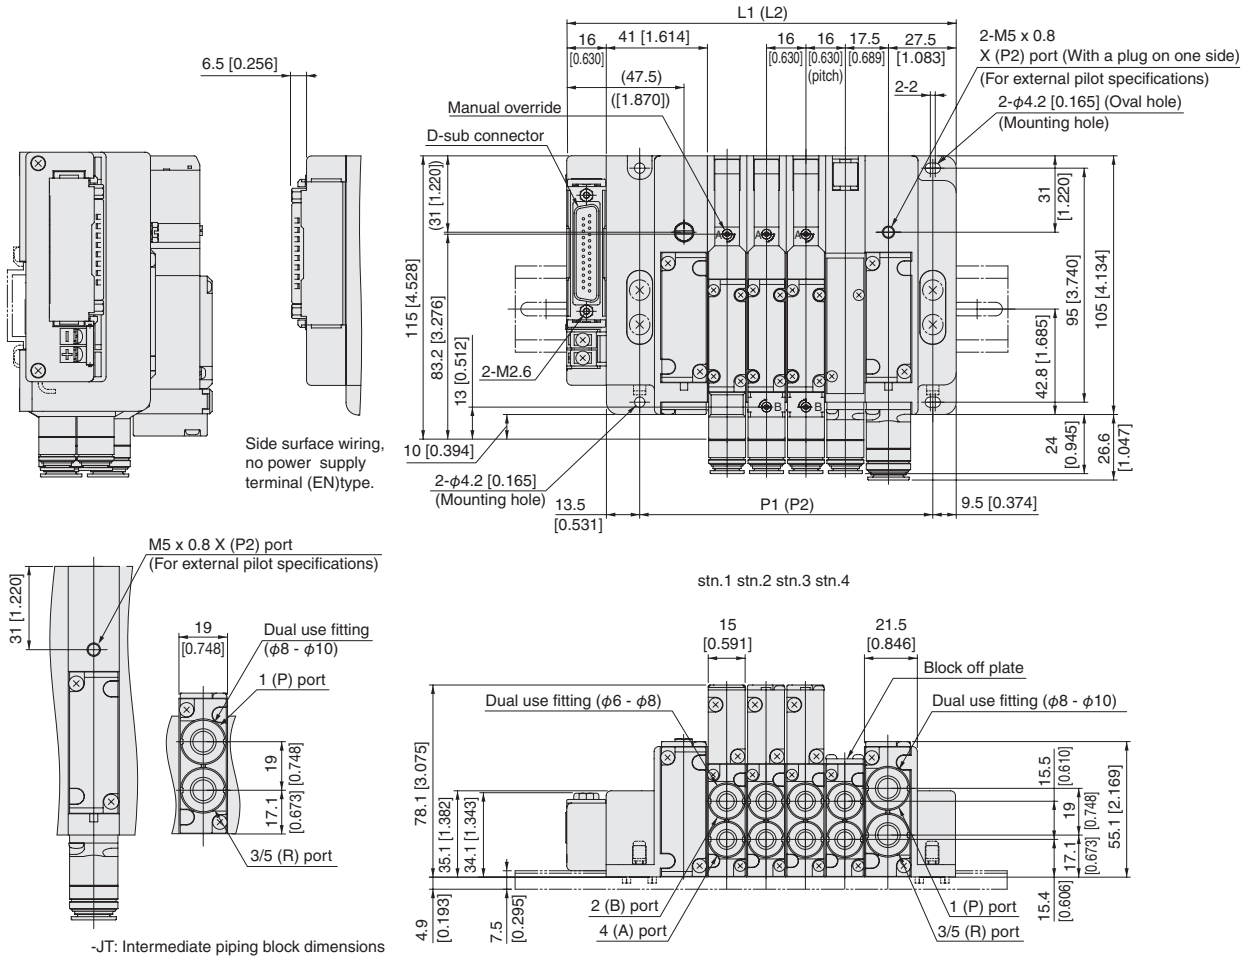

Unit dimensions


Number of units	L1	P1	Length of DIN rail	L2*	P2*	Length of DIN rail <small>Note</small>
2	126 [4.961]	87 [3.425]	175 [6.890]	-	-	-
3	142 [5.591]	103 [4.055]	200 [7.874]	161 [6.339]	122 [4.803]	200 [7.874]
4	158 [6.220]	119 [4.685]	200 [7.874]	177 [6.969]	138 [5.433]	225 [8.858]
5	174 [6.850]	135 [5.315]	225 [8.858]	193 [7.598]	154 [6.063]	225 [8.858]
6	190 [7.480]	151 [5.945]	250 [9.843]	209 [8.228]	170 [6.693]	250 [9.843]
7	206 [8.110]	167 [6.575]	250 [9.843]	225 [8.858]	186 [7.323]	250 [9.843]
8	222 [8.740]	183 [7.205]	275 [10.827]	241 [9.488]	202 [7.953]	275 [10.827]
9	238 [9.370]	199 [7.835]	300 [11.811]	257 [10.118]	218 [8.583]	300 [11.811]
10	254 [10.000]	215 [8.465]	300 [11.811]	273 [10.748]	234 [9.213]	300 [11.811]
11	270 [10.630]	231 [9.094]	325 [12.795]	289 [11.378]	250 [9.843]	325 [12.795]
12	286 [11.260]	247 [9.724]	350 [13.780]	305 [12.008]	266 [10.472]	350 [13.780]
13	302 [11.890]	263 [10.354]	350 [13.780]	321 [12.638]	282 [11.102]	350 [13.780]
14	318 [12.520]	279 [10.984]	375 [14.764]	337 [13.268]	298 [11.732]	375 [14.764]
15	334 [13.150]	295 [11.614]	375 [14.764]	353 [13.898]	314 [12.362]	400 [15.748]
16	350 [13.780]	311 [12.244]	400 [15.748]	369 [14.528]	330 [12.992]	400 [15.748]
17	366 [14.409]	327 [12.874]	425 [16.732]	385 [15.157]	346 [13.622]	425 [16.732]
18	382 [15.039]	343 [13.504]	425 [16.732]	401 [15.787]	362 [14.252]	450 [17.717]
19	398 [15.669]	359 [14.134]	450 [17.717]	417 [16.417]	378 [14.882]	450 [17.717]
20	414 [16.299]	375 [14.764]	475 [18.701]	433 [17.047]	394 [15.512]	475 [18.701]
21	-	-	-	449 [17.677]	410 [16.142]	475 [18.701]

Note: When the J□T or MT piping block specifications is selected.

Dimensions of F15 series easy assembly type manifold plug-in type. mm [in]

F15M Number of units **XP** **M** Pilot specifications (Base piping specifications)

With manifold outlet port dual use fitting blocks
Terminal block type

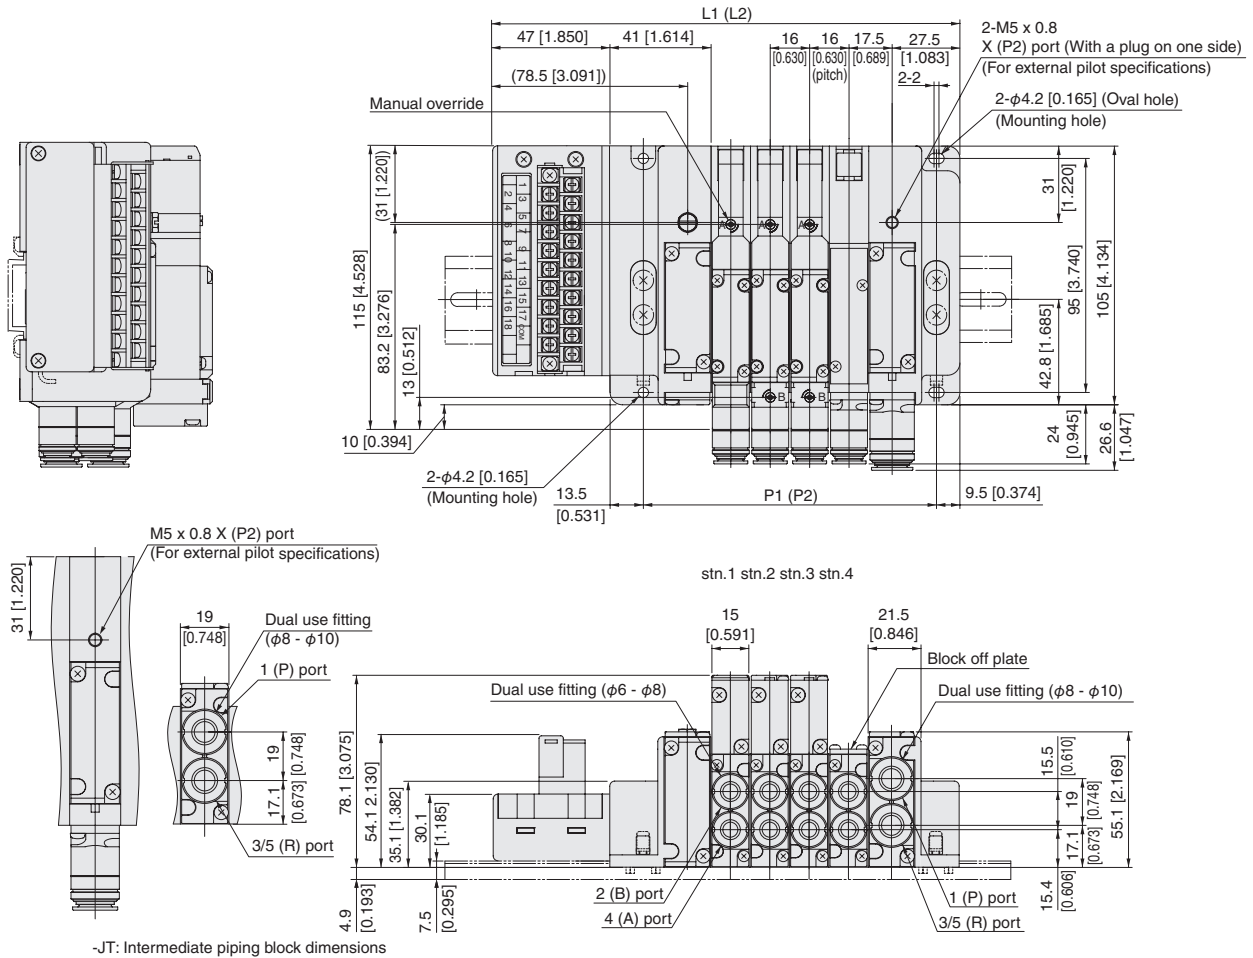

Unit dimensions


Number of units	L1	P1	Length of DIN rail	L2*	P2*	Length of DIN rail <small>Note</small>
2	157 [6.181]	87 [3.425]	200 [7.874]	-	-	-
3	173 [6.811]	103 [4.055]	225 [8.858]	192 [7.559]	122 [4.803]	225 [8.858]
4	189 [7.441]	119 [4.685]	250 [9.843]	208 [8.189]	138 [5.433]	250 [9.843]
5	205 [8.071]	135 [5.315]	250 [9.843]	224 [8.819]	154 [6.063]	250 [9.843]
6	221 [8.701]	151 [5.945]	275 [10.827]	240 [9.449]	170 [6.693]	275 [10.827]
7	237 [9.331]	167 [6.575]	300 [11.811]	256 [10.079]	186 [7.323]	300 [11.811]
8	253 [9.961]	183 [7.205]	300 [11.811]	272 [10.709]	202 [7.953]	300 [11.811]
9	269 [10.591]	199 [7.835]	325 [12.795]	288 [11.339]	218 [8.583]	325 [12.795]
10	285 [11.220]	215 [8.465]	350 [13.780]	304 [11.969]	234 [9.213]	350 [13.780]
11	301 [11.850]	231 [9.094]	350 [13.780]	320 [12.598]	250 [9.843]	350 [13.780]
12	317 [12.480]	247 [9.724]	375 [14.764]	336 [13.228]	266 [10.472]	375 [14.764]
13	333 [13.110]	263 [10.354]	375 [14.764]	352 [13.858]	282 [11.102]	400 [15.748]
14	349 [13.740]	279 [10.984]	400 [15.748]	368 [14.488]	298 [11.732]	400 [15.748]
15	365 [14.370]	295 [11.614]	425 [16.732]	384 [15.118]	314 [12.362]	425 [16.732]
16	381 [15.000]	311 [12.244]	425 [16.732]	400 [15.748]	330 [12.992]	425 [16.732]
17	397 [15.630]	327 [12.874]	450 [17.717]	416 [16.378]	346 [13.622]	450 [17.717]
18	413 [16.260]	343 [13.504]	475 [18.701]	432 [17.008]	362 [14.252]	475 [18.701]
19	-	-	-	448 [17.638]	378 [14.882]	475 [18.701]

Note: When the J□T or MT piping block specifications is selected.

Dimensions of F15 series easy assembly type manifold serial transmission type. mm [in]

F15M Number of units **XS** ^J_M Pilot specifications (Base piping specifications)

With manifold outlet port dual use fitting block
 (Stand alone serial transmission block compatible minifold) *The figure shows CC-Link.

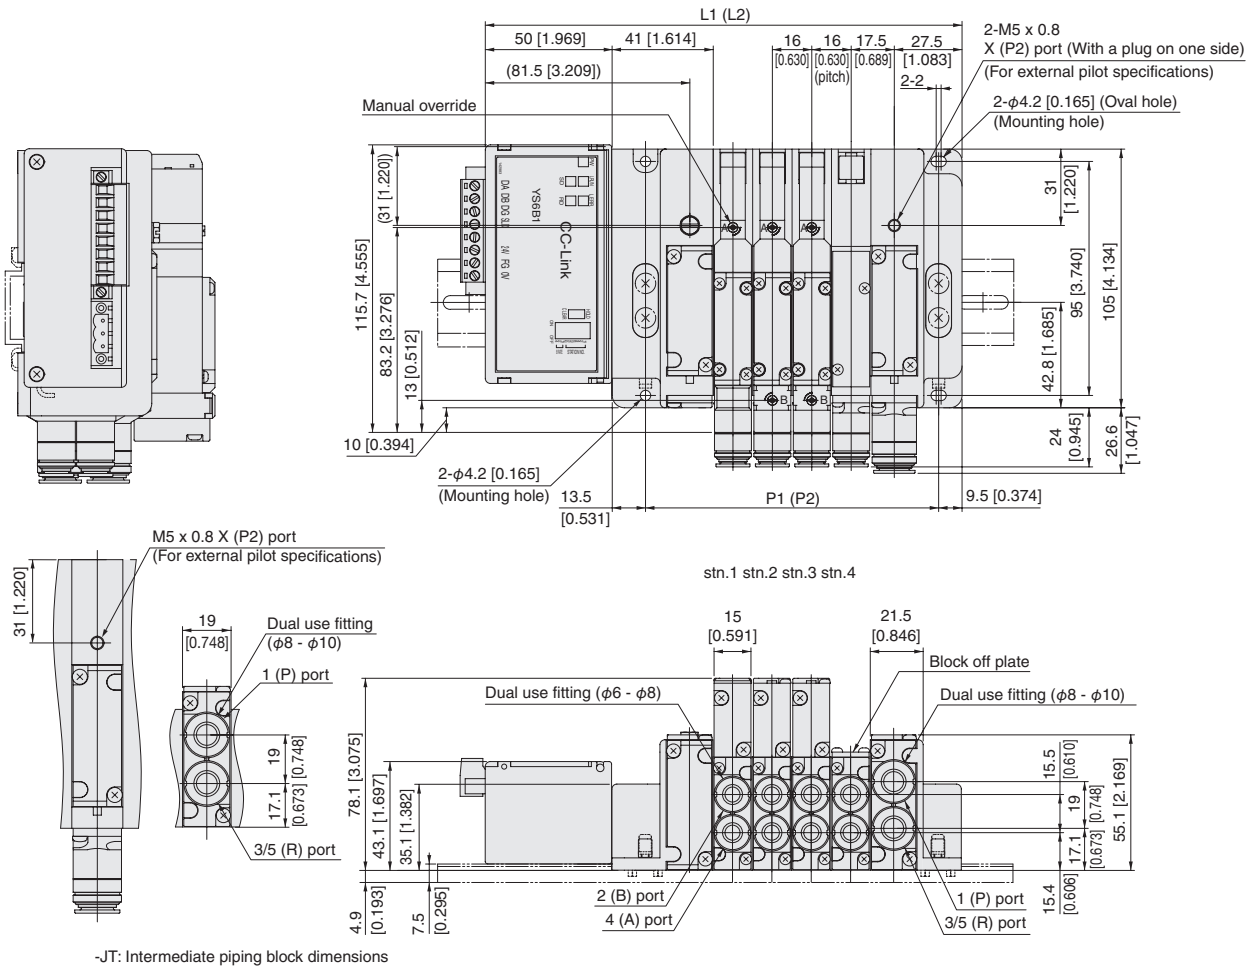

Unit dimensions


Number of units	L1	P1	Length of DIN rail	L2*	P2*	Length of DIN rail <small>Note</small>
2	160 [6.298]	87 [3.425]	225 [8.858]	-	-	-
3	176 [6.929]	103 [4.055]	225 [8.858]	195 [7.677]	122 [4.803]	225 [8.858]
4	192 [7.559]	119 [4.685]	250 [9.843]	211 [8.307]	138 [5.433]	250 [9.843]
5	208 [8.189]	135 [5.315]	250 [9.843]	227 [8.937]	154 [6.063]	275 [10.827]
6	224 [8.819]	151 [5.945]	275 [10.827]	243 [9.567]	170 [6.693]	275 [10.827]
7	240 [9.449]	167 [6.575]	300 [11.811]	259 [10.197]	186 [7.323]	300 [11.811]
8	256 [10.079]	183 [7.205]	300 [11.811]	275 [10.827]	202 [7.953]	300 [11.811]
9	272 [10.709]	199 [7.835]	325 [12.795]	291 [11.457]	218 [8.583]	325 [12.795]
10	288 [11.339]	215 [8.465]	350 [13.780]	307 [12.087]	234 [9.213]	350 [13.780]
11	304 [11.969]	231 [9.094]	350 [13.780]	323 [12.717]	250 [9.843]	350 [13.780]
12	320 [12.599]	247 [9.724]	375 [14.764]	339 [13.346]	266 [10.472]	375 [14.764]
13	336 [13.228]	263 [10.354]	400 [15.748]	355 [13.976]	282 [11.102]	400 [15.748]
14	352 [13.858]	279 [10.984]	400 [15.748]	371 [14.606]	298 [11.732]	400 [15.748]
15	368 [14.488]	295 [11.614]	425 [16.732]	387 [15.236]	314 [12.362]	425 [16.732]
16	384 [15.118]	311 [12.244]	425 [16.732]	403 [15.866]	330 [12.992]	450 [17.717]
17	400 [15.748]	327 [12.874]	450 [17.717]	419 [16.496]	346 [13.622]	450 [17.717]
18	416 [16.378]	343 [13.504]	475 [18.701]	435 [17.126]	362 [14.252]	475 [18.701]
19	432 [17.008]	359 [14.134]	475 [18.701]	451 [17.756]	378 [14.882]	500 [19.685]
20	448 [17.638]	375 [14.764]	500 [19.685]	467 [18.386]	394 [15.512]	500 [19.685]
21	-	-	-	483 [19.016]	410 [16.142]	525 [20.669]

Note: When the J□T or MT piping block specifications is selected.

Dimensions of F15 series easy assembly type manifold serial transmission type. mm [in]

F15M Number of units **XS^M** Pilot specifications (Base piping specifications)

With manifold outlet port dual use fitting block
 <EtherCAT/EtherNet/IP>*The figure shows EtherCat.

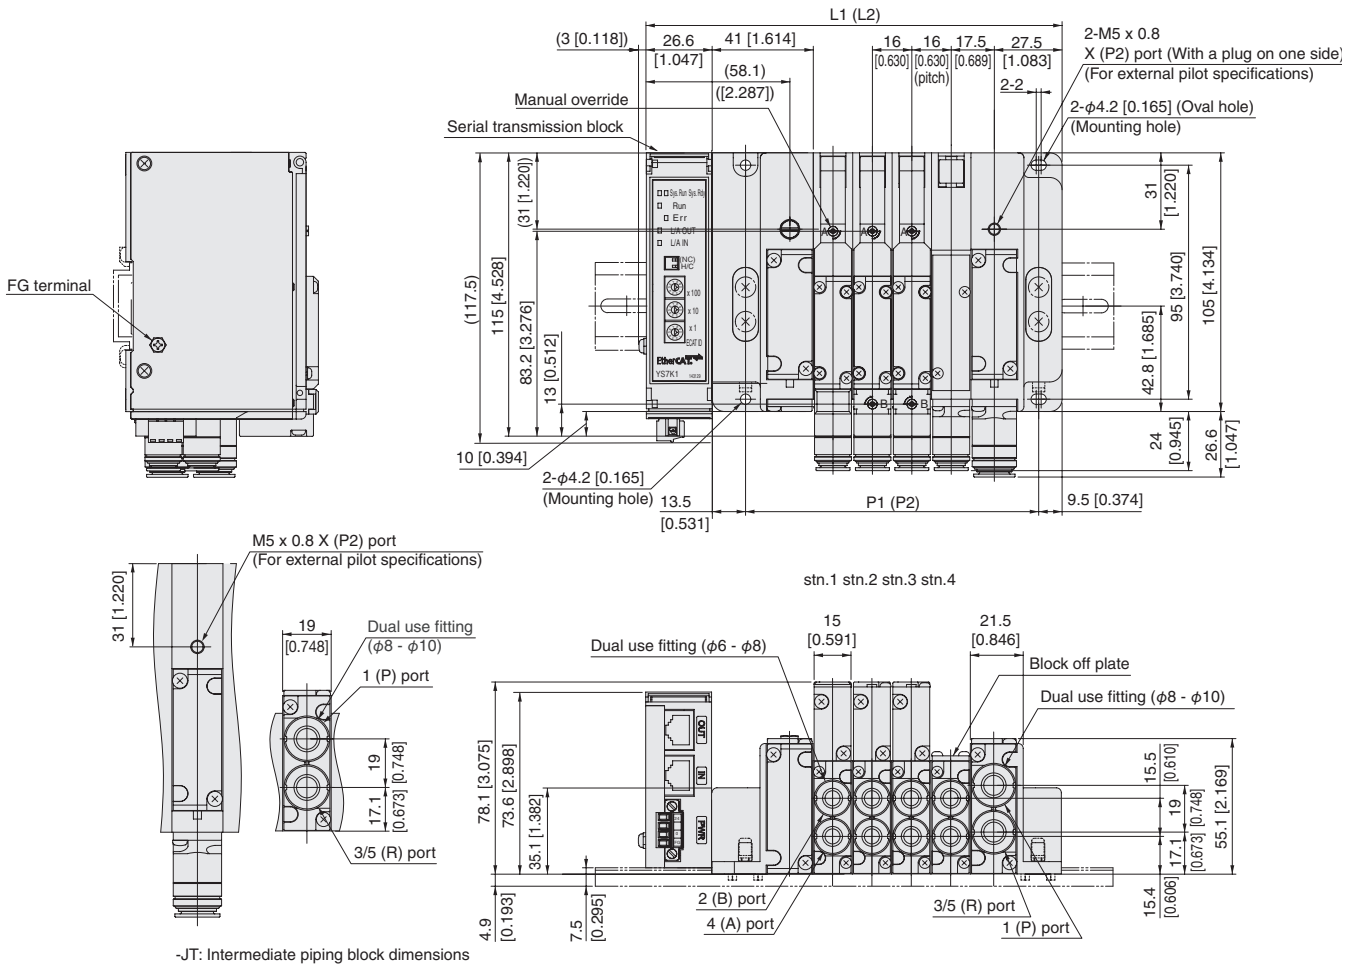

-JT: Intermediate piping block dimensions


Unit dimensions

Number of units	L1	P1	Length of DIN rail	L2*	P2*	Length of DIN rail <small>Note</small>
2	136.6 [5.378]	87 [3.425]	200 [7.874]	-	-	-
3	162.6 [6.008]	103 [4.055]	200 [7.874]	171.6 [6.756]	122 [4.803]	200 [7.874]
4	188.6 [6.638]	119 [4.685]	225 [8.858]	187.6 [7.386]	138 [5.433]	225 [8.858]
5	184.6 [7.268]	135 [5.315]	250 [9.843]	203.6 [8.016]	154 [6.063]	250 [9.843]
6	200.6 [7.898]	151 [5.945]	250 [9.843]	219.6 [8.646]	170 [6.693]	250 [9.843]
7	216.6 [8.528]	167 [6.575]	275 [10.827]	235.6 [9.276]	186 [7.323]	275 [10.827]
8	232.6 [9.157]	183 [7.205]	275 [10.827]	251.6 [9.906]	202 [7.953]	300 [11.811]
9	248.6 [9.787]	199 [7.835]	300 [11.811]	267.6 [10.535]	218 [8.583]	300 [11.811]
10	264.6 [10.417]	215 [8.465]	325 [12.795]	283.6 [11.165]	234 [9.213]	325 [12.795]
11	280.6 [11.047]	231 [9.094]	325 [12.795]	299.6 [11.795]	250 [9.843]	325 [12.795]
12	296.6 [11.677]	247 [9.724]	350 [13.780]	315.6 [12.425]	266 [10.472]	350 [13.780]
13	312.6 [12.307]	263 [10.354]	375 [14.764]	331.6 [13.055]	282 [11.102]	375 [14.764]
14	328.6 [12.937]	279 [10.984]	375 [14.764]	347.6 [13.685]	298 [11.732]	375 [14.764]
15	344.6 [13.567]	295 [11.614]	400 [15.748]	363.6 [14.315]	314 [12.362]	400 [15.748]
16	360.6 [14.197]	311 [12.244]	425 [16.732]	379.6 [14.945]	330 [12.992]	425 [16.732]
17	376.6 [14.827]	327 [12.874]	425 [16.732]	395.6 [15.575]	346 [13.622]	425 [16.732]
18	392.6 [15.457]	343 [13.504]	450 [17.717]	411.6 [16.205]	362 [14.252]	450 [17.717]
19	408.6 [16.087]	359 [14.134]	450 [17.717]	427.6 [16.835]	378 [14.882]	475 [18.701]
20	424.6 [16.717]	375 [14.764]	475 [18.701]	443.6 [17.465]	394 [15.512]	475 [18.701]
21	-	-	-	459.6 [18.094]	410 [16.142]	500 [19.685]



Note: When the J□T or MT piping block specifications is selected.

Additional parts (available separately)

- Muffler: **KM-J10** [for both plug-in and non-plug-in]

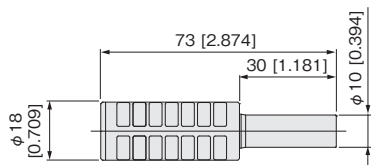

- Muffler: **KM-J8**

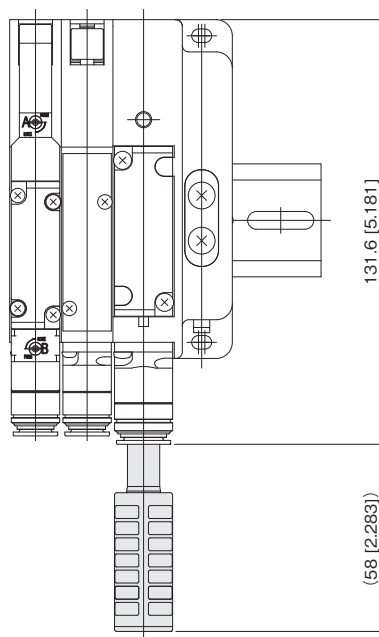

SOLENOID VALVES


F18 SERIES

Contents

Specifications 254

ORDER CODES	Single Valve Unit 259
	Monoblock Manifold A Type (Base Piping Type) 261
	Monoblock Manifold F Type (Direct Piping Type) 263
	Split Manifold Non-plug-in Type 266
	Split Manifold Plug-in Type 270
	Split Manifold Serial Transmission Type 274

DIMENSIONS	Single Valve Unit 278
	Monoblock Manifold A Type 281
	Monoblock Manifold F Type 282
	Split Manifold Non-plug-in Type 283
	Split Manifold Plug-in Type 284
	Split Manifold Serial Transmission Type 287

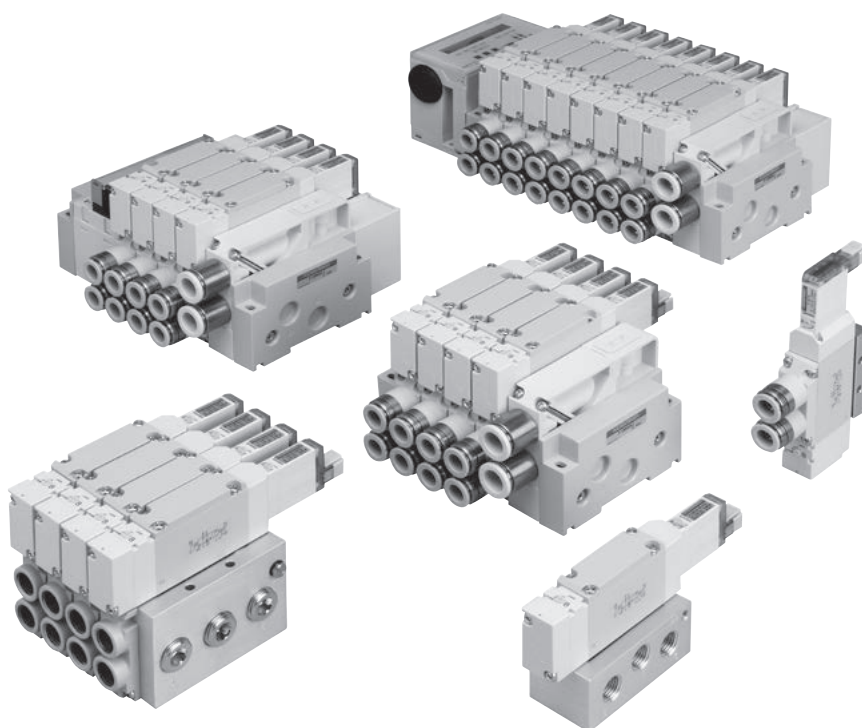

F18 SERIES

F18 SERIES Specifications

Specifications

Basic Models and Valve Functions

Item	Basic model	F18□T0	F18□T1 F18□T2	F18□T3 F18□T4 F18□T5	F18□TA F18□TB F18□TC
	Number of positions	2 positions			3 positions
Number of ports	5				Tandem 3-port
Valve function	Single solenoid only	Both single and double solenoid use		Closed center, Exhaust center, Pressure center	NC/NC, NO/NO, NC/NO

Remark: For the optional specifications and order codes, see p.259.

Specifications

Item	Basic model	F18□T0 F18□T1 F18□T2	F18□T3 F18□T4 F18□T5	F18□TA F18□TB F18□TC	F18□T0G F18□T1G F18□T2G	F18□T3G F18□T4G F18□T5G	F18□T0V F18□T1V F18□T2V	F18□T3V
	Media	Air						
Operation type	Internal pilot type				External pilot type (for positive pressure)		External pilot type (for vacuum)	
Flow rate characteristics	Sonic conductance C dm ³ /(s · bar) ^{Note1}	3.48	3.40	2.54	3.48	3.40	3.48	3.40
	Effective area ^{Note2} mm ² [Cv]	17.4 [0.97]	17 [0.94]	12.7 [0.71]	17.4 [0.97]	17 [0.94]	17.4 [0.97]	17 [0.94]
Port size ^{Note3}	Dual use fitting for φ8 and φ10, Rc1/4, NPT1/4				M5×0.8, 10-32UNF, dual use fitting for φ8 and φ10, Rc1/4, NPT1/4			
Lubrication	Not required							
Operating pressure range	Main valve	0.15~0.7 MPa [22~102 psi.]			0~0.7 MPa [0~102 psi.] ^{Note4}		-100 kPa~0.15 MPa [-29.53 in.Hg~22 psi.]	
	External pilot	—			0.2~0.7 MPa [29~102 psi.] ^{Note4}		0.2~0.7 MPa [29~102 psi.]	
Proof pressure	MPa [psi.]				1.05 [152]			
Response time ^{Note5} ms	12VDC, 24VDC	30/35 (40) or below	20/70 (75) or below	30/55 (60) or below	30/35 (40) or below	20/70 (75) or below	30/35 (40) or below	20/70 (75) or below
	100VAC	30/35 or below	20/70 or below	—	30/35 or below	20/70 or below	30/35 or below	20/70 or below
ON/OFF								
Maximum operating frequency	Hz							
Minimum time to energize for self holding ^{Note6} ms	50	—		50	—		50	—
Operating temperature range (atmosphere and media) °C [°F]	5~50 [41~122]							
Shock resistance	m/s ² [G]							
Mounting direction	Any							

- Notes: 1. For details, see the flow rate characteristics on p.255.
 2. The effective area is a calculated value, and not a measured value.
 3. For details, see the port size on p.255.
 4. When the main valve pressure is 0.2~0.7 MPa [29~102 psi.], set the external pilot pressure to the main valve pressure or higher, and to 0.7 MPa [102 psi.] or less.

- Notes: 5. Values when air pressure is 0.5 MPa [73 psi.]. For switching phase timing in the AC specification, add a maximum of 5 ms to the response time. The values for 2-position valves are those when used as a single solenoid, and the values for 3-position valves are those when switching from the neutral position of closed center. Values in parentheses () are for low-current type.
 6. When used as a double solenoid valve. Excludes T0.

Remark: Specification values are based on Koganei test standards.

Solenoid Specifications

Item	Rated voltage	12VDC	24VDC (Standard type)	24VDC (Low-current type)	100VAC	120VAC	
	Voltage range	V	10.8~13.2 (12±10%)	21.6~26.4 (24±10%)	21.6~26.4 (24±10%)	90~110 (100±10%)	108~132 (120±10%)
Rated frequency	Hz	—	—	—	50 60	50 60	
Standard	Current (when rated voltage is applied) mA (r.m.s)	33	17	—	8	8.3	
	Power consumption	W	0.4	0.4	—	0.8 VA	1 VA
Low-current type	Current (when rated voltage is applied)	Starting	—	17	—	—	
		Holding	—	4.2			
	Power consumption	Starting	—	0.4	—	—	
		Holding	—	0.1			
Starting time (standard)	ms	—	—	70	—	—	
Allowable leakage current	mA	2.0	1.0	1.0	1.0	1.0	
Type of insulation	Type B						
Insulation resistance ^{Note 1}	MΩ	Over 100					
Color of LED indicator ^{Note2}	14(SA) : Red, 12(SB) : Green						
Surge suppression (as standard)	Surge absorption transistor		Flywheel diode		Bridge diode		


Notes: 1. Value at 500VDC megger.

2. The color of the T0 indicator is red only.

Remark: Specification values are based on Koganei test standards.


Cylinder Operating Speed

How to obtain cylinder speed




Measuring conditions


- Air pressure: 0.5 MPa [73 psi.]
- Piping (outer diameter x inner diameter x length) : $\phi 10 \times \phi 7.5 \times 1000$ mm [61 in.]
- Fitting: Quick fitting TS10-02
- Load ratio = $\frac{\text{Load}}{\text{Cylinder theoretical thrust}}$ (%)
- Cylinder stroke: 150 mm [5.91 in.]



Maximum operating speed

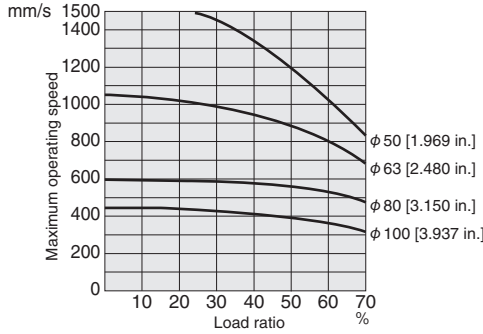


Delay time

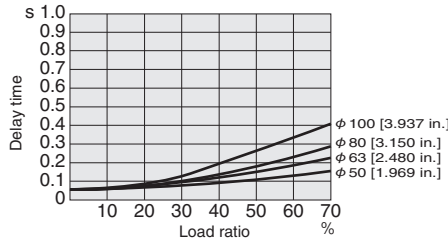

Note: Delay time may vary according to the cylinder stroke.

Flow Rate

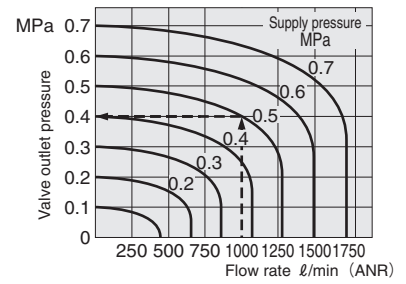

How to read the graph

When the supply pressure is 0.5 MPa [73 psi.] and flow rate is 1000 l/min [35.3 ft.³/min.] (ANR), the valve outlet pressure becomes 0.4 MPa [58 psi.].

- 1 mm/s = 0.0394 in./sec.
- 1 MPa = 145 psi.
- 1 l/min = 0.0353ft.³/min.

Port Size

Description/Piping specification		PR	X (P2)	4 (A), 2 (B)	1 (P), 3 (R2), 5 (R1), 3, 5 (R)
With sub-base		M5×0.8, 10-32UNF	M5×0.8, 10-32UNF	Rc1/4, NPT1/4	Rc1/4, NPT1/4
Single unit	With female thread block	—	—	Rc1/4, NPT1/4	Rc1/4, NPT1/4
	With dual use fitting block	—	—	Dual use fitting for $\phi 8$ and $\phi 10$	Rc1/4, NPT1/4
	With single use fitting block	—	—	$\phi 8$ or $\phi 10$	Rc1/4, NPT1/4
Manifold	Monoblock type with female thread block, and PC board type with female thread block	M5×0.8, 10-32UNF	M5×0.8, 10-32UNF	Rc1/4, NPT1/4	Rc3/8, NPT3/8
	Monoblock type with fitting block, and PC board type with fitting block	M5×0.8, 10-32UNF	M5×0.8, 10-32UNF	Dual use fitting for $\phi 8$ and $\phi 10$	Rc3/8, NPT3/8
	Monoblock type with single use fitting block, and PC board type with single use fitting block	M5×0.8, 10-32UNF	M5×0.8, 10-32UNF	$\phi 8$ or $\phi 10$	Rc3/8, NPT3/8
	Split type with female thread block, and serial transmission type with female thread block	—	M5×0.8, 10-32UNF	Rc1/4, NPT1/4	Rc3/8, NPT3/8
	Split type with fitting block, and serial transmission type with fitting block	—	M5×0.8, 10-32UNF	Dual use fitting for $\phi 8$ and $\phi 10$	Single use fitting for $\phi 12$
	Split type with single use fitting block, and serial transmission type with single use fitting block	—	M5×0.8, 10-32UNF	$\phi 8$ or $\phi 10$	Single use fitting for $\phi 12$

Specifications for DIN Connector (-39□) Type

Specifications

Remark: Specification values are the same as the Standard type, excluding the response time. See page 254.

Item	Basic model	F18T0		F18T3		F18T0G		F18T3G		F18T0V		F18T3V
		F18T2	F18T1	F18T4	F18T5	F18T2G	F18T1G	F18T5G	F18T2V	F18T1V		
Response time ^{Note} ON/OFF	ms	20/30 or below	15/50 or below	20/30 or below	15/50 or below	20/30 or below	15/50 or below	20/30 or below	15/50 or below	20/30 or below	15/50 or below	15/50 or below

Note: Values when air pressure is 0.5 MPa [73 psi.]. For switching phase timing in the AC specification, add a maximum of 5 ms to the response time. The values for 2-position valves are those when used as a single solenoid, and the values for 3-position valves are those when switching from the neutral position of closed center.

Solenoid Specifications for DIN Connector (-39□) Type

Rated voltage		12VDC	24VDC	120VAC		240VAC		
Voltage range		10.8~13.2 (12±10%)	21.6~26.4 (24±10%)	90~132		180~264		
Current	Frequency	—	—	50	60	50	60	
	Starting	—	—	43	38	22	19	
	Holding	140 (1.7W)	75 (1.8W)	29	24	14	12	
Allowable leakage current		mA		4		2		
Insulation resistance ^{Note}		MΩ						Over 100
Surge suppression (as standard)		Surge absorption transistor		Varistor		Varistor		

Note: Value at 500VDC megger.

Remark: Specification values are based on Koganei test standards.

Flow Rate Characteristics

● When used as a single unit

Basic model	1 (P) → 2 (B) / 1 (P) → 4 (A)		2 (B) → 3 (R2) / 4 (A) → 5 (R1)	
	Sonic conductance C dm ³ /(s·bar)	Critical pressure ratio b	Sonic conductance C dm ³ /(s·bar)	Critical pressure ratio b
F18□T0-A2 F18□T1-A2 F18□T2-A2	3.48	0.11	3.42	0.23
F18□T3-A2 F18□T4-A2 F18□T5-A2	3.40	0.25	3.00	0.27
F18□TA-A2 F18□TB-A2 F18□TC-A2	2.53	0.33	2.54	0.34
F18□T0-F3 F18□T1-F3 F18□T2-F3	3.22	0.34	2.52	0.31
F18□T3-F3 F18□T4-F3 F18□T5-F3	3.04	0.35	2.93	0.26
F18□TA-F3 F18□TB-F3 F18□TC-F3	2.40	0.33	2.58	0.22
F18□T0-F4 F18□T1-F4 F18□T2-F4	3.39	0.36	3.27	0.30
F18□T3-F4 F18□T4-F4 F18□T5-F4	3.39	0.30	3.10	0.27
F18□TA-F4 F18□TB-F4 F18□TC-F4	2.52	0.34	2.70	0.31

Basic model	1 (P) → 2 (B) / 1 (P) → 4 (A)		2 (B) → 3 (R2) / 4 (A) → 5 (R1)	
	Sonic conductance C dm ³ /(s·bar)	Critical pressure ratio b	Sonic conductance C dm ³ /(s·bar)	Critical pressure ratio b
F18□T0-F5 F18□T1-F5 F18□T2-F5	3.14	0.41	3.00	0.33
F18□T3-F5 F18□T4-F5 F18□T5-F5	3.17	0.32	3.03	0.24
F18□TA-F5 F18□TB-F5 F18□TC-F5	2.38	0.35	2.61	0.28
F18□T0-F6 F18□T1-F6 F18□T2-F6	3.31	0.34	3.10	0.28
F18□T3-F6 F18□T4-F6 F18□T5-F6	3.21	0.35	3.01	0.25
F18□TA-F6 F18□TB-F6 F18□TC-F6	2.48	0.33	2.62	0.28

● When mounted on a manifold

Manifold type		Monoblock manifold F type F18M□F (FP)		Monoblock manifold A type F18M□A (AP)		Split manifold F18M□N (P) (S)	
		1 (P) → 2 (B) / 1 (P) → 4 (A)	2 (B) → 3 (R2) / 4 (A) → 5 (R1)	1 (P) → 2 (B) / 1 (P) → 4 (A)	2 (B) → 3 (R2) / 4 (A) → 5 (R1)	1 (P) → 2 (B) / 1 (P) → 4 (A)	2 (B) → 3 (R2) / 4 (A) → 5 (R1)
Valve type		Sonic conductance C	dm ³ /(s·bar)	Sonic conductance C	dm ³ /(s·bar)	Sonic conductance C	dm ³ /(s·bar)
F18□T0□ F18□T1□ F18□T2□	Outlet port dual use fitting for φ 8 and φ10 ※These are the cases of φ10.	3.31	3.05	3.03	2.94	3.05	2.99
F18□T3□ F18□T4□ F18□T5□		3.20	2.98	2.92	2.77	2.94	2.69
F18□TA□ F18□TB□ F18□TC□		2.45	2.58	2.41	2.51	2.40	2.32
F18□T0□ F18□T1□ F18□T2□	Outlet port φ8 fitting	3.03	3.02	2.83	2.85	2.86	3.02
F18□T3□ F18□T4□ F18□T5□		2.99	2.96	2.68	2.75	2.80	2.82
F18□TA□ F18□TB□ F18□TC□		2.39	2.56	2.25	2.40	2.38	2.35
F18□T0□ F18□T1□ F18□T2□	Outlet port φ10 fitting	3.15	3.12	2.94	2.96	2.90	3.13
F18□T3□ F18□T4□ F18□T5□		3.14	3.00	2.79	2.85	2.85	2.91
F18□TA□ F18□TB□ F18□TC□		2.43	2.59	2.29	2.49	2.41	2.39

Notes: 1. When the individual air supply spacer or the individual air exhaust spacer, the back pressure prevention valve, or the stop valve is used, sonic conductance decreases by about 30%.

2: For the flow rate characteristics of other outlet ports, consult us.

Remark: Specification values are based on Koganei test standards.

Mass

Single Valve Unit Mass

g [oz.]

F18T□□	F18T□□-A1	F18T□□-A2	F18T□□-FJ	F18T□□-FJ5	F18T□□-FJ6
Outlet portion None	Outlet portion With plate	Outlet portion With plate	Outlet portion With dual use fitting block	Outlet portion With φ8 fitting block	Outlet portion With φ10 fitting block
Inlet portion None	Inlet portion None	Inlet portion With A type sub-base	Inlet portion None	Inlet portion None	Inlet portion None
113 [3.99]	139 [4.90]	303 [10.69]	154 [5.43]	179 [6.31]	188 [6.63]

g [oz.]

F18T□□-FM	F18T□□-F3	F18T□□-F4	F18T□□-F5	F18T□□-F6
Outlet portion With female thread block	Outlet portion With dual use fitting block	Outlet portion With female thread block	Outlet portion With φ8 fitting block	Outlet portion With φ10 fitting block
Inlet portion None	Inlet portion With female thread block	Inlet portion With female thread block	Inlet portion With female thread block	Inlet portion With female thread block
142 [5.01]	179 [6.31]	167 [5.89]	204 [7.20]	213 [7.51]

Basic Type F18T0 is 17 g [0.60 oz.] less than the mass shown above.

Monoblock Manifold Mass (single valve unit included)

g [oz.]

Monoblock manifold	Mass calculation of each unit			
	4(A), 2(B) ports outlet specifications			
	Female thread block	Dual use fitting block	φ8 fitting block	φ10 fitting block
A type	$(329 \times n) + 165$ [(11.61×n) + 5.82]	$(339 \times n) + 165$ [(11.96×n) + 5.82]	$(364 \times n) + 165$ [(12.84×n) + 5.82]	$(373 \times n) + 165$ [(13.16×n) + 5.82]
F type	$(217 \times n) + 70$ [(7.65×n) + 2.47]	$(227 \times n) + 70$ [(8.01×n) + 2.47]	$(252 \times n) + 70$ [(8.89×n) + 2.47]	$(261 \times n) + 70$ [(9.21×n) + 2.47]

Calculation example : F18M8AM

stn.1~stn.8 F18T1-A1-PS DC24V

$(329 \times 8) + 165 = 2797$ g [98.66 oz.]

When mounting a block-off plate, subtract 105 g [3.70 oz.] per unit from the above calculation result for the female thread specification; subtract 115 g [4.06 oz.] for the dual use fitting specification; subtract 140 g [4.94 oz.] for the φ8 fitting specification; and subtract 149 g [5.26 oz.] for the φ10 fitting specification.

When mounting the F18T0 specification valve, subtract 17 g [0.60 oz.] per unit from the above calculation result.

Mass of Split Manifold and Serial Transmission Compatible Manifold

Because the valve and manifold have the same output specifications, their mass is the same. The mass can only be changed by choosing a different type of inlet/outlet block.

Mass of Split Manifold Non-Plug-in Type (single valve unit included)

g [oz.]

Non-plug-in type	Mass calculation of each unit			
	4(A), 2(B) ports outlet specifications			
	Female thread block	Dual use fitting block	φ8 fitting block	φ10 fitting block
	$(236 \times n) + 234$ [(8.33×n) + 8.25]	$(246 \times n) + 234$ [(8.68×n) + 8.25]	$(271 \times n) + 234$ [(9.56×n) + 8.25]	$(280 \times n) + 234$ [(9.88×n) + 8.25]

g [oz.]

Additional mass	
Piping block specification	
Female thread block	Fitting block
164 [5.78]	189 [6.67]

Calculation example : F18M8N-MR

stn.1~stn.8 F18T1-A1-PS DC24V

$(236 \times 8) + 234 + 164 = 2286$ g [80.64 oz.]

When mounting a block-off plate, subtract 105 g [3.70 oz.] per unit from the above calculation result for the female thread specification; subtract 115 g [4.06 oz.] for the dual use fitting specification; subtract 140 g [4.94 oz.] for the φ8 fitting specification; and subtract 149 g [5.26 oz.] for the φ10 fitting specification.

When mounting the F18T0 specification valve, subtract 17 g [0.60 oz.] per unit from the above calculation result.

Mass

Mass of Split Manifold Plug-in Type/ Serial Transmission Compatible Manifold (single valve unit included) g [oz.]

Plug-in type Serial transmission compatible manifold	Mass calculation of each unit			
	4(A), 2(B) ports outlet specifications			
	Female thread block	Dual use fitting block	φ 8 fitting block	φ 10 fitting block
	$(238 \times n) + 238$ [(8.40 × n) + 8.40]	$(248 \times n) + 238$ [(8.75 × n) + 8.40]	$(273 \times n) + 238$ [(9.63 × n) + 8.40]	$(282 \times n) + 238$ [(9.95 × n) + 8.40]

g [oz.]

Additional mass	
Piping block specification	
Female thread block	Fitting block
174 [6.14]	199 [7.02]

g [oz.]

Additional mass			
Wiring block specification			
-F100, -F101	-F200, -F201, -F260	-D250, -D251	-T200
69 [2.43]	71 [2.50]	72 [2.54]	154 [5.43]

Additional mass				
Serial transmission block specification				
Integrated type (for B7A or CompoBus/ S, CC-Link)	Stand-alone type (for CompoNet)	Integrated type (for DeviceNet)	Integrated type (for EtherCAT)	Integrated type (for EtherNet/IP)
160 [5.64]	236 [8.33]	243 [8.57]	205 [7.23]	215 [7.58]

Calculation example : **F18M8PM-MR-F201 DC24V**


























stn.1~stn.8 **F18T1-A1 DC24V**

$(238 \times 8) + 238 + 174 + 71 = 2387$ g [84.20 oz.]

When mounting the block-off plate, subtract 125 g [4.41 oz.] per unit from the above calculation result.

When mounting the **F18□T0** specification valve, subtract 17 g [0.60 oz.] per unit from the above calculation result.

F18 Series Single Valve Unit Order Codes

Valve size	Manual override	Valve outlet type	Wiring specification				
<p>F18 18 mm [0.709 in.] width Standard type</p> <p>F18L 18 mm [0.709 in.] width Low-current type</p>	<p>Manual override button</p>  <p>Blank</p> <p>No protrusion with DIN connector</p> <p>Manual override lever^{Note1}</p>  <p>-R</p> <p>Protruding locking type^{Note9}</p>  <p>-83</p>	<p>Without inlet/outlet block</p>  <p>Blank</p> <p>With outlet port dual use fitting block</p>  <p>-FJ</p> <p>Outlet port fitting φ 8, φ 10</p> <p>With outlet port single use fitting block</p>  <p>-FJ5</p> <p>Outlet port fitting φ 8</p> <p>With outlet port single use fitting block</p>  <p>-FJ6</p> <p>Outlet port fitting φ 10</p> <p>With outlet port female thread block</p>  <p>-FM</p> <p>Outlet port Rc1/4</p> <p>With outlet port female thread block</p>  <p>-FMH</p> <p>Outlet port NPT1/4</p> <p>With A type outlet plate</p>  <p>-A1</p> <p>With A type sub-base</p>  <p>-A2</p> <p>Inlet/outlet port Rc1/4</p> <p>With A type sub-base</p>  <p>-A2H</p> <p>Inlet/outlet port NPT1/4</p>	<p>With outlet port dual use fitting block With inlet port female thread block</p>  <p>-F3</p> <p>Inlet port Rc1/4 Outlet port fitting φ 8, φ 10</p> <p>With outlet port female thread block With inlet port female thread block</p>  <p>-F4</p> <p>Inlet port Rc1/4 Outlet port Rc1/4</p> <p>With outlet port female thread block With inlet port female thread block</p>  <p>-F4H</p> <p>Inlet port NPT1/4 Outlet port NPT1/4</p> <p>With outlet port single use fitting block With inlet port female thread block</p>  <p>-F5</p> <p>Inlet port Rc1/4 Outlet port fitting φ 8</p> <p>With outlet port single use fitting block With inlet port female thread block</p>  <p>-F6</p> <p>Inlet port Rc1/4 Outlet port fitting φ 10</p>	<p>L type plug connector Without connector</p>  <p>Blank</p> <p>S type plug connector Without connector</p>  <p>-PN</p> <p>S type plug connector Lead wire 300 mm[*]</p>  <p>-PS</p> <p>L type plug connector Lead wire 300 mm[*]</p>  <p>-PL</p> <p>S type plug connector Lead wire 3000 mm[*]</p>  <p>-PS3</p> <p>L type plug connector Lead wire 3000 mm[*]</p>  <p>-PL3</p> <p>DIN connector type with indicator^{Note10}</p>  <p>-39L</p> <p>DIN connector type without connector^{Note10}</p>  <p>-39N</p>			
<p>Valve specification</p> <p>T0: 2-position, for single solenoid only T1: 2-position single solenoid specification (for both single and double solenoid use) T2: 2-position double solenoid specification (for both single and double solenoid use) T3: 3-position closed center T4: 3-position exhaust center^{Note4} T5: 3-position pressure center^{Note4} TA: Tandem 3-port (NC and NC)^{Note4} TB: Tandem 3-port (NO and NO)^{Note4} TC: Tandem 3-port (NC and NO)^{Note4}</p>	<p>Operation type</p> <p>Blank Internal pilot type</p> <p>G External pilot type^{Note} (for positive pressure)</p> <p>V External pilot type^{Note} (for vacuum)[*] [*] This is a vacuum valve.</p> <p>Note: When using as a single unit, select -A2 (A type with sub-base) for the valve outlet type. Without a sub-base, piping for the external pilot is not possible.</p>	<p>Valve size</p> <p>Valve specification</p> <p>Operation type</p> <p>IP Specifications</p> <p>Manual override</p> <p>Valve outlet type</p> <p>Wiring specification</p> <p>Voltage</p>	<p>Blank^{Note2}</p> <p>-A1^{Note2}</p> <p>-A2</p> <p>-A2H</p> <p>-FJ^{Note2, 4}</p> <p>-FJ5^{Note2, 4}</p> <p>-FJ6^{Note2, 4}</p> <p>-FM^{Note2, 4}</p> <p>-FMH^{Note2, 4}</p> <p>-F3^{Note3}</p> <p>-F4^{Note3}</p> <p>-F4H^{Note3}</p> <p>-F5^{Note3}</p> <p>-F6^{Note3}</p> <p>Blank</p> <p>-PN</p> <p>-PS</p> <p>-PL</p> <p>-PS3</p> <p>-PL3</p> <p>-39L^{Note10}</p> <p>-39N^{Note10}</p>				
F18	T0 T1 T2 T3 T4 ^{Note4} T5 ^{Note4} TA ^{Note5} TB ^{Note5} TC ^{Note5}	Blank G V	Blank -P ^{Note6}	Blank -R ^{Note1} -83 ^{Note9}	Blank ^{Note2} -A1 ^{Note2} -A2 -A2H -FJ ^{Note2, 4} -FJ5 ^{Note2, 4} -FJ6 ^{Note2, 4} -FM ^{Note2, 4} -FMH ^{Note2, 4} -F3 ^{Note3} -F4 ^{Note3} -F4H ^{Note3} -F5 ^{Note3} -F6 ^{Note3}	Blank -PN -PS -PL -PS3 -PL3 -39L ^{Note10} -39N ^{Note10}	DC24V DC12V ^{Note7} AC100V ^{Note8,11} AC120V AC240V ^{Note9}

Notes: 1. When the valve specification is T1 or T2, the manual override lever is placed only on the A side. This is not available with -39 □ .
 2. Two manifold mounting screws are included.
 3. "With inlet port female thread block" is compatible with the internal pilot type valve only.
 4. Not available in the vacuum valves.
 5. Not available in external pilot type and vacuum valves.
 6. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.
 7. Not available in low-current type.
 8. Not available in low-current type and tandem 3-port valves.
 9. Only for wiring specification -39 □ .
 10. Not available for valve specification T1. In addition, the valve is used only as a double solenoid for T2.
 11. Not available with DIN connectors.
 Remark: Negative common specifications are also available as made to order products (add -129W to the end of order code). For details, consult us.

F18 Series Single Valve Unit Additional Parts Order Codes

● For internal pilot

F18 Z -

Valve size
18: 18 mm
[0.709 in.] width

Parts content

- Z1** : Mounting bracket (mounting bracket, 2 mounting screws)
- Z5** : Sub-base Rc1/4 (sub-base body, gasket, exhaust valve)^{Note1}
- Z5H** : Sub-base NPT1/4 (sub-base body, gasket, exhaust valve)^{Note1}
- P** : Plate (plate, gasket, 2 mounting screws)
- J** : Dual use fitting block (fitting block, gasket, 2 mounting screws)
- J5** : Single use fitting block ϕ 8 (fitting block, gasket, 2 mounting screws)
- J6** : Single use fitting block ϕ 10 (fitting block, gasket, 2 mounting screws)
- M** : Female thread block Rc1/4 (female thread block, gasket, 2 mounting screws)
- MH** : Female thread block NPT1/4 (female thread block, gasket, 2 mounting screws)
- MP** : P port female thread block Rc1/4 (P port female thread block, gasket)^{Note1}
- MPH** : P port female thread block NPT1/4 (P port female thread block, gasket)^{Note1}
- MPP** : IP dedicated P port female thread block (P port female thread block, gasket)
- GS1** : Gasket (gasket, exhaust valve)^{Note2}

Notes: 1. Valve mounting screws are not included.
2. Caution should be exercised as this gasket is different from the **GS2** gasket for the split-type manifolds.

● For external pilot

F18 Z -

Valve size
18: 18 mm
[0.709 in.] width

Parts content

- P** : Plate (plate, gasket, 2 mounting screws)
- J** : Dual use fitting block (fitting block, gasket, 2 mounting screws)
- J5** : Single use fitting block ϕ 8 (fitting block, gasket, 2 mounting screws)
- J6** : Single use fitting block ϕ 10 (fitting block, gasket, 2 mounting screws)
- M** : Female thread block Rc1/4 (female thread block, gasket, 2 mounting screws)
- MH** : Female thread block NPT1/4 (female thread block, gasket, 2 mounting screws)
- GS1** : Gasket (gasket, exhaust valve)^{Note}

Note: Caution should be exercised as this gasket is different from the **GS2** gasket for the split type manifolds.

Sub-base for external pilot

F18 ZG - 25 (Sub-base Rc1/4)

F18 ZG - 25H (Sub-base NPT1/4)

Connector-related order codes

JAZ - -

Valve specification
For T1, T2, T3, T4, T5, TA, TB, TC

UL compatible type ^{Note1}
Blank: -
UR : UL certified product

- #### Connector specification
- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, white, for total of 3 lead wires)
 - CP3** : Connector, lead wire length 3000 mm [118 in.] (black, red, white, for total of 3 lead wires)
 - CPN** : Connector without lead wire (1 short bar and 3 contacts included)

Remarks: A connector for negative common is also available. See p. 19 for details. (UR is unsupported)
Notes: 1. The lead wire thickness is 24AWG when Blank or 22AWG when UR is specified.

JAZ0 - -

Valve specification
For T0

UL compatible type ^{Note1}
Blank: -
UR : UL certified product

- #### Connector specification
- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, for total of 2 lead wires)
 - CP3** : Connector, lead wire length 3000 mm [118 in.] (black, red, for total of 2 lead wires)
 - CPN** : Connector without lead wire (1 short bar, 2 contacts included)

FZ -

Valve specification
For T1, T2, T3, T4, T5, TA, TB, TC

- #### Connector specification
- CC1.5** : Cabtyre cable length 1500 mm [59 in.]^{*}
 - CC3** : Cabtyre cable length 3000 mm [118 in.]^{*}

^{*} For details, see p. 22.

Connector-related order codes

JAZ - P - (for double use only)

Valve specification
For T2, T3, T4, T5, TA, TB, or TC

Connector specification

- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, white, for total of 3 lead wires)
 - CP3** : Connector, lead wire length 3000 mm [118 in.] (black, red, white, for total of 3 lead wires)
 - PA** : Positive common A type, lead wire length 300 mm [11.8 in.]^{*}
 - PA3** : Positive common A type, lead wire length 3000 mm [118 in.]^{*}
 - PB** : Positive common B type, lead wire length 300 mm [11.8 in.]^{*}
 - PB3** : Positive common B type, lead wire length 3000 mm [118 in.]^{*}
 - PC** : Positive common C type, lead wire length 300 mm [11.8 in.]^{*}
 - PC3** : Positive common C type, lead wire length 3000 mm [118 in.]^{*}
- ^{*}A common connector assembly.

IP specification

JAZ0 - P - (for single use only)

Valve specification
For T0/T1

Connector specification

- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, for total of 2 lead wires)
 - CP3** : Connector, lead wire length 3000 mm [118 in.] (black, red, for total of 2 lead wires)
 - PA** : Positive common A type, lead wire length 300 mm [11.8 in.]^{*}
 - PA3** : Positive common A type, lead wire length 3000 mm [118 in.]^{*}
 - PB** : Positive common B type, lead wire length 300 mm [11.8 in.]^{*}
 - PB3** : Positive common B type, lead wire length 3000 mm [118 in.]^{*}
 - PC** : Positive common C type, lead wire length 300 mm [11.8 in.]^{*}
 - PC3** : Positive common C type, lead wire length 3000 mm [118 in.]^{*}
- ^{*}A common connector assembly.

- Notes:
1. When the valve specification is **T1**, select the **JAZ0-P-** single dedicated type.
 2. When switching between the single and double type (**T1/T2**), purchase and use a dedicated connector for single or double use (the number of seal holes in the lead wire differs for the single and double type).
 3. There is no white lead wire for the **JAZ0-P-**.
 4. It is necessary to disassemble the connector to add a common connector assembly. Contact your nearest KOGANEI sales office.
 5. For information on use in locations/atmospheres subject to substances other than water, such as organic solvents, cutting oil, or reagents, contact your nearest KOGANEI sales office.
 6. For information on replacing the waterproof seal, contact your nearest KOGANEI sales office.

F18 Series Monoblock Manifold A Type (Base Piping Type) Order Codes


Valve size

F18M

18 mm [0.709 in.] width


Manifold outlet specification

With dual use fitting blocks (base piping type)




Outlet port fitting $\phi 8, \phi 10$

With selectable fittings (base piping type)



Outlet port should be selected in accordance with the manifold fitting specification.

With female thread blocks (base piping type)



Outlet port female thread Rc1/4

Valve specification

- T0 : 2-position, for single solenoid only
- T1 : 2-position, single solenoid specification
- T2 : 2-position, double solenoid specification
- T3 : 3-position, closed center
- T4 : 3-position, exhaust center^{Note6}
- T5 : 3-position, pressure center^{Note6}

Pilot specification

Blank

Internal pilot manifold

G

External pilot manifold

Operation type

Blank

Internal pilot type^{Note4}

G

External pilot type^{Note5} (for positive pressure)

V

External pilot type^{Note5} (for vacuum)
 ※ This is a vacuum valve.
 Note: Cannot be mounted together with a positive pressure valve.


Manual override

Manual override button




No protrusion with DIN connector

Manual override lever^{Note2}




Protruding locking type^{Note12}




Valve outlet type

With plate^{Note3} (base piping type)



Wiring specification

L type plug connector
Without connector




S type plug connector
Without connector



S type plug connector
Lead wire 300 mm^{*}



L type plug connector
Lead wire 300 mm^{*}




S type plug connector
Lead wire 3000 mm^{*}




L type plug connector
Lead wire 3000 mm^{*}




Pre-wired positive common terminal
S type plug connector
Lead wire 300 mm^{*}




Pre-wired positive common terminal
L type plug connector
Lead wire 300 mm^{*}



Pre-wired positive common terminal
S type plug connector
Lead wire 3000 mm^{*}




Pre-wired positive common terminal
L type plug connector
Lead wire 3000 mm^{*}



DIN connector type with indicator^{Note13}



DIN connector type without connector^{Note13}



Individual air supply and exhaust spacer

- Blank : No spacer
- NP8 : Individual air supply spacer (with $\phi 8$ fitting)^{Note11}
- NP0 : Individual air supply spacer (with $\phi 10$ fitting)^{Note11}
- NR8 : Individual exhaust spacer (with $\phi 8$ fitting)^{Note11}
- NR0 : Individual exhaust spacer (with $\phi 10$ fitting)^{Note11}

For details, see p. 26.

Manifold fitting specification

- J5 With single use $\phi 8$ fitting block^{Note9} (base piping type)
- J6 With single use $\phi 10$ fitting block^{Note9} (base piping type)
- MH With female thread NPT1/4 block^{Note15} (base piping type)

※ 300 mm = 11.8 in.
3000 mm = 118 in.

Valve size	Valve units	Manifold type	Manifold outlet specification	Pilot specification	Station	Valve size	Valve specification	Operation type	Manual override	Valve outlet type	Wiring specification	Manifold fitting specification	Individual air supply and exhaust spacer	Voltage
Manifold model		Mounting valve model												
F18M	2 : 20	A	J M	Blank G	stn. 1 : : stn. □ Note1	F18 F18L	T0 T1 T2 T3 T4 ^{Note6} T5 ^{Note6} TA ^{Note7} TB ^{Note7} TC ^{Note7}	Blank ^{Note4} G ^{Note5} V ^{Note5}	Blank -R ^{Note2}	-A1 Note3	Blank -PN -PS -PL -PS3 -PL3 -CPS -CPL -CPS3 -CPL3		Blank -NP8 ^{Note16} -NP0 ^{Note16} -NR8 ^{Note16} -NR0 ^{Note16}	DC24V DC12V AC100V
		A AH	L	Blank G	stn. 1 : : stn. □ Note1	F18 F18L	T0 T1 T2 T3 T4 ^{Note6} T5 ^{Note6} TA ^{Note7} TB ^{Note7} TC ^{Note7}	Blank ^{Note4} G ^{Note5} V ^{Note5}	Blank -R ^{Note2} -83 ^{Note7}	-A1 Note3	Blank -PN -PS -PL -PS3 -PL3 -CPS -CPL -CPS3 -CPL3 -39L ^{Note13} -39N ^{Note13}	-J5 ^{Note9} -J6 ^{Note9} -MH ^{Note15}	Blank -NP8 ^{Note16} -NP0 ^{Note16} -NR8 ^{Note16} -NR0 ^{Note16}	DC24V DC12V AC100V AC120V AC240V ^{Note12}
											BP (for block-off plate)			
											BP (for block-off plate)			

Notes: 1. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
 2. When the valve specification is T1 or T2, the manual override lever is placed only on the A side. This is not available with -39□.
 3. Always enter -A1.
 4. Cannot be mounted on the external pilot manifold.
 5. Cannot be mounted on the internal pilot manifold.
 6. Not available in the vacuum valves.
 7. Not available in external pilot type and vacuum valves.
 8. Not available in low-current type.
 9. Not available in the low current type and tandem 3-port valves.
 10. The -P□ (including when Blank) and -CP□ wiring specifications cannot be mixed.

11. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.
 12. Only for wiring specification -39□.
 13. Not available for valve specification T1. In addition, the valve is used only as a double solenoid for T2.
 14. Can be selected only when the manifold type is A.
 15. Can be selected only when the manifold type is AH.
 16. Not available with DIN connectors (-39□).

Remark: Negative common specifications are also available as made to order products (add -129W to the ends of the valve and manifold model order codes). For details, consult us.

F18 Series Monoblock Manifold A Type Additional Parts Order Codes

Gasket (gasket and exhaust valve)

F18 Z - GS1

Valve size
18: 18 mm
[0.709 in.] width

Block-off plate (block-off plate and 2 mounting screws)

F18 BP

Valve size
18: 18 mm
[0.709 in.] width

Connector-related order codes

FZ -

Valve specification
Blank: For T1, T2,
T3, T4, T5
0: For T0


Connector specification
CP : Connector, lead wire length 300 mm [11.8 in.]
CP3 : Connector, lead wire length 3000 mm [118 in.]
CLN : Connector without lead wire (short bar and contacts included)
PA : Positive common A type, lead wire length 300 mm [11.8 in.]
PA3 : Positive common A type, lead wire length 3000 mm [118 in.]
PB : Positive common B type, lead wire length 300 mm [11.8 in.]
PB3 : Positive common B type, lead wire length 3000 mm [118 in.]
PC : Positive common C type, lead wire length 300 mm [11.8 in.]
PC3 : Positive common C type, lead wire length 3000 mm [118 in.]
CC1.5 : Cabtyre cable, length 1500 mm [59 in.]
CC3 : Cabtyre cable, length 3000 mm [118 in.]

※ For details, see p. 19.


Note: Not available for T0

Common connector assembly


A type: FZ-PA ※



B type: FZ-PB ※



C type: FZ-PC ※



※ Lead wire length Blank: 300 mm [11.8 in.]
3: 3000 mm [118 in.]

Note: White lead wire is not available for FZ0-P .

Manifold Order Code Example

(6 units of F18 Series)

F18M6AL

stn.1~2 F18T0-A1-PS-J5 DC24V
stn.3~5 F18T2-A1-PS-J6 DC24V
stn.6 F18BP-J6

Precautions for Order Codes

Manifold outlet specification

Select from among “dual use fitting blocks”, “with female thread blocks” or “with selectable fittings.” For repair or replacement, purchase the single valve unit additional parts, F18Z-J (dual use fitting block), F18Z-J (single use fitting block), or F18Z-M (female thread block), on p. 260.

Orders for valves only

Place orders from “F18 Series Single Valve Unit Order Codes” on p. 259. Note, however, that the only available valve outlet type is A1. In addition, for common terminal wiring connections, order the common connector assemblies listed above separately.

Individual air supply and exhaust spacer

(Spacer for non-plug-in type, gasket, exhaust valve, and 2 mounting screws)

F18 Z -

Valve size
18: 18 mm
[0.709 in.] width

Specification
NP8 : Individual air supply spacer (with ϕ 8 fitting)
NP0 : Individual air supply spacer (with ϕ 10 fitting)
NR8 : Individual exhaust spacer (with ϕ 8 fitting)
NR0 : Individual exhaust spacer (with ϕ 10 fitting)

※ For details, see p. 26.

※ Not available with DIN connectors (-39).

Muffler

KM - J

Fitting size

8: Outer diameter ϕ 8 (for individual exhaust spacer)
10: Outer diameter ϕ 10 (for individual exhaust spacer)
(Sales unit: Set of 10 mufflers)

Connector-related order codes

JAZ - P - (for double use only)

Valve specification
For T2, T3, T4,
T5, TA, TB, or
TC

IP specification

Connector specification

CP : Connector, lead wire length 300 mm [11.8 in.] (black, red, white, for total of 3 lead wires)
CP3 : Connector, lead wire length 3000 mm [118 in.] (black, red, white, for total of 3 lead wires)
PA : Positive common A type, lead wire length 300 mm [11.8 in.]
PA3 : Positive common A type, lead wire length 3000 mm [118 in.]
PB : Positive common B type, lead wire length 300 mm [11.8 in.]
PB3 : Positive common B type, lead wire length 3000 mm [118 in.]
PC : Positive common C type, lead wire length 300 mm [11.8 in.]
PC3 : Positive common C type, lead wire length 3000 mm [118 in.]
 ※A common connector assembly.

Notes: 1. When the valve specification is T1, select the JAZ0-P- single dedicated type.

2. When switching between the single and double type (T1/T2), purchase and use a dedicated connector for single or double use (the number of seal holes in the lead wire differs for the single and double type).

3. There is no white lead wire for the JAZ0-P- .

4. It is necessary to disassemble the connector to add a common connector assembly. Contact your nearest KOGANEI sales office.

5. For information on use in locations/atmospheres subject to substances other than water, such as organic solvents, cutting oil, or reagents, contact your nearest KOGANEI sales office.

6. For information on replacing the waterproof seal, contact your nearest KOGANEI sales office.

JAZ0 - P - (for single use only)

Valve specification
For T0/T1

IP specification

Connector specification

CP : Connector, lead wire length 300 mm [11.8 in.] (black, red, for total of 2 lead wires)
CP3 : Connector, lead wire length 3000 mm [118 in.] (black, red, for total of 2 lead wires)
PA : Positive common A type, lead wire length 300 mm [11.8 in.]
PA3 : Positive common A type, lead wire length 3000 mm [118 in.]
PB : Positive common B type, lead wire length 300 mm [11.8 in.]
PB3 : Positive common B type, lead wire length 3000 mm [118 in.]
PC : Positive common C type, lead wire length 300 mm [11.8 in.]
PC3 : Positive common C type, lead wire length 3000 mm [118 in.]
 ※A common connector assembly.

F18 Series Monoblock Manifold F Type (Direct Piping Type) Order Codes

Valve size

F18M

18 mm [0.709 in.] width

Valve specification

- T0: 2-position, for single solenoid only
- T1: 2-position, single solenoid specification
- T2: 2-position, double solenoid specification
- T3: 3-position, closed center
- T4: 3-position, exhaust center
- T5: 3-position, pressure center
- TA: Tandem 3-port (NC and NC)
- TB: Tandem 3-port (NO and NO)
- TC: Tandem 3-port (NC and NO)

Manual override


Manual override button



Blank


No protrusion with DIN connector

Manual override lever^{Note2}



-R

Protruding locking type^{Note7}



-83

Valve outlet type

- FJ** With dual use ϕ 8, ϕ 10 fitting block^{Note5} (direct piping type)
- FJ5** With single use ϕ 8 fitting block^{Note5} (direct piping type)
- FJ6** With single use ϕ 10 fitting block^{Note5} (direct piping type)
- FM** With Rc1/4 female thread block^{Note5} (direct piping type)
- FMH** With NPT1/4 female thread block^{Note10} (direct piping type)


Wiring specification

L type plug connector
Without connector




Blank

S type plug connector
Without connector




-PN

S type plug connector
Lead wire 300 mm*



-PS

L type plug connector
Lead wire 300 mm*




-PL

S type plug connector
Lead wire 3000 mm*




-PS3

L type plug connector
Lead wire 3000 mm*



-PL3

Pre-wired positive common terminal
S type plug connector
Lead wire 300 mm*



-CPS

DIN connector type
with indicator^{Note8}




-39L

DIN connector type
without connector^{Note8}


-39N

Pre-wired positive common terminal
L type plug connector
Lead wire 300 mm*




-CPL

Pre-wired positive common terminal
S type plug connector
Lead wire 3000 mm*



-CPS3

Pre-wired positive common terminal
L type plug connector
Lead wire 3000 mm*



-CPL3

* 300 mm = 11.8 in.
3000 mm = 118 in.

Individual air supply and exhaust spacer

- Blank : No spacer
 - NP8 : Individual air supply spacer (with ϕ 8 fitting)^{Note11}
 - NP0 : Individual air supply spacer (with ϕ 10 fitting)^{Note11}
 - NR8 : Individual exhaust spacer (with ϕ 8 fitting)^{Note11}
 - NR0 : Individual exhaust spacer (with ϕ 10 fitting)^{Note11}
- For details, see p. 26.

Valve size	Valve units	Manifold type	Station	Valve size	Valve specification	IP specification	Manual override	Valve outlet type	Wiring specification	Individual air supply and exhaust spacer	Voltage	
Manifold model			Mounting valve model									
F18M	2 ⋮ 20	F FH	stn. 1 ⋮ stn. □ <small>Note1</small>	F18	T0 T3 T1 T4 T2 T5	Blank -P ^{Note7}	Blank -R ^{Note2} -83 ^{Note3}	-FJ ^{Note9} -FJ5 ^{Note9} -FJ6 ^{Note9} -FM ^{Note9} -FMH ^{Note10}	Blank -PN -PS -PL -PS3 -PL3	-CPS -CPL -CPS3 -CPL3 -39L ^{Note8} -39N ^{Note8}	Blank -NP8 ^{Note11} -NP0 ^{Note11} -NR8 ^{Note11} -NR0 ^{Note11}	DC24V DC12V AC100V ^{Note11} AC120V AC240V ^{Note7}
BP (for block-off plate)												

Notes: 1. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
2. When the valve specification is T1 or T2, the manual override lever is placed only on the A side. This is not available with -39□.
3. Not available in low-current type.
4. Not available in low-current type and tandem 3-port valves.
5. The -P □ (including when Blank) and -CP □ wiring specifications cannot be mixed.
6. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.

7. Only for wiring specification -39□.
8. Not available for valve specification T1. In addition, the valve is used only as a double solenoid for T2.
9. Can be selected only when the manifold type is F.
10. Can be selected only when the manifold type is FH.
11. Not available with DIN connectors (-39□).
Remarks: 1. The external pilot valve cannot be mounted on the F type manifold.
2. Negative common specifications are also available as made to order products (add -129W to the ends of the valve and manifold model order codes). For details, consult us.

F18 ORDER CODES

F18 Series Monoblock Manifold F Type Additional Parts Order Codes

Gasket (gasket and exhaust valve)

F18 Z - GS1

Valve size
18: 18 mm
[0.709 in.] width

Block-off plate (block-off plate and 2 mounting screws)

F18 BP

Valve size
18: 18 mm
[0.709 in.] width

Connector-related order codes

FZ -

Valve specification
Blank: For T1, T2, T3, T4, T5
0: For T0


Connector specification
CP : Connector, lead wire length 300 mm [11.8 in.]
CP3 : Connector, lead wire length 3000 mm [118 in.]
CLN : Connector without lead wire (short bar and contacts included)
PA : Positive common A type, lead wire length 300 mm [11.8 in.]
PA3 : Positive common A type, lead wire length 3000 mm [118 in.]
PB : Positive common B type, lead wire length 300 mm [11.8 in.]
PB3 : Positive common B type, lead wire length 3000 mm [118 in.]
PC : Positive common C type, lead wire length 300 mm [11.8 in.]
PC3 : Positive common C type, lead wire length 3000 mm [118 in.]
CC1.5 : Cabtyre cable, length 1500 mm [59 in.]
CC3 : Cabtyre cable, length 3000 mm [118 in.]

※ For details, see p. 19.


Note: Not available for T0

Common connector assembly


A type: FZ-PA ※



B type: FZ-PB ※



C type: FZ-PC ※



※ Lead wire length Blank: 300 mm [11.8 in.]
3: 3000 mm [118 in.]

Note: White lead wire is not available for FZ0-P .

Individual air supply and exhaust spacer (Spacer for non-plug-in type, gasket, exhaust valve, and 2 mounting screws)

F18 Z -

Valve size
18: 18 mm
[0.709 in.] width

Specification
NP8 : Individual air supply spacer (with ϕ 8 fitting)
NP0 : Individual air supply spacer (with ϕ 10 fitting)
NR8 : Individual exhaust spacer (with ϕ 8 fitting)
NR0 : Individual exhaust spacer (with ϕ 10 fitting)

※ For details, see p. 26.

※ Not available with DIN connectors (-39).

Muffler

KM - J

Fitting size

8: Outer diameter ϕ 8 (for individual exhaust spacer)
10: Outer diameter ϕ 10 (for individual exhaust spacer)
(Sales unit: Set of 10 mufflers)

Connector-related order codes

JAZ - P - (for double use only)

Valve specification
For T2, T3, T4, T5, TA, TB, or TC

IP specification

Connector specification
CP : Connector, lead wire length 300 mm [11.8 in.] (black, red, white, for total of 3 lead wires)
CP3 : Connector, lead wire length 3000 mm [118 in.] (black, red, white, for total of 3 lead wires)
PA : Positive common A type, lead wire length 300 mm [11.8 in.]
PA3 : Positive common A type, lead wire length 3000 mm [118 in.]
PB : Positive common B type, lead wire length 300 mm [11.8 in.]
PB3 : Positive common B type, lead wire length 3000 mm [118 in.]
PC : Positive common C type, lead wire length 300 mm [11.8 in.]
PC3 : Positive common C type, lead wire length 3000 mm [118 in.]
※A common connector assembly.

- Notes: 1. When the valve specification is T1, select the JAZ0-P- single dedicated type.
2. When switching between the single and double type (T1/T2), purchase and use a dedicated connector for single or double use (the number of seal holes in the lead wire differs for the single and double type).
3. There is no white lead wire for the JAZ0-P- .
4. It is necessary to disassemble the connector to add a common connector assembly. Contact your nearest KOGANEI sales office.
5. For information on use in locations/atmospheres subject to substances other than water, such as organic solvents, cutting oil, or reagents, contact your nearest KOGANEI sales office.
6. For information on replacing the waterproof seal, contact your nearest KOGANEI sales office.

JAZ0 - P - (for single use only)

Valve specification
For T0/T1

IP specification

Connector specification
CP : Connector, lead wire length 300 mm [11.8 in.] (black, red, for total of 2 lead wires)
CP3 : Connector, lead wire length 3000 mm [118 in.] (black, red, for total of 2 lead wires)
PA : Positive common A type, lead wire length 300 mm [11.8 in.]
PA3 : Positive common A type, lead wire length 3000 mm [118 in.]
PB : Positive common B type, lead wire length 300 mm [11.8 in.]
PB3 : Positive common B type, lead wire length 3000 mm [118 in.]
PC : Positive common C type, lead wire length 300 mm [11.8 in.]
PC3 : Positive common C type, lead wire length 3000 mm [118 in.]
※A common connector assembly.

Manifold Order Code Example

(4 units of F18 Series)

F18M4F

stn.1~2 F18T0-FJ5-PS DC24V
stn.3 F18T2-FJ6-PS DC24V
stn.4 F18BP


Precautions for Order Codes

Orders for valves only

Place orders from "F18 Series Single Valve Unit Order Codes" on p. 259.

Select from valve outlet types -FJ, -FJ5, -FJ6, or -FM . In addition, for common terminal wiring connections, order the common connector assemblies listed above separately.

F18 Series Split Manifold Non-Plug-in Type Order Codes

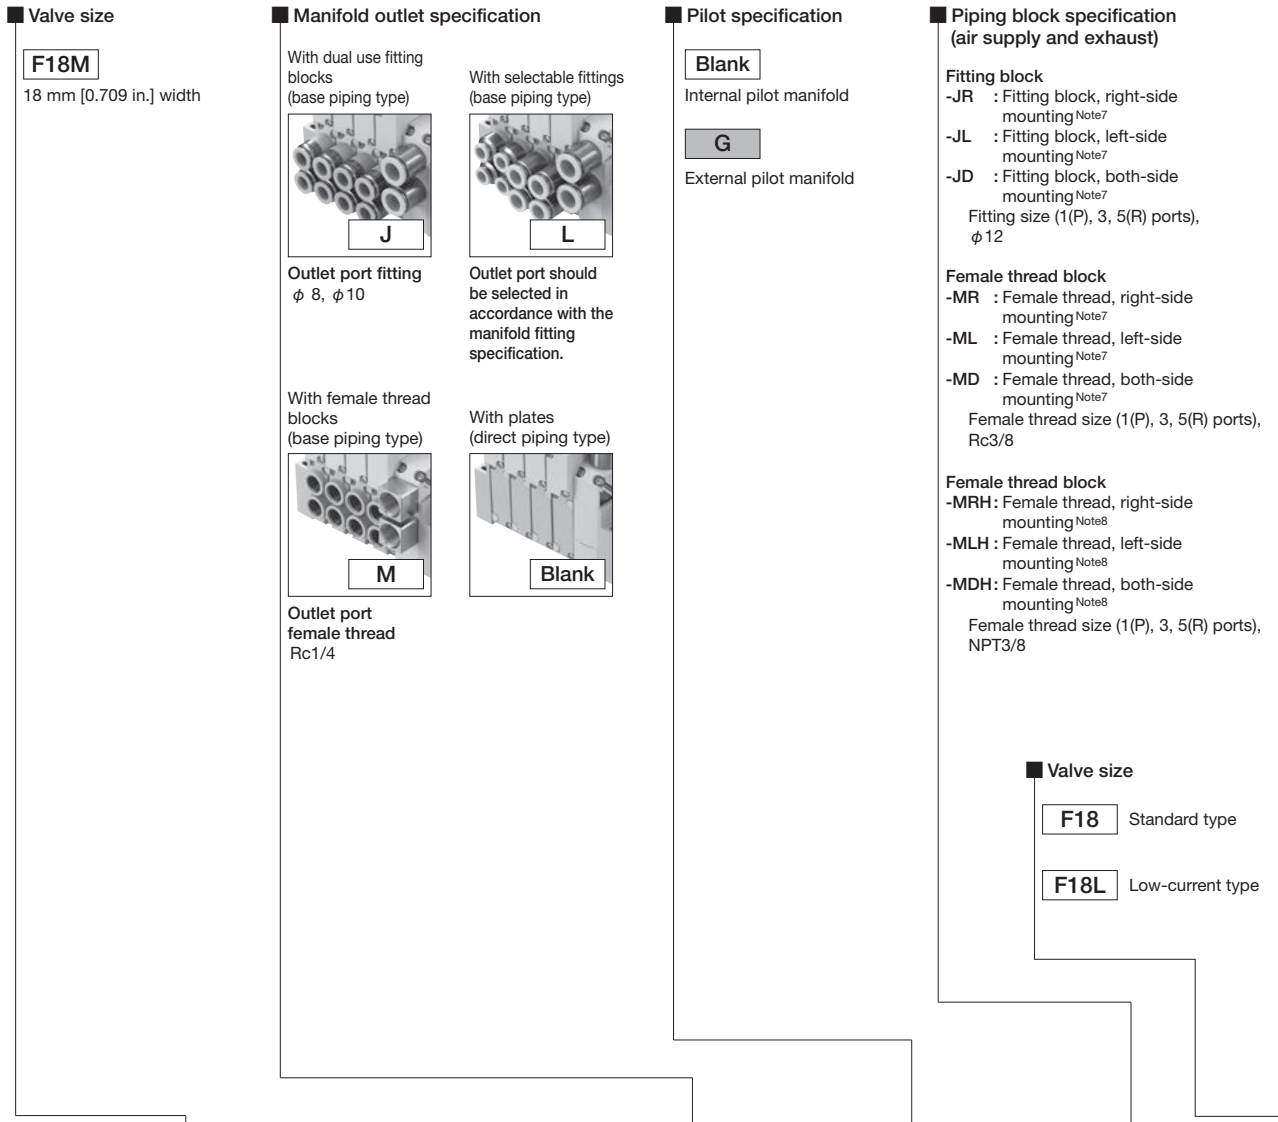

Valve size	Valve units	Manifold type	Manifold outlet specification	Pilot specification	Piping block specification
Manifold model					

Base piping type	F18M	2 ⋮ 20	N	J M	Blank G	-JR -MR -JL -ML -JD -MD
Base piping type selectable fitting			N	L	Blank G	-JR ^{Note7} -MR ^{Note7} -MRH ^{Note8} -JL ^{Note7} -ML ^{Note7} -MLH ^{Note8} -JD ^{Note7} -MD ^{Note7} -MDH ^{Note8}
Direct piping type			NH	Blank	Blank G	-JR ^{Note7} -MR ^{Note7} -MRH ^{Note8} -JL ^{Note7} -ML ^{Note7} -MLH ^{Note8} -JD ^{Note7} -MD ^{Note7} -MDH ^{Note8}

Remark: Negative common specifications are also available as made to order products (add -129W to the ends of the valve and manifold model order codes). For details, consult us.

Valve specification

- T0 : 2-position, for single solenoid only
- T1 : 2-position, single solenoid specification
- T2 : 2-position, double solenoid specification
- T3 : 3-position, closed center
- T4 : 3-position, exhaust center
- T5 : 3-position, pressure center
- TA : Tandem 3-port (NC and NO)^{Note7}
- TB : Tandem 3-port (NO and NO)^{Note7}
- TC : Tandem 3-port (NC and NO)^{Note7}

Operation type

Blank

Internal pilot type^{Note5}

G

External pilot type^{Note6}

(for positive pressure)
 ※ No vacuum valve can be mounted.

Valve outlet type


- A1 With plate^{Note3} (base piping type)
- FJ With dual use ϕ 8, ϕ 10 fitting block^{Note7} (direct piping type)
- FJ5 With single use ϕ 8 fitting block^{Note7} (direct piping type)
- FJ6 With single use ϕ 10 fitting block^{Note7} (direct piping type)
- FM With Rc1/4 female thread block^{Note7} (direct piping type)
- FMH With NPT1/4 female thread block^{Note8} (direct piping type)

Manual override

Manual override button



Manual override lever^{Note2}



Wiring specification

S type plug connector
Without connector




S type plug connector
Lead wire 300 mm^{*}




S type plug connector
Lead wire 3000 mm^{*}



Pre-wired positive common terminal
S type plug connector
Lead wire 300 mm^{*}



Pre-wired positive common terminal
S type plug connector
Lead wire 3000 mm^{*}



※ 300 mm = 11.8 in.
3000 mm = 118 in.

Manifold fitting specification

- J5 With single use ϕ 8 fitting block^{Note7} (base piping type)
- J6 With single use ϕ 10 fitting block^{Note7} (base piping type)
- MH With NPT1/4 female thread block^{Note8} (base piping type)

Individual air supply and exhaust spacer

- Blank : No spacer
 - NP8 : Individual air supply spacer (with ϕ 8 fitting)
 - NP0 : Individual air supply spacer (with ϕ 10 fitting)
 - NR8 : Individual exhaust spacer (with ϕ 8 fitting)
 - NR0 : Individual exhaust spacer (with ϕ 10 fitting)
- For details, see p. 26.

Port isolator

- Blank : No port isolator
- SP : For 1(P) port^{Note4}
- SR : For 3(R2), 5(R1) ports^{Note4}
- SA : For 1(P), 3(R2), and 5(R1) ports^{Note4}

Station	Valve size	Valve specification	Operation type	IP specification	Manual override	Valve outlet type	Wiring specification	Manifold fitting specification	Individual air supply and exhaust spacer	Port isolator	Voltage
Mounting valve model											
stn. 1 . . . stn. □ Note1	F18 F18L	T0 T1 T2 T3 T4 T5 TA ^{Note7} TB ^{Note7} TC ^{Note7}	Blank ^{Note5} G ^{Note6}	Blank -P ^{Note11}	Blank -R ^{Note2}	-A1 ^{Note3}	-PN -PS -PS3 -CPS -CPS3		Blank -NP8 -NR8 -NP0 -NR0	Blank -SP ^{Note4} -SR ^{Note4} -SA ^{Note4}	DC24V DC12V ^{Note8} AC100V ^{Note9} AC120V
BPN (for block-off plate)											
stn. 1 . . . stn. □ Note1	F18 F18L	T0 T1 T2 T3 T4 T5 TA ^{Note7} TB ^{Note7} TC ^{Note7}	Blank ^{Note5} G ^{Note6}	Blank -P ^{Note11}	Blank -R ^{Note2}	-A1 ^{Note3}	-PN -PS -PS3 -CPS -CPS3	-J5 ^{Note12} -J6 ^{Note12} -MH ^{Note13}	Blank -NP8 -NR8 -NP0 -NR0	Blank -SP ^{Note4} -SR ^{Note4} -SA ^{Note4}	DC24V DC12V ^{Note8} AC100V ^{Note9} AC120V
BPN (for block-off plate)											
stn. 1 . . . stn. □ Note1	F18 F18L	T0 T1 T2 T3 T4 T5 TA ^{Note7} TB ^{Note7} TC ^{Note7}	Blank ^{Note5} G ^{Note6}	Blank -P ^{Note11}	Blank -R ^{Note2}	-FJ ^{Note12} -FJ5 ^{Note12} -FJ6 ^{Note12} -FM ^{Note12} -FMH ^{Note13}	-PN -PS -PS3 -CPS -CPS3		Blank -NP8 -NR8 -NP0 -NR0	Blank -SP ^{Note4} -SR ^{Note4} -SA ^{Note4}	DC24V DC12V ^{Note8} AC100V ^{Note9} AC120V
BPN (for block-off plate)											

- Notes:
1. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
 2. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
 3. When selecting J, M, or L (base piping type) for the manifold outlet specification, always enter -A1 (with plate) for the valve outlet type.
 4. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for -SA, or 1 each port isolator for -SP and -SR for a total of 2 locations. When shipping, the designated port isolators are mounted between the designated station and the station to its immediate left (the next smaller stn. No.).
 5. Cannot be mounted on the external pilot manifold.
 6. Cannot be mounted on the internal pilot manifold.
 7. Not available in external pilot type.
 8. Not available in low-current type.
 9. Not available in low-current type and tandem 3-port valves.
 10. The -P □ (including when Blank) and -CP □ wiring specifications cannot be mixed.
 11. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.
 12. Can be selected only when the manifold type is N.
 13. Can be selected only when the manifold type is NH.

F18 ORDER CODES

F18 Series Split Manifold Non-Plug-in Type Additional Parts Order Codes

Parts for manifold

F18 Z -

Valve size
18: 18 mm
[0.709 in.] width

Parts content
GS2 : Gasket (gasket and exhaust valve)
SP : Port isolator (for 1(P) port)
SR : Port isolator (for 3(R2), 5(R1) ports)
SA : Port isolator (for 1(P), 3(R2), 5(R1) ports)

Block-off plate (block-off plate, 2 mounting screws)

F18 BPN

Valve size
18: 18 mm
[0.709 in.] width

For non-plug-in type

Connector-related order codes

JAZ -

Valve specification
Blank: For T1, T2, T3, T4, T5
0: For T0

※ For details, see p. 23.

Connector specification
CP : Connector, lead wire length 300 mm
CP3 : Connector, lead wire length 3000 mm
CLN : Connector without lead wire (short bar, contacts included)
PA : Positive common A type, lead wire length 300 mm *
PA3 : Positive common A type, lead wire length 3000 mm *
PB : Positive common B type, lead wire length 300 mm *
PB3 : Positive common B type, lead wire length 3000 mm *
PC : Positive common C type, lead wire length 300 mm *
PC3 : Positive common C type, lead wire length 3000 mm *

300 mm = 11.8 in.
1500 mm = 59 in.
3000 mm = 118 in.


FZ -

Valve specification
T1, T2, T3, T4, T5, TA, TB, TC


Connector specification
CC1.5 : Cabtyre cable, length 1500 mm *
CC3 : Cabtyre cable, length 3000 mm *

Common connector assembly


A type: FZ-PA *



B type: FZ-PB *



C type: FZ-PC *



※ Lead wire length Blank: 300 mm [11.8 in.] Note: White lead wire is not available for FZ0-P .
3: 3000 mm [118 in.]

Valve base assembly (valve base and gasket)

F18 Z -

Valve size
18: 18 mm
[0.709 in.] width

Piping specification
VJ : Dual use fitting valve base
VJ5 : Single use ϕ 8 fitting valve base
VJ6 : Single use ϕ 10 fitting valve base
VM : Rc1/4 female thread valve base
VMH : NPT1/4 female thread valve base
VP : Valve base plate

Piping block assembly

F18 Z -

Valve size
18: 18 mm
[0.709 in.] width

Piping specification
PJ : Fitting piping block
PM : Rc3/8 female thread piping block
PMH : NPT3/8 female thread piping block

Pilot specification
Blank : Internal pilot
G : External pilot

End blocks (one set of left and right)

F18 Z - E

Valve size
18: 18 mm [0.709 in.] width

Individual air supply and exhaust spacer (Spacer for non-plug-in type, gasket, exhaust valve, and 2 mounting screws)

F18 Z -

Valve size
18: 18 mm
[0.709 in.] width

Specification
NP8 : Individual air supply spacer (with ϕ 8 fitting)
NP0 : Individual air supply spacer (with ϕ 10 fitting)
NR8 : Individual exhaust spacer (with ϕ 8 fitting)
NR0 : Individual exhaust spacer (with ϕ 10 fitting)

※ For details, see p. 26.

Muffler

KM - J

Fitting size
8: Outer diameter ϕ 8 (for individual exhaust spacer)
10: Outer diameter ϕ 10 (for individual exhaust spacer)
12: Outer diameter ϕ 12
(Sales unit: Set of 10 mufflers)

Connecting rod

F18 Z - -

Valve size
18: 18 mm
[0.709 in.] width

Additional unit number
01~20 (01~04 for RH)
※ For reduction of units, consult us.

Specification
RV : For valve base
RH : For piping and wiring base

Manifold Order Code Example

(4 units of F18 Series)

F18M4NL-JR

stn.1~2 F18T0-A1-PS-J5 DC24V
stn.3 F18T2-A1-PS-J6 DC24V
stn.4 F18BPN-J6

Precautions for Order Codes

Orders for valves only

Place orders from "F18 Series Single Valve Unit Order Codes" on p. 72. However, Blank, A2 , F3, F4 , F5, and F6, cannot be selected for the valve outlet type. And for the wiring specification, Blank, PL, and PL3 cannot be selected. In addition, for common terminal wiring connections, separately order the common connector assemblies listed on the left.

Connector-related order codes

JAZ - P - □ (for double use only)

Valve specification
For **T2, T3, T4, T5, TA, TB, or TC**

Connector specification

- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, white, for total of 3 lead wires)
 - CP3**: Connector, lead wire length 3000 mm [118 in.] (black, red, white, for total of 3 lead wires)
 - PA** : Positive common A type, lead wire length 300 mm [11.8 in.]※
 - PA3** : Positive common A type, lead wire length 3000 mm [118 in.]※
 - PB** : Positive common B type, lead wire length 300 mm [11.8 in.]※
 - PB3** : Positive common B type, lead wire length 3000 mm [118 in.]※
 - PC** : Positive common C type, lead wire length 300 mm [11.8 in.]※
 - PC3** : Positive common C type, lead wire length 3000 mm [118 in.]※
- ※A common connector assembly.

JAZ0 - P - □ (for single use only)

Valve specification
For **T0/T1**

Connector specification

- CP** : Connector, lead wire length 300 mm [11.8 in.] (black, red, for total of 2 lead wires)
 - CP3**: Connector, lead wire length 3000 mm [118 in.] (black, red, for total of 2 lead wires)
 - PA** : Positive common A type, lead wire length 300 mm [11.8 in.]※
 - PA3** : Positive common A type, lead wire length 3000 mm [118 in.]※
 - PB** : Positive common B type, lead wire length 300 mm [11.8 in.]※
 - PB3** : Positive common B type, lead wire length 3000 mm [118 in.]※
 - PC** : Positive common C type, lead wire length 300 mm [11.8 in.]※
 - PC3** : Positive common C type, lead wire length 3000 mm [118 in.]※
- ※A common connector assembly.

- Notes:
1. When the valve specification is **T1**, select the **JAZ0-P-□** single dedicated type.
 2. When switching between the single and double type (**T1/T2**), purchase and use a dedicated connector for single or double use (the number of seal holes in the lead wire differs for the single and double type).
 3. There is no white lead wire for the **JAZ0-P-□**.
 4. It is necessary to disassemble the connector to add a common connector assembly. Contact your nearest KOGANEI sales office.
 5. For information on use in locations/atmospheres subject to substances other than water, such as organic solvents, cutting oil, or reagents, contact your nearest KOGANEI sales office.
 6. For information on replacing the waterproof seal, contact your nearest KOGANEI sales office.

F18 Series Split Manifold Plug-in Type Order Codes

Manifold outlet specification

With dual use fitting blocks (base piping type) **J**

With selectable fittings (base piping type) **L**

Outlet port fitting $\phi 8, \phi 10$

Outlet port should be selected in accordance with the manifold fitting specification.

With female thread blocks (base piping type) **M**

With plates (direct piping type) **Blank**

Outlet port female thread Rc1/4

Pilot specification

Blank
Internal pilot manifold

G
External pilot manifold

Piping block specification (air supply and exhaust)

Fitting block

- JR** : Fitting block, right-side mounting^{Note11}
- JL** : Fitting block, left-side mounting^{Note11}
- JD** : Fitting block, both-side mounting^{Note11}

Fitting size (1(P), 3, 5(R) ports), $\phi 12$

Female thread block

- MR** : Female thread, right-side mounting^{Note11}
- ML** : Female thread, left-side mounting^{Note11}
- MD** : Female thread, both-side mounting^{Note11}

Female thread size (1(P), 3, 5(R) ports), Rc3/8

Female thread block

- MRH** : Female thread, right-side mounting^{Note14}
- MLH** : Female thread, left-side mounting^{Note14}
- MDH** : Female thread, both-side mounting^{Note14}

Female thread size (1(P), 3, 5(R) ports), NPT3/8

Wiring specification (wiring block)

Flat cable connector (with socket and strain relief) **-F**

-F100 : 10-pin
-F101 : 10-pin
-F200 : 20-pin
-F201 : 20-pin
-F260 : 26-pin
For details, see p. 47.

D-sub connector **-D25**

Terminal block (19 terminals, M3 screws) **-T200**

(M2.6 mounting screws)
-D250 : 25-pin^{Note13}
-D251 : 25-pin^{Note13}

(4-40UNC mounting screws)
-D250U : 25-pin^{Note14}
-D251U : 25-pin^{Note14}
-D370NU : 37-pin, no-power terminal^{Note14}

Also can provide the terminal block with cover.^{Note3}

For details, see p. 47.

Wiring connection specification

Blank

Packed wiring: Wiring is made in accordance with the mounted valve specifications.

-W

Double wiring: Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

Wiring position (wiring block)

Blank : Left-side mounting
-R : Right-side mounting

Valve size

F18M
18 mm [0.709 in.] width

Valve size	Valve units	Manifold type	Manifold outlet specification	Pilot specification	Piping block specification	Wiring specification	Wiring connection specification	Wiring position	Voltage
Manifold model									

Base piping type	F18M	2 ⋮ □ ^{Note1}	P	J M	Blank G	-JR -JL -JD	-MR -ML -MD	-F100 -F101 -F200 -F201 -F260	-D250 -D251 -T200	Blank -W	Blank -R	DC24V DC12V AC100V ^{Note2} AC120V ^{Note2}
Base piping type selectable fitting			PH	L	Blank G	-JR ^{Note13} -JL ^{Note13} -JD ^{Note13} -MR ^{Note13} -ML ^{Note13}	-MD ^{Note13} -MRH ^{Note14} -MLH ^{Note14} -MDH ^{Note14}	-F100 -F101 -F200 -F201 -F260 -D250 ^{Note13}	-D251 ^{Note13} -D250U ^{Note14} -D251U ^{Note14} -D370NU ^{Note14} -T200	Blank -W	Blank -R	DC24V DC12V AC100V ^{Note2} AC120V ^{Note2}
Direct piping type			PH	Blank	Blank G	-JR ^{Note13} -JL ^{Note13} -JD ^{Note13} -MR ^{Note13} -ML ^{Note13}	-MD ^{Note13} -MRH ^{Note14} -MLH ^{Note14} -MDH ^{Note14}	-F100 -F101 -F200 -F201 -F260 -D250 ^{Note13}	-D251 ^{Note13} -D250U ^{Note14} -D251U ^{Note14} -D370NU ^{Note14} -T200	Blank -W	Blank -R	DC24V DC12V AC100V ^{Note2} AC120V ^{Note2}

Notes: 1. For the maximum number of units, see the table for maximum number of valve units by wiring specification, on p. 272.
2. AC100V, AC120V is available only for the **-D250** □, **-D251** □, **-D370NU** (D-sub connector) and **-T200** (terminal block) wiring specifications.
3. The terminal block with cover is also available as a made to order product (add **-139W** to the end of the manifold model order code). For details, consult us.

Remark: Negative common specifications are also available as made to order products (add **-129W** to the ends of the valve and manifold model order codes). For details, consult us.

Valve specification

- T0**: 2-position, for single solenoid only
- T1**: 2-position, single solenoid specification
- T2**: 2-position, double solenoid specification
- T3**: 3-position, closed center
- T4**: 3-position, exhaust center
- T5**: 3-position, pressure center
- TA**: Tandem 3-port (NC and NC) Note12
- TB**: Tandem 3-port (NO and NO) Note12
- TC**: Tandem 3-port (NC and NO) Note12

Operation type

Blank

Internal pilot type Note10

G


External pilot type Note11
(for positive pressure)
※ No vacuum valve can be mounted.

Valve outlet type

- A1** With plate Note6
(base piping type)
- FJ** With dual use ϕ 8, ϕ 10 fitting block Note12
(direct piping type)
- FJ5** With single use ϕ 8 fitting block Note12
(direct piping type)
- FJ6** With single use ϕ 10 fitting block Note12
(direct piping type)
- FM** With Rc1/4 female thread block Note12
(direct piping type)
- FMH** With NPT1/4 female thread block Note12
(direct piping type)

Manual override

Manual override button



Manual override lever Note7



Manifold fitting specification

- J5** With single use ϕ 8 fitting block Note12
(base piping type)
- J6** With single use ϕ 10 fitting block Note12
(base piping type)
- MH** With NPT1/4 female thread block Note13
(base piping type)

Individual air supply and exhaust spacer

- Blank**: No spacer
 - PP8**: Individual air supply spacer (with ϕ 8 fitting)
 - PP0**: Individual air supply spacer (with ϕ 10 fitting)
 - PR8**: Individual exhaust spacer (with ϕ 8 fitting)
 - PR0**: Individual exhaust spacer (with ϕ 10 fitting)
- For details, see p. 27.

Port isolator

- Blank**: No port isolator
- SP**: For 1(P) port Note9
- SR**: For 3(R2), 5(R1) ports Note9
- SA**: For 1(P), 3(R2), 5(R1) ports Note9

Station	Valve size	Valve specification	Operation type	Manual override	Valve outlet type	Manifold fitting specification	Individual air supply and exhaust spacer	Port isolator	Voltage
---------	------------	---------------------	----------------	-----------------	-------------------	--------------------------------	--	---------------	---------

Mounting valve model

stn. 1 ⋮ stn. □ <small>Note5</small>	F18	T0 T3 T1 T4 T2 T5	Blank <small>Note10</small> G <small>Note11</small>	Blank -R <small>Note8</small>	-A1 <small>Note6</small>		Blank -PP8 -PR8 -PP0 -PR0	Blank -SP <small>Note9</small> -SR <small>Note9</small> -SA <small>Note9</small>	DC24V DC12V AC100V <small>Note2</small> AC120V <small>Note2</small>
		BPP (for block-off plate) <small>Note7</small>							
stn. 1 ⋮ stn. □ <small>Note5</small>	F18	T0 T3 T1 T4 T2 T5	Blank <small>Note10</small> G <small>Note11</small>	Blank -R <small>Note8</small>	-A1 <small>Note6</small>	-J5 <small>Note13</small> -J6 <small>Note13</small> -MH <small>Note14</small>	Blank -PP8 -PR8 -PP0 -PR0	Blank -SP <small>Note9</small> -SR <small>Note9</small> -SA <small>Note9</small>	DC24V DC12V AC100V <small>Note2</small> AC120V <small>Note2</small>
		BPP (for block-off plate) <small>Note7</small>							
stn. 1 ⋮ stn. □ <small>Note5</small>	F18	T0 T3 T1 T4 T2 T5	Blank <small>Note10</small> G <small>Note11</small>	Blank -R <small>Note8</small>	-FJ <small>Note13</small> -FJ5 <small>Note13</small> -FJ6 <small>Note13</small> -FM <small>Note13</small> -FMH <small>Note14</small>		Blank -PP8 -PR8 -PP0 -PR0	Blank -SP <small>Note9</small> -SR <small>Note9</small> -SA <small>Note9</small>	DC24V DC12V AC100V <small>Note2</small> AC120V <small>Note2</small>
		BPP (for block-off plate) <small>Note7</small>							

- Notes:
5. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
 6. When selecting **J**, **M**, or **L** (base piping type) for the manifold outlet specification, always enter **-A1** (with plate) for the valve outlet type.
 7. Caution should be exercised that the block-off wiring is always double wiring (allocated 2 control pins at 1 stn.), regardless of the wiring connection specification. For wiring for a single solenoid, see p. 273.
 8. When the valve specification is **T1** or **T2**, the manual override lever is placed only on the A side.
 9. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for **-SA**, or 1 each port isolator for **-SP** and **-SR** for a total of 2 locations. When shipping, the designated port isolators are mounted between the designated station and the station to its immediate left (the next smaller stn. No.).
 10. Cannot be mounted on the external pilot manifold.
 11. Cannot be mounted on the internal pilot manifold.
 12. Not available in external pilot type.
 13. Can be selected only when the manifold type is **P**.
 14. Can be selected only when the manifold type is **PH**.

F18 Series Split Manifold Plug-in Type Additional Parts Order Codes

Parts for manifold

F18 Z - 

Valve size
18: 18 mm
[0.709 in.] width

Parts content
GS2 : Gasket (gasket and exhaust valve)
SP : Port isolator (for 1(P) port)
SR : Port isolator (for 3(R2), 5(R1) ports)
SA : Port isolator
 (for 1(P), 3(R2), 5(R1) ports)


Block-off plate (block-off plate, 2 mounting screws, and plug)

F18 BP P

Valve size
18: 18 mm
[0.709 in.] width

For plug-in type

Valve base assembly (valve base, gasket, lead wire, and plug-in connector)

F18 Z -  - 

Valve size
18: 18 mm
[0.709 in.] width

Wiring specification
D: For D-sub connector
F: For flat cable connector, terminal block

Piping specification
VJ : Dual use fitting valve base
VJ5 : Single use ϕ 8 fitting valve base
VJ6 : Single use ϕ 10 fitting valve base
VM : Rc1/4 female thread valve base
VMH : NPT1/4 female thread valve base
VP : Valve base plate

Piping block assembly

F18 Z  - 

Valve size
18: 18 mm
[0.709 in.] width

Piping specification
PJP : Fitting piping block
PMP : Rc3/8 female thread piping block
PMPH : NPT3/8 female thread piping block



Pilot specification
Blank : Internal pilot
G : External pilot

End blocks (one set of left and right)



F18 Z - EP

Valve size
18: 18 mm
[0.709 in.] width

Wiring block assembly (one set)

F18 Z -  - 

Valve size
18: 18 mm
[0.709 in.] width

Voltage (Not required for T200)
DC24
DC12
AC100 (for **D250** , **D251** , **D370NU** only)

Piping specification
F100 : Flat cable connector (DC specification)
F101 : Flat cable connector (DC specification)
F200 : Flat cable connector (DC specification)
F201 : Flat cable connector (DC specification)
F260 : Flat cable connector (DC specification)
D250 : D-sub connector (M2.6 screws)
D251 : D-sub connector (M2.6 screws)
D250U : D-sub connector (4-40UNC screws)
D251U : D-sub connector (4-40UNC screws)
D370NU : D-sub connector (4-40UNC screws), without power terminal
T200L : Terminal block for left-side mounting
T200R : Terminal block for right-side mounting

Individual air supply and exhaust spacer (Spacer for plug-in type, gasket, exhaust valve, and 2 mounting screws)

F18 Z - 

Valve size
18: 18 mm
[0.709 in.] width

Specification
PP8 : Individual air supply spacer (with ϕ 8 fitting)
PP0 : Individual air supply spacer (with ϕ 10 fitting)
PR8 : Individual exhaust spacer (with ϕ 8 fitting)
PR0 : Individual exhaust spacer (with ϕ 10 fitting)

※ For details, see p. 27.

Muffler

KM - J 

Fitting size
8: Outer diameter ϕ 8 (for individual exhaust spacer)
10: Outer diameter ϕ 10 (for individual exhaust spacer)
12: Outer diameter ϕ 12
 (Sales unit: Set of 10 mufflers)

Connecting rod



F18 Z -  - 

Valve size
18: 18 mm
[0.709 in.] width

Number of additional units
01 ~ 20 (01 ~ 04 for RH)
 ※ Example: To add 2 valve units, enter **-02**.
 ※ For reduction of units, consult us.

Specification
RV : For valve base
RH : For piping and wiring base

Table for maximum number of valve units by wiring specification

		Maximum number of units	
		Wiring connection specification	
Wiring specification	Max. outputs	Packed wiring (Blank)	Double wiring (-W)
F100 Flat cable (10P)	8	Varies depending on the number of mounted single solenoids, double solenoids, and block-off plates. The number of controlled solenoids should be designated as the maximum number of outputs or less. D370NU is a maximum of 20 units.	4 units
F101 Flat cable (10P)	8		4 units
F200 Flat cable (20P)	16		8 units
F201 Flat cable (20P)	16		8 units
F260 Flat cable (26P)	20		10 units
D250  D-sub connector (25P)	16		8 units
D251  D-sub connector (25P)	20		10 units
D370NU D-sub connector (37P)	32		16 units
T200 Terminal block (19 terminals)	18		9 units

Manifold Order Code Example

(12 units of F18 Series)

F18M12PL-JR-F201 DC24V

stn.1~8 F18T0-A1-J5 DC24V

stn.9~11 F18T2-A1-J6 DC24V

stn.12 F18BPP-J6

Precautions for Order Codes

● Orders for valves only

Place orders from "F18 Series Single Valve Unit Order Codes" on p. 259.

However, **Blank**, **A2** □, **F3**, **F4** □, **F5**, and **F6** cannot be selected for the valve outlet type. For the wiring specification, **Blank** is the only selection.

● Wiring connection specification

Blank (packed wiring): Wiring is made in accordance with the mounted valve specifications.

-W (double wiring): Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

Caution

Caution should be exercised that the block-off plate wiring is always double wiring (allocated 2 control pins at 1 stn.), regardless of the wiring connection specification.


The block-off plate wiring can be made as wiring for a single solenoid. Add **-1W** to the end of the block-off plate order code in the case.

For details, consult us.

F18 Series Serial Transmission Compatible Manifold Order Codes


Manifold outlet specification

With dual use fitting blocks (base piping type)




Outlet port fitting
φ 8, φ 10

With selectable fittings (base piping type)




Outlet port should be selected in accordance with the manifold fitting specification.

With female thread blocks (base piping type)



Outlet port female thread
Rc1/4

With plates (direct piping type)



Pilot specification

Blank

Internal pilot manifold

G

External pilot manifold

Piping block specification (air supply and exhaust)

Fitting block

-JR : Fitting block, right-side mounting^{Note12}

-JL : Fitting block, left-side mounting^{Note12}

-JD : Fitting block, both-side mounting^{Note12}

Fitting size (1(P), 3, 5(R) ports), φ 12

Female thread block

-MR : Female thread, right-side mounting^{Note12}

-ML : Female thread, left-side mounting^{Note12}

-MD : Female thread, both-side mounting^{Note12}

Female thread size (1(P), 3, 5(R) ports), Rc3/8

Female thread block

-MRH : Female thread, right-side mounting^{Note13}


-MLH : Female thread, left-side mounting^{Note13}

-MDH : Female thread, both-side mounting^{Note13}

Female thread size (1(P), 3, 5(R) ports), NPT3/8

Transmission block specification

※ These are the serial transmission block specifications compatible with each system.



● Block photoed on right is compatible with CompoNet.
For details, see p. 41-44.

-31 : For OMRON B7A Link Terminal (standard)

-32 : For OMRON B7A Link Terminal (high speed)

-B1 : For CC-Link (16 outputs)

-H1 : For CompoNet (16 outputs)^{Note2}

-D1 : For DeviceNet (16 outputs)^{Note2}

-D3 : For DeviceNet (32 outputs)^{Note2}

-K1 : For EtherCAT (16 outputs)^{Note2}

-K3 : For EtherCAT (32 outputs)^{Note2}

-M1 : For EtherNet/IP (16 outputs)^{Note2,3}

-M3 : For EtherNet/IP (32 outputs)^{Note2,3}

Wiring connection specification

Blank

Packed wiring: Wiring is made in accordance with the mounted valve specifications.

-W

Double wiring: Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.

Wiring position (transmission block)

Blank : Left-side mounting

-R : Right-side mounting^{Note2}

Valve size

F18M

18 mm [0.709 in.] width

Valve size	Valve units	Manifold type	Manifold outlet specification	Pilot specification	Piping block specification	Transmission block specification	Wiring connection specification	Wiring position
------------	-------------	---------------	-------------------------------	---------------------	----------------------------	----------------------------------	---------------------------------	-----------------

		Manifold model								
Base piping type	Valve units	S	J M	Blank G	-JR -JL -JD	-MR -ML -MD	-31 -32 -B1 -H1 -D1	-D3 ^{Note2} -K1 ^{Note2} -K3 ^{Note2} -M1 ^{Note2,3} -M3 ^{Note2,3}	Blank -W	Blank -R ^{Note2}
Base piping type selectable fitting	F18M 2 . . . □ Note1	S	L	Blank G	-JR ^{Note12} -JL ^{Note12} -JD ^{Note12} -MR ^{Note12} -ML ^{Note12}	-MD ^{Note12} -MRH ^{Note13} -MLH ^{Note13} -MDH ^{Note13}	-31 -32 -B1 -H1 -D1	-D3 ^{Note2} -K1 ^{Note2} -K3 ^{Note2} -M1 ^{Note2,3} -M3 ^{Note2,3}	Blank -W	Blank -R ^{Note2}
Direct piping type		SH	Blank	Blank G	-JR ^{Note12} -JL ^{Note12} -JD ^{Note12} -MR ^{Note12} -ML ^{Note12}	-MD ^{Note12} -MRH ^{Note13} -MLH ^{Note13} -MDH ^{Note13}	-31 -32 -B1 -H1 -D1	-D3 ^{Note2} -K1 ^{Note2} -K3 ^{Note2} -M1 ^{Note2,3} -M3 ^{Note2,3}	Blank -W	Blank -R ^{Note2}

Notes: 1. To determine the maximum number of units, see the table for maximum number of valve units by transmission block specification, on p. 276.
2. The -H1, -D1, -D3, -K1, -K3, -M1, or -M3, transmission block is mountable on the left side only.
3. Complies with the CE marking regulation.

Valve specification

- T0**: 2-position, for single solenoid only
- T1**: 2-position, single solenoid specification
- T2**: 2-position, double solenoid specification
- T3**: 3-position, closed center
- T4**: 3-position, exhaust center
- T5**: 3-position, pressure center

Operation type

Blank

Internal pilot type ^{Note9}

G


External pilot type ^{Note10}
(for positive pressure)
※ No vacuum valve can be mounted.

Valve outlet type


- A1** With plate^{Note5} (base piping type)
- FJ** With dual use ϕ 8, ϕ 10 fitting block^{Note12} (direct piping type)
- FJ5** With single use ϕ 8 fitting block^{Note12} (direct piping type)
- FJ6** With single use ϕ 10 fitting block^{Note12} (direct piping type)
- FM** With Rc1/4 female thread block^{Note12} (direct piping type)
- FMH** With NPT1/4 female thread block^{Note12} (direct piping type)

Manual override

Manual override button



Manual override lever^{Note7}



Manifold fitting specification

- J5** With single use ϕ 8 fitting block^{Note12} (base piping type)
- J6** With single use ϕ 10 fitting block^{Note12} (base piping type)
- MH** With NPT1/4 female thread block^{Note13} (base piping type)

Individual air supply and exhaust spacer

- Blank**: No spacer
 - PP8**: Individual air supply spacer (with ϕ 8 fitting)
 - PP0**: Individual air supply spacer (with ϕ 10 fitting)
 - PR8**: Individual exhaust spacer (with ϕ 8 fitting)
 - PR0**: Individual exhaust spacer (with ϕ 10 fitting)
- For details, see p. 27.

Port isolator

- Blank**: No port isolator
- SP**: For 1(P) port^{Note8}
- SR**: For 3(R2), 5(R1) ports^{Note8}
- SA**: For 1(P), 3(R2), 5(R1) ports^{Note8}

Station	Valve size	Valve specification	Operation type	Manual override	Valve outlet type	Manifold fitting specification	Individual air supply and exhaust spacer	Port isolator	Voltage
---------	------------	---------------------	----------------	-----------------	-------------------	--------------------------------	--	---------------	---------

Mounting valve model

stn. 1 ⋮ stn. □ <small>Note4</small>	F18 F18L	T0 T1 T2 T3 T4	T5 TA ^{Note11} TB ^{Note11} TC ^{Note11}	Blank ^{Note9} G ^{Note10}	Blank -R ^{Note7}	-A1 ^{Note5}	Blank -PP8 -PP0	-PR8 -PR0	Blank -SP ^{Note8} -SR ^{Note8} -SA ^{Note8}	DC24V	
		BPP (for block-off plate) ^{Note6}									
stn. 1 ⋮ stn. □ <small>Note4</small>	F18 F18L	T0 T1 T2 T3 T4	T5 TA ^{Note11} TB ^{Note11} TC ^{Note11}	Blank ^{Note9} G ^{Note10}	Blank -R ^{Note7}	-A1 ^{Note5}	-J5 ^{Note12} -J6 ^{Note12} -MH ^{Note13}	Blank -PP8 -PP0	-PR8 -PR0	Blank -SP ^{Note8} -SR ^{Note8} -SA ^{Note8}	DC24V
		BPP (for block-off plate) ^{Note6}									
stn. 1 ⋮ stn. □ <small>Note4</small>	F18 F18L	T0 T1 T2 T3 T4	T5 TA ^{Note11} TB ^{Note11} TC ^{Note11}	Blank ^{Note9} G ^{Note10}	Blank -R ^{Note7}	-FJ ^{Note12} -FJ5 ^{Note12} -FJ6 ^{Note12} -FM ^{Note12} -FMH ^{Note13}	Blank -PP8 -PP0	-PR8 -PR0	Blank -SP ^{Note8} -SR ^{Note8} -SA ^{Note8}	DC24V	
		BPP (for block-off plate) ^{Note6}									

- Notes:
4. Valve mounting location is from the left, with the solenoid on top, and the 4(A), 2(B) ports side in front.
 5. When selecting J, M, or L (base piping type) for the manifold outlet specifications, always enter -A1 (with plate) for the valve outlet type.
 6. Caution should be exercised that the block-off plate wiring is always double wiring (allocated 2 control pins at 1 stn.), regardless of the wiring connection specification. For wiring for a single solenoid, see p. 250.
 7. When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
 8. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for -SA, or 1 each port isolator for -SP and -SR for a total of 2 locations. When shipping, the designated port isolators are mounted between the designated station and the station to its immediate left (the next smaller stn. No.).
 9. Cannot be mounted on the external pilot manifold.
 10. Cannot be mounted on the internal pilot manifold.
 11. Not available in external pilot type.
 12. Can be selected only when the manifold type is S.
 13. Can be selected only when the manifold type is SH.

F18 Series Serial Transmission Compatible Manifold Additional Parts Order Codes

Parts for manifold

F18 Z - 

Valve size
18 : 18 mm
[0.709 in.] width

Parts content
GS2 : Gasket (gasket and exhaust valve)

Block-off plate (block-off plate, 2 mounting screws, and plug)

F18 BPP

Valve size
18 : 18 mm
[0.709 in.] width

Individual air supply and exhaust spacer (Spacer for plug-in type, gasket, exhaust valve, and 2 mounting screws)

F18 Z - 

Valve size
18 : 18 mm
[0.709 in.] width

Specification
PP8 : Individual air supply spacer (with ϕ 8 fitting)
PP0 : Individual air supply spacer (with ϕ 10 fitting)
PR8 : Individual exhaust spacer (with ϕ 8 fitting)
PR0 : Individual exhaust spacer (with ϕ 10 fitting)

※ For details, see p. 27.

Muffler

KM - J 

Fitting size
8 : Outer diameter ϕ 8 (for individual exhaust spacer)
10 : Outer diameter ϕ 10 (for individual exhaust spacer)
12 : Outer diameter ϕ 12
(Sales unit: Set of 10 mufflers)

Serial transmission block (single unit)

YS2 

Wiring position
S : For integrated type, left-side mounting
T : For integrated type, right-side mounting

Transmission block specification

31 : For OMRON B7A Link Terminal (standard) **A1** : For OMRON CompoBus/S (16 outputs)
32 : For OMRON B7A Link Terminal (high speed) **B1** : For CC-Link (16 outputs)

YS5H1U

For CompoNet (16 outputs)
※ DIN rail included (length 75 mm [2.95 in.])

YS6 

(Dedicated for manifold mounting)

Transmission block specification

D1 : For DeviceNet (16 outputs)
D3 : For DeviceNet (32 outputs)
Note: The same wiring position is used for both the left-side and the right-side.

YS7 

L (Dedicated for manifold mounting)

Wiring position
L : For left-side mounting

Transmission block specification

K1 : For EtherCAT (16 outputs)
K3 : For EtherCAT (32 outputs)
M1 : For EtherNet/IP (16 outputs)
M3 : For EtherNet/IP (32 outputs)

Table for maximum number of valve units by transmission block specification

Transmission block specifications	Max. outputs	Maximum number of units	
		Wiring connection specification	
		Packed wiring (Blank)	Double wiring (-W)
-31 : For OMRON B7A Link Terminal (standard)	16	Varies depending on the number of mounted single solenoids, double solenoids, and block-off plates. The number of controlled solenoids should be designated as the maximum number of outputs or less.	8 units
-32 : For OMRON B7A Link Terminal (high speed)	16		8 units
-B1 : For CC-LINK (16 Outputs)	16		8 units
-H1 : For CompoNet (16 Outputs)	16		8 units
-D1 : For DeviceNet (16 Outputs)	16		8 units
-D3 : For DeviceNet (32 Outputs)	32		16 units
-K1 : For EtherCAT (16 Outputs)	16		8 units
-K3 : For EtherCAT (32 Outputs)	32		16 units
-M1 : For EtherNet/IP (16 Outputs)	16		8 units
-M3 : For EtherNet/IP (32 Outputs)	32		16 units

Manifold Order Code Example

(8 units of F18 Series)



F18M8SL-JR-B1-W

stn.1~5 F18T0-A1-J5 DC24V
stn.6~7 F18T2-A1-J6 DC24V
stn.8 F18BPP-J6

Precautions for Order Codes

● Orders for valves only

Place orders from "F18 Series Single Valve Unit Order Codes" on p. 259.

However, **Blank**, **A2** , **F3**, **F4** , **F5**, and **F6**, cannot be selected for the valve outlet type. For the wiring specification, **Blank** is the only selection.

● Wiring connection specification

Blank (packed wiring): Wiring is made in accordance with the mounted valve specifications.

-W (double wiring): Wiring is always for the double solenoid, regardless of the specifications of the mounted valve.


Caution

Caution should be exercised that the block-off plate wiring is always double wiring (allocated 2 control pins at 1 stn.), regardless of the wiring connection specification. The block-off plate wiring can be made as wiring for a single solenoid. Add **-1W** to the end of the block-off plate order code in the case. For details, consult us.

F18T Valve specifications -F3-PS

With outlet port dual use fitting block
 With inlet port female thread block
 S type plug connector

* For T0 Type dimensions, see page 279.

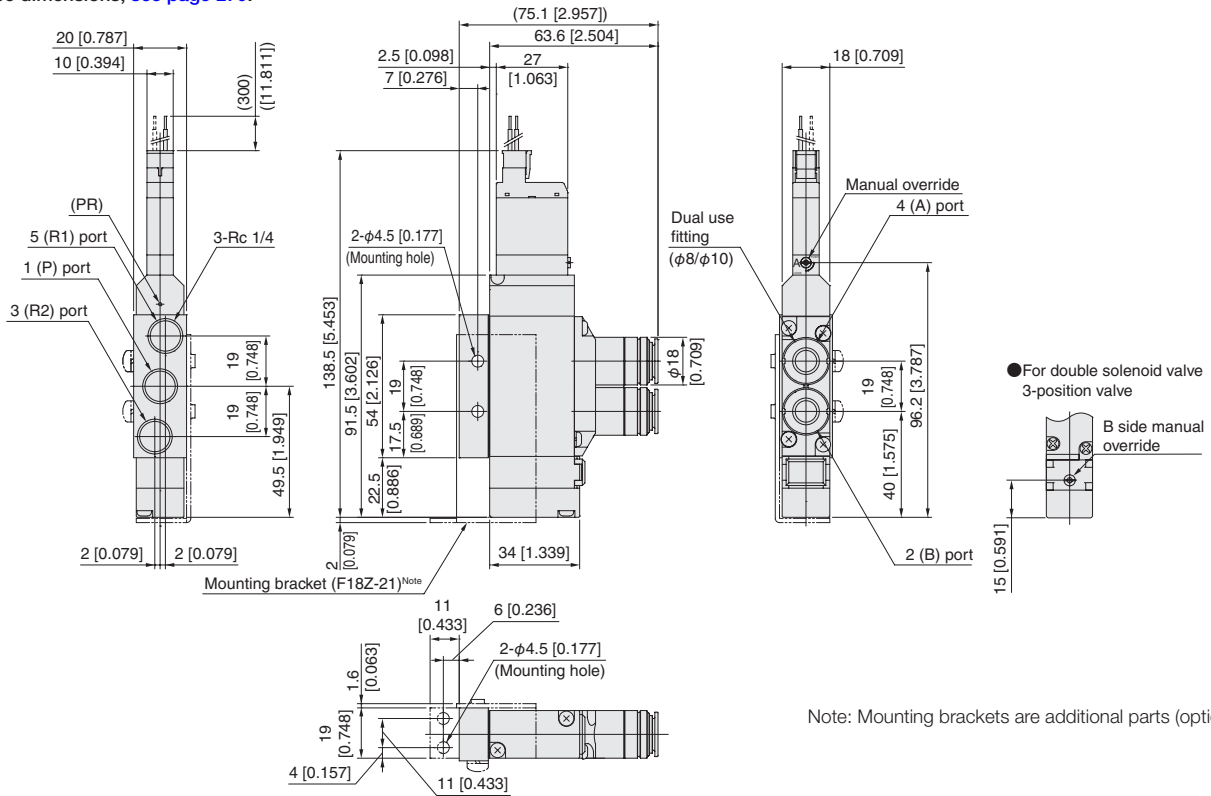


Note: Mounting brackets are additional parts (options).

F18T Valve specifications -F4-PS

F18T Valve specifications -F4H-PS

With outlet port female thread block
 With inlet port female thread block
 S type plug connector


* For T0 Type dimensions, see page 279.

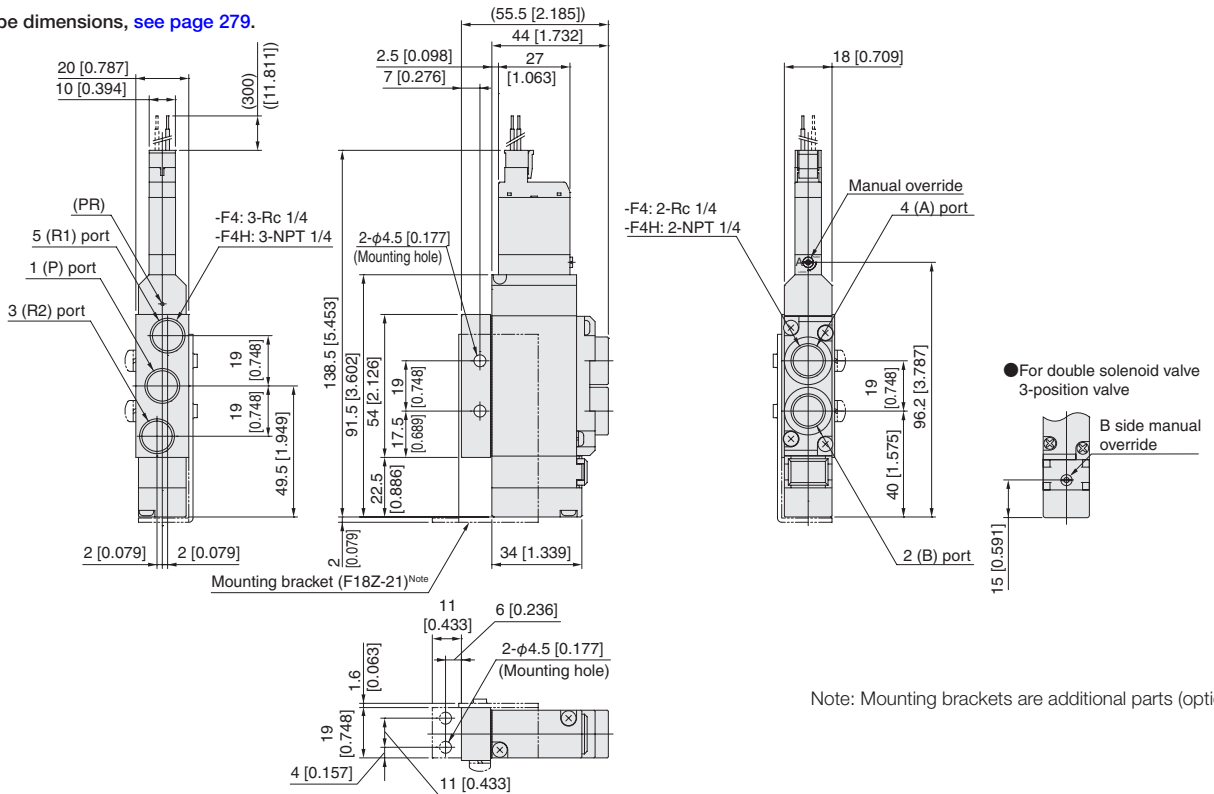

Note: Mounting brackets are additional parts (options).

F18T0-F □ -PS


With outlet port single use fitting block
 With inlet port female thread block
 S type plug connector

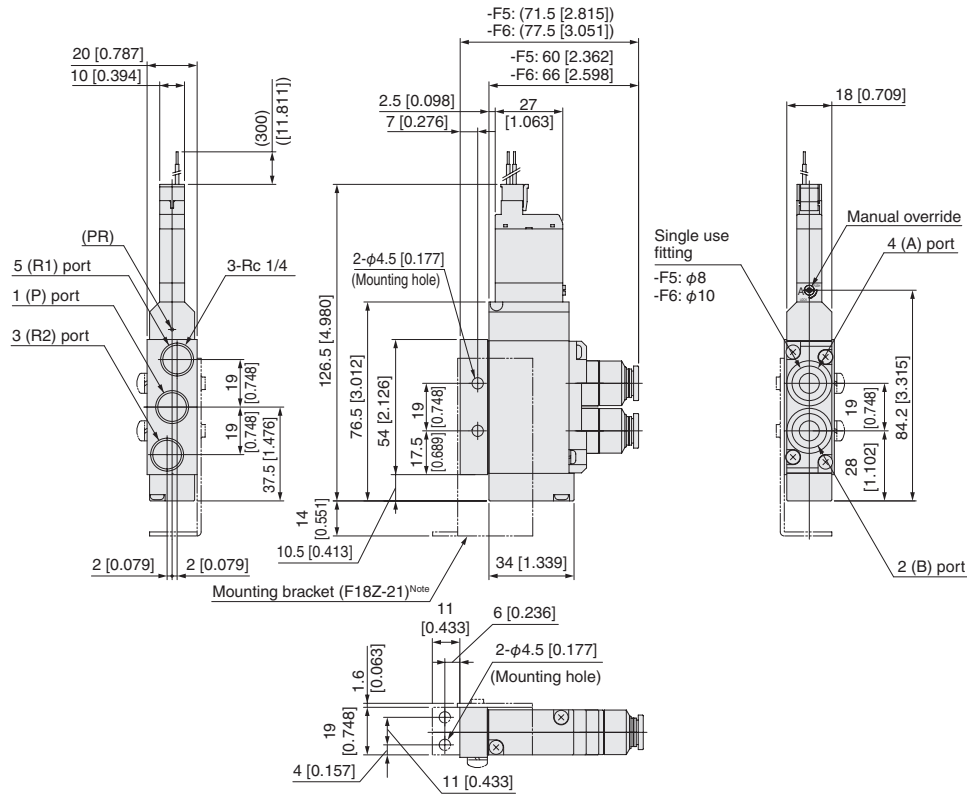


Note: Mounting brackets are additional parts (options).

IP type

F18T Valve specifications Operation system -P-A2-PS

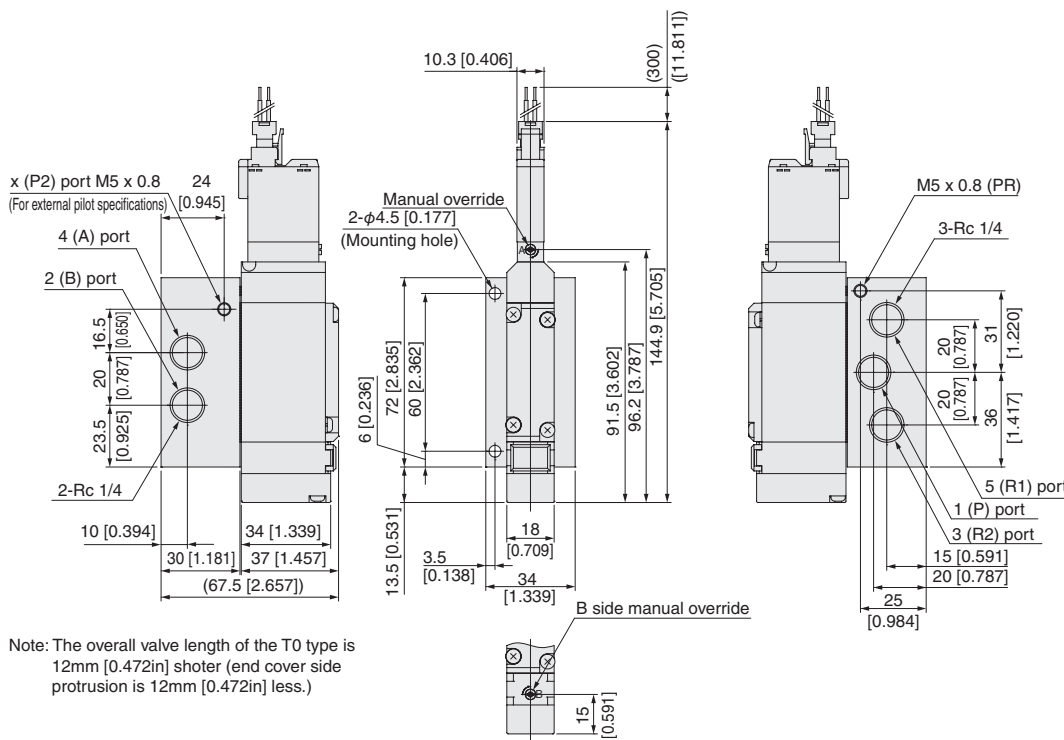

● L type plug connector: -PL

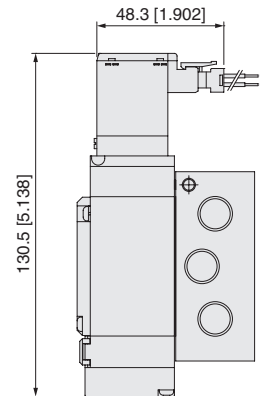


Note: The overall valve length of the T0 type is 12mm [0.472in] shorter (end cover side protrusion is 12mm [0.472in] less.)

For double solenoid and 3-position valve

F18T Valve specifications Operation system **-A2-PS**


With A-type sub-base
S type plug connector

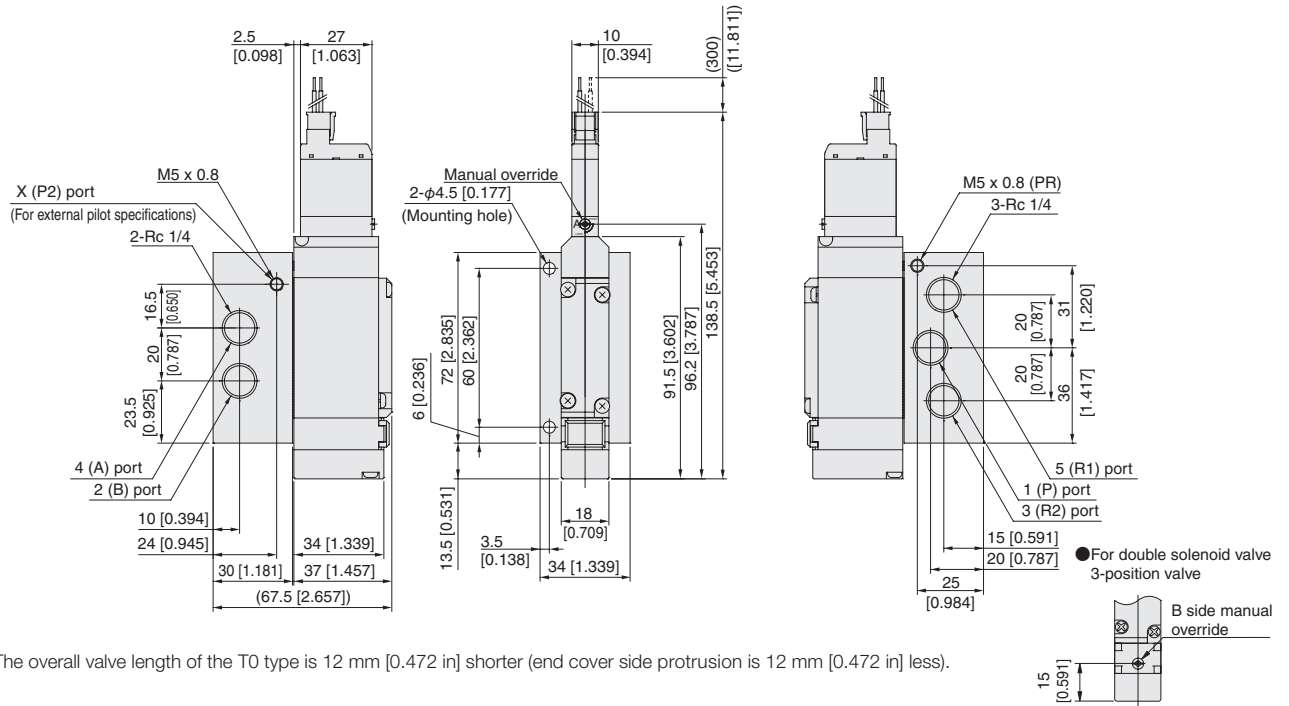

Note: The overall valve length of the T0 type is 12 mm [0.472 in] shorter (end cover side protrusion is 12 mm [0.472 in] less).


Options

● L type plug connector: **-PL**

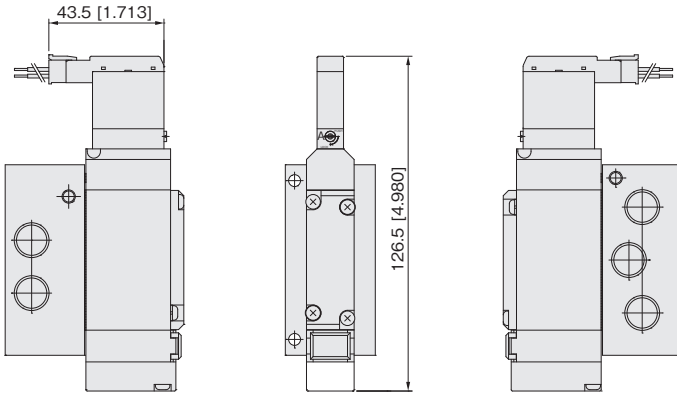


Note: The overall valve length of the T0 type is 12 mm [0.472 in] shorter (end cover side protrusion is 12 mm [0.472 in] less).

● Manual lever: **-R**

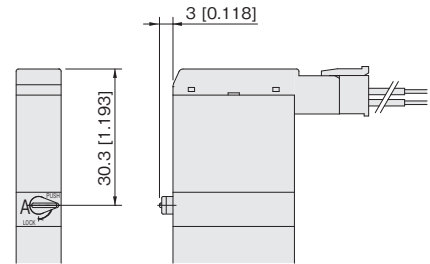


● Solenoid with DIN type connector: **-39**

Pg. 7 Compatible cable diameter φ4 to φ6

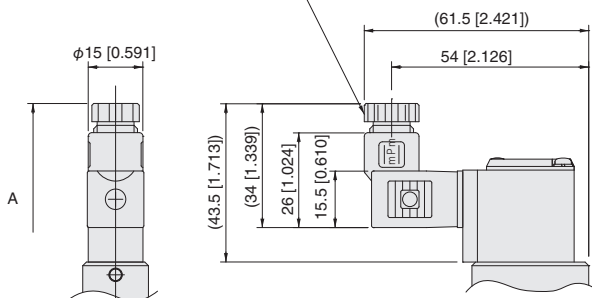

Model	Symbol	A (Full length)
F18T0		127.7 [5.028]
F18T2		180.4 [7.102]
F18T2 to T5		192.4 [7.575]


● Protruding locking type manual override: **-83**






F18M Number of valves **A M J** Pilot specifications (Base piping type)

Monoblock manifold A type
With manifold outlet port dual use fitting block
S type plug connector

● **Internal pilot specifications**

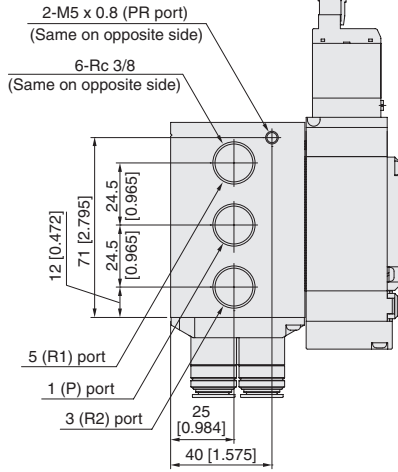


● **External pilot specifications** Note

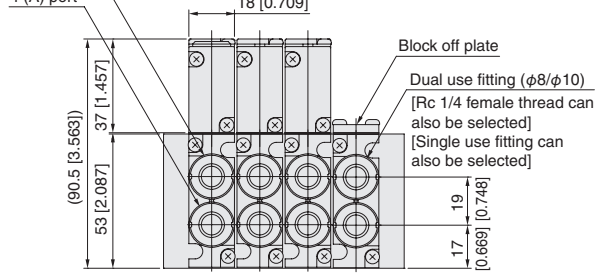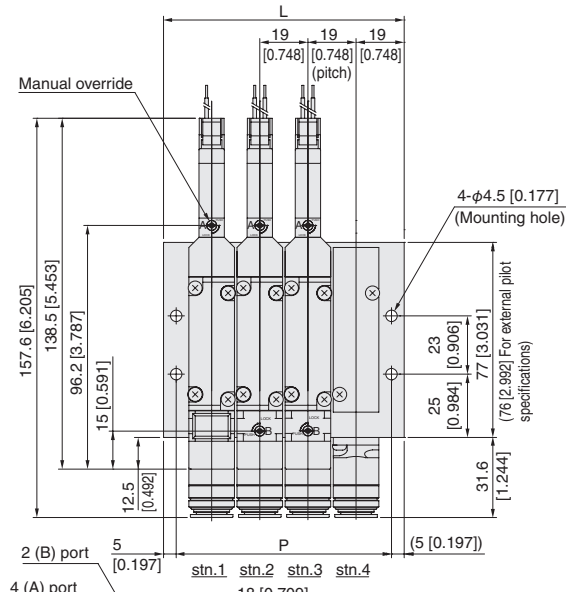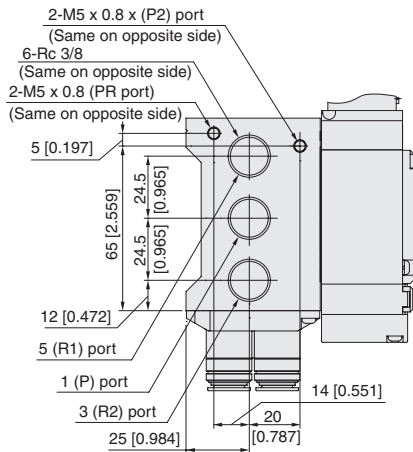

Note: For external pilot specifications, the shape of the monoblock manifold A type body is different from the internal pilot specifications

Unit dimensions


Number of units	L	P
2	57 [2.244]	47 [1.850]
3	76 [2.992]	66 [2.598]
4	95 [3.740]	85 [3.346]
5	114 [4.488]	104 [4.094]
6	133 [5.236]	123 [4.843]
7	152 [5.984]	142 [5.591]
8	171 [6.732]	161 [6.339]
9	190 [7.480]	180 [7.087]
10	209 [8.228]	199 [7.835]
11	228 [8.976]	218 [8.583]
12	247 [9.724]	237 [9.331]
13	266 [10.472]	256 [10.079]
14	285 [11.220]	275 [10.827]
15	304 [11.969]	294 [11.575]
16	323 [12.717]	313 [12.323]
17	342 [13.465]	332 [13.071]
18	361 [14.213]	351 [13.819]
19	380 [14.961]	370 [14.567]
20	399 [15.709]	389 [15.315]

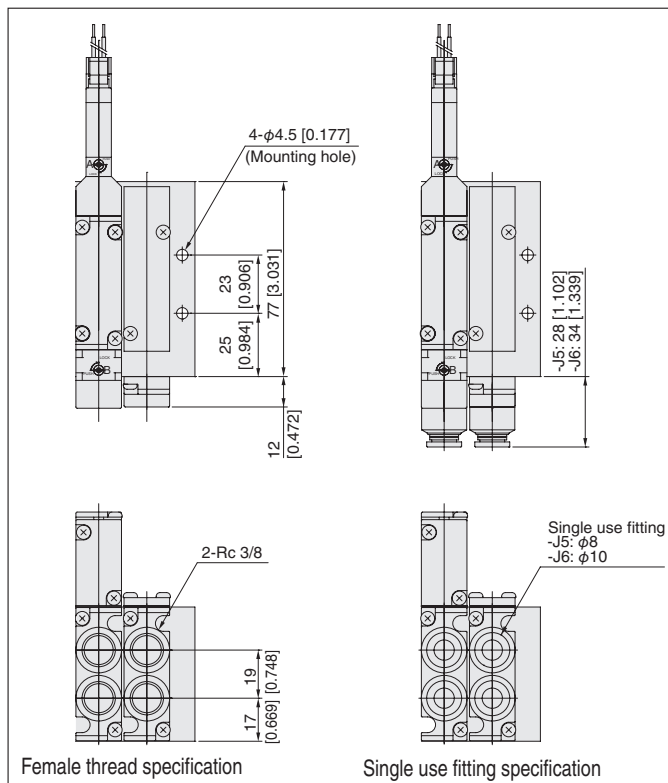

F18M Number of valves **F** (Direct piping type)

Monoblock manifold F type
 With valve outlet port dual use fitting block
 S type plug connector

Unit dimensions

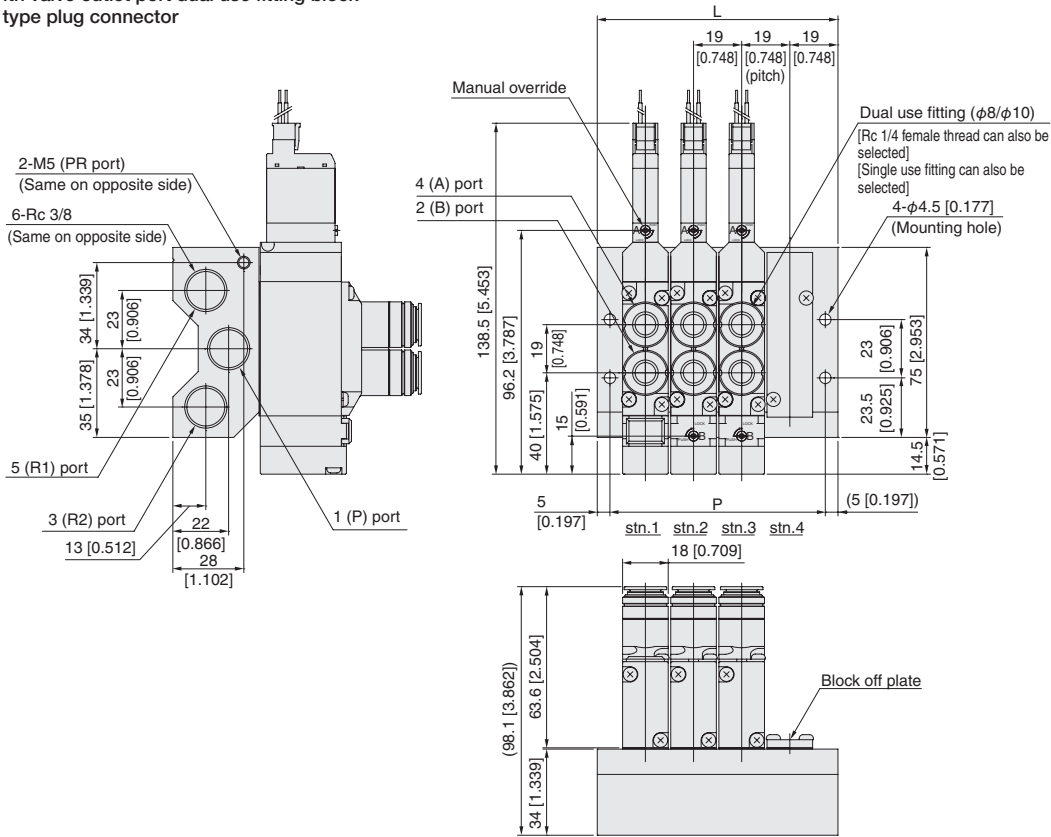

Note: The overall valve length of the T0 type is 12 mm [0.472 in] shorter (end cover side protrusion is 12 mm [0.472 in] less).


Number of units	L	P
2	57 [2.244]	47 [1.850]
3	76 [2.992]	66 [2.598]
4	95 [3.740]	85 [3.346]
5	114 [4.488]	104 [4.094]
6	133 [5.236]	123 [4.843]
7	152 [5.984]	142 [5.591]
8	171 [6.732]	161 [6.339]
9	190 [7.480]	180 [7.087]
10	209 [8.228]	199 [7.835]
11	228 [8.976]	218 [8.583]
12	247 [9.724]	237 [9.331]
13	266 [10.472]	256 [10.079]
14	285 [11.220]	275 [10.827]
15	304 [11.969]	294 [11.575]
16	323 [12.717]	313 [12.323]
17	342 [13.465]	332 [13.071]
18	361 [14.213]	351 [13.819]
19	380 [14.961]	370 [14.567]
20	399 [15.709]	389 [15.315]

Dimensions of F18 series split manifold non-plug-in type mm [in]

F18M Number of valves N Pilot specifications (Base piping type)

With manifold outlet port dual use fitting block
S type plug connector

※See the bottom of page 286 for the dimensions of the F18M□NM/NL.

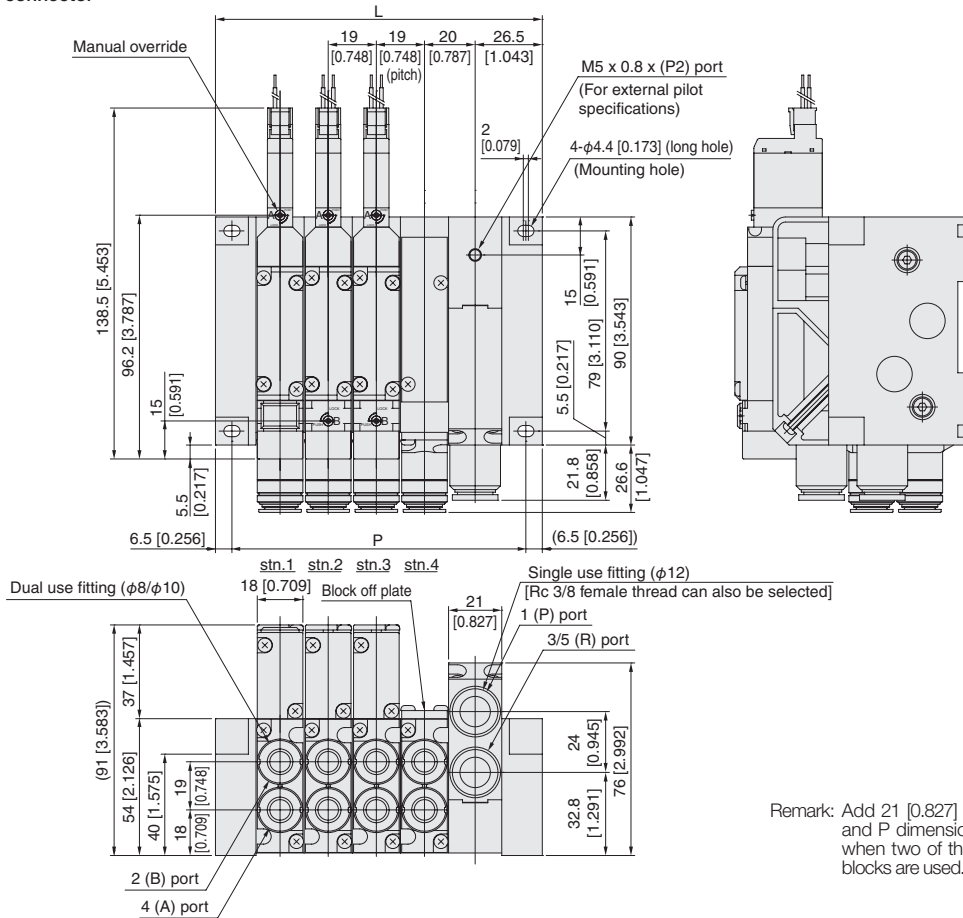


Unit dimensions

Number of units	L	P
2	91 [3.583]	78 [3.071]
3	110 [4.331]	97 [3.819]
4	129 [5.079]	116 [4.567]
5	148 [5.827]	135 [5.315]
6	167 [6.575]	154 [6.063]
7	186 [7.323]	173 [6.811]
8	205 [8.071]	192 [7.559]
9	224 [8.819]	211 [8.307]
10	243 [9.567]	230 [9.055]
11	262 [10.315]	249 [9.803]
12	281 [11.063]	268 [10.551]
13	300 [11.811]	287 [11.299]
14	319 [12.559]	306 [12.047]
15	338 [13.307]	325 [12.795]
16	357 [14.055]	344 [13.543]
17	376 [14.803]	363 [14.291]
18	395 [15.551]	382 [15.039]
19	414 [16.299]	401 [15.787]
20	433 [17.047]	420 [16.535]

Remark: Add 21 [0.827] to the L and P dimensions right when two of the piping blocks are used.

F18M Number of valves N Pilot specifications (Direct piping type)

With valve outlet port dual use fitting block
S type plug connector

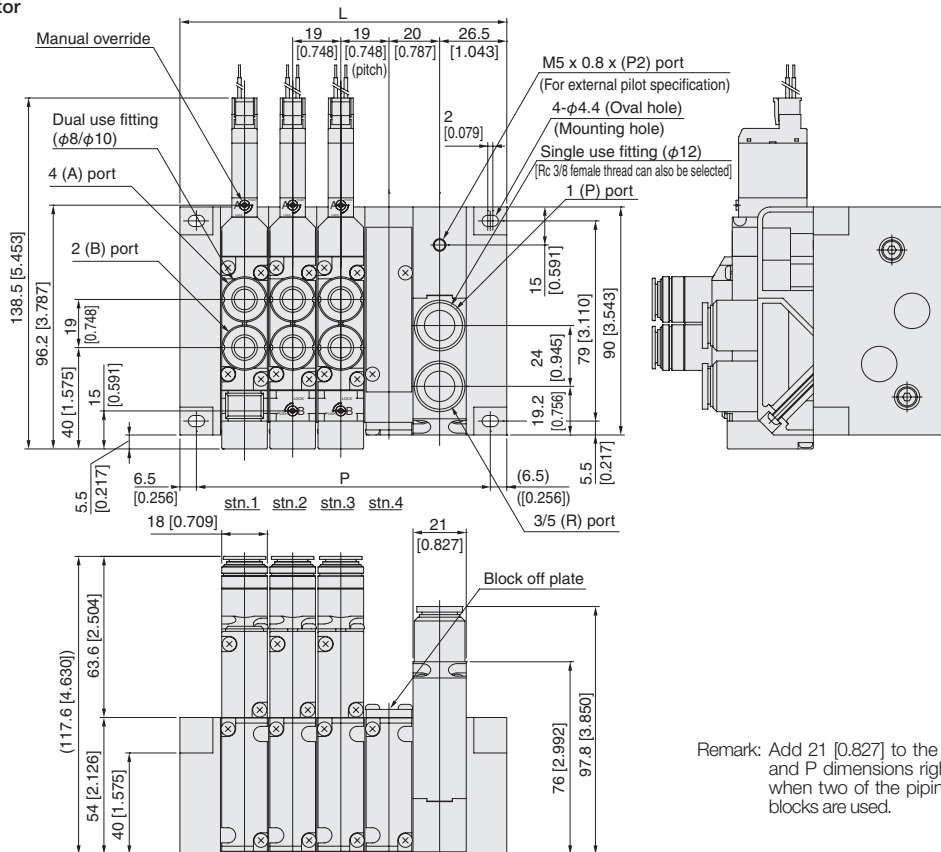

Unit dimensions

Number of units	L	P
2	91 [3.583]	78 [3.071]
3	110 [4.331]	97 [3.819]
4	129 [5.079]	116 [4.567]
5	148 [5.827]	135 [5.315]
6	167 [6.575]	154 [6.063]
7	186 [7.323]	173 [6.811]
8	205 [8.071]	192 [7.559]
9	224 [8.819]	211 [8.307]
10	243 [9.567]	230 [9.055]
11	262 [10.315]	249 [9.803]
12	281 [11.063]	268 [10.551]
13	300 [11.811]	287 [11.299]
14	319 [12.559]	306 [12.047]
15	338 [13.307]	325 [12.795]
16	357 [14.055]	344 [13.543]
17	376 [14.803]	363 [14.291]
18	395 [15.551]	382 [15.039]
19	414 [16.299]	401 [15.787]
20	433 [17.047]	420 [16.535]

Remark: Add 21 [0.827] to the L and P dimensions right when two of the piping blocks are used.


Note: The overall valve length of the T0 type is 12 mm [0.472 in] shorter (end cover side protrusion is 12 mm [0.472 in] less).

Dimensions of F18 series split manifold plug-in type mm [in]

F18M Number of valves P M L Pilot specifications (Base piping type)

※ See the bottom of page 286 for the dimensions of the F18M□PM/PL.

With manifold outlet port dual use fitting block
Flat cable connector 10-pin specifications

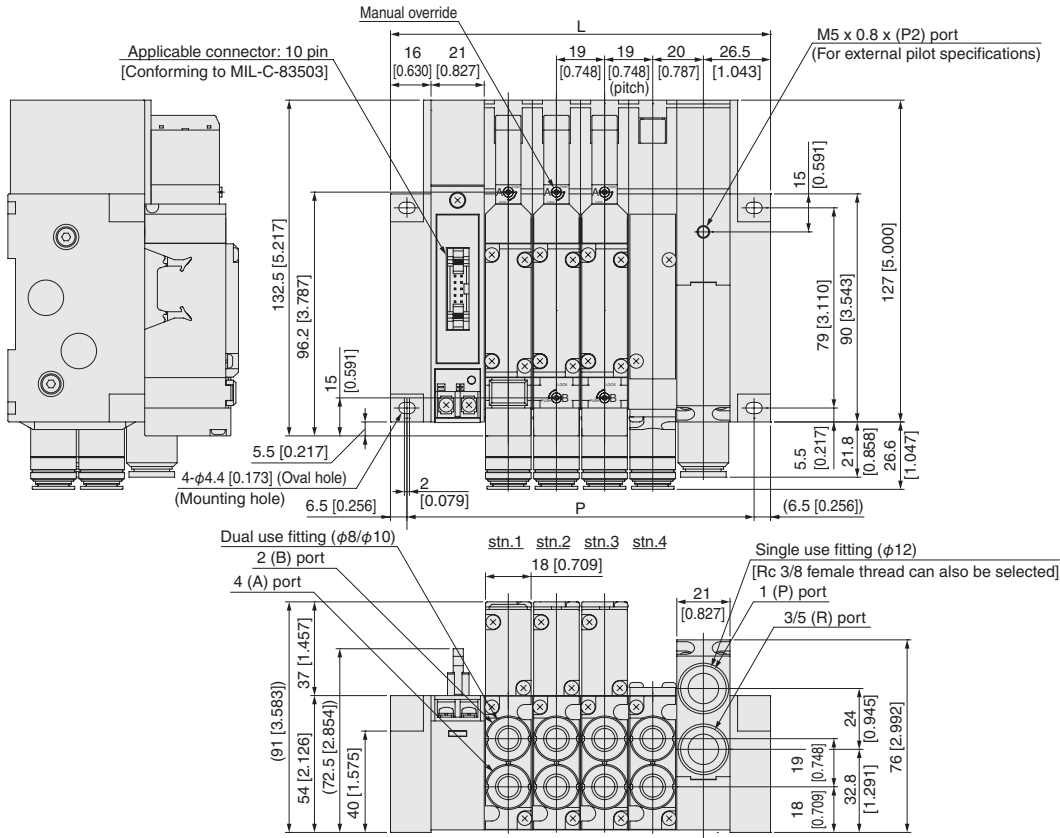

Unit dimensions


Number of units	L	P
2	112 [4.409]	99 [3.898]
3	131 [5.157]	118 [4.646]
4	150 [5.906]	137 [5.394]
5	169 [6.654]	156 [6.142]
6	188 [7.402]	175 [6.890]
7	207 [8.150]	194 [7.638]
8	226 [8.898]	213 [8.386]

Remark: Add 21 [0.827] to the L and P dimensions above when two of the piping blocks are used.

F18M Number of valves P M L Pilot specifications (Base piping type)

※ See the bottom of page 286 for the dimensions of the F18M□PM/PL.

With manifold outlet port dual use fitting block
Flat cable connector 20-pin specifications

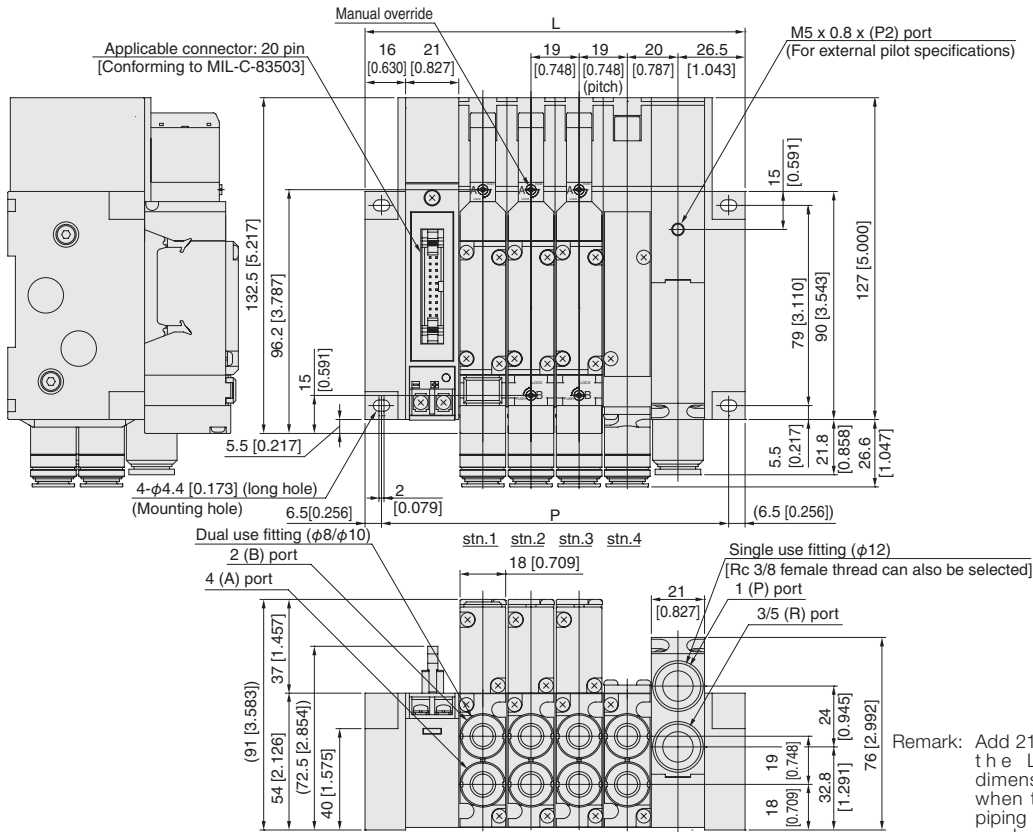

Unit dimensions

Number of units	L	P
2	112 [4.409]	99 [3.898]
3	131 [5.157]	118 [4.646]
4	150 [5.906]	137 [5.394]
5	169 [6.654]	156 [6.142]
6	188 [7.402]	175 [6.890]
7	207 [8.150]	194 [7.638]
8	226 [8.898]	213 [8.386]
9	245 [9.646]	232 [9.134]
10	264 [10.394]	251 [9.882]
11	283 [11.142]	270 [10.630]
12	302 [11.890]	289 [11.378]
13	321 [12.638]	308 [12.126]
14	340 [13.386]	327 [12.874]
15	359 [14.134]	346 [13.622]
16	378 [14.882]	365 [14.370]


Remark: Add 21 [0.827] to the L and P dimensions right when two of the piping blocks are used.

Dimensions of F18 series split manifold plug-in type mm [in]

F18M Number of valves P M J Pilot specifications (Base piping type)

※See the bottom of page 286 for the dimensions of the F18M□PM/PL.

With manifold outlet port dual use fitting block
Flat cable connector 26-pin specifications

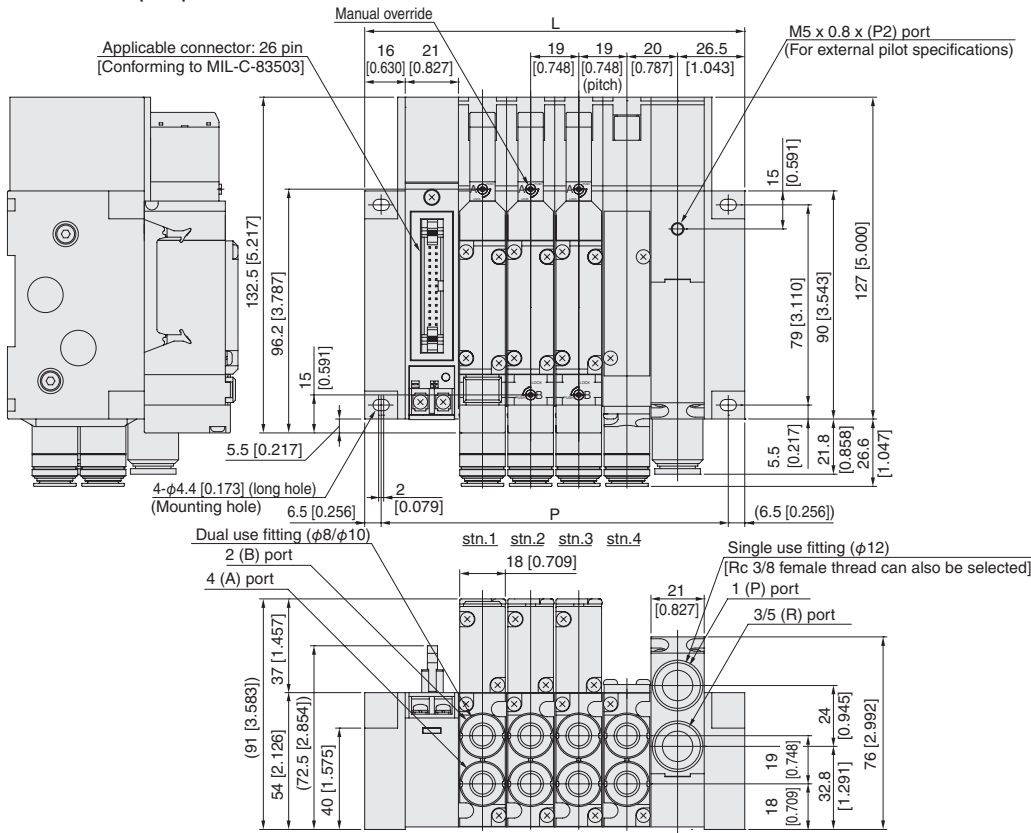

Remark: Add 21 [0.827] to the L and P dimensions right when two of the piping blocks are used.


Unit dimensions

Number of units	L	P
2	112 [4.409]	99 [3.898]
3	131 [5.157]	118 [4.646]
4	150 [5.906]	137 [5.394]
5	169 [6.654]	156 [6.142]
6	188 [7.402]	175 [6.890]
7	207 [8.150]	194 [7.638]
8	226 [8.898]	213 [8.386]
9	245 [9.646]	232 [9.134]
10	264 [10.394]	251 [9.882]
11	283 [11.142]	270 [10.630]
12	302 [11.890]	289 [11.378]
13	321 [12.638]	308 [12.126]
14	340 [13.386]	327 [12.874]
15	359 [14.134]	346 [13.622]
16	378 [14.882]	365 [14.370]
17	397 [15.630]	384 [15.118]
18	416 [16.378]	403 [15.866]
19	435 [17.126]	422 [16.614]
20	454 [17.874]	441 [17.362]

F18M Number of valves P M J Pilot specifications (Base piping type)

※See the bottom of p286 for the dimensions of the F18M□PM/PL.

With manifold outlet port dual use fitting block
D-sub connector 25-pin specifications

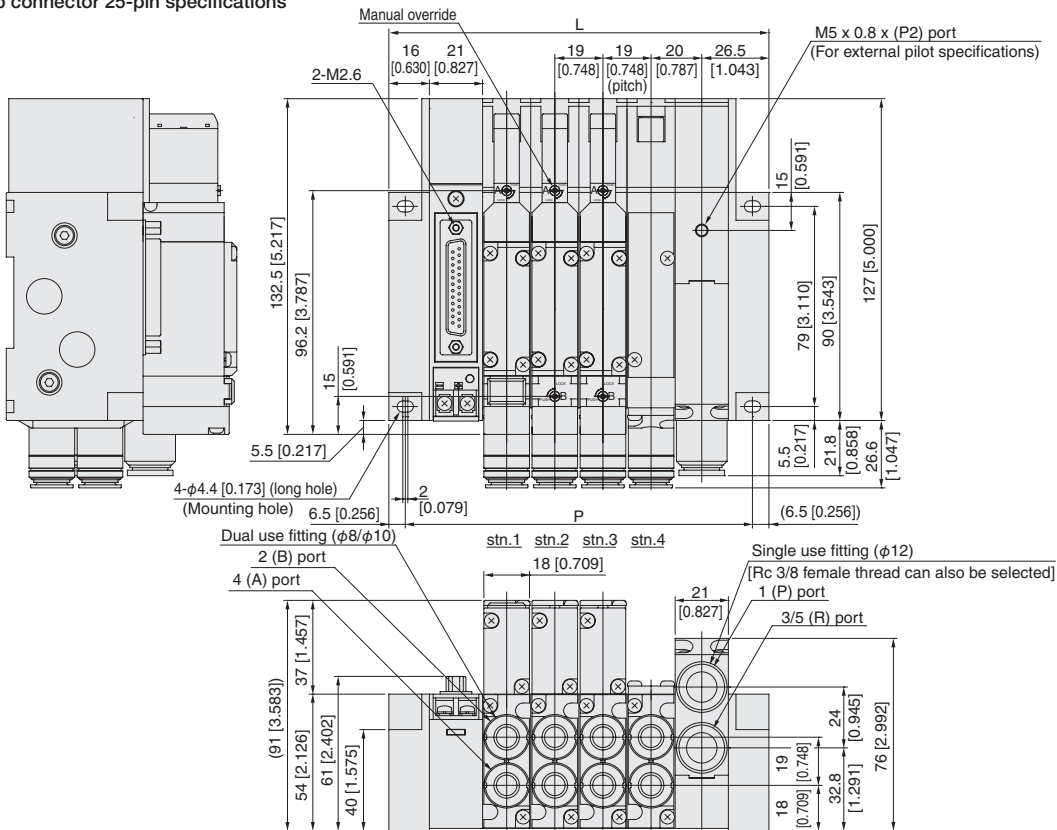

Remark: Add 21 [0.827] to the L and P dimensions right when two of the piping blocks are used.

Unit dimensions

Number of units	L	P
2	112 [4.409]	99 [3.898]
3	131 [5.157]	118 [4.646]
4	150 [5.906]	137 [5.394]
5	169 [6.654]	156 [6.142]
6	188 [7.402]	175 [6.890]
7	207 [8.150]	194 [7.638]
8	226 [8.898]	213 [8.386]
9	245 [9.646]	232 [9.134]
10	264 [10.394]	251 [9.882]
11	283 [11.142]	270 [10.630]
12	302 [11.890]	289 [11.378]
13	321 [12.638]	308 [12.126]
14	340 [13.386]	327 [12.874]
15	359 [14.134]	346 [13.622]
16	378 [14.882]	365 [14.370]
17	397 [15.630]	384 [15.118]
18	416 [16.378]	403 [15.866]
19	435 [17.126]	422 [16.614]
20	454 [17.874]	441 [17.362]

Dimensions of F18 series split manifold plug-in type mm [in]

F18M Number of valves **PM** Pilot specifications (Base piping type)



※See the bottom of p.286 for the dimensions of the F18M□PM/PL.

With manifold outlet port dual use fitting block
Terminal block type

Unit dimensions

Number of units	L	P
2	133 [5.236]	120 [4.724]
3	152 [5.984]	139 [5.472]
4	171 [6.732]	158 [6.220]
5	190 [7.480]	177 [6.969]
6	209 [8.228]	196 [7.717]
7	228 [8.976]	215 [8.465]
8	247 [9.724]	234 [9.213]
9	266 [10.472]	253 [9.961]
10	285 [11.220]	272 [10.709]
11	304 [11.969]	291 [11.457]
12	323 [12.717]	310 [12.205]
13	342 [13.465]	329 [12.953]
14	361 [14.213]	348 [13.701]
15	380 [14.961]	367 [14.449]
16	399 [15.709]	386 [15.197]
17	418 [16.457]	405 [15.945]
18	437 [17.205]	424 [16.693]

Remark: Add 21 [0.827] to the L and P dimensions above when two of the piping blocks are used.

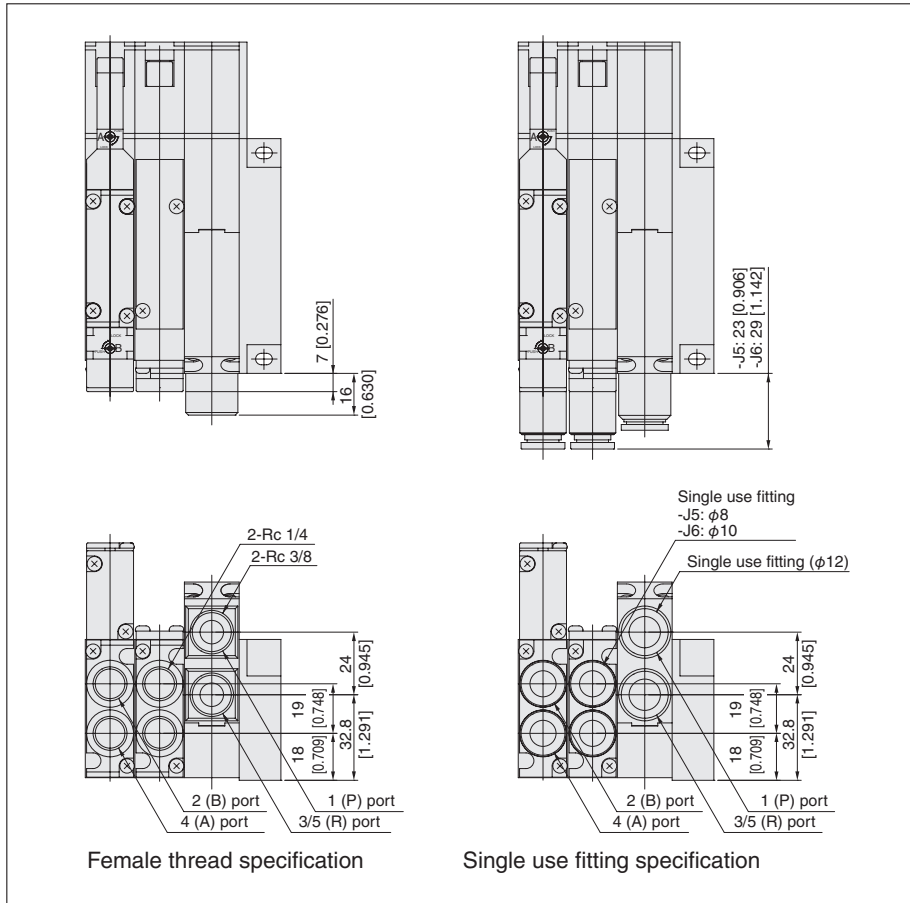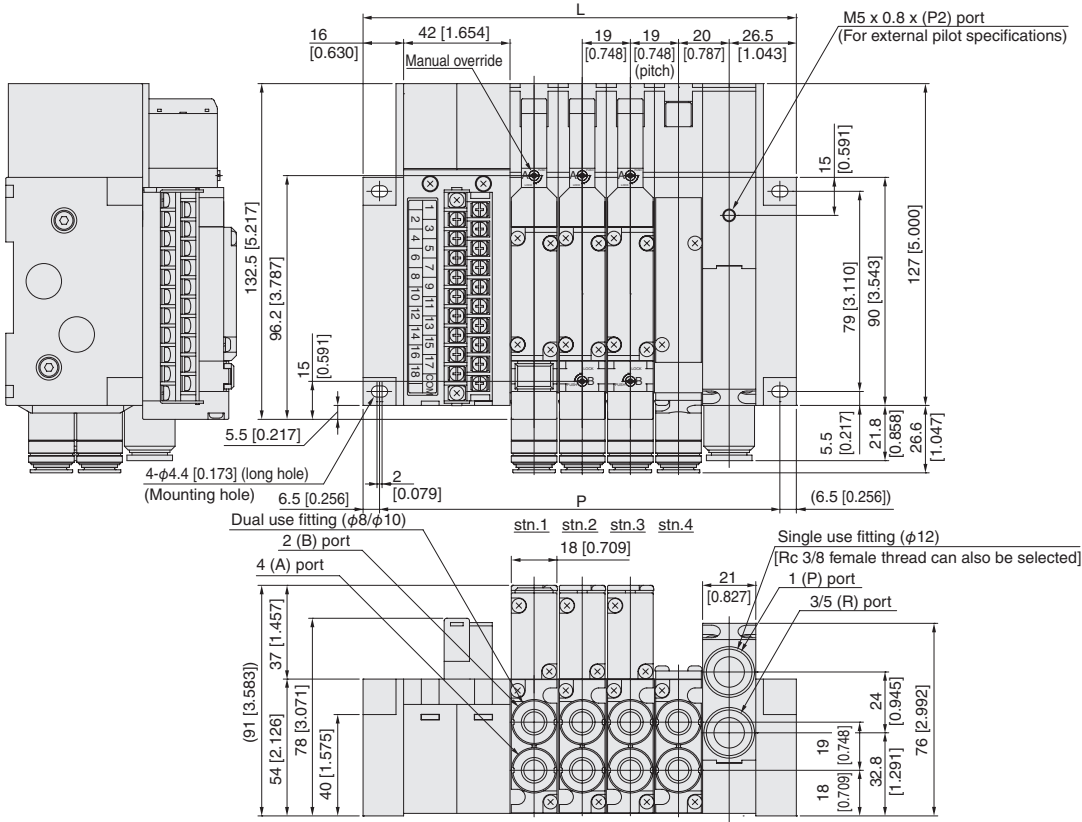


Omron B7A, SandCC-Link supported

F18M Number of valves **S**^J**M**_L Pilot specifications (Base piping type)

※See the bottom of p.286 for the dimensions of the F18M□SM/SL.

With manifold outlet port dual use fitting block

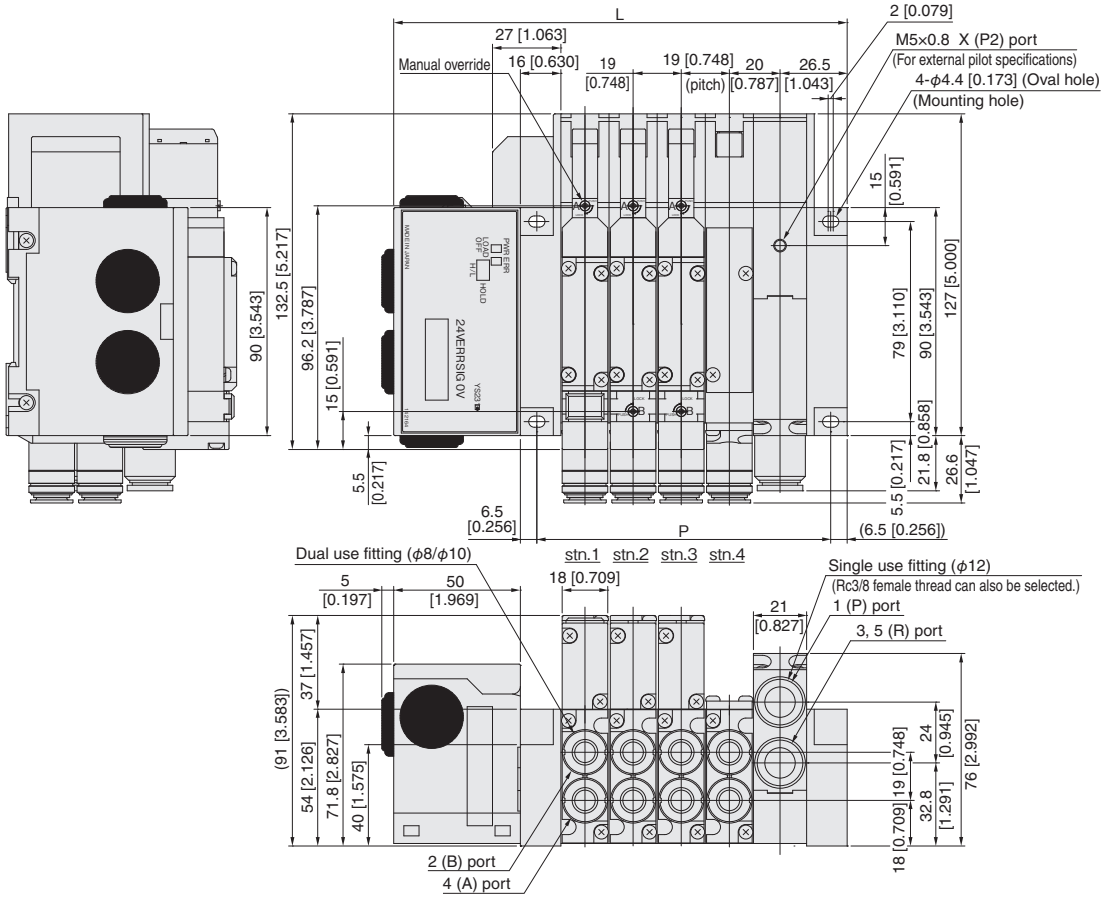


CompoNet supported

F18M Number of valves **S^M** Pilot specifications (Base piping type)

※ See the bottom of p.286 for the dimensions of the F18M□PM/PL.

With manifold outlet port dual use fitting block

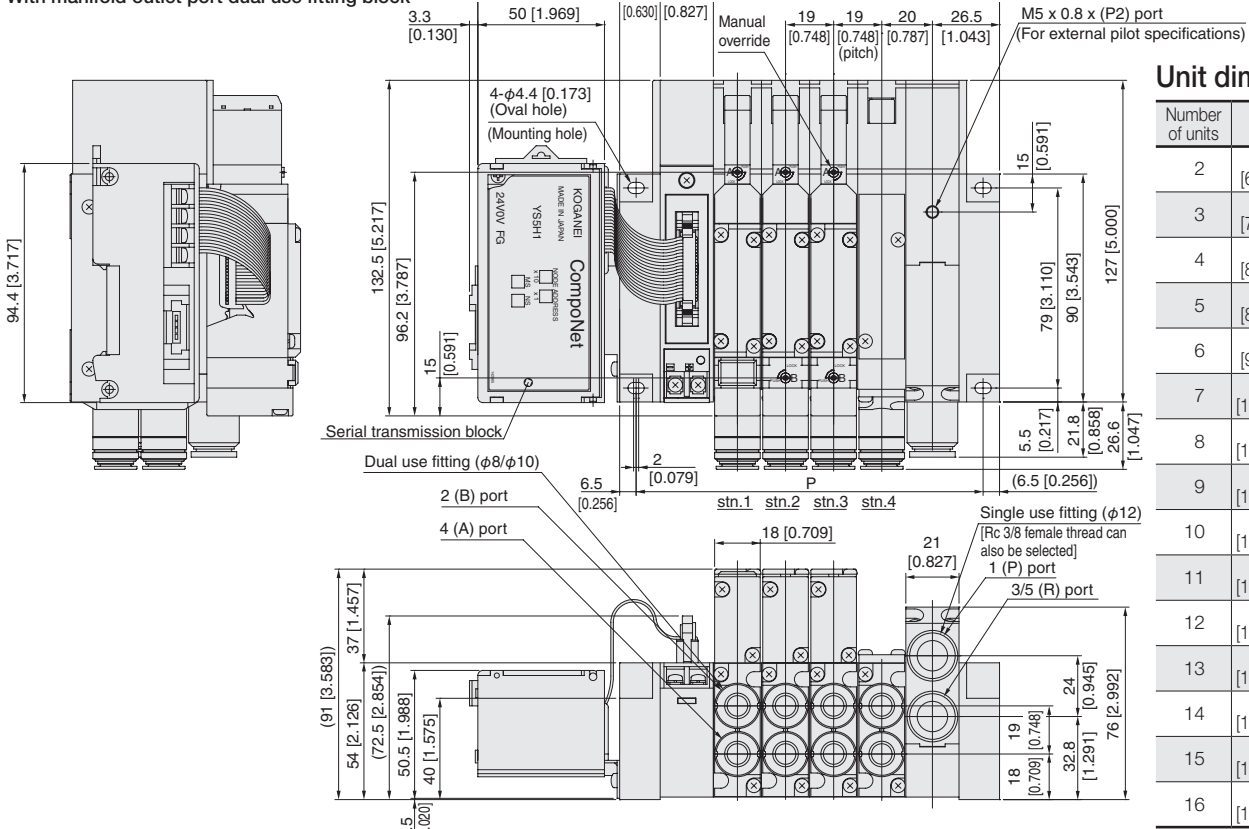

Unit dimensions

Number of units	L	P
2	168 [6.614]	99 [3.898]
3	187 [7.362]	118 [4.646]
4	206 [8.110]	137 [5.394]
5	225 [8.858]	156 [6.142]
6	244 [9.606]	175 [6.890]
7	263 [10.354]	194 [7.638]
8	282 [11.102]	213 [8.386]
9	301 [11.850]	232 [9.134]
10	320 [12.598]	251 [9.882]
11	339 [13.346]	270 [10.630]
12	358 [14.094]	289 [11.378]
13	377 [14.843]	308 [12.126]
14	396 [15.591]	327 [12.874]
15	415 [16.339]	346 [13.622]
16	434 [17.087]	365 [14.370]

* The communication connectors are sold by Omron Corporation. Contact Omron Corporation for details.

Remark: Add 21 [0.827] to the L and P dimensions above when two of the piping blocks are used.


EtherCAT and EtherNet/IP supported

※ See the bottom of page 286 for the dimensions of the F18M□PM/PL.

F18M Number of valves **S^M** Pilot specifications (Base piping type)

※ The dimension is of EtherCAT.

With manifold outlet port dual use fitting block

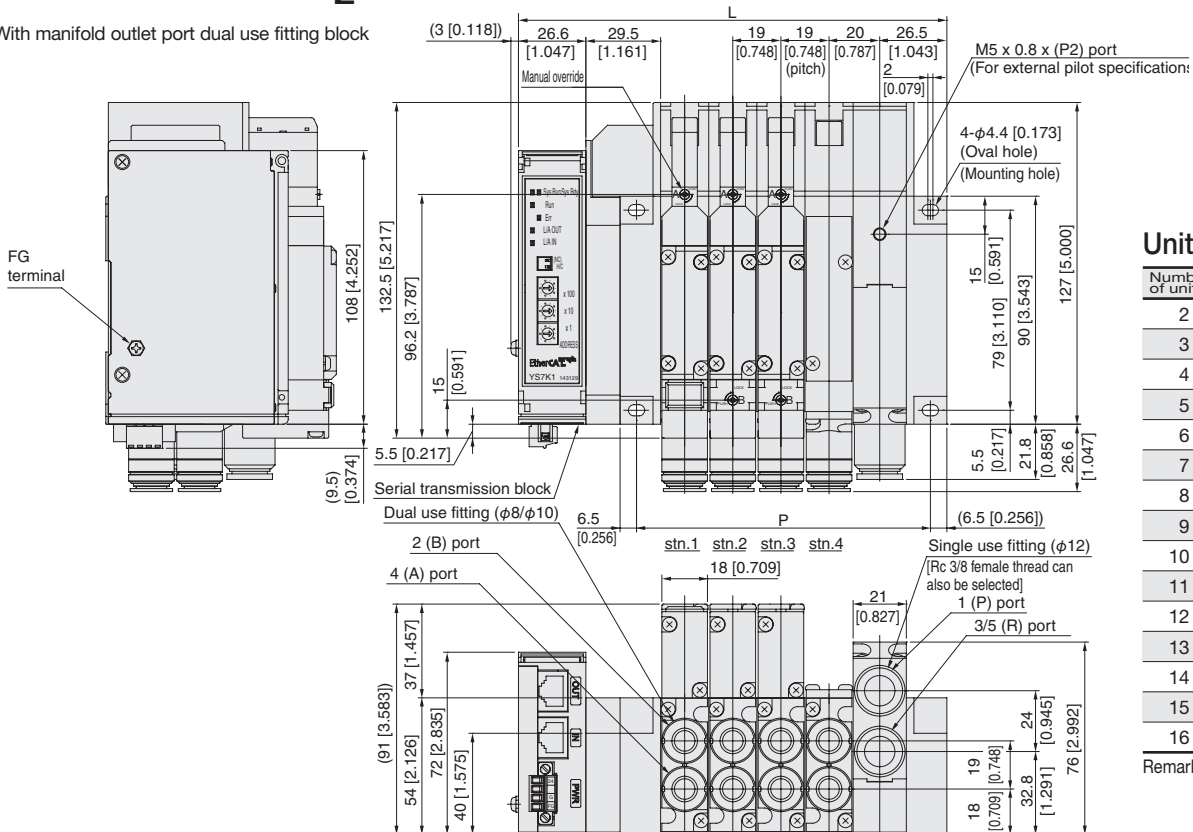

Unit dimensions

Number of units	L	P
2	131.1 [5.161]	78 [3.071]
3	150.1 [5.909]	97 [3.819]
4	169.1 [6.657]	116 [4.567]
5	188.1 [7.406]	135 [5.315]
6	207.1 [8.154]	154 [6.063]
7	226.1 [8.902]	173 [6.811]
8	245.1 [9.650]	192 [7.559]
9	264.1 [10.398]	211 [8.307]
10	283.1 [11.146]	230 [9.055]
11	302.1 [11.894]	249 [9.803]
12	321.1 [12.642]	268 [10.551]
13	340.1 [13.390]	287 [11.299]
14	359.1 [14.138]	306 [12.047]
15	378.1 [14.886]	325 [12.795]
16	397.1 [15.634]	344 [13.543]


Remarks: When using two piping blocks, add 21 to the above L and P dimensions.

DeviceNet supported

F18M **S^J M^L** (Base piping specifications)

*See the bottom of page 286 for the dimensions of the F18M .

With manifold outlet port dual use fitting block

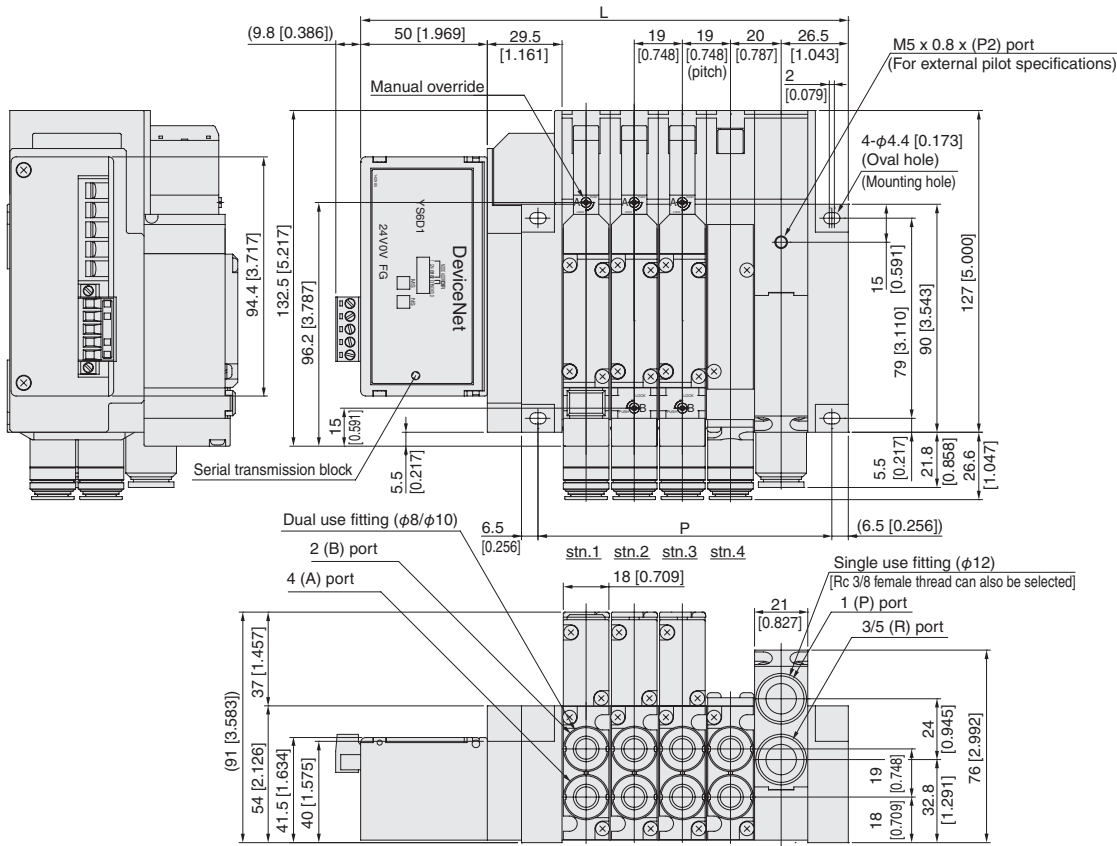


Unit dimensions

Number of units	L	P
2	154.5 [6.083]	78 [3.071]
3	173.5 [6.831]	97 [3.819]
4	192.5 [7.579]	116 [4.567]
5	211.5 [8.327]	135 [5.315]
6	230.5 [9.074]	154 [6.063]
7	249.5 [9.822]	173 [6.811]
8	268.5 [10.571]	192 [7.559]
9	287.5 [11.319]	211 [8.307]
10	306.5 [12.067]	230 [9.055]
11	325.5 [12.815]	249 [9.803]
12	344.5 [13.563]	268 [10.551]
13	363.5 [14.311]	287 [11.299]
14	382.5 [15.059]	306 [12.047]
15	401.5 [15.807]	325 [12.795]
16	420.5 [16.555]	344 [13.543]


Remarks: When using two piping blocks, add 21 to the above L and P dimensions.

Additional parts (sold separately)



- Muffler: KM-J12 [for both plug-in and non-plug-in type]

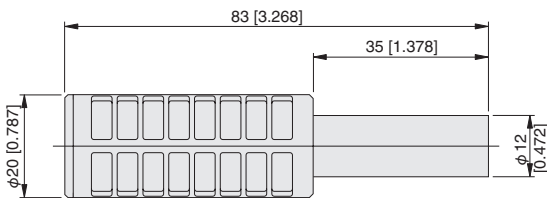

- Muffler: KM-J8 [for individual exhaust spacer only]

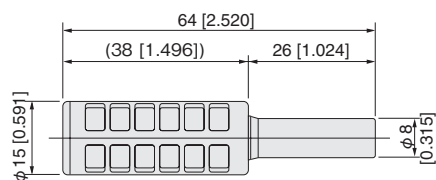

- Muffler: KM-J10 [for individual exhaust spacer only]

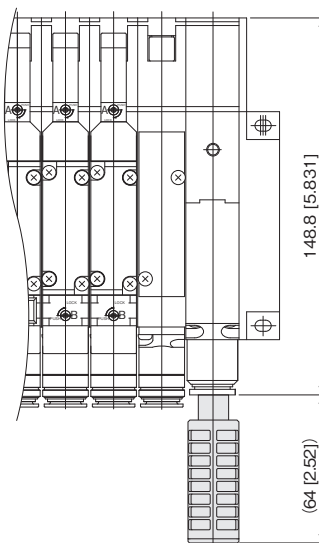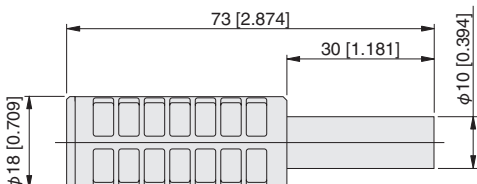

F Series Specifications confirmation Form

INDEX

■F10, F15 Series

Monoblock Manifold A Type (Base Piping Type)	294
Monoblock Manifold F Type (Direct Piping Type)	296
Monoblock Manifold A Type, Wire-Saving Type (Base Piping Type)	298
Monoblock Manifold F Type, Wire-Saving Type (Direct Piping Type)	300
PC Board Manifold A Type (Base Piping Type)	302
PC Board Manifold F Type (Direct Piping Type)	304
Split Manifold Non-Plug-in Type	306
Split Manifold Plug-in Type	308
Split Manifold Serial Transmission Type	310
Easy Assembly Type Manifold Non-Plug-In Type	312
Easy Assembly Type Manifold Plug-in Type	314
Easy Assembly Type Manifold Serial Transmission Type	316

■F18 Series

Monoblock Manifold A Type (Base Piping Type)	318
Monoblock Manifold F Type (Direct Piping Type)	320
Split Manifold Non-Plug-in Type	322
Split Manifold Plug-in Type	324
Split Manifold Serial Transmission Type	326

Example of Specifications Confirmation Form

When ordering F series manifolds, use this specifications confirmation form for complex model configurations, for confirming specifications, etc.

Using the example below for reference, fill out the required items in the "Specifications confirmation Forms" found on p.202 and up, and send it. (Make copies of the Specifications Confirmation Form for your use.)

F10, F15 Series

Monoblock Manifold

A Type (Base Piping Type)

Specifications Confirmation Form 1/2

• Fill in selections inside the thick-lined boxes.

Manifold model

F
10
M
8
A
AH
J

Valve units
2 to 20

Valve size
10: 10mm width
15: 15mm width

Manifold outlet specification
J : With dual use fitting blocks
M : With female thread blocks
L : With selectable fitting blocks

Pilot specification
Blank : Internal pilot manifold
G : External pilot manifold

	Order Date	Month/	Day/	Year/
Company name				
Contact person				
Order No.				

Mounting valve model

stn.

F
Valve size
T
Valve specification

- Note 1,4

- Note 3

- A1 -
PS

- Note 4

- Note 8

- Note 5
DC24V

Operation type
Blank: Internal pilot type^{Note1}
G : External pilot type (for positive pressure)^{Note2}
V : External pilot type (for vacuum)^{Note2}

IP Specification
Blank: Standard
P^{Note14}: IP Specification

Manual override
Blank: Manual override button
R : Manual override lever^{Note3}
83 : Protruding locking type^{Note11}

Wiring specification
Blank: L type plug connector, Without connector
PN : S type plug connector, Without connector
PS : S type plug connector, Lead wire length 300mm [11.8in.]
PL : L type plug connector, Lead wire length 300mm [11.8in.]
PS3 : S type plug connector, Lead wire length 3000mm [118in.]
PL3 : L type plug connector, Lead wire length 3000mm [118in.]
CPS : Pre-wired positive common terminal S type plug connector, Lead wire length 300mm [11.8in.]
CPL : Pre-wired positive common terminal L type plug connector, Lead wire length 300mm [11.8in.]
CPS3 : Pre-wired positive common terminal S type plug connector, Lead wire length 3000mm [118in.]
CPL3 : Pre-wired positive common terminal L type plug connector, Lead wire length 3000mm [118in.]
39L : DIN connector type with indicator^{Note12}
39N : DIN connector type without indicator^{Note12}

Manifold fitting specifications^{Note4}
Can be selected only when the manifold outlet specification is L (with selectable fitting blocks (metric))
J5 : Manifold side outlet port with single use fitting block (F10: φ4, F15: φ6)
J6 : Manifold side outlet port with single use fitting block (F10: φ6, F15: φ8)
M : Manifold side outlet port with female thread block (F10: M5X0.8, F15: Rc1/8)
J5A : Manifold side outlet port with single use fitting block, 3-port normally closed (NC) (F10: φ4, F15: φ6)
J5B : Manifold side outlet port with single use fitting block, 3-port normally open (NO) (F10: φ4, F15: φ6)
J6A : Manifold side outlet port with single use fitting block, 3-port normally closed (NC) (F10: φ6, F15: φ8)
J6B : Manifold side outlet port with single use fitting block, 3-port normally open (NO) (F10: φ6, F15: φ8)
MA : Manifold side outlet port with female thread block, 3-port normally closed (NC) (F10: M5X0.8, F15: Rc1/8)
MB : Manifold side outlet port with female thread block, 3-port normally open (NO) (F10: M5X0.8, F15: Rc1/8)

Can be selected only when the manifold type is AH and the manifold outlet specification is L (with selectable fitting blocks (imperial))
MH : Manifold side outlet port with female thread block (F10:10-32UNF, F15: NPT1/8)
MAH : Manifold side outlet port with female thread block, 3-port normally closed (NC) (F10:10-32UNF, F15: NPT1/8)
MBH : Manifold side outlet port with female thread block, 3-port normally open (NO) (F10:10-32UNF, F15: NPT1/8)

Back pressure prevention valve^{Note8}
Blank: No back pressure prevention valve
E1 : With back pressure prevention valve

Individual air supply and exhaust spacer, stop valve^{Note5}
Blank: No spacer and no stop valve
NPM : Individual air supply spacer (with M5 female thread for F10)^{Note13}
NP6 : Individual air supply spacer (with φ6 fitting for F15)^{Note13}
NP8 : Individual air supply spacer (with φ8 fitting for F15)^{Note13}
NRM : Individual exhaust spacer (with M5 female thread for F10)^{Note13}
NR6 : Individual exhaust spacer (with φ6 fitting for F15)^{Note13}
NR8 : Individual exhaust spacer (with φ8 fitting for F15)^{Note13}
STP : With stop valve^{Note1}

Voltage
DC12V^{Note9}
DC24V
AC100V^{Note10,13}
AC240V^{Note10,11}

Enter ○ in each designated station in tables on the next page.

268 KOGANEI

F10, F15 Series

Monoblock Manifold A Type (Base Piping Type)

Specifications Confirmation Form 2/2

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve, block-off plate		Station	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
<input type="checkbox"/>	T0	2-position, for single solenoid only																					
<input type="checkbox"/>	T1	2-position, single solenoid specification																					
<input type="checkbox"/>	T2	2-position, double solenoid specification																					
<input type="checkbox"/>	T3	3-position, closed center																					
<input type="checkbox"/>	T4 ^{Note6}	3-position, exhaust center																					
<input type="checkbox"/>	T5 ^{Note6}	3-position, pressure center																					
<input type="checkbox"/>	TA ^{Note7}	Tandem 3-port (NC and NC)																					
<input type="checkbox"/>	TB ^{Note7}	Tandem 3-port (NO and NO)																					
<input type="checkbox"/>	TC ^{Note7}	Tandem 3-port (NC and NO)																					
<input type="checkbox"/>	LT0	(Low current type) 2-position, for single solenoid only																					
<input type="checkbox"/>	LT1	(Low current type) 2-position, single solenoid specification																					
<input type="checkbox"/>	LT2	(Low current type) 2-position, double solenoid specification																					
<input type="checkbox"/>	LT3	(Low current type) 3-position, closed center																					
<input type="checkbox"/>	LT4 ^{Note6}	(Low current type) 3-position, exhaust center																					
<input type="checkbox"/>	LT5 ^{Note6}	(Low current type) 3-position, pressure center																					
<input type="checkbox"/>	LTA ^{Note7}	(Low current type) Tandem 3-port (NC and NC)																					
<input type="checkbox"/>	LTB ^{Note7}	(Low current type) Tandem 3-port (NO and NO)																					
<input type="checkbox"/>	LTC ^{Note7}	(Low current type) Tandem 3-port (NC and NO)																					
<input type="checkbox"/>	BP	Block-off plate																					
<input type="checkbox"/>	^{Note14}	IP Specification																					
Manual override	R	Manual override lever ^{Note3}																					
	83	Protruding locking type ^{Note11}																					
Manifold fitting specification ^{Note4} (Manifold side outlet port)	J5	With single use fitting block																					
	J6	With single use fitting block																					
	M	With female thread block																					
	J5A	With single use fitting block, 3-port normally closed (NC)																					
	J5B	With single use fitting block, 3-port normally open (NO)																					
	J6A	With single use fitting block, 3-port normally closed (NC)																					
	J6B	With single use fitting block, 3-port normally open (NO)																					
	MA	With female thread block, 3-port normally closed (NC)																					
	MB	With female thread block, 3-port normally open (NO)																					
	MH	With female thread block																					
MAH	With female thread block, 3-port normally closed (NC)																						
MBH	With female thread block, 3-port normally open (NO)																						
E1 ^{Note8}	Back pressure prevention valve																						
NPM	Individual air supply spacer (with M5 female thread for F10)																						
NP6	Individual air supply spacer (with φ 6 fitting for F15)																						
NP8	Individual air supply spacer (with φ 8 fitting for F15)																						
NRM	Individual exhaust spacer (with M5 female thread for F10)																						
NR6	Individual exhaust spacer (with φ 6 fitting for F15)																						
NR8	Individual exhaust spacer (with φ 8 fitting for F15)																						
STP	With stop valve																						

- Notes: 1. Cannot be mounted on the external pilot manifold.
 2. Cannot be mounted on the internal pilot manifold.
 3. To designate a manual override lever, enter ○ in the manual override boxes of the designated station in the above table.
 When the valve specification is **T1** or **T2**, the manual override lever is placed only on the A side. This is not available with **-39□**.
 4. When the manifold outlet specifications are **L** (with selectable fitting), select fitting specification for each station, and enter ○ in the manifold fitting specification boxes of the above table.
 The 3-port specifications are only available in valve specification **T0**, **T1**, and **T2**.
 5. When mounting the individual air supply or exhaust spacer or stop valve, enter ○ in the spacer or stop valve boxes of the designated stations in the above table.
 6. Not available in the vacuum valves.
 7. Not available in external pilot type and vacuum valves.
 8. When mounting the back pressure prevention valve, enter ○ in the back pressure prevention valve boxes of the designated stations in the above table. Not available with the individual exhaust spacer and vacuum valve.
 9. Not available in low-current type.
 10. Not available in low-current type and tandem 3-port valves.
 11. Only for wiring specification **-39□**.
 12. Only for **F15** series and not available for valve specification **T1**, **TA**, **TB**, and **TC**. In addition, the valve is used only as a double solenoid for **T2**.
 13. Not available with DIN connectors (**-39□**).
 14. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.

Quantity set Delivery

F10, F15 Series


Monoblock Manifold

A Type (Base Piping Type)

Specifications Confirmation Form 1/2

Company name	
Contact person	
Order No.	

• Fill in selections inside the thick-lined boxes.

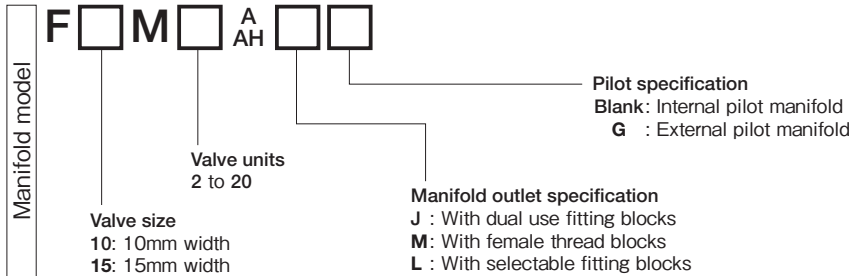

Mounting valve model	stn. <input type="checkbox"/> F <input type="checkbox"/> Valve size <input type="checkbox"/> T <input type="checkbox"/> Valve specification <input type="checkbox"/> - <input type="checkbox"/> - <input type="checkbox"/> - A1 - <input type="checkbox"/> - <input type="checkbox"/> - <input type="checkbox"/> - <input type="checkbox"/> - <input type="checkbox"/> - <input type="checkbox"/>	<p>Operation type Blank: Internal pilot type^{Note1} G : External pilot type (for positive pressure)^{Note2} V : External pilot type (for vacuum)^{Note2}</p> <p>IP Specification Blank :Standard P^{Note14}:IP Specification</p> <p>Manual override Blank: Manual override button R : Manual override lever^{Note3} 83 : Protruding locking type^{Note11}</p> <p>Wiring specification Blank: L type plug connector, Without connector PN : S type plug connector, Without connector PS : S type plug connector, Lead wire length 300mm [11.8in.] PL : L type plug connector, Lead wire length 300mm [11.8in.] PS3 : S type plug connector, Lead wire length 3000mm [118in.] PL3 : L type plug connector, Lead wire length 3000mm [118in.] CPS : Pre-wired positive common terminal S type plug connector, Lead wire length 300mm [11.8in.] CPL : Pre-wired positive common terminal L type plug connector, Lead wire length 300mm [11.8in.] CPS3 : Pre-wired positive common terminal S type plug connector, Lead wire length 3000mm [118in.] CPL3 : Pre-wired positive common terminal L type plug connector, Lead wire length 3000mm [118in.] 39L : DIN connector type with indicator^{Note12} 39N : DIN connector type without indicator^{Note12}</p> <p>Manifold fitting specifications^{Note4} Can be selected only when the manifold outlet specification is L (with selectable fitting blocks (metric)) J5 : Manifold side outlet port with single use fitting block (F10: φ 4, F15: φ 6) J6 : Manifold side outlet port with single use fitting block (F10: φ 6, F15: φ 8) M : Manifold side outlet port with female thread block (F10: M5X0.8, F15: Rc1/8) J5A : Manifold side outlet port with single use fitting block, 3-port normally closed (NC) (F10: φ 4, F15: φ 6) J5B : Manifold side outlet port with single use fitting block, 3-port normally open (NO) (F10: φ 4, F15: φ 6) J6A : Manifold side outlet port with single use fitting block, 3-port normally closed (NC) (F10: φ 6, F15: φ 8) J6B : Manifold side outlet port with single use fitting block, 3-port normally open (NO) (F10: φ 6, F15: φ 8) MA : Manifold side outlet port with female thread block, 3-port normally closed (NC) (F10: M5X0.8, F15: Rc1/8) MB : Manifold side outlet port with female thread block, 3-port normally open (NO) (F10: M5X0.8, F15: Rc1/8)</p> <p>Can be selected only when the manifold type is AH and the manifold outlet specification is L (with selectable fitting blocks (imperial)) MH : Manifold side outlet port with female thread block (F10:10-32UNF, F15: NPT1/8) MAH : Manifold side outlet port with female thread block, 3-port normally closed (NC) (F10:10-32UNF, F15: NPT1/8) MBH : Manifold side outlet port with female thread block, 3-port normally open (NO) (F10:10-32UNF, F15: NPT1/8)</p>	<p>Voltage DC12V^{Note9} DC24V AC100V^{Note10,13} AC240V^{Note10,11}</p> <p>Back pressure prevention valve^{Note8} Blank: No back pressure prevention valve E1 : With back pressure prevention valve</p> <p>Individual air supply and exhaust spacer, stop valve^{Note5} Blank: No spacer and no stop valve NPM : Individual air supply spacer (with M5 female thread for F10)^{Note13} NP6 : Individual air supply spacer (with φ 6 fitting for F15)^{Note13} NP8 : Individual air supply spacer (with φ 8 fitting for F15)^{Note13} NRM : Individual exhaust spacer (with M5 female thread for F10)^{Note13} NR6 : Individual exhaust spacer (with φ 6 fitting for F15)^{Note13} NR8 : Individual exhaust spacer (with φ 8 fitting for F15)^{Note13} STP : With stop valve^{Note1}</p>
	Enter ○ in each designated station in tables on the next page.		

F10, F15 Series

Monoblock Manifold A Type (Base Piping Type)

Specifications Confirmation Form 2/2

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve models	Mounting valve, block-off plate	Station	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
		<input type="checkbox"/> T0	2-position, for single solenoid only																					
<input type="checkbox"/> T1	2-position, single solenoid specification																							
<input type="checkbox"/> T2	2-position, double solenoid specification																							
<input type="checkbox"/> T3	3-position, closed center																							
<input type="checkbox"/> T4 ^{Note6}	3-position, exhaust center																							
<input type="checkbox"/> T5 ^{Note6}	3-position, pressure center																							
<input type="checkbox"/> TA ^{Note7}	Tandem 3-port (NC and NC)																							
<input type="checkbox"/> TB ^{Note7}	Tandem 3-port (NO and NO)																							
<input type="checkbox"/> TC ^{Note7}	Tandem 3-port (NC and NO)																							
<input type="checkbox"/> LT0	(Low current type) 2-position, for single solenoid only																							
<input type="checkbox"/> LT1	(Low current type) 2-position, single solenoid specification																							
<input type="checkbox"/> LT2	(Low current type) 2-position, double solenoid specification																							
<input type="checkbox"/> LT3	(Low current type) 3-position, closed center																							
<input type="checkbox"/> LT4 ^{Note6}	(Low current type) 3-position, exhaust center																							
<input type="checkbox"/> LT5 ^{Note6}	(Low current type) 3-position, pressure center																							
<input type="checkbox"/> LTA ^{Note7}	(Low current type) Tandem 3-port (NC and NC)																							
<input type="checkbox"/> LTB ^{Note7}	(Low current type) Tandem 3-port (NO and NO)																							
<input type="checkbox"/> LTC ^{Note7}	(Low current type) Tandem 3-port (NC and NO)																							
<input type="checkbox"/> BP	Block-off plate																							
<input type="checkbox"/> P ^{Note14}	IP Specification																							
Manual override	<input type="checkbox"/> R	Manual override lever ^{Note3}																						
	<input type="checkbox"/> 83	Protruding locking type ^{Note11}																						
Manifold fitting specification ^{Note4} (Manifold side outlet port)	<input type="checkbox"/> J5	With single use fitting block																						
	<input type="checkbox"/> J6	With single use fitting block																						
	<input type="checkbox"/> M	With female thread block																						
	<input type="checkbox"/> J5A	With single use fitting block, 3-port normally closed (NC)																						
	<input type="checkbox"/> J5B	With single use fitting block, 3-port normally open (NO)																						
	<input type="checkbox"/> J6A	With single use fitting block, 3-port normally closed (NC)																						
	<input type="checkbox"/> J6B	With single use fitting block, 3-port normally open (NO)																						
	<input type="checkbox"/> MA	With female thread block, 3-port normally closed (NC)																						
	<input type="checkbox"/> MB	With female thread block, 3-port normally open (NO)																						
	<input type="checkbox"/> MH	With female thread block																						
<input type="checkbox"/> MAH	With female thread block, 3-port normally closed (NC)																							
<input type="checkbox"/> MBH	With female thread block, 3-port normally open (NO)																							
<input type="checkbox"/> E1 ^{Note8}	Back pressure prevention valve																							
<input type="checkbox"/> NPM	Individual air supply spacer (with M5 female thread for F10)																							
<input type="checkbox"/> NP6	Individual air supply spacer (with φ 6 fitting for F15)																							
<input type="checkbox"/> NP8	Individual air supply spacer (with φ 8 fitting for F15)																							
<input type="checkbox"/> NRM	Individual exhaust spacer (with M5 female thread for F10)																							
<input type="checkbox"/> NR6	Individual exhaust spacer (with φ 6 fitting for F15)																							
<input type="checkbox"/> NR8	Individual exhaust spacer (with φ 8 fitting for F15)																							
<input type="checkbox"/> STP	With stop valve																							

- Notes: 1. Cannot be mounted on the external pilot manifold.
 2. Cannot be mounted on the internal pilot manifold.
 3. To designate a manual override lever, enter ○ in the manual override boxes of the designated station in the above table.
 When the valve specification is **T1** or **T2**, the manual override lever is placed only on the A side. This is not available with **-39□**.
 4. When the manifold outlet specifications are **L** (with selectable fitting), select fitting specification for each station, and enter ○ in the manifold fitting specification boxes of the above table.
 The 3-port specifications are only available in valve specification **T0**, **T1**, and **T2**.
 5. When mounting the individual air supply or exhaust spacer or stop valve, enter ○ in the spacer or stop valve boxes of the designated stations in the above table.
 6. Not available in the vacuum valves.
 7. Not available in external pilot type and vacuum valves.
 8. When mounting the back pressure prevention valve, enter ○ in the back pressure prevention valve boxes of the designated stations in the above table. Not available with the individual exhaust spacer and vacuum valve.
 9. Not available in low-current type.
 10. Not available in low-current type and tandem 3-port valves.
 11. Only for wiring specification **-39□**.
 12. Only for **F15** series and not available for valve specification **T1**, **TA**, **TB**, and **TC**. In addition, the valve is used only as a double solenoid for **T2**.
 13. Not available with DIN connectors (**-39□**).
 14. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.

Quantity	set	Delivery
----------	-----	----------

F10, F15 Series


Monoblock Manifold

F Type (Direct Piping Type)

Specifications Confirmation Form 1/2

Company name	
Contact person	
Order No.	

• Fill in selections inside the thick-lined boxes.



Mounting valve model

stn. **F** Valve size **T** Valve specification - Note 10 - Note 1 - Note 2 - - Note 4 - Note 3 -

IP Specification
Blank: Standard
P^{Note10}: IP Specification

Manual override
Blank: Manual override button
R: Manual override lever^{Note1}
83: Protruding locking type^{Note7}

Valve outlet type^{Note2}
 Can be selected only when the manifold type is **F** (metric).
FJ: With dual use fitting block (F10: φ4 and φ6, F15: φ6 and φ8)
FJ5: With single use fitting block (F10: φ4, F15: φ6)
FJ6: With single use fitting block (F10: φ6, F15: φ8)
FM: With female thread block (F10: M5X0.8, F15: Rc1/8)
FJ5A: With single use fitting block, 3-port normally closed (NC) (F10: φ4, F15: φ6)
FJ5B: With single use fitting block, 3-port normally open (NO) (F10: φ4, F15: φ6)
FJ6A: With single use fitting block, 3-port normally closed (NC) (F10: φ6, F15: φ8)
FJ6B: With single use fitting block, 3-port normally open (NO) (F10: φ6, F15: φ8)
FMA: With female thread block, 3-port normally closed (NC) (F10: M5X0.8, F15: Rc1/8)
FMB: With female thread block, 3-port normally open (NO) (F10: M5X0.8, F15: Rc1/8)

Can be selected only when the manifold type is **FH** (imperial).
FMH: With female thread block (F10:10-32UNF, F15: NPT1/8)
FMAH: With female thread block, 3-port normally closed (NC) (F10:10-32UNF, F15: NPT1/8)
FMBH: With female thread block, 3-port normally open (NO) (F10:10-32UNF, F15: NPT1/8)

Individual air supply and exhaust spacer, stop valve^{Note3}
Blank: No spacer and no stop valve
NPM: Individual air supply spacer (with M5 female thread for F10)^{Note9}
NP6: Individual air supply spacer (with φ6 fitting for F15)^{Note9}
NP8: Individual air supply spacer (with φ8 fitting for F15)^{Note9}
NRM: Individual exhaust spacer (with M5 female thread for F10)^{Note9}
NR6: Individual exhaust spacer (with φ6 fitting for F15)^{Note9}
NR8: Individual exhaust spacer (with φ8 fitting for F15)^{Note9}
STP: With stop valve

Back pressure prevention valve^{Note4}
Blank: No back pressure prevention valve
E1: With back pressure prevention valve

Voltage
 DC12V^{Note5}
 DC24V
 AC100V^{Note6,9}
 AC120V^{Note6}
 AC240V^{Note6}

Wiring specification
Blank: L type plug connector, Without connector
PN: S type plug connector, Without connector
PS: S type plug connector, Lead wire length 300mm [11.8in.]
PL: L type plug connector, Lead wire length 300mm [11.8in.]
PS3: S type plug connector, Lead wire length 3000mm [118in.]
PL3: L type plug connector, Lead wire length 3000mm [118in.]
CPS: Pre-wired positive common terminal S type plug connector, Lead wire length 300mm [11.8in.]
CPL: Pre-wired positive common terminal L type plug connector, Lead wire length 300mm [11.8in.]
CPS3: Pre-wired positive common terminal S type plug connector, Lead wire length 3000mm [118in.]
CPL3: Pre-wired positive common terminal L type plug connector, Lead wire length 3000mm [118in.]
39L: DIN connector type with indicator^{Note8}
39N: DIN connector type without indicator^{Note8}

Enter ○ in each designated station in tables on the next page.

F10, F15 Series

Monoblock Manifold F Type (Direct Piping Type)

Specifications Confirmation Form 2/2

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve models	Mounting valve, block-off plate	Station	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
		F <input type="checkbox"/> T0	2-position, for single solenoid only																			
	F <input type="checkbox"/> T1	2-position, single solenoid specification																				
	F <input type="checkbox"/> T2	2-position, double solenoid specification																				
	F <input type="checkbox"/> T3	3-position, closed center																				
	F <input type="checkbox"/> T4	3-position, exhaust center																				
	F <input type="checkbox"/> T5	3-position, pressure center																				
	F <input type="checkbox"/> TA	Tandem 3-port (NC and NC)																				
	F <input type="checkbox"/> TB	Tandem 3-port (NO and NO)																				
	F <input type="checkbox"/> TC	Tandem 3-port (NC and NO)																				
	F <input type="checkbox"/> LT0	(Low current type) 2-position, for single solenoid only																				
	F <input type="checkbox"/> LT1	(Low current type) 2-position, single solenoid specification																				
	F <input type="checkbox"/> LT2	(Low current type) 2-position, double solenoid specification																				
	F <input type="checkbox"/> LT3	(Low current type) 3-position, closed center																				
	F <input type="checkbox"/> LT4	(Low current type) 3-position, exhaust center																				
	F <input type="checkbox"/> LT5	(Low current type) 3-position, pressure center																				
	F <input type="checkbox"/> LTA	(Low current type) Tandem 3-port (NC and NC)																				
	F <input type="checkbox"/> LTB	(Low current type) Tandem 3-port (NO and NO)																				
	F <input type="checkbox"/> LTC	(Low current type) Tandem 3-port (NC and NO)																				
	F <input type="checkbox"/> BP	Block-off plate																				
	P ^{Note10}	IP Specification																				
Manual override	R	Manual override lever ^{Note1}																				
	83	Protruding locking type ^{Note7}																				
Valve outlet type ^{Note2}	FJ	With dual use fitting block																				
	FJ5	With single use fitting block																				
	FJ6	With single use fitting block																				
	FM	With female thread block																				
	FJ5A	With single use fitting block, 3-port normally closed (NC)																				
	FJ5B	With single use fitting block, 3-port normally open (NO)																				
	FJ6A	With single use fitting block, 3-port normally closed (NC)																				
	FJ6B	With single use fitting block, 3-port normally open (NO)																				
	FMA	With female thread block, 3-port normally closed (NC)																				
	FMB	With female thread block, 3-port normally open (NO)																				
	FMH	With female thread block																				
	FMAH	With female thread block, 3-port normally closed (NC)																				
FMBH	With female thread block, 3-port normally open (NO)																					
E1 ^{Note4}	Back pressure prevention valve																					
NPM	Individual air supply spacer (with M5 female thread for F10)																					
NP6	Individual air supply spacer (with φ 6 fitting for F15)																					
NP8	Individual air supply spacer (with φ 8 fitting for F15)																					
NRM	Individual exhaust spacer (with M5 female thread for F10)																					
NR6	Individual exhaust spacer (with φ 6 fitting for F15)																					
NR8	Individual exhaust spacer (with φ 8 fitting for F15)																					
STP	With stop valve																					

- Notes: 1. To designate a manual override lever, enter ○ in the manual override boxes of the designated station in the above table. When the valve specification is T1 or T2, the manual override lever is placed only on the A side. This is not available with -39□.
2. Select valve outlet type for each station, and enter ○ in the valve outlet type boxes of the above table. The 3-port specifications are only available in valve specifications T0, T1, and T2.
3. When mounting the individual air supply or exhaust spacer or stop valve, enter ○ in the spacer or stop valve boxes of the designated stations in the above table.
4. When mounting the back pressure prevention valve, enter ○ in the back pressure prevention valve boxes of the designated stations in the above table. Not available with the individual exhaust spacer.
5. Not available in low-current type.
6. Not available in low-current type and tandem 3-port valves.
7. Only for wiring specification -39□.
8. Only for F15 series and not available for valve specification T1, TA, TB, and TC. In addition, the valve is used only as a double solenoid for T2.
9. Not available with DIN connectors (-39□).
10. The IP protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.

Quantity	set	Delivery
----------	-----	----------

F10, F15 Series

Monoblock Manifold A Type,
Wire-Saving Type (Base Piping Type)

Company name	
Contact person	
Order No.	

Specifications Confirmation Form 1/2

• Fill in selections inside the thick-lined boxes.

Manifold model

F M A AH - -

Valve size
10: 10mm width
15: 15mm width

Pilot specification
Blank: Internal pilot manifold
G : External pilot manifold

Manifold outlet specification
J : With dual use fitting blocks
M : With female thread blocks
L : With selectable fitting blocks

Valve units
2 to Note

Wiring connection specification
Blank: Packed wiring
W : Double wiring

Wiring specification
F100N : Flat cable connector 10-pin
F101N : Flat cable connector 10-pin
F200N : Flat cable connector 20-pin
F201N : Flat cable connector 20-pin
F260N : Flat cable connector 26-pin

(M2.6 mounting screw)
D250N : D-sub connector 25-pin^{Note11}
D251N : D-sub connector 25-pin^{Note11}

(4-40UNC mounting screw)
D250NU : D-sub connector 25-pin^{Note12}
D251NU : D-sub connector 25-pin^{Note12}

Note: For the maximum number of units, check the table for maximum number of valve units by wiring specification on page 51.

Mounting valve model

stn. F Valve size T Valve specification - Note 3 - A1 - PN - Note 4 - Note 8 - Note 5

Operation type
Blank: Internal pilot type^{Note1}
G : External pilot type (for positive pressure)^{Note2}
V : External pilot type (for vacuum)^{Note2}

Manual override
Blank: Manual override button
R : Manual override lever^{Note3}

Manifold fitting specifications^{Note4}
Can be selected only when the manifold type is A and the manifold outlet specification is L (with selectable fitting block (metric)).
J5: Manifold side outlet port with single use fitting block (F10: φ4, F15: φ6)
J6: Manifold side outlet port with single use fitting block (F10: φ6, F15: φ8)
M: Manifold side outlet port with female thread block (F10: M5X0.8, F15: Rc1/8)
J5A: Manifold side outlet port with single use fitting block, 3-port normally closed (NC) (F10: φ4, F15: φ6)
J5B: Manifold side outlet port with single use fitting block, 3-port normally open (NO) (F10: φ4, F15: φ6)
J6A: Manifold side outlet port with single use fitting block, 3-port normally closed (NC) (F10: φ6, F15: φ8)
J6B: Manifold side outlet port with single use fitting block, 3-port normally open (NO) (F10: φ6, F15: φ8)
MA: Manifold side outlet port with female thread block, 3-port normally closed (NC) (F10: M5X0.8, F15: Rc1/8)
MB: Manifold side outlet port with female thread block, 3-port normally open (NO) (F10: M5X0.8, F15: Rc1/8)

Can be selected only when the manifold type is AH and the manifold outlet specification is L (with selectable fitting blocks (imperial)).
MH: Manifold side outlet port with female thread block (F10:10-32UNF, F15: NPT1/8)
MAH: Manifold side outlet port with female thread block, 3-port normally closed (NC) (F10:10-32UNF, F15: NPT1/8)
MBH: Manifold side outlet port with female thread block, 3-port normally open (NO) (F10:10-32UNF, F15: NPT1/8)

Voltage
DC12V^{Note9}
DC24V
AC100V^{Note10}
AC120V^{Note10}

Individual air supply and exhaust spacer, stop valve^{Note5}
Blank: No spacer and no stop valve
NPM: Individual air supply spacer (with M5 female thread for F10)
NP6: Individual air supply spacer (with φ6 fitting for F15)
NP8: Individual air supply spacer (with φ8 fitting for F15)
NRM: Individual exhaust spacer (with M5 female thread for F10)
NR6: Individual exhaust spacer (with φ6 fitting for F15)
NR8: Individual exhaust spacer (with φ8 fitting for F15)
STP: With stop valve^{Note1}

Back pressure prevention valve^{Note8}
Blank: No back pressure prevention valve
E1: With back pressure prevention valve

Enter ○ in each designated station in tables on the next page.

F10, F15 Series

Monoblock Manifold A Type, Wire-Saving Type (Base Piping Type) Specifications Confirmation Form 2/2

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve models	Mounting valve, block-off plate	Station	Station																			
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	F <input type="checkbox"/> T0	2-position, for single solenoid only																				
	F <input type="checkbox"/> T1	2-position, single solenoid specification																				
	F <input type="checkbox"/> T2	2-position, double solenoid specification																				
	F <input type="checkbox"/> T3	3-position, closed center																				
	F <input type="checkbox"/> T4 ^{Note6}	3-position, exhaust center																				
	F <input type="checkbox"/> T5 ^{Note6}	3-position, pressure center																				
	F <input type="checkbox"/> TA ^{Note7}	Tandem 3-port (NC and NC)																				
	F <input type="checkbox"/> TB ^{Note7}	Tandem 3-port (NO and NO)																				
	F <input type="checkbox"/> TC ^{Note7}	Tandem 3-port (NC and NO)																				
	F <input type="checkbox"/> LT0	(Low current type) 2-position, for single solenoid only																				
	F <input type="checkbox"/> LT1	(Low current type) 2-position, single solenoid specification																				
	F <input type="checkbox"/> LT2	(Low current type) 2-position, double solenoid specification																				
	F <input type="checkbox"/> LT3	(Low current type) 3-position, closed center																				
	F <input type="checkbox"/> LT4 ^{Note6}	(Low current type) 3-position, exhaust center																				
	F <input type="checkbox"/> LT5 ^{Note6}	(Low current type) 3-position, pressure center																				
	F <input type="checkbox"/> LTA ^{Note7}	(Low current type) Tandem 3-port (NC and NC)																				
	F <input type="checkbox"/> LTB ^{Note7}	(Low current type) Tandem 3-port (NO and NO)																				
	F <input type="checkbox"/> LTC ^{Note7}	(Low current type) Tandem 3-port (NC and NO)																				
	F <input type="checkbox"/> BP	Block-off plate																				
	Manual override (-R) Manual override lever ^{Note3}																					
Manifold fitting specification- ^{Note4} (Manifold side outlet port)	J5	With single use fitting block																				
	J6	With single use fitting block																				
	M	With female thread block																				
	J5A	With single use fitting block, 3-port normally closed (NC)																				
	J5B	With single use fitting block, 3-port normally open (NO)																				
	J6A	With single use fitting block, 3-port normally closed (NC)																				
	J6B	With single use fitting block, 3-port normally open (NO)																				
	MA	With female thread block, 3-port normally closed (NC)																				
	MB	With female thread block, 3-port normally open (NO)																				
	MH	With female thread block																				
MAH	With female thread block, 3-port normally closed (NC)																					
MBH	With female thread block, 3-port normally open (NO)																					
E1 ^{Note8}	Back pressure prevention valve																					
NPM	Individual air supply spacer (with M5 female thread for F10)																					
NP6	Individual air supply spacer (with φ 6 fitting for F15)																					
NP8	Individual air supply spacer (with φ 8 fitting for F15)																					
NRM	Individual exhaust spacer (with M5 female thread for F10)																					
NR6	Individual exhaust spacer (with φ 6 fitting for F15)																					
NR8	Individual exhaust spacer (with φ 8 fitting for F15)																					
STP	With stop valve																					

- Notes: 1. Cannot be mounted on the external pilot manifold.
 2. Cannot be mounted on the internal pilot manifold.
 3. To designate a manual override lever, enter ○ in the manual override boxes of the designated station in the above table.
 When the valve specification is T1 or T2, the manual override lever is placed only on the A side.
 4. When the manifold outlet specifications are L (with selectable fitting), select fitting specification for each station, and enter ○ in the manifold fitting specification boxes of the above table.
 The 3-port specifications are only available in valve specification T0, T1, and T2.
 5. When mounting the individual air supply or exhaust spacer or stop valve, enter ○ in the spacer or stop valve boxes of the designated stations in the above table.
 6. Not available in the vacuum valves.
 7. Not available in external pilot type and vacuum valves.
 8. When mounting the back pressure prevention valve, enter ○ in the back pressure prevention valve boxes of the designated stations in the above table. Not available with the individual exhaust spacer and vacuum valve.
 9. Not available in low-current type.
 10. Not available in low-current type and tandem 3-port valves. In addition, only available when the wiring specification is a D-sub connector.
 11. Can be selected only when the manifold type is A.
 12. Can be selected only when the manifold type is AH.

Quantity	set	Delivery
----------	-----	----------

F10, F15 Series

Monoblock Manifold F Type,
Wire-Saving Type (Direct Piping Type)

Company name	
Contact person	
Order No.	

Specifications Confirmation Form 1/2

• Fill in selections inside the thick-lined boxes.

Manifold model

F M F_{FH} - -

Valve units
2 to ^{Note}

Note: For the maximum number of units, check the table for maximum number of valve units by wiring specification on page 51.

Valve size
10: 10mm width
15: 15mm width

Wiring connection specification
Blank: Packed wiring
W : Double wiring

Wiring specification
F100N : Flat cable connector 10-pin
F101N : Flat cable connector 10-pin
F200N : Flat cable connector 20-pin
F201N : Flat cable connector 20-pin
F260N : Flat cable connector 26-pin

(M2.6 mounting screw)
D250N : D-sub connector 25-pin^{Note7}
D251N : D-sub connector 25-pin^{Note7}

(4-40UNC mounting screw)
D250NU : D-sub connector 25-pin^{Note8}
D251NU : D-sub connector 25-pin^{Note8}

Mounting valve model

stn. F Valve size T Valve specification - - PN - -

Manual override
Blank: Manual override button
R : Manual override lever^{Note1}

Valve outlet type^{Note2}
Can be selected only when the manifold type is F (metric).
FJ : With dual use fitting block (F10: φ 4 and φ 6, F15: φ 6 and φ 8)
FJ5 : With single use fitting block (F10: φ 4, F15: φ 6)
FJ6 : With single use fitting block (F10: φ 6, F15: φ 8)
FM : With female thread block (F10: M5X0.8, F15: Rc1/8)
FJ5A : With single use fitting block, 3-port normally closed (NC) (F10: φ 4, F15: φ 6)
FJ5B : With single use fitting block, 3-port normally open (NO) (F10: φ 4, F15: φ 6)
FJ6A : With single use fitting block, 3-port normally closed (NC) (F10: φ 6, F15: φ 8)
FJ6B : With single use fitting block, 3-port normally open (NO) (F10: φ 6, F15: φ 8)
FMA : With female thread block, 3-port normally closed (NC) (F10: M5X0.8, F15: Rc1/8)
FMB : With female thread block, 3-port normally open (NO) (F10: M5X0.8, F15: Rc1/8)

Can be selected only when the manifold type is FH (imperial).
FMH : With female thread block (F10:10-32UNF, F15:NPT1/8)
FMAH : With female thread block, 3-port normally closed (NC) (F10:10-32UNF, F15: NPT1/8)
FMBH : With female thread block, 3-port normally open (NO) (F10:10-32UNF, F15: NPT1/8)

Individual air supply and exhaust spacer, stop valve^{Note3}
Blank: No spacer and no stop valve
NPM : Individual air supply spacer (with M5 female thread for F10)
NP6 : Individual air supply spacer (with φ 6 fitting for F15)
NP8 : Individual air supply spacer (with φ 8 fitting for F15)
NRM : Individual exhaust spacer (with M5 female thread for F10)
NR6 : Individual exhaust spacer (with φ 6 fitting for F15)
NR8 : Individual exhaust spacer (with φ 8 fitting for F15)
STP : With stop valve

Back pressure prevention valve^{Note4}
Blank: No back pressure prevention valve
E1 : With back pressure prevention valve

Voltage
DC12V^{Note5}
DC24V
AC100V^{Note6}
AC120V^{Note6}

Enter ○ in each designated station in tables on the next page.

F10, F15 Series

Monoblock Manifold F Type Wire-Saving Type (Direct Piping Type) Specifications Confirmation Form 2/2

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve models	Mounting valve models	Station	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
		Mounting valve models	Station	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	F <input type="checkbox"/> T0	2-position, for single solenoid only																					
	F <input type="checkbox"/> T1	2-position, single solenoid specification																					
	F <input type="checkbox"/> T2	2-position, double solenoid specification																					
	F <input type="checkbox"/> T3	3-position, closed center																					
	F <input type="checkbox"/> T4	3-position, exhaust center																					
	F <input type="checkbox"/> T5	3-position, pressure center																					
	F <input type="checkbox"/> TA	Tandem 3-port (NC and NC)																					
	F <input type="checkbox"/> TB	Tandem 3-port (NO and NO)																					
	F <input type="checkbox"/> TC	Tandem 3-port (NC and NO)																					
	F <input type="checkbox"/> LT0	(Low current type) 2-position, for single solenoid only																					
	F <input type="checkbox"/> LT1	(Low current type) 2-position, single solenoid specification																					
	F <input type="checkbox"/> LT2	(Low current type) 2-position, double solenoid specification																					
	F <input type="checkbox"/> LT3	(Low current type) 3-position, closed center																					
	F <input type="checkbox"/> LT4	(Low current type) 3-position, exhaust center																					
	F <input type="checkbox"/> LT5	(Low current type) 3-position, pressure center																					
	F <input type="checkbox"/> LTA	(Low current type) Tandem 3-port (NC and NC)																					
	F <input type="checkbox"/> LTB	(Low current type) Tandem 3-port (NO and NO)																					
	F <input type="checkbox"/> LTC	(Low current type) Tandem 3-port (NC and NO)																					
	F <input type="checkbox"/> BP	Block-off plate																					
	Manual override (-R) Manual override lever ^{Note1}																						
Valve outlet type ^{Note2}	FJ	With dual use fitting block																					
	FJ5	With single use fitting block																					
	FJ6	With single use fitting block																					
	FM	With female thread block																					
	FJ5A	With single use fitting block, 3-port normally closed (NC)																					
	FJ5B	With single use fitting block, 3-port normally open (NO)																					
	FJ6A	With single use fitting block, 3-port normally closed (NC)																					
	FJ6B	With single use fitting block, 3-port normally open (NO)																					
	FMA	With female thread block, 3-port normally closed (NC)																					
	FMB	With female thread block, 3-port normally open (NO)																					
	FMH	With female thread block																					
	FMAH	With female thread block, 3-port normally closed (NC)																					
	FMBH	With female thread block, 3-port normally open (NO)																					
E1 ^{Note4}	Back pressure prevention valve																						
NPM	Individual air supply spacer (with M5 female thread for F10)																						
NP6	Individual air supply spacer (with φ 6 fitting for F15)																						
NP8	Individual air supply spacer (with φ 8 fitting for F15)																						
NRM	Individual exhaust spacer (with M5 female thread for F10)																						
NR6	Individual exhaust spacer (with φ 6 fitting for F15)																						
NR8	Individual exhaust spacer (with φ 8 fitting for F15)																						
STP	With stop valve																						

Notes: 1. To designate a manual override lever, enter ○ in the manual override boxes of the designated station in the above table.

When the valve specification is T1 or T2, the manual override lever is placed only on the A side.

2. Select valve outlet type for each station, and enter ○ in the valve outlet type boxes of the above table. In addition, the 3-port specifications are only available in valve specifications T0, T1, and T2.

3. When mounting the individual air supply or exhaust spacer or stop valve, enter ○ in the spacer or stop valve boxes of the designated stations in the above table.

4. When mounting the back pressure prevention valve, enter ○ in the back pressure prevention valve boxes of the designated stations in the above table. Not available with the individual exhaust spacer.

5. Not available in low-current type.

6. Not available in low-current type and tandem 3-port valves. In addition, only available when the wiring specification is a D-sub connector.

7. Can be selected only when the manifold type is F.

8. Can be selected only when the manifold type is FH.

Quantity	set	Delivery
----------	-----	----------

F10, F15 Series

PC Board Manifold

A Type (Base Piping Type)

Company name	
Contact person	
Order No.	

Specifications Confirmation Form 1/2

• Fill in selections inside the thick-lined boxes.

Manifold model

F M AP - -

Wiring specification
S : Single wiring
W : Double wiring

Wiring specification
F200
F201

Pilot specification
Blank : Internal pilot manifold
G : External pilot manifold

Manifold outlet specification
J : With dual use fitting blocks
M : With female thread blocks
L : With selectable fitting blocks (metric)

Valve units
 6 to 16 (only even-numbered units)
 Note: There should be 6 or 8 valve units, when the wiring connection specifications are -W (double wiring)

Valve size
10: 10mm width
15: 15mm width

Mounting valve model

stn. F Valve size T Valve specification - Note 3 - A1 - PP - Note 4 - Note 8 - Note 5

Operation type
Blank: Internal pilot type^{Note1}
G : External pilot type (for positive pressure)^{Note2}
V : External pilot type (for vacuum)^{Note2}

Manual override
Blank: Manual override button
R : Manual override lever^{Note3}

Manifold fitting specifications^{Note4}
 Can be selected only when the manifold outlet specification is L.
J5: Manifold side outlet port with single use fitting block (F10: φ 4, F15: φ 6)
J6: Manifold side outlet port with single use fitting block (F10: φ 6, F15: φ 8)
M: Manifold side outlet port with female thread block (F10: M5X0.8, F15: Rc1/8)
J5A: Manifold side outlet port with single use fitting block, 3-port normally closed (NC) (F10: φ 4, F15: φ 6)
J5B: Manifold side outlet port with single use fitting block, 3-port normally open (NO) (F10: φ 4, F15: φ 6)
J6A: Manifold side outlet port with single use fitting block, 3-port normally closed (NC) (F10: φ 6, F15: φ 8)
J6B: Manifold side outlet port with single use fitting block, 3-port normally open (NO) (F10: φ 6, F15: φ 8)
MA: Manifold side outlet port with female thread block, 3-port normally closed (NC) (F10: M5X0.8, F15: Rc1/8)
MB: Manifold side outlet port with female thread block, 3-port normally open (NO) (F10: M5X0.8, F15: Rc1/8)

Individual air supply and exhaust spacer, stop valve^{Note5}
Blank: No spacer and no stop valve
NPM: Individual air supply spacer (with M5 female thread for F10)
NP6: Individual air supply spacer (with φ 6 fitting for F15)
NP8: Individual air supply spacer (with φ 8 fitting for F15)
NRM: Individual exhaust spacer (with M5 female thread for F10)
NR6: Individual exhaust spacer (with φ 6 fitting for F15)
NR8: Individual exhaust spacer (with φ 8 fitting for F15)
STP: With stop valve

Back pressure prevention valve^{Note8}
Blank: No back pressure prevention valve
E1: With back pressure prevention valve

Voltage
DC12V^{Note9}
DC24V

Enter ○ in each designated station in tables on the next page.

F10, F15 Series

PC Board Manifold A Type (Base Piping Type)

Specifications Confirmation Form 2/2

Wiring connection specifications are -S (for single wiring)

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve, block-off plate	Station	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
<input type="checkbox"/> T0	2-position, for single solenoid only																
<input type="checkbox"/> T1	2-position, single solenoid specification																
<input type="checkbox"/> LT0	(Low current type) 2-position, for single solenoid only																
<input type="checkbox"/> LT1	(Low current type) 2-position, single solenoid specification																
<input type="checkbox"/> BPC	Block-off plate																
Manual override (-R) Manual override lever ^{Note3}																	
Manifold fitting specification- ^{Note4} (Manifold side outlet port)	<input type="checkbox"/> J5	With single use fitting block															
	<input type="checkbox"/> J6	With single use fitting block															
	<input type="checkbox"/> M	With female thread block															
	<input type="checkbox"/> J5A	With single use fitting block, 3-port normally closed (NC)															
	<input type="checkbox"/> J5B	With single use fitting block, 3-port normally open (NO)															
	<input type="checkbox"/> J6A	With single use fitting block, 3-port normally closed (NC)															
	<input type="checkbox"/> J6B	With single use fitting block, 3-port normally open (NO)															
	<input type="checkbox"/> MA	With female thread block, 3-port normally closed (NC)															
<input type="checkbox"/> MB	With female thread block, 3-port normally open (NO)																
<input type="checkbox"/> E1 ^{Note8}	Back pressure prevention valve																
<input type="checkbox"/> NPM	Individual air supply spacer (with M5 female thread for F10)																
<input type="checkbox"/> NP6	Individual air supply spacer (with φ 6 fitting for F15)																
<input type="checkbox"/> NP8	Individual air supply spacer (with φ 8 fitting for F15)																
<input type="checkbox"/> NRM	Individual exhaust spacer (with M5 female thread for F10)																
<input type="checkbox"/> NR6	Individual exhaust spacer (with φ 6 fitting for F15)																
<input type="checkbox"/> NR8	Individual exhaust spacer (with φ 8 fitting for F15)																
<input type="checkbox"/> STP	With stop valve ^{Note1}																

Caution: Valve units can be selected from only the even-numbered units between 6 and 16.

Wiring connection specifications are -W (for double wiring)

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve, block-off plate	Station	1	2	3	4	5	6	7	8
<input type="checkbox"/> T0	2-position, for single solenoid only								
<input type="checkbox"/> T1	2-position, single solenoid specification								
<input type="checkbox"/> T2	2-position, double solenoid specification								
<input type="checkbox"/> T3	3-position, closed center								
<input type="checkbox"/> T4 ^{Note6}	3-position, exhaust center								
<input type="checkbox"/> T5 ^{Note6}	3-position, pressure center								
<input type="checkbox"/> TA ^{Note7}	Tandem 3-port (NC and NC)								
<input type="checkbox"/> TB ^{Note7}	Tandem 3-port (NO and NO)								
<input type="checkbox"/> TC ^{Note7}	Tandem 3-port (NC and NO)								
<input type="checkbox"/> LT0	(Low current type) 2-position, for single solenoid only								
<input type="checkbox"/> LT1	(Low current type) 2-position, single solenoid specification								
<input type="checkbox"/> LT2	(Low current type) 2-position, double solenoid specification								
<input type="checkbox"/> LT3	(Low current type) 3-position, closed center								
<input type="checkbox"/> LT4 ^{Note6}	(Low current type) 3-position, exhaust center								
<input type="checkbox"/> LT5 ^{Note6}	(Low current type) 3-position, pressure center								
<input type="checkbox"/> LTA ^{Note7}	(Low current type) Tandem 3-port (NC and NC)								
<input type="checkbox"/> LTB ^{Note7}	(Low current type) Tandem 3-port (NO and NO)								
<input type="checkbox"/> LTC ^{Note7}	(Low current type) Tandem 3-port (NC and NO)								
<input type="checkbox"/> BPC	Block-off plate								
Manual override (-R) Manual override lever ^{Note3}									
Manifold fitting specification- ^{Note4} (Manifold side outlet port)	<input type="checkbox"/> J5	With single use fitting block							
	<input type="checkbox"/> J6	With single use fitting block							
	<input type="checkbox"/> M	With female thread block							
	<input type="checkbox"/> J5A	With single use fitting block, 3-port normally closed (NC)							
	<input type="checkbox"/> J5B	With single use fitting block, 3-port normally open (NO)							
	<input type="checkbox"/> J6A	With single use fitting block, 3-port normally closed (NC)							
	<input type="checkbox"/> J6B	With single use fitting block, 3-port normally open (NO)							
	<input type="checkbox"/> MA	With female thread block, 3-port normally closed (NC)							
<input type="checkbox"/> MB	With female thread block, 3-port normally open (NO)								
<input type="checkbox"/> E1 ^{Note8}	Back pressure prevention valve								
<input type="checkbox"/> NPM	Individual air supply spacer (with M5 female thread for F10)								
<input type="checkbox"/> NP6	Individual air supply spacer (with φ 6 fitting for F15)								
<input type="checkbox"/> NP8	Individual air supply spacer (with φ 8 fitting for F15)								
<input type="checkbox"/> NRM	Individual exhaust spacer (with M5 female thread for F10)								
<input type="checkbox"/> NR6	Individual exhaust spacer (with φ 6 fitting for F15)								
<input type="checkbox"/> NR8	Individual exhaust spacer (with φ 8 fitting for F15)								
<input type="checkbox"/> STP	With stop valve ^{Note1}								

Caution: There should be either 6 and 8 valves units.

- Notes:
- Cannot be mounted on the external pilot manifold.
 - Cannot be mounted on the internal pilot manifold.
 - To designate a manual override lever, enter ○ in the manual override boxes of the designated station in the left table.
 - When the manifold outlet specifications are L (with selectable fitting), select fitting specification for each station, and enter ○ in the manifold fitting specification boxes of the left table. The 3-port specifications are only available in valve specification T0, T1, and T2.
 - When mounting the individual air supply or exhaust spacer or stop valve, enter ○ in the spacer or stop valve boxes of the designated stations in the left table.
 - Not available with vacuum valves.
 - Not available in external pilot type and vacuum valves.
 - When mounting the back pressure prevention valve, enter ○ in the back pressure prevention valve boxes of the designated stations in the left table. Not available with the individual exhaust spacer and vacuum valve.
 - Not available in low-current type.

Mounting valve models

Quantity	set	Delivery
----------	-----	----------

F10, F15 Series

PC Board Manifold

F Type (Direct Piping Type)

Specifications Confirmation Form 1/2

Company name	
Contact person	
Order No.	

• Fill in selections inside the thick-lined boxes.

Manifold model

F M FP - -

Valve units
6 to 16 (only even-numbered units)

Note: There should be 6 or 8 valve units, when the wiring connection specifications are -W (double wiring)

Valve size
10: 10mm width
15: 15mm width

Wiring specification
F200
F201

Wiring connection specification
S : Single wiring
W : Double wiring

Mounting valve model

stn. F Valve size T Valve specification Note 1 - Note 2 - PP - Note 4 - Note 3 -

Manual override

Blank: Manual override button
R : Manual override lever^{Note1}

Valve outlet type^{Note2}

FJ : With dual use fitting block (F10: φ 4 and φ 6, F15: φ 6 and φ 8)
FJ5 : With single use fitting block (F10: φ 4, F15: φ 6)
FJ6 : With single use fitting block (F10: φ 6, F15: φ 8)
FM : With female thread block (F10: M5X0.8, F15: Rc1/8)
FJ5A : With single use fitting block, 3-port normally closed (NC) (F10: φ 4, F15: φ 6)
FJ5B : With single use fitting block, 3-port normally open (NO) (F10: φ 4, F15: φ 6)
FJ6A : With single use fitting block, 3-port normally closed (NC) (F10: φ 6, F15: φ 8)
FJ6B : With single use fitting block, 3-port normally open (NO) (F10: φ 6, F15: φ 8)
FMA : With female thread block, 3-port normally closed (NC) (F10: M5X0.8, F15: Rc1/8)
FMB : With female thread block, 3-port normally open (NO) (F10: M5X0.8, F15: Rc1/8)

Individual air supply and exhaust spacer, stop valve^{Note3}
Blank: No spacer and no stop valve
NPM : Individual air supply spacer (with M5 female thread for F10)
NP6 : Individual air supply spacer (with φ 6 fitting for F15)
NP8 : Individual air supply spacer (with φ 8 fitting for F15)
NRM : Individual exhaust spacer (with M5 female thread for F10)
NR6 : Individual exhaust spacer (with φ 6 fitting for F15)
NR8 : Individual exhaust spacer (with φ 8 fitting for F15)
STP : With stop valve

Back pressure prevention valve^{Note4}
Blank: No back pressure prevention valve
E1 : With back pressure prevention valve

Voltage
DC12V^{Note5}
DC24V

Enter ○ in each designated station in tables on the next page.

F10, F15 Series

PC Board Manifold F Type (Direct Piping Type)

Specifications Confirmation Form 2/2

Wiring connection specifications are -S (for single wiring)

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve, block-off plate		Station	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
<input type="checkbox"/>	T0	2-position, for single solenoid only																
<input type="checkbox"/>	T1	2-position, single solenoid specification																
<input type="checkbox"/>	LT0	(Low current type) 2-position, for single solenoid only																
<input type="checkbox"/>	LT1	(Low current type) 2-position, single solenoid specification																
<input type="checkbox"/>	BPC	Block-off plate																
Manual override (-R) Manual override lever ^{Note1}																		
Valve outlet type ^{Note2}	FJ	With dual use fitting block																
	FJ5	With single use fitting block																
	FJ6	With single use fitting block																
	F	With female thread block																
	J5A	With single use fitting block, 3-port normally closed (NC)																
	J5B	With single use fitting block, 3-port normally open (NO)																
	J6A	With single use fitting block, 3-port normally closed (NC)																
	J6B	With single use fitting block, 3-port normally open (NO)																
	MA	With female thread block, 3-port normally closed (NC)																
MB	With female thread block, 3-port normally open (NO)																	
E1 ^{Note4}	Back pressure prevention valve																	
NPM	Individual air supply spacer (with M5 female thread for F10)																	
NP6	Individual air supply spacer (with φ 6 fitting for F15)																	
NP8	Individual air supply spacer (with φ 8 fitting for F15)																	
NRM	Individual exhaust spacer (with M5 female thread for F10)																	
NR6	Individual exhaust spacer (with φ 6 fitting for F15)																	
NR8	Individual exhaust spacer (with φ 8 fitting for F15)																	
STP	With stop valve																	

Caution: Valve units can be selected from only the even-numbered units between 6 and 16.

Wiring connection specifications are -W (for double wiring)

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve, block-off plate		Station	1	2	3	4	5	6	7	8
<input type="checkbox"/>	T0	2-position, for single solenoid only								
<input type="checkbox"/>	T1	2-position, single solenoid specification								
<input type="checkbox"/>	T2	2-position, double solenoid specification								
<input type="checkbox"/>	T3	3-position, closed center								
<input type="checkbox"/>	T4	3-position, exhaust center								
<input type="checkbox"/>	T5	3-position, pressure center								
<input type="checkbox"/>	TA	Tandem 3-port (NC and NC)								
<input type="checkbox"/>	TB	Tandem 3-port (NO and NO)								
<input type="checkbox"/>	TC	Tandem 3-port (NC and NO)								
<input type="checkbox"/>	LT0	(Low current type) 2-position, for single solenoid only								
<input type="checkbox"/>	LT1	(Low current type) 2-position, single solenoid specification								
<input type="checkbox"/>	LT2	(Low current type) 2-position, double solenoid specification								
<input type="checkbox"/>	LT3	(Low current type) 3-position, closed center								
<input type="checkbox"/>	LT4	(Low current type) 3-position, exhaust center								
<input type="checkbox"/>	LT5	(Low current type) 3-position, pressure center								
<input type="checkbox"/>	LTA	(Low current type) Tandem 3-port (NC and NC)								
<input type="checkbox"/>	LTB	(Low current type) Tandem 3-port (NO and NO)								
<input type="checkbox"/>	LTC	(Low current type) Tandem 3-port (NC and NO)								
<input type="checkbox"/>	BPC	Block-off plate								
Manual override (-R) Manual override lever ^{Note1}										
Valve outlet type ^{Note2}	FJ	With dual use fitting block								
	FJ5	With single use fitting block								
	J6	With single use fitting block								
	FM	With female thread block								
	FJ5A	With single use fitting block, 3-port normally closed (NC)								
	FJ5B	With single use fitting block, 3-port normally open (NO)								
	FJ6A	With single use fitting block, 3-port normally closed (NC)								
	FJ6B	With single use fitting block, 3-port normally open (NO)								
	FMA	With female thread block, 3-port normally closed (NC)								
FMB	With female thread block, 3-port normally open (NO)									
E1 ^{Note4}	Back pressure prevention valve									
NPM	Individual air supply spacer (with M5 female thread for F10)									
NP6	Individual air supply spacer (with φ 6 fitting for F15)									
NP8	Individual air supply spacer (with φ 8 fitting for F15)									
NRM	Individual exhaust spacer (with M5 female thread for F10)									
NR6	Individual exhaust spacer (with φ 6 fitting for F15)									
NR8	Individual exhaust spacer (with φ 8 fitting for F15)									
STP	With stop valve									

Caution: There should be either 6 and 8 valves units.

- Notes: 1. To designate a manual override lever, enter ○ in the manual override boxes of the designated station in the left table.
 2. Select fitting for each station, and enter ○ in the valve outlet type boxes of the above table. In addition, the 3-port specifications are only available in valve specifications T0, T1, and T2.
 3. When mounting the individual air supply or exhaust spacer or stop valve, enter ○ in the spacer or stop valve boxes of the designated stations in the left table.
 4. When mounting the back pressure prevention valve, enter ○ in the back pressure prevention valve boxes of the designated stations in the left table.
 5. Not available in low-current type.

Mounting valve models

Quantity set Delivery

F10, F15 Series

Split Manifold Non-Plug-in Type

Specifications Confirmation Form 1/2

Company name	
Contact person	
Order No.	

• Fill in selections inside the thick-lined boxes.

Manifold model

F M N NH -

Valve units
2 to 20

Valve size
10: 10mm width
15: 15mm width

Pilot specification
Blank: Internal pilot manifold
G : External pilot manifold

Manifold outlet specification
J : With dual use fitting blocks
M : With female thread blocks
L : With selectable fitting blocks
Blank: With plates (direct piping type)

Piping block specification (air supply and exhaust)
Can be selected only when the manifold type is **N** (metric).
JR : With dual use fitting, right-side mounting
JL : With dual use fitting, left-side mounting
JD : With dual use fitting, both-side mounting
MR : With female thread, right-side mounting
ML : With female thread, left-side mounting
MD : With female thread, both-side mounting
J5R : With single use fitting $\phi 8$, right-side mounting
J6R : With single use fitting $\phi 10$, right-side mounting
J5L : With single use fitting $\phi 8$, left-side mounting
J6L : With single use fitting $\phi 10$, left-side mounting
J5D : With single use fitting $\phi 8$, both-side mounting

Can be selected only when the manifold type is **NH** (imperial).
MRH: With female thread, right-side mounting
MLH: With female thread, left-side mounting
MDH: With female thread, both-side mounting

stn. F Valve size T Valve specification - Note 13 - Note 3 - A1 Note 4 - Note 5 - Note 10 - Note 6 - Note 7

Operation type
Blank: Internal pilot type^{Note1}
G : External pilot type^{Note2}

IP Specification
Blank : Standard
P ^{Note13}: IP Specification

Manual override
Blank: Manual override button
R : Manual override lever^{Note3}

Manifold fitting specifications^{Note5}
Can be selected only when the manifold type is **N** and the manifold outlet specification is **L** (with selectable fitting blocks (metric))
J5 : Manifold side outlet port with single use fitting block^{Note13} (F10: $\phi 4$, F15: $\phi 6$)
J6 : Manifold side outlet port with single use fitting block^{Note13} (F10: $\phi 6$, F15: $\phi 8$)
M : Manifold side outlet port with female thread block^{Note13} (F10: M5X0.8, F15: Rc1/8)
J5A : Manifold side outlet port with single use fitting block, 3-port normally closed (NC)^{Note13} (F10: $\phi 4$, F15: $\phi 6$)
J5B : Manifold side outlet port with single use fitting block, 3-port normally open (NO)^{Note13} (F10: $\phi 4$, F15: $\phi 6$)
J6A : Manifold side outlet port with single use fitting block, 3-port normally closed (NC)^{Note13} (F10: $\phi 6$, F15: $\phi 8$)
J6B : Manifold side outlet port with single use fitting block, 3-port normally open (NO)^{Note13} (F10: $\phi 6$, F15: $\phi 8$)
MA : Manifold side outlet port with female thread block, 3-port normally closed (NC)^{Note13} (F10: M5X0.8, F15: Rc1/8)
MB : Manifold side outlet port with female thread block, 3-port normally open (NO)^{Note13} (F10: M5X0.8, F15: Rc1/8)
Can be selected only when the manifold type is **NH** and the manifold outlet specification is **L** (with selectable fitting blocks (imperial))
MH: Manifold side outlet port with female thread block^{Note14} (F10:10-32UNF, F15: NPT1/8)
MAH: Manifold side outlet port with female thread block, 3-port normally closed (NC)^{Note14} (F10:10-32UNF, F15: NPT1/8)
MBH: Manifold side outlet port with female thread block, 3-port normally open (NO)^{Note14} (F10:10-32UNF, F15: NPT1/8)

Wiring specification
PN : S type plug connector, Without connector
PS : S type plug connector, Lead wire length 300mm [11.8in.]
PS3 : S type plug connector, Lead wire length 3000mm [118in.]
CPS : Pre-wired positive common terminal S type plug connector, Lead wire length 300mm [11.8in.]
CPS3 : Pre-wired positive common terminal S type plug connector, Lead wire length 3000mm [118in.]

Valve outlet type
A1 : With plate (When manifold outlet specification are J, M, or L, the valve type should be A1.)
Can be selected only when the manifold type is **N** and the manifold outlet specification is "Blank" (metric).
FJ : With dual use fitting block^{Note 4} (F10: $\phi 4$ and $\phi 6$, F15: $\phi 6$ and $\phi 8$)
FJ5 : With single use fitting block^{Note 4} (F10: $\phi 4$, F15: $\phi 6$)
FJ6 : With single use fitting block^{Note 4} (F10: $\phi 6$, F15: $\phi 8$)
FM : With female thread block^{Note 4} (F10: M5X0.8, F15: Rc1/8)
FJ5A : With single use fitting block, 3-port normally closed (NC)^{Note 4} (F10: $\phi 4$, F15: $\phi 6$)
FJ5B : With single use fitting block, 3-port normally open (NO)^{Note 4} (F10: $\phi 4$, F15: $\phi 6$)
FJ6A : With single use fitting block, 3-port normally closed (NC)^{Note 4} (F10: $\phi 6$, F15: $\phi 8$)
FJ6B : With single use fitting block, 3-port normally open (NO)^{Note 4} (F10: $\phi 6$, F15: $\phi 8$)
FMA : With female thread block, 3-port normally closed (NC)^{Note 4} (F10: M5X0.8, F15: Rc1/8)
FMB : With female thread block, 3-port normally open (NO)^{Note 4} (F10: M5X0.8, F15: Rc1/8)
Can be selected only when the manifold type is **NH** and the manifold outlet specification is "Blank" (imperial).
FMH : With female thread block^{Note4} (F10:10-32UNF, F15: NPT1/8)
FMAH : With female thread block, 3-port normally closed (NC)^{Note4} (F10:10-32UNF, F15: NPT1/8)
FMBH : With female thread block, 3-port normally open (NO)^{Note4} (F10:10-32UNF, F15: NPT1/8)

When manifold outlet specifications are J, M, or L.

Port isolator
Blank: No port isolator
SP : For 1(P) port^{Note7}
SR : For 3(R2), 5(R1) ports^{Note7}
SA : For 1(P), 3(R2), 5(R1) ports^{Note7}

Individual air supply and exhaust spacer^{Note6}
Blank: No spacer
NPM : Individual air supply spacer (with M5 female thread for F10)
NP6 : Individual air supply spacer (with $\phi 6$ fitting for F15)
NP8 : Individual air supply spacer (with $\phi 8$ fitting for F15)
NRM : Individual exhaust spacer (with M5 female thread for F10)
NR6 : Individual exhaust spacer (with $\phi 6$ fitting for F15)
NR8 : Individual exhaust spacer (with $\phi 8$ fitting for F15)

Back pressure prevention valve^{Note10}
Blank: No back pressure prevention valve
E2 : With back pressure prevention valve

Voltage
DC12V^{Note11}
DC24V
AC100V^{Note12}
AC120V^{Note12}

Mounting valve model

Enter in each designated station in tables on the next page.

F10, F15 Series

Split Manifold Non-Plug-in Type

Specifications Confirmation Form 2/2

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve, block-off plate		Station	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
<input type="checkbox"/> T0	2-position, for single solenoid only																						
<input type="checkbox"/> T1	2-position, single solenoid specification																						
<input type="checkbox"/> T2	2-position, double solenoid specification																						
<input type="checkbox"/> T3	3-position, closed center																						
<input type="checkbox"/> T4	3-position, exhaust center																						
<input type="checkbox"/> T5	3-position, pressure center																						
<input type="checkbox"/> TA ^{Note9}	Tandem 3-port (NC and NC)																						
<input type="checkbox"/> TB ^{Note9}	Tandem 3-port (NO and NO)																						
<input type="checkbox"/> TC ^{Note9}	Tandem 3-port (NC and NO)																						
<input type="checkbox"/> LT0	(Low current type) 2-position, for single solenoid only																						
<input type="checkbox"/> LT1	(Low current type) 2-position, single solenoid specification																						
<input type="checkbox"/> LT2	(Low current type) 2-position, double solenoid specification																						
<input type="checkbox"/> LT3	(Low current type) 3-position, closed center																						
<input type="checkbox"/> LT4	(Low current type) 3-position, exhaust center																						
<input type="checkbox"/> LT5	(Low current type) 3-position, pressure center																						
<input type="checkbox"/> LTA ^{Note9}	(Low current type) Tandem 3-port (NC and NC)																						
<input type="checkbox"/> LTB ^{Note9}	(Low current type) Tandem 3-port (NO and NO)																						
<input type="checkbox"/> LTC ^{Note9}	(Low current type) Tandem 3-port (NC and NO)																						
<input type="checkbox"/> BPN	Block-off plate																						
<input type="checkbox"/> P ^{Note13}	IP Specification																						
Manual override (-R) Manual override lever ^{Note3}																							
Valve outlet type ^{Note4}	<input type="checkbox"/> FJ With dual use fitting block																						
	<input type="checkbox"/> FJ5 With single use fitting block																						
	<input type="checkbox"/> FJ6 With single use fitting block																						
	<input type="checkbox"/> FM With female thread block																						
	<input type="checkbox"/> FJ5A With single use fitting block, 3-port normally closed (NC)																						
	<input type="checkbox"/> FJ5B With single use fitting block, 3-port normally open (NO)																						
	<input type="checkbox"/> FJ6A With single use fitting block, 3-port normally closed (NC)																						
	<input type="checkbox"/> FJ6B With single use fitting block, 3-port normally open (NO)																						
	<input type="checkbox"/> FMA With female thread block, 3-port normally closed (NC)																						
	<input type="checkbox"/> FMB With female thread block, 3-port normally open (NO)																						
	<input type="checkbox"/> FMH With female thread block																						
	<input type="checkbox"/> FMAH With female thread block, 3-port normally closed (NC)																						
	<input type="checkbox"/> FMBH With female thread block, 3-port normally open (NO)																						
Manifold fitting specification- ^{Note5} (Manifold side outlet port)	<input type="checkbox"/> J5 With single use fitting block																						
	<input type="checkbox"/> J6 With single use fitting block																						
	<input type="checkbox"/> M With female thread block																						
	<input type="checkbox"/> J5A With single use fitting block, 3-port normally closed (NC)																						
	<input type="checkbox"/> J5B With single use fitting block, 3-port normally open (NO)																						
	<input type="checkbox"/> J6A With single use fitting block, 3-port normally closed (NC)																						
	<input type="checkbox"/> J6B With single use fitting block, 3-port normally open (NO)																						
	<input type="checkbox"/> MA With female thread block, 3-port normally closed (NC)																						
	<input type="checkbox"/> MB With female thread block, 3-port normally open (NO)																						
	<input type="checkbox"/> MH With female thread block																						
<input type="checkbox"/> MAH With female thread block, 3-port normally closed (NC)																							
<input type="checkbox"/> MBH With female thread block, 3-port normally open (NO)																							
<input type="checkbox"/> E2 ^{Note10}	Back pressure prevention valve																						
<input type="checkbox"/> NPM	Individual air supply spacer (with M5 female thread for F10)																						
<input type="checkbox"/> NP6	Individual air supply spacer (with φ 6 fitting for F15)																						
<input type="checkbox"/> NP8	Individual air supply spacer (with φ 8 fitting for F15)																						
<input type="checkbox"/> NRM	Individual exhaust spacer (with M5 female thread for F10)																						
<input type="checkbox"/> NR6	Individual exhaust spacer (with φ 6 fitting for F15)																						
<input type="checkbox"/> NR8	Individual exhaust spacer (with φ 8 fitting for F15)																						
Port isolator (-SP) For 1(P) port ^{Note8}																							
Port isolator (-SR) For 3(R2), 5(R1) ports ^{Note8}																							
Port isolator (-SA) For 1(P), 3(R2), 5(R1) ports ^{Note8}																							

- Notes: 1. Cannot be mounted on the external pilot manifold.
 2. Cannot be mounted on the internal pilot manifold.
 3. To designate a manual override lever, enter ○ in the manual override boxes of the designated stations in the above table.
 4. When the manifold outlet specifications are "Blank", select fitting specification for each station, and enter ○ in the valve outlet type boxes of the above table. The 3-port specifications are only available in valve specifications T0, T1, and T2.
 5. When the manifold outlet specifications are L (with selectable fitting), select manifold fitting specification for each station, and enter ○ in the manifold fitting specification boxes of the above table. The 3-port specifications are only available in valve specifications T0, T1, and T2.
 6. When mounting the individual air supply or exhaust spacer, enter ○ in the spacer boxes of the designated stations in the above table.
 7. To designate a port isolator, enter ○ in one box of the designated stations in the above table.
 8. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for -SA, or 1 each port isolator for -SP and -SR for a total of 2 locations. When shipping, the designated port isolators are installed between the designated station and the station to its immediate left (the next smaller stn. No.).
 9. Not available in external pilot type.
 10. When mounting the back pressure prevention valve, enter ○ in the back pressure prevention valve boxes of the designated stations in the above table. Not available with the individual exhaust spacer.
 11. Not available in low-current type.
 12. Not available in low-current type and tandem 3-port valves.
 13. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.

Quantity	set	Delivery
----------	-----	----------

Company name	
Contact person	
Order No.	

F10, F15 Series

Split Manifold Plug-in Type

Specifications Confirmation Form 1/2

• Fill in selections inside the thick-lined boxes.

Manifold model	F <input type="text"/> M <input type="text"/> P <input type="text"/> PH <input type="text"/> - <input type="text"/> - <input type="text"/> - <input type="text"/> - <input type="text"/>	<p>Valve size 10: 10mm width 15: 15mm width</p> <p>Valve units 2 to <input type="text"/>^{Note} Note: For the maximum number of units, see the table for maximum number of valve units by wiring specification, on P. 66</p> <p>Manifold outlet specification J : With dual use fitting blocks M : With female thread blocks L : With selectable fitting blocks Blank: With plates (direct piping type)</p> <p>Piping block specification (air supply and exhaust) Can be selected only when the manifold type is P (metric). JR: With dual use fitting, right-side mounting JL: With dual use fitting, left-side mounting JD: With dual use fitting, both-side mounting MR: With female thread, right-side mounting ML: With female thread, left-side mounting MD: With female thread, both-side mounting J5R: With single use fitting φ8, right-side mounting J6R: With single use fitting φ10, right-side mounting J5L: With single use fitting φ8, left-side mounting J6L: With single use fitting φ10, left-side mounting J5D: With single use fitting φ8, both-side mounting J6D: With single use fitting φ10, both-side mounting</p> <p>Can be selected only when the manifold type is PH (imperial). MRH: With female thread, right-side mounting MLH: With female thread, left-side mounting MDH : With female thread, both-side mounting</p>	<p>Pilot specification Blank: Internal pilot manifold G : External pilot manifold</p> <p>Wiring connection specification Blank: Packed wiring W : Double wiring</p> <p>Wiring specification <connector top surface wiring> F100 : Flat cable connector 10-pin F100N : Flat cable connector 10-pin without power terminal F101 : Flat cable connector 10-pin F101N : Flat cable connector 10-pin without power terminal F200 : Flat cable connector 20-pin F200N : Flat cable connector 20-pin without power terminal F201 : Flat cable connector 20-pin F201N : Flat cable connector 20-pin without power terminal F260 : Flat cable connector 26-pin F260N : Flat cable connector 26-pin without power terminal</p> <p>(M2.6 mounting screw) D250 : D-sub connector 25-pin^{Note13} D250N : D-sub connector 25-pin without power terminal^{Note13} D251 : D-sub connector 25-pin^{Note13} D251N : D-sub connector 25-pin without power terminal^{Note13}</p> <p>(4-40UNC mounting screw) D250U : D-sub connector 25-pin^{Note14} D251U : D-sub connector 25-pin without power terminal^{Note14} D370NU : D-sub connector 37-pin without power terminal^{Note14}</p> <p>T200: Terminal block 19 terminals</p>	<p>Wiring position (wiring block) Blank: Left-side mounting R : Right-side mounting</p> <p>Voltage DC12V^{Note9} DC24V AC100V^{Note10}</p> <p><connector side surface wiring> F100E : Flat cable connector 10-pin F100EN : Flat cable connector 10-pin without power terminal F101E : Flat cable connector 10-pin F101EN : Flat cable connector 10-pin without power terminal F200E : Flat cable connector 20-pin F200EN : Flat cable connector 20-pin without power terminal F201E : Flat cable connector 20-pin F201EN : Flat cable connector 20-pin without power terminal F260E : Flat cable connector 26-pin F260EN : Flat cable connector 26-pin without power terminal</p> <p>(M2.6 mounting screw) D250E : D-sub connector 25-pin^{Note13} D250EN : D-sub connector 25-pin without power terminal^{Note13} D251E : D-sub connector 25-pin^{Note13} D251EN : D-sub connector 25-pin without power terminal^{Note13}</p> <p>(4-40UNC mounting screw) D250EU : D-sub connector 25-pin^{Note14} D251EU : D-sub connector 25-pin without power terminal^{Note14}</p>
----------------	--	---	--	---

Mounting valve model	stn. <input type="text"/> F <input type="text"/> Valve size <input type="text"/> T <input type="text"/> Valve specification <input type="text"/> - <input type="text"/> ^{Note 3} - <input type="text"/> ^{Note 4} - <input type="text"/> ^{Note 5} - <input type="text"/> ^{Note 12} - <input type="text"/> ^{Note 6} - <input type="text"/> ^{Note 7} - <input type="text"/>	<p>Operation type Blank: Internal pilot type^{Note1} G : External pilot type^{Note2}</p> <p>Manual override Blank: Manual override button R : Manual override lever^{Note3}</p> <p>Valve outlet type A1 : With plate (When manifold outlet specification are J, M, or L, the valve type should be A1.)</p> <p>Can be selected only when the manifold type is P and the manifold outlet specification is "Blank" (metric). FJ : With dual use fitting block^{Note4} (F10: φ4 and φ6, F15: φ6 and φ8) FJ5 : With single use fitting block^{Note4} (F10: φ4, F15: φ6) FJ6 : With single use fitting block^{Note4} (F10: φ6, F15: φ8) FM : With female thread block^{Note4} (F10: M5X0.8, F15: Rc1/8) FJ5A : With single use fitting block, 3-port normally closed (NC)^{Note4} (F10: φ4, F15: φ6) FJ5B : With single use fitting block, 3-port normally open (NO)^{Note4} (F10: φ4, F15: φ6) FJ6A : With single use fitting block, 3-port normally closed (NC)^{Note4} (F10: φ6, F15: φ8) FJ6B : With single use fitting block, 3-port normally open (NO)^{Note4} (F10: φ6, F15: φ8) FMA : With female thread block, 3-port normally closed (NC)^{Note4} (F10: M5X0.8, F15: Rc1/8) FMB : With female thread block, 3-port normally open (NO)^{Note4} (F10: M5X0.8, F15: Rc1/8)</p> <p>Can be selected only when the manifold type is PH and the manifold outlet specification is "Blank" (imperial). FMH : With female thread block^{Note4} (F10: 10-32UNF, F15: NPT1/8) FMAH : With female thread block, 3-port normally closed (NC)^{Note4} (F10: 10-32UNF, F15: NPT1/8) FMBH : With female thread block, 3-port normally open (NO)^{Note4} (F10: 10-32UNF, F15: NPT1/8)</p> <p>Manifold fitting specifications^{Note5} Can be selected only when the manifold type is P and the manifold outlet specification is L (with selectable fitting blocks (metric)) J5 : Manifold side outlet port with single use fitting block (F10: φ4, F15: φ6) J6 : Manifold side outlet port with single use fitting block (F10: φ6, F15: φ8) M : Manifold side outlet port with female thread block (F10: M5X0.8, F15: Rc1/8) J5A : Manifold side outlet port with single use fitting block, 3-port normally closed (NC) (F10: φ4, F15: φ6) J5B : Manifold side outlet port with single use fitting block, 3-port normally open (NO) (F10: φ4, F15: φ6) J6A : Manifold side outlet port with single use fitting block, 3-port normally closed (NC) (F10: φ6, F15: φ8) J6B : Manifold side outlet port with single use fitting block, 3-port normally open (NO) (F10: φ6, F15: φ8) MA : Manifold side outlet port with female thread block, 3-port normally closed (NC) (F10: M5X0.8, F15: Rc1/8) MB : Manifold side outlet port with female thread block, 3-port normally open (NO) (F10: M5X0.8, F15: Rc1/8)</p> <p>Can be selected only when manifold type is PH and manifold outlet specification is L (with selectable fitting blocks (imperial)) MH : Manifold side outlet port with female thread block (F10: 10-32UNF, F15: NPT1/8) MAH : Manifold side outlet port with female thread block, 3-port normally closed (NC) (F10: 10-32UNF, F15: NPT1/8) MBH : Manifold side outlet port with female thread block, 3-port normally open (NO) (F10: 10-32UNF, F15: NPT1/8)</p>	<p>When manifold outlet specifications are J, M, or L.</p> <p>Voltage DC12V^{Note9} DC24V AC100V^{Note10} AC120V^{Note10}</p> <p>Port isolator Blank: No port isolator SP : For 1(P) port^{Note7} SR : For 3(R2), 5(R1) ports^{Note7} SA : For 1(P), 3(R2), 5(R1) ports^{Note7}</p> <p>Individual air supply and exhaust spacer^{Note6} Blank: No spacer PPM : Individual air supply spacer (with M5 female thread for F10) PP6 : Individual air supply spacer (with φ6 fitting for F15) PP8 : Individual air supply spacer (with φ8 fitting for F15) PRM : Individual exhaust spacer (with M5 female thread for F10) PR6 : Individual exhaust spacer (with φ6 fitting for F15) PR8 : Individual exhaust spacer (with φ8 fitting for F15)</p> <p>Back pressure prevention valve^{Note12} Blank: No back pressure prevention valve E2 : With back pressure prevention valve</p>
----------------------	---	--	--

Enter ○ in each designated station in tables on the next page.

F10, F15 Series

Split Manifold Plug-in Type

Specifications Confirmation Form 2/2

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve, block-off plate		Station	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
<input type="checkbox"/>	T0	2-position, for single solenoid only																					
<input type="checkbox"/>	T1	2-position, single solenoid specification																					
<input type="checkbox"/>	T2	2-position, double solenoid specification																					
<input type="checkbox"/>	T3	3-position, closed center																					
<input type="checkbox"/>	T4	3-position, exhaust center																					
<input type="checkbox"/>	T5	3-position, pressure center																					
<input type="checkbox"/>	TA ^{Note11}	Tandem 3-port (NC and NC)																					
<input type="checkbox"/>	TB ^{Note11}	Tandem 3-port (NO and NO)																					
<input type="checkbox"/>	TC ^{Note11}	Tandem 3-port (NC and NO)																					
<input type="checkbox"/>	LT0	(Low current type) 2-position, for single solenoid only																					
<input type="checkbox"/>	LT1	(Low current type) 2-position, single solenoid specification																					
<input type="checkbox"/>	LT2	(Low current type) 2-position, double solenoid specification																					
<input type="checkbox"/>	LT3	(Low current type) 3-position, closed center																					
<input type="checkbox"/>	LT4	(Low current type) 3-position, exhaust center																					
<input type="checkbox"/>	LT5	(Low current type) 3-position, pressure center																					
<input type="checkbox"/>	LTA ^{Note11}	(Low current type) Tandem 3-port (NC and NC)																					
<input type="checkbox"/>	LTB ^{Note11}	(Low current type) Tandem 3-port (NO and NO)																					
<input type="checkbox"/>	LTC ^{Note11}	(Low current type) Tandem 3-port (NC and NO)																					
<input type="checkbox"/>	BPP	Block-off plate																					
<input type="checkbox"/>	BPP-1W	Block-off plate (wiring for single solenoid)																					
Manual override (-R) Manual override lever ^{Note3}																							
Mounting valve models	Valve outlet type ^{Note4}	FJ	With dual use fitting block																				
		FJ5	With single use fitting block																				
		FJ6	With single use fitting block																				
		FM	With female thread block																				
		FJ5A	With single use fitting block, 3-port normally closed (NC)																				
		FJ5B	With single use fitting block, 3-port normally open (NO)																				
		FJ6A	With single use fitting block, 3-port normally closed (NC)																				
		FJ6B	With single use fitting block, 3-port normally open (NO)																				
		FMA	With female thread block, 3-port normally closed (NC)																				
		FMB	With female thread block, 3-port normally open (NO)																				
		FMH	With female thread block																				
		FMAH	With female thread block, 3-port normally closed (NC)																				
		FMBH	With female thread block, 3-port normally open (NO)																				
		Manifold fitting specification- ^{Note5} (Manifold side outlet port)	J5	With single use fitting block																			
J6	With single use fitting block																						
M	With female thread block																						
J5A	With single use fitting block, 3-port normally closed (NC)																						
J5B	With single use fitting block, 3-port normally open (NO)																						
J6A	With single use fitting block, 3-port normally closed (NC)																						
J6B	With single use fitting block, 3-port normally open (NO)																						
MA	With female thread block, 3-port normally closed (NC)																						
MB	With female thread block, 3-port normally open (NO)																						
MH	With female thread block																						
MAH	With female thread block, 3-port normally closed (NC)																						
MBH	With female thread block, 3-port normally open (NO)																						
E2 ^{Note12}	Back pressure prevention valve																						
PPM	Individual air supply spacer (with M5 female thread for F10)																						
PP6	Individual air supply spacer (with φ 6 fitting for F15)																						
PP8	Individual air supply spacer (with φ 8 fitting for F15)																						
PRM	Individual exhaust spacer (with M5 female thread for F10)																						
PR6	Individual exhaust spacer (with φ 6 fitting for F15)																						
PR8	Individual exhaust spacer (with φ 8 fitting for F15)																						
Port isolator (-SP) For 1(P) port ^{Note8}																							
Port isolator (-SR) For 3(R2), 5(R1) ports ^{Note8}																							
Port isolator (-SA) For 1(P), 3(R2), 5(R1) ports ^{Note8}																							

- Notes: 1. Cannot be mounted on the external pilot manifold.
 2. Cannot be mounted on the internal pilot manifold.
 3. To designate a manual override lever, enter ○ in the manual override boxes of the designated stations in the above table.
 4. When the manifold outlet specifications are "Blank", select fitting specification for each station, and enter ○ in the valve outlet type boxes of the above table.
 The 3-port specifications are only available in valve specifications T0, T1, and T2.
 5. When the manifold outlet specifications are L (with selectable fitting), select manifold fitting specification for each station, and enter ○ in the manifold fitting specification boxes of the above table.
 The 3-port specifications are only available in valve specifications T0, T1, and T2.
 6. When mounting the individual air supply or exhaust spacer, enter ○ in the spacer boxes of the designated stations in the above table.
 7. To designate a port isolator, enter ○ in one port isolator box of the designated stations in the above table.
 8. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for -SA, or 1 each port isolator for -SP and -SR for a total of 2 locations.
 When shipping, the designated port isolators are installed between the designated station and the station to its immediate left (the next smaller stn. No.).
 9. Not available in low-current type.
 10. AC100V and AC120V can only be used when wiring specifications are -D250□, -D251□ (D-sub connector), or -T200 (terminal). In addition, not available in low-current type and tandem 3-port valves
 11. Not available in external pilot type.
 12. When mounting the back pressure prevention valve, enter ○ in the back pressure prevention valve boxes of the designated stations in the above table. Not available with the individual exhaust spacer.
 13. Can be selected only when the manifold type is P.
 14. Can be selected only when the manifold type is PH.

Quantity	set	Delivery
----------	-----	----------

SPECIFICATION CHECK SHEET

F10, F15 Series

Split Manifold Serial Transmission Type

Specifications Confirmation Form 1/2

Company name	
Contact person	
Order No.	

• Fill in selections inside the thick-lined boxes.

Manifold model

F M S SH - - - -

Valve size
 10: 10mm width
 15: 15mm width

Valve units
 2 to Note
Note: For the maximum number of units, see the table for maximum number of valve units by wiring specification, on P. 70.

Manifold outlet specification
J : With dual use fitting blocks
M : With female thread blocks
L : With selectable fitting blocks
Blank: With plates (direct piping type)

Pilot specification
Blank: Internal pilot manifold
G : External pilot manifold

Wiring connection specification
Blank: Packed wiring
W : Double wiring

Wiring position (transmission block)
Blank: Left-side mounting
R : Right-side mounting

Piping block specification (air supply and exhaust)
 Can be selected only when the manifold type is **S** (metric).
JR : With dual use fitting, right-side mounting
JL : With dual use fitting, left-side mounting
JD : With dual use fitting, both-side mounting
MR : With female thread, right-side mounting
ML : With female thread, left-side mounting
MD : With female thread, both-side mounting
J5R: With single use fitting φ8, right-side mounting
J6R: With single use fitting φ10, right-side mounting
J5L: With single use fitting φ8, left-side mounting
J6L: With single use fitting φ10, left-side mounting
J5D: With single use fitting φ8, both-side mounting
J6D: With single use fitting φ10, both-side mounting

Transmission block specification
31 : For OMRON B7A Link Terminal (standard)
32 : For OMRON B7A Link Terminal (high speed)
B1: For CC-Link (16 outputs)
B3: For CC-Link (32 outputs)
D1: For DeviceNet (16 outputs)
D3: For DeviceNet (32 outputs)
H1: For CompoNet (16 outputs)
K1: For EtherCAT (16 outputs)
K3: For EtherCAT (32 outputs)
M1: For EtherNet/IP (16 point output) Note11
M3: For EtherNet/IP (32 point output) Note11

Can be selected only when the manifold type is **SH** (imperial).
MRH: With female thread, right-side mounting
MLH: With female thread, left-side mounting
MDH: With female thread, both-side mounting

Mounting valve model

stn. F Valve size T Valve specification - Note 3 - A1 Note 4 - Note 5 - Note 10 - Note 6 - Note 7 DC24V

Operation type
Blank: Internal pilot type Note1
G : External pilot type Note2

Manual override
Blank: Manual override button
R : Manual override lever Note3

Valve outlet type
A1 : With plate (When manifold outlet specification are **J**, **M**, or **L**, the valve type should be **A1**.)
 Can be selected only when the manifold type is **S** and the manifold outlet spec. is "Blank" (metric).
FJ : With dual use fitting block (F10: φ4 and φ6, F15: φ6 and φ8)
FJ5: With single use fitting block (F10: φ4, F15: φ6)
FJ6: With single use fitting block (F10: φ6, F15: φ8)
FM : With female thread block (F10: M5X0.8, F15: Rc1/8)
FJ5A: With single use fitting block, 3-port normally closed (NC) (F10: φ4, F15: φ6)
FJ5B: With single use fitting block, 3-port normally open (NO) (F10: φ4, F15: φ6)
FJ6A: With single use fitting block, 3-port normally closed (NC) (F10: φ6, F15: φ8)
FJ6B: With single use fitting block, 3-port normally open (NO) (F10: φ6, F15: φ8)
FMA: With female thread block, 3-port normally closed (NC) (F10: M5X0.8, F15: Rc1/8)
FMB: With female thread block, 3-port normally open (NO) (F10: M5X0.8, F15: Rc1/8)
 Can be selected only when the manifold type is **SH** and the manifold outlet spec. is "Blank" (imperial).
FMH: With female thread block (F10:10-32UNF, F15: NPT1/8)
FMAH: With female thread block, 3-port normally closed (NC) (F10:10-32UNF, F15: NPT1/8)
FMBH: With female thread block, 3-port normally open (NO) (F10:10-32UNF, F15: NPT1/8)

Port isolator
Blank: No port isolator
SP : For 1(P) port Note7
SR : For 3(R2), 5(R1) ports Note7
SA : For 1(P), 3(R2), 5(R1) ports Note7

Individual air supply and exhaust spacer Note6
Blank: No spacer
PPM : Individual air supply spacer (with M5 female thread for F10)
PP6 : Individual air supply spacer (with φ6 fitting for F15)
PP8 : Individual air supply spacer (with φ8 fitting for F15)
PRM : Individual exhaust spacer (with M5 female thread for F10)
PR6 : Individual exhaust spacer (with φ6 fitting for F15)
PR8 : Individual exhaust spacer (with φ8 fitting for F15)

Back pressure prevention valve Note10
Blank: No back pressure prevention valve
E2 : With back pressure prevention valve

Manifold fitting specifications Note5
 Can be selected only when the manifold type is **S** and the manifold outlet specification is **L** (with selectable fitting blocks (metric))
J5 : Manifold side outlet port with single use fitting block (F10: φ4, F15: φ6)
J6 : Manifold side outlet port with single use fitting block (F10: φ6, F15: φ8)
M : Manifold side outlet port with female thread block (F10: M5X0.8, F15: Rc1/8)
J5A : Manifold side outlet port with single use fitting block, 3-port normally closed (NC) (F10: φ4, F15: φ6)
J5B : Manifold side outlet port with single use fitting block, 3-port normally open (NO) (F10: φ4, F15: φ6)
J6A : Manifold side outlet port with single use fitting block, 3-port normally closed (NC) (F10: φ6, F15: φ8)
J6B : Manifold side outlet port with single use fitting block, 3-port normally open (NO) (F10: φ6, F15: φ8)
MA : Manifold side outlet port with female thread block, 3-port normally closed (NC) (F10: M5X0.8, F15: Rc1/8)
MB : Manifold side outlet port with female thread block, 3-port normally open (NO) (F10: M5X0.8, F15: Rc1/8)
 Can be selected only when the manifold type is **SH** and the manifold outlet specification is **L** (with selectable fitting blocks (imperial))
MH : Manifold side outlet port with female thread block (F10:10-32UNF, F15: NPT1/8)
MAH : Manifold side outlet port with female thread block, 3-port normally closed (NC) (F10:10-32UNF, F15: NPT1/8)
MBH : Manifold side outlet port with female thread block, 3-port normally open (NO) (F10:10-32UNF, F15: NPT1/8)

Enter ○ in each designated station in tables on the next page.

F10, F15 Series

Split Manifold Serial Transmission Type

Specifications Confirmation Form 2/2

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve, block-off plate		Station	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Mounting valve models	<input type="checkbox"/> T0	2-position, for single solenoid only																				
	<input type="checkbox"/> T1	2-position, single solenoid specification																				
	<input type="checkbox"/> T2	2-position, double solenoid specification																				
	<input type="checkbox"/> T3	3-position, closed center																				
	<input type="checkbox"/> T4	3-position, exhaust center																				
	<input type="checkbox"/> T5	3-position, pressure center																				
	<input type="checkbox"/> TA ^{Note9}	Tandem 3-port (NC and NC)																				
	<input type="checkbox"/> TB ^{Note9}	Tandem 3-port (NO and NO)																				
	<input type="checkbox"/> TC ^{Note9}	Tandem 3-port (NC and NO)																				
	<input type="checkbox"/> LT0	(Low current type) 2-position, for single solenoid only																				
	<input type="checkbox"/> LT1	(Low current type) 2-position, single solenoid specification																				
	<input type="checkbox"/> LT2	(Low current type) 2-position, double solenoid specification																				
	<input type="checkbox"/> LT3	(Low current type) 3-position, closed center																				
	<input type="checkbox"/> LT4	(Low current type) 3-position, exhaust center																				
	<input type="checkbox"/> LT5	(Low current type) 3-position, pressure center																				
	<input type="checkbox"/> LTA	(Low current type) Tandem 3-port (NC and NC)																				
	<input type="checkbox"/> LTB	(Low current type) Tandem 3-port (NO and NO)																				
	<input type="checkbox"/> LTC	(Low current type) Tandem 3-port (NC and NO)																				
	<input type="checkbox"/> BPP	Block-off plate																				
	Manual override (-R) Manual override lever ^{Note3}																					
	Valve outlet type ^{Note4}	<input type="checkbox"/> FJ	With dual use fitting block																			
		<input type="checkbox"/> FJ5	With single use fitting block																			
		<input type="checkbox"/> FJ6	With single use fitting block																			
		<input type="checkbox"/> FM	With female thread block																			
		<input type="checkbox"/> FJ5A	With single use fitting block, 3-port normally closed (NC)																			
		<input type="checkbox"/> FJ5B	With single use fitting block, 3-port normally open (NO)																			
		<input type="checkbox"/> FJ6A	With single use fitting block, 3-port normally closed (NC)																			
		<input type="checkbox"/> FJ6B	With single use fitting block, 3-port normally open (NO)																			
		<input type="checkbox"/> FMA	With female thread block, 3-port normally closed (NC)																			
		<input type="checkbox"/> FMB	With female thread block, 3-port normally open (NO)																			
		<input type="checkbox"/> FMH	With female thread block																			
		<input type="checkbox"/> FMAH	With female thread block, 3-port normally closed (NC)																			
		<input type="checkbox"/> FMBH	With female thread block, 3-port normally open (NO)																			
		Manifold fitting specification- ^{Note5} (Manifold side outlet port)	<input type="checkbox"/> J5	With single use fitting block																		
	<input type="checkbox"/> J6		With single use fitting block																			
	<input type="checkbox"/> M		With female thread block																			
	<input type="checkbox"/> J5A		With single use fitting block, 3-port normally closed (NC)																			
	<input type="checkbox"/> J5B		With single use fitting block, 3-port normally open (NO)																			
<input type="checkbox"/> J6A	With single use fitting block, 3-port normally closed (NC)																					
<input type="checkbox"/> J6B	With single use fitting block, 3-port normally open (NO)																					
<input type="checkbox"/> MA	With female thread block, 3-port normally closed (NC)																					
<input type="checkbox"/> MB	With female thread block, 3-port normally open (NO)																					
<input type="checkbox"/> MH	With female thread block																					
<input type="checkbox"/> MAH	With female thread block, 3-port normally closed (NC)																					
<input type="checkbox"/> MBH	With female thread block, 3-port normally open (NO)																					
<input type="checkbox"/> E2 ^{Note10}	Back pressure prevention valve																					
<input type="checkbox"/> PPM	Individual air supply spacer (with M5 female thread for F10)																					
<input type="checkbox"/> PP6	Individual air supply spacer (with φ 6 fitting for F15)																					
<input type="checkbox"/> PP8	Individual air supply spacer (with φ 8 fitting for F15)																					
<input type="checkbox"/> PRM	Individual exhaust spacer (with M5 female thread for F10)																					
<input type="checkbox"/> PR6	Individual exhaust spacer (with φ 6 fitting for F15)																					
<input type="checkbox"/> PR8	Individual exhaust spacer (with φ 8 fitting for F15)																					
<input type="checkbox"/>	Port isolator (-SP) For 1(P) port ^{Note8}																					
<input type="checkbox"/>	Port isolator (-SR) For 3(R2), 5(R1) ports ^{Note8}																					
<input type="checkbox"/>	Port isolator (-SA) For 1(P), 3(R2), 5(R1) ports ^{Note8}																					

- Notes: 1. Cannot be mounted on the external pilot manifold.
 2. Cannot be mounted on the internal pilot manifold.
 3. To designate a manual override lever, enter ○ in the manual override boxes of the designated stations in the above table.
 4. When the manifold outlet specifications are "Blank", select fitting specification for each station, and enter ○ in the valve outlet type boxes of the above table. The 3-port specifications are only available in valve specifications T0, T1, and T2.
 5. When the manifold outlet specifications are L (with selectable fitting), select manifold fitting specification for each station, and enter ○ in the manifold fitting specification boxes of the above table. The 3-port specifications are only available in valve specifications T0, T1, and T2.
 6. When mounting the individual air supply or exhaust spacer, enter ○ in the spacer boxes of the designated stations in the above table.
 7. To designate a port isolator, enter ○ in one port isolator box of the designated stations in the above table.
 8. Port isolators can be installed only when piping blocks are installed on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for -SA, or 1 each port isolator for -SP and -SR for a total of 2 locations. When shipping, the designated port isolators are installed between the designated station and the station to its immediate left (the next smaller stn. No.).
 9. Not available in external pilot type.
 10. When mounting the back pressure prevention valve, enter ○ in the back pressure prevention valve boxes of the designated stations in the above table. Not available with the individual exhaust spacer.
 11. Complies with the CE marking regulations.

Quantity	set	Delivery
----------	-----	----------

F10, F15 Series

Easy Assembly Type Manifold Non-Plug-in Type Specifications

Confirmation Form 1/2

● Fill in selections inside the thick-lined boxes.

Manifold model

F **M** **XN** **XNH** - -

Valve units
2 to 21^{Note13}

Valve size
10: 10 mm width
15: 15mm width

Pilot specification
Blank: Internal pilot manifold
G: External pilot manifold

Manifold outlet specification
J: With dual use fitting blocks
M: With female thread blocks
L: With selectable fitting blocks
Blank: With plates (direct piping type)

Company name	
Contact person	
Order No.	

Piping block specification (air supply, exhaust and intermediate)

Mounting specification
Blank: Direct mounting
DN: With DIN bracket (no rail)
DR: With DIN bracket, with rail

Fitting block
JR: Dual use fitting, right-side mounting
JL: Dual use fitting, left-side mounting
JD: Dual use fitting, both-side mounting

Female thread block
MR: Female thread, right-side mounting
ML: Female thread, left-side mounting
MD: Female thread, both-side mounting

Single use fitting block
J5R: Single use fitting, right-side mounting
J5L: Single use fitting, left-side mounting
J5D: Single use fitting, both-side mounting
J6R: Single use fitting, right-side mounting
J6L: Single use fitting, left-side mounting
J6D: Single use fitting, both-side mounting

Intermediate piping block
JT: Dual use fitting, both-side mounting, intermediate piping block mounting fitting size F10: φ6, φ8 F15: φ8, φ10
J5T: Single use fitting, both-side mounting, intermediate piping block mounting fitting size F10: φ6 F15: φ8
J6T: Single use fitting, both-side mounting, intermediate piping block mounting fitting size F10: φ8 F15: φ10
MT: Female thread, both-side mounting, intermediate piping block mounting fitting size F10: Rc 1/8 F15: Rc 1/4
Can be selected only when the manifold type is **XNH** (imperial).
MRH: With female thread, right-side mounting
MLH: With female thread, left-side mounting
MDH: With female thread, both-side mounting
MTH: With female thread, both-side mounting, intermediate piping block mounting

Fitting size (1(P), 3, 5(R) ports)
F10: φ6, φ8 F15: φ8, φ10

Female thread size (1(P), 3, 5(R) ports)
F10: Rc 1/8 F15: Rc 1/4

Fitting size (1(P), 3, 5(R) ports)
F10: φ6 F15: φ8

Fitting size (1(P), 3, 5(R) ports)
F10: φ8 F15: φ10

Manifold fitting specifications^{Note5}
Can be selected only when the manifold outlet specification is L.
J5: Manifold side outlet port with single use fitting block F10: φ4, F15: φ6
J6: Manifold side outlet port with single use fitting block F10: φ6, F15: φ8
M: Manifold side outlet port with female thread block F10: M5 x 0.8, F15: Rc 1/8
J5A: Manifold side outlet port with single use fitting block, 3-port normally closed (NC) F10: φ4, F15: φ6
J5B: Manifold side outlet port with single use fitting block, 3-port normally open (NO) F10: φ4, F15: φ6
J6A: Manifold side outlet port with single use fitting block, 3-port normally closed (NC) F10: φ6, F15: φ8
J6B: Manifold side outlet port with single use fitting block, 3-port normally open (NO) F10: φ6, F15: φ8
MA: Manifold side outlet port with female thread block, 3-port normally closed (NC) F10: M5 x 0.8, F15: Rc 1/8
MB: Manifold side outlet port with female thread block, 3-port normally open (NO) F10: M5 x 0.8, F15: Rc 1/8
Can be selected only when the manifold type is **NH** and the manifold outlet specification is L (with selectable fitting blocks (imperial))
MH: Manifold side outlet port with female thread block^{Note14} (F10:10-32UNF, F15: NPT1/8)
MAH: Manifold side outlet port with female thread block, 3-port normally closed (NC)^{Note14} (F10:10-32UNF, F15: NPT1/8)
MBH: Manifold side outlet port with female thread block, 3-port normally open (NO)^{Note14} (F10:10-32UNF, F15: NPT1/8)

Wiring specification
PN: S type plug connector, Without connector
PS: S type plug connector, Lead wire length 300mm [11.8in.]
PS3: S type plug connector, Lead wire length 3000mm [118in.]
CPS: Pre-wired positive common terminal S type plug connector, Lead wire length 300mm [11.8in.]
CPS3: Pre-wired positive common terminal S type plug connector, Lead wire length 3000mm [118in.]
MS: Pre-wired negative common terminal S type plug connector Lead wire 300 mm [11.8 in.]
MS3: Pre-wired negative common terminal S type plug connector Lead wire 3000 mm [118 in.]
CMS: Pre-wired negative common terminal S type plug connector Lead wire 300 mm [11.8 in.]
CMS3: Pre-wired negative common terminal S type plug connector Lead wire 3000 mm [118 in.]

Valve outlet type
A1: With plate (When manifold outlet specification are J, M, or L, the valve type should be A1.)
FJ: With dual use fitting block^{Note4} (F10:φ4 and φ6, F15:φ6 and φ8)
FJ5: With single use fitting block^{Note4} (F10:φ4, F15:φ6)
FJ6: With single use fitting block^{Note4} (F10:φ6, F15:φ8)
FM: With female thread block^{Note4} (F10: M5X0.8, F15: Rc1/8)
FJ5A: With single use fitting block, 3-port normally closed (NC)^{Note4} (F10:φ4, F15:φ6)
FJ5B: With single use fitting block, 3-port normally open (NO)^{Note4} (F10:φ4, F15:φ6)
FJ6A: With single use fitting block, 3-port normally closed (NC)^{Note4} (F10:φ6, F15:φ8)
FJ6B: With single use fitting block, 3-port normally open (NO)^{Note4} (F10:φ6, F15:φ8)
FMA: With female thread block, 3-port normally closed (NC)^{Note4} (F10: M5X0.8, F15: Rc1/8)
FMB: With female thread block, 3-port normally open (NO)^{Note4} (F10: M5X0.8, F15: Rc1/8)
Can be selected only when the manifold type is **NH** and the manifold outlet specification is "Blank" (imperial).
MH: Manifold side outlet port with female thread block (F10:10-32UNF, F15: NPT1/8)
MAH: Manifold side outlet port with female thread block, 3-port normally closed (NC) (F10:10-32UNF, F15: NPT1/8)
MBH: Manifold side outlet port with female thread block, 3-port normally open (NO) (F10:10-32UNF, F15: NPT1/8)

Operation type
Blank: Internal pilot type^{Note1}
G: External pilot type^{Note2}

IP Specification
Blank: Standard
P^{Note13}: IP Specification

Manual override
Blank: Manual override button
R: Manual override lever^{Note3}

Back pressure prevention valve^{Note10}
Blank: No back pressure prevention valve
E2: With back pressure prevention valve

Individual air supply and exhaust spacer^{Note6}
Blank: No spacer
XNPM: Individual air supply spacer (with M5 female thread for F10)
XNP6: Individual air supply spacer (with φ6 fitting for F15)
XNP8: Individual air supply spacer (with φ8 fitting for F15)
XNRM: Individual exhaust spacer (with M5 female thread for F10)
XNR6: Individual exhaust spacer (with φ6 fitting for F15)
XNR8: Individual exhaust spacer (with φ8 fitting for F15)
STP: Stop valve

Port isolator
Blank: No port isolator
XSP: For 1 (P) port^{Note7}
XSR: For 3(R2), 5(R1) ports port^{Note7}
XSA: For 1 (P), 3(R2), 5(R1) ports^{Note7}

Voltage
DC12V^{Note11}
DC24V
AC100V^{Note12}
AC120V^{Note12}

When manifold outlet specifications are J, M, or L.

Enter ○ in each designated station in tables on the next page.

F10, F15 Series

Easy Assembly Type Manifold Non-Plug-in Type

Specifications Confirmation Form 2/2

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve, block-off plate	Station	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
		<input type="checkbox"/> T0 2-position, for single solenoid only																					
<input type="checkbox"/> T1 2-position, single solenoid specification																							
<input type="checkbox"/> T2 2-position, double solenoid specification																							
<input type="checkbox"/> T3 3-position, closed center																							
<input type="checkbox"/> T4 3-position, exhaust center																							
<input type="checkbox"/> T5 3-position, pressure center																							
<input type="checkbox"/> TA ^{Note9} Tandem 3-port (NC and NC)																							
<input type="checkbox"/> TB ^{Note9} Tandem 3-port (NO and NO)																							
<input type="checkbox"/> TC ^{Note9} Tandem 3-port (NC and NO)																							
<input type="checkbox"/> LT0 (Low current type) 2-position, for single solenoid only																							
<input type="checkbox"/> LT1 (Low current type) 2-position, single solenoid specification																							
<input type="checkbox"/> LT2 (Low current type) 2-position, double solenoid specification																							
<input type="checkbox"/> LT3 (Low current type) 3-position, closed center																							
<input type="checkbox"/> LT4 (Low current type) 3-position, exhaust center																							
<input type="checkbox"/> LT5 (Low current type) 3-position, pressure center																							
<input type="checkbox"/> LTA ^{Note9} (Low current type) Tandem 3-port (NC and NC)																							
<input type="checkbox"/> LTB ^{Note9} (Low current type) Tandem 3-port (NO and NO)																							
<input type="checkbox"/> LTC ^{Note9} (Low current type) Tandem 3-port (NC and NO)																							
<input type="checkbox"/> XBPN Block-off plate																							
<input type="checkbox"/> ZX ^{Note14} Intermediate piping block																							
P ^{Note13} IP Specifications																							
Manual override (-R) Manual override lever ^{Note3}																							
Valve outlet type ^{Note4}	FJ With dual use fitting block																						
	FJ5 With single use fitting block																						
	FJ6 With single use fitting block																						
	FM With female thread block																						
	FJ5A With single use fitting block, 3-port normally closed (NC)																						
	FJ5B With single use fitting block, 3-port normally open (NO)																						
	FJ6A With single use fitting block, 3-port normally closed (NC)																						
	FJ6B With single use fitting block, 3-port normally open (NO)																						
	FMA With female thread block, 3-port normally closed (NC)																						
	FMB With female thread block, 3-port normally open (NO)																						
	FMH With female thread block																						
	FMAH With female thread block, 3-port normally closed (NC)																						
	FMBH With female thread block, 3-port normally open (NO)																						
	Manifold fitting specification ^{Note5} (Manifold side outlet port)	J5 With single use fitting block																					
J6 With single use fitting block																							
M With female thread block																							
J5A With single use fitting block, 3-port normally closed (NC)																							
J5B With single use fitting block, 3-port normally open (NO)																							
J6A With single use fitting block, 3-port normally closed (NC)																							
J6B With single use fitting block, 3-port normally open (NO)																							
MA With female thread block, 3-port normally closed (NC)																							
MB With female thread block, 3-port normally open (NO)																							
MH With female thread block																							
MAH With female thread block, 3-port normally closed (NC)																							
MBH With female thread block, 3-port normally open (NO)																							
E2 ^{Note10} Back pressure prevention valve																							
XNPM Individual air supply spacer (with M5 female thread for F10)																							
XNP6 Individual air supply spacer (with φ 6 fitting for F15)																							
XNP8 Individual air supply spacer (with φ 8 fitting for F15)																							
XNRM Individual exhaust spacer (with M5 female thread for F10)																							
XNR6 Individual exhaust spacer (with φ 6 fitting for F15)																							
XNR8 Individual exhaust spacer (with φ 8 fitting for F15)																							
STP ^{Note1} with stop valve																							
Port isolator (-XSP) For 1(P) port ^{Note8}																							
Port isolator (-XSR) For 3(R2), 5(R1) ports ^{Note8}																							
Port isolator (-XSA) For 1(P), 3(R2), 5(R1) ports ^{Note8}																							

- Notes: 1. Cannot be mounted on the external pilot manifold.
 2. Cannot be mounted on the internal pilot manifold.
 3. To designate a manual override lever, enter ○ in the manual override boxes of the designated stations in the above table.
 4. When the manifold outlet specifications are "Blank", select fitting specification for each station, and enter ○ in the valve outlet type boxes of the above table.
 The 3-port specifications are only available in valve specifications **T0**, **T1**, and **T2**.
 5. When the manifold outlet specifications are **L** (with selectable fitting), select manifold fitting specification for each station, and enter ○ in the manifold fitting specification boxes of the above table.
 The 3-port specifications are only available in valve specifications **T0**, **T1**, and **T2**.
 6. When mounting the individual air supply or exhaust spacer, enter ○ in the spacer boxes of the designated stations in the above table.
 7. To designate a port isolator, enter ○ in one box of the designated stations in the above table.
 8. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for **-SA**, or 1 each port isolator for **-SP** and **-SR** for a total of 2 locations.

- When shipping, the designated port isolators are installed between the designated station and the station to its immediate left (the next smaller stn. No.).
 9. Not available in external pilot type.
 10. When mounting the back pressure prevention valve, enter ○ in the back pressure prevention valve boxes of the designated stations in the above table. Not available with the individual exhaust spacer.
 11. Not available in low-current type.
 12. Not available in low-current type and tandem 3-port valves.
 13. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.
 14. Only one intermediate piping block can be installed. For information on the type, see page 100 for F10 or page 198 for F15.

Quantity	set	Delivery
----------	-----	----------

F10, F15 Series

Easy Assembly Type Manifold Plug-in Type

Specifications Confirmation Form 2/2

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve, block-off plate		Station	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
<input type="checkbox"/>	T0	2-position, for single solenoid only																						
<input type="checkbox"/>	T1	2-position, single solenoid specification																						
<input type="checkbox"/>	T2	2-position, double solenoid specification																						
<input type="checkbox"/>	T3	3-position, closed center																						
<input type="checkbox"/>	T4	3-position, exhaust center																						
<input type="checkbox"/>	T5	3-position, pressure center																						
<input type="checkbox"/>	TA ^{Note11}	Tandem 3-port (NC and NC)																						
<input type="checkbox"/>	TB ^{Note11}	Tandem 3-port (NO and NO)																						
<input type="checkbox"/>	TC ^{Note11}	Tandem 3-port (NC and NO)																						
<input type="checkbox"/>	LTO	(Low current type) 2-position, for single solenoid only																						
<input type="checkbox"/>	LT1	(Low current type) 2-position, single solenoid specification																						
<input type="checkbox"/>	LT2	(Low current type) 2-position, double solenoid specification																						
<input type="checkbox"/>	LT3	(Low current type) 3-position, closed center																						
<input type="checkbox"/>	LT4	(Low current type) 3-position, exhaust center																						
<input type="checkbox"/>	LT5	(Low current type) 3-position, pressure center																						
<input type="checkbox"/>	LTA ^{Note11}	(Low current type) Tandem 3-port (NC and NC)																						
<input type="checkbox"/>	LTB ^{Note11}	(Low current type) Tandem 3-port (NO and NO)																						
<input type="checkbox"/>	LTC ^{Note11}	(Low current type) Tandem 3-port (NC and NO)																						
<input type="checkbox"/>	XBPP	Block-off plate																						
<input type="checkbox"/>	XBPP-S	Block-off plate(wiring for single solenoid)																						
<input type="checkbox"/>	ZX ^{Note15}	Intermediate piping block																						
Manual override (-R) Manual override lever ^{Note3}																								
Mounting valve models	Valve outlet type ^{Note4}	FJ With dual use fitting block																						
		FJ5 With single use fitting block																						
		FJ6 With single use fitting block																						
		FM With female thread block																						
		FJ5A With single use fitting block, 3-port normally closed (NC)																						
		FJ5B With single use fitting block, 3-port normally open (NO)																						
		FJ6A With single use fitting block, 3-port normally closed (NC)																						
		FJ6B With single use fitting block, 3-port normally open (NO)																						
		FMA With female thread block, 3-port normally closed (NC)																						
		FMB With female thread block, 3-port normally open (NO)																						
		FMH With female thread block																						
		FMAH With female thread block, 3-port normally closed (NC)																						
		FMBH With female thread block, 3-port normally open (NO)																						
		Manifold fitting specification- ^{Notes} (Manifold side outlet port)	J5 With single use fitting block																					
J6 With single use fitting block																								
M With female thread block																								
J5A With single use fitting block, 3-port normally closed (NC)																								
J5B With single use fitting block, 3-port normally open (NO)																								
J6A With single use fitting block, 3-port normally closed (NC)																								
J6B With single use fitting block, 3-port normally open (NO)																								
MA With female thread block, 3-port normally closed (NC)																								
MB With female thread block, 3-port normally open (NO)																								
E2 ^{Note12}	Back pressure prevention valve																							
XPPM	Individual air supply spacer (with M5 female thread for F10)																							
XPP6	Individual air supply spacer (with φ 6 fitting for F15)																							
XPP8	Individual air supply spacer (with φ 8 fitting for F15)																							
XPRM	Individual exhaust spacer (with M5 female thread for F10)																							
XPR6	Individual exhaust spacer (with φ 6 fitting for F15)																							
XPR8	Individual exhaust spacer (with φ 8 fitting for F15)																							
Port isolator (-XSP) For 1(P) port ^{Note8}																								
Port isolator (-XSR) For 3(R2), 5(R1) ports ^{Note8}																								
Port isolator (-XSA) For 1(P), 3(R2), 5(R1) ports ^{Note8}																								

- Notes: 1. Cannot be mounted on the external pilot manifold.
 2. Cannot be mounted on the internal pilot manifold.
 3. To designate a manual override lever, enter ○ in the manual override boxes of the designated stations in the above table.
 4. When the manifold outlet specifications are "Blank", select fitting specification for each station, and enter ○ in the valve outlet type boxes of the above table. The 3-port specifications are only available in valve specifications **T0**, **T1**, and **T2**.
 5. When the manifold outlet specifications are L (with selectable fitting), select manifold fitting specification for each station, and enter ○ in the manifold fitting specification boxes of the above table. The 3-port specifications are only available in valve specifications **T0**, **T1**, and **T2**.
 6. When mounting the individual air supply or exhaust spacer, enter ○ in the spacer boxes of the designated stations in the above table.
 7. To designate a port isolator, enter ○ in one port isolator box of the designated stations in the above table.
 8. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for **-SA**, or 1 each port isolator for **-SP** and **-SR** for a total of 2 locations. When shipping, the designated port isolators are installed between the designated station and the station to its immediate left (the next smaller stn. No.).
 9. Not available in low-current type.
 10. AC100V and AC120V can only be used when wiring specifications are **-D250**□, **-D251**□ (D-sub connector), or **-T200** (terminal). In addition, not available in low-current type and tandem 3-port valves.
 11. Not available in external pilot type.
 12. When mounting the back pressure prevention valve, enter ○ in the back pressure prevention valve boxes of the designated stations in the above table. Not available with the individual exhaust spacer.
 13. Can be selected only when the manifold type is **XP**.
 14. Can be selected only when the manifold type is **XPH**.
 15. Only one intermediate piping block can be installed. For information on the type, see page 100 for F10 or page 198 for F15.

Quantity	set	Delivery
----------	-----	----------

F10, F15 Series

Easy Assembly Type Manifold Serial Transmission Type

Company name	
Contact person	
Order No.	

Specifications Confirmation Form 1/2

● Fill in selections inside the thick-lined boxes.

Manifold type

F **M** **XS** **XSH** - - - -

Valve size
10: 10 mm width
15: 15mm width

Valve units
2 to Note
NoteFor the maximum number of units, see the table for maximum number of valve units by wiring specification.
F10: on P114 **F15**: on P212

Pilot specification
Blank: Internal pilot manifold
G: External pilot manifold

Manifold outlet specification
J : With dual use fitting blocks
M : With female thread blocks
L : With selectable fitting blocks
Blank : With plates (direct piping type)

Wiring connection specification
Blank: Packed wiring
W: Double wiring

Mounting specification
Blank : Direct mounting
DN : With DIN bracket (no rail)
DR : With DIN bracket, with rail

Piping block specification (air supply, exhaust and intermediate)
 Can be selected only when the manifold type is **S** (metric).
JR: Dual use fitting, right-side mounting
JL: Dual use fitting, left-side mounting
JD: Dual use fitting, both-side mounting
MR: Female thread, right-side mounting
ML: Female thread, left-side mounting
MD: Female thread, both-side mounting
J5R: Single use fitting φ8, right-side mounting
J6R: Single use fitting φ10, right-side mounting
J5L: Single use fitting φ8, left-side mounting
J6L: Single use fitting φ10, left-side mounting
J5D: Single use fitting φ8, both-side mounting
J6D: Single use fitting φ10, both-side mounting
 Can be selected only when the manifold type is **SH** (imperial).
MRH: With female thread, right-side mounting
MLH: With female thread, left-side mounting
MDH: With female thread, both-side mounting
MTH: With female thread, both-side mounting, intermediate piping block mounting

Transmission block specification
B1: For CC-Link (16 outputs)
B3: For CC-Link (32 outputs)
D1: For DeviceNet (16 outputs)
D3: For DeviceNet (32 outputs)
H1: For CompoNet (16 outputs)
K1: For EtherCAT (16 outputs)
K3: For EtherCAT (32 outputs)
M1: For EtherNet/IP (16 outputs) Note11
M3: For EtherNet/IP (32 outputs) Note11

Valve type included

stn. **F** **Valve size** **T** **Valve specifications** - **DC24V**

Operation type
Blank: Internal pilot type Note1
G: External pilot type Note2
Manual override
Blank: Manual override button
R: Manual override lever Note3

Valve outlet type
A1 : With plate (When manifold outlet specification are **J**, **M**, or **L**, the valve type should be **A1**.)
 Can be selected only when the manifold type is **S** and the manifold outlet spec. is "Blank" (metric).
FJ : With dual use fitting block (**F10**: φ 4 and φ 6, **F15**: φ 6 and φ 8)
FJ5 : With single use fitting block (**F10**: φ 4, **F15**: φ 6)
FJ6 : With single use fitting block (**F10**: φ 6, **F15**: φ 8)
FM : With female thread block (**F10**: M5X0.8, **F15**: Rc1/8)
FJ5A : With single use fitting block, 3-port normally closed (NC) (**F10**: φ 4, **F15**: φ 6)
FJ5B : With single use fitting block, 3-port normally open (NO) (**F10**: φ 4, **F15**: φ 6)
FJ6A : With single use fitting block, 3-port normally closed (NC) (**F10**: φ 6, **F15**: φ 8)
FJ6B : With single use fitting block, 3-port normally open (NO) (**F10**: φ 6, **F15**: φ 8)
FMA : With female thread block, 3-port normally closed (NC) (**F10**: M5X0.8, **F15**: Rc1/8)
FMB : With female thread block, 3-port normally open (NO) (**F10**: M5X0.8, **F15**: Rc1/8)
 Can be selected only when the manifold type is **SH** and the manifold outlet spec. is "Blank" (imperial).
FMH : With female thread block (**F10**:10-32UNF, **F15**: NPT1/8)
FMAH : With female thread block, 3-port normally closed (NC) (**F10**:10-32UNF, **F15**: NPT1/8)
FMBH : With female thread block, 3-port normally open (NO) (**F10**:10-32UNF, **F15**: NPT1/8)

Manifold fitting specifications Note5
 Can be selected only when the manifold type is **S** and the manifold outlet specification is **L** (with selectable fitting blocks (metric))
J5 : Manifold side outlet port with single use fitting block (**F10**: φ 4, **F15**: φ 6)
J6 : Manifold side outlet port with single use fitting block (**F10**: φ 6, **F15**: φ 8)
M : Manifold side outlet port with female thread block (**F10**: M5X0.8, **F15**: Rc1/8)
J5A : Manifold side outlet port with single use fitting block, 3-port normally closed (NC) (**F10**: φ 4, **F15**: φ 6)
J5B : Manifold side outlet port with single use fitting block, 3-port normally open (NO) (**F10**: φ 4, **F15**: φ 6)
J6A : Manifold side outlet port with single use fitting block, 3-port normally closed (NC) (**F10**: φ 6, **F15**: φ 8)
J6B : Manifold side outlet port with single use fitting block, 3-port normally open (NO) (**F10**: φ 6, **F15**: φ 8)
MA : Manifold side outlet port with female thread block, 3-port normally closed (NC) (**F10**: M5X0.8, **F15**: Rc1/8)
MB : Manifold side outlet port with female thread block, 3-port normally open (NO) (**F10**: M5X0.8, **F15**: Rc1/8)

Port isolator
Blank : No port isolator
XSP : For 1 (P) port Note7
XS : For 3(R2), 5(R1) ports Note7
XSA : For 1 (P), 3(R2), 5(R1) ports Note7

Individual air supply and exhaust spacer Note6
Blank: No spacer
XPPM : Individual air supply spacer (with M5 female thread for F10)
XPP6 : Individual air supply spacer (with φ6 fitting for F15)
XPP8 : Individual air supply spacer (with φ8 fitting for F15)
XPRM : Individual exhaust spacer (with M5 female thread for F10)
XPR6 : Individual exhaust spacer (with φ6 fitting for F15)
XPR8 : Individual exhaust spacer (with φ8 fitting for F15)

Back pressure prevention valve Note10
Blank: No back pressure prevention valve
E2 : With back pressure prevention valve

Enter ○ in each designated station in tables on the next page.

F10, F15 Series

Easy Assembly Type Manifold Serial Transmission Type

Specifications Confirmation Form 2/2

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve models	Mounting valve, block-off plate	Station																					
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
<input type="checkbox"/> T0	2-position, for single solenoid only																						
<input type="checkbox"/> T1	2-position, single solenoid specification																						
<input type="checkbox"/> T2	2-position, double solenoid specification																						
<input type="checkbox"/> T3	3-position, closed center																						
<input type="checkbox"/> T4	3-position, exhaust center																						
<input type="checkbox"/> T5	3-position, pressure center																						
<input type="checkbox"/> TA ^{Note9}	Tandem 3-port (NC and NC)																						
<input type="checkbox"/> TB ^{Note9}	Tandem 3-port (NO and NO)																						
<input type="checkbox"/> TC ^{Note9}	Tandem 3-port (NC and NO)																						
<input type="checkbox"/> LT0	(Low current type) 2-position, for single solenoid only																						
<input type="checkbox"/> LT1	(Low current type) 2-position, single solenoid specification																						
<input type="checkbox"/> LT2	(Low current type) 2-position, double solenoid specification																						
<input type="checkbox"/> LT3	(Low current type) 3-position, closed center																						
<input type="checkbox"/> LT4	(Low current type) 3-position, exhaust center																						
<input type="checkbox"/> LT5	(Low current type) 3-position, pressure center																						
<input type="checkbox"/> LTA	(Low current type) Tandem 3-port (NC and NC)																						
<input type="checkbox"/> LTB	(Low current type) Tandem 3-port (NO and NO)																						
<input type="checkbox"/> LTC	(Low current type) Tandem 3-port (NC and NO)																						
<input type="checkbox"/> XBPP	Block-off plate																						
<input type="checkbox"/> XBPP-S	Block-off plate(wiring for single solenoid)																						
<input type="checkbox"/> ZX ^{Note12}	Intermediate piping block																						
Manual override (-R) Manual override lever ^{Note3}																							
Valve outlet type ^{Note4}	<input type="checkbox"/> FJ	With dual use fitting block																					
	<input type="checkbox"/> FJ5	With single use fitting block																					
	<input type="checkbox"/> FJ6	With single use fitting block																					
	<input type="checkbox"/> FM	With female thread block																					
	<input type="checkbox"/> FJ5A	With single use fitting block, 3-port normally closed (NC)																					
	<input type="checkbox"/> FJ5B	With single use fitting block, 3-port normally open (NO)																					
	<input type="checkbox"/> FJ6A	With single use fitting block, 3-port normally closed (NC)																					
	<input type="checkbox"/> FJ6B	With single use fitting block, 3-port normally open (NO)																					
	<input type="checkbox"/> FMA	With female thread block, 3-port normally closed (NC)																					
	<input type="checkbox"/> FMB	With female thread block, 3-port normally open (NO)																					
	<input type="checkbox"/> FMH	With female thread block																					
	<input type="checkbox"/> FMAH	With female thread block, 3-port normally closed (NC)																					
	<input type="checkbox"/> FMBH	With female thread block, 3-port normally open (NO)																					
	Manifold fitting specification- ^{Note5} (Manifold side outlet port)	<input type="checkbox"/> J5	With single use fitting block																				
<input type="checkbox"/> J6		With single use fitting block																					
<input type="checkbox"/> M		With female thread block																					
<input type="checkbox"/> J5A		With single use fitting block, 3-port normally closed (NC)																					
<input type="checkbox"/> J5B		With single use fitting block, 3-port normally open (NO)																					
<input type="checkbox"/> J6A		With single use fitting block, 3-port normally closed (NC)																					
<input type="checkbox"/> J6B		With single use fitting block, 3-port normally open (NO)																					
<input type="checkbox"/> MA		With female thread block, 3-port normally closed (NC)																					
<input type="checkbox"/> MB	With female thread block, 3-port normally open (NO)																						
<input type="checkbox"/> E2 ^{Note10}	Back pressure prevention valve																						
<input type="checkbox"/> XPPM	Individual air supply spacer (with M5 female thread for F10)																						
<input type="checkbox"/> XPP6	Individual air supply spacer (with φ 6 fitting for F15)																						
<input type="checkbox"/> XPP8	Individual air supply spacer (with φ 8 fitting for F15)																						
<input type="checkbox"/> XPRM	Individual exhaust spacer (with M5 female thread for F10)																						
<input type="checkbox"/> XPR6	Individual exhaust spacer (with φ 6 fitting for F15)																						
<input type="checkbox"/> XPR8	Individual exhaust spacer (with φ 8 fitting for F15)																						
Port isolator (-XSP) For 1(P) port ^{Note8}																							
Port isolator (-XSR) For 3(R2), 5(R1) ports ^{Note8}																							
Port isolator (-XSA) For 1(P), 3(R2), 5(R1) ports ^{Note8}																							

- Notes: 1. Cannot be mounted on the external pilot manifold.
 2. Cannot be mounted on the internal pilot manifold.
 3. To designate a manual override lever, enter ○ in the manual override boxes of the designated stations in the above table.
 4. When the manifold outlet specifications are "Blank", select fitting specification for each station, and enter ○ in the valve outlet type boxes of the above table. The 3-port specifications are only available in valve specifications T0, T1, and T2.
 5. When the manifold outlet specifications are L (with selectable fitting), select manifold fitting specification for each station, and enter ○ in the manifold fitting specification boxes of the above table. The 3-port specifications are only available in valve specifications T0, T1, and T2.
 6. When mounting the individual air supply or exhaust spacer, enter ○ in the spacer boxes of the designated stations in the above table.
 7. To designate a port isolator, enter ○ in one port isolator box of the designated stations in the above table.
 8. Port isolators can be installed only when piping blocks are installed on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for -SA, or 1 each port isolator for -SP and -SR for a total of 2 locations.
 When shipping, the designated port isolators are installed between the designated station and the station to its immediate left (the next smaller stn. No.).
 9. Not available in external pilot type.
 10. When mounting the back pressure prevention valve, enter ○ in the back pressure prevention valve boxes of the designated stations in the above table. Not available with the individual exhaust spacer.
 11. Complies with the CE marking regulations.
 12. Only one intermediate piping block can be installed. For information on the type, see page 100 for F10 or page 198 for F15.

Quantity	set	Delivery
----------	-----	----------

F18 Series

Monoblock Manifold A Type (Base Piping Type)

Company name	
Contact person	
Order No.	

Specifications Confirmation Form 1/2

• Fill in selections inside the thick-lined boxes.

Manifold model

F18M A AH

Valve units
2 to 20

Manifold outlet specification
J : With dual use fitting blocks
M : With female thread blocks
L : With selectable fitting blocks

Pilot specification
Blank: Internal pilot manifold
G : External pilot manifold

Mounting valve model

stn. F18T Valve specification - - Note 10 - Note 3 - A1 - - Note 4 - Note 5

Operation type
Blank: Internal pilot type^{Note1}
G : External pilot type (for positive pressure)^{Note2}
V : External pilot type (for vacuum)^{Note2}

IP Specification
Blank : Standard
P^{Note10} : IP Specification

Manual override
Blank: Manual override button
R : Manual override lever^{Note3}
83 : Protruding locking type^{Note11}

Wiring specification
Blank: L type plug connector, Without connector
PN : S type plug connector, Without connector
PS : S type plug connector, Lead wire length 300mm [11.8in.]
PL : L type plug connector, Lead wire length 300mm [11.8in.]
PS3 : S type plug connector, Lead wire length 3000mm [118in.]
PL3 : L type plug connector, Lead wire length 3000mm [118in.]
CPS : Pre-wired positive common terminal S type plug connector, Lead wire length 300mm [11.8in.]
CPL : Pre-wired positive common terminal L type plug connector, Lead wire length 300mm [11.8in.]
CPS3 : Pre-wired positive common terminal S type plug connector, Lead wire length 3000mm [118in.]
CPL3 : Pre-wired positive common terminal L type plug connector, Lead wire length 3000mm [118in.]
39L : DIN connector type with indicator^{Note12}
39N : DIN connector type without indicator^{Note12}

Individual air supply and exhaust spacer^{Note5}
Blank: Without spacer
NP8 : Individual air supply spacer (with φ 8 fitting)
NP0 : Individual air supply spacer (with φ 10 fitting)
NR8 : Individual exhaust spacer (with φ 8 fitting)
NR0 : Individual exhaust spacer (with φ 10 fitting)

Manifold fitting specifications^{Note4}
 Can be selected only when the manifold outlet specification is L (with selectable fitting blocks (metric))
J5 : Manifold side outlet port with single use φ 8 fitting block
J6 : Manifold side outlet port with single use φ 10 fitting block

Can be selected only when the manifold type is AH and the manifold outlet specification is L (with selectable fitting blocks (metric))
MH : Manifold side outlet port with NPT1/4 female thread block

Voltage
DC24V
DC12V^{Note8}
AC100V^{Note9, 13}
AC120V
AC240V^{Note11}

Enter ○ in each designated station in tables on the next page.

F18 Series

Monoblock Manifold A Type (Base Piping Type)

Company name	
Contact person	
Order No.	

Specifications Confirmation Form 2/2

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve model	Mounting valve, block-off plate	Station	Station																				
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
	F18T0	2-position, for single solenoid only																					
	F18T1	2-position, single solenoid specification																					
	F18T2	2-position, double solenoid specification																					
	F18T3	3-position, closed center																					
	F18T4 ^{Note6}	3-position, exhaust center																					
	F18T5 ^{Note6}	3-position, pressure center																					
	F18TA ^{Note7}	Tandem 3-port (NC and NC)																					
	F18TB ^{Note7}	Tandem 3-port (NO and NO)																					
	F18TC ^{Note7}	Tandem 3-port (NC and NO)																					
	F18LT0	(Low current type) 2-position, for single solenoid only																					
	F18LT1	(Low current type) 2-position, single solenoid specification																					
	F18LT2	(Low current type) 2-position, double solenoid specification																					
	F18LT3	(Low current type) 3-position, closed center																					
	F18LT4 ^{Note6}	(Low current type) 3-position, exhaust center																					
	F18LT5 ^{Note6}	(Low current type) 3-position, pressure center																					
	F18LTA ^{Note7}	(Low current type) Tandem 3-port (NC and NC)																					
	F18LTB ^{Note7}	(Low current type) Tandem 3-port (NO and NO)																					
	F18LTC ^{Note7}	(Low current type) Tandem 3-port (NC and NO)																					
	F18BP	Block-off plate																					
	P ^{Note10}	IP Specification																					
	Manual mechanism (-R) manual lever ^{Note3}																						
	Manifold fitting specification ^{Note4} (Manifold side outlet port)	83	Protruding locking type ^{Note7}																				
		J5	With single use fitting block																				
		J6	With single use fitting block																				
		MH	With female thread block																				
	NP8	Individual air supply spacer (with φ 8 fitting)																					
	NP0	Individual air supply spacer (with φ 10 fitting)																					
	NR8	Individual exhaust spacer (with φ 8 fitting)																					
	NRO	Individual exhaust spacer (with φ 10 fitting)																					

- Notes: 1. Cannot be mounted on the external pilot manifold.
 2. Cannot be mounted on the internal pilot manifold.
 3. To designate a manual override lever, enter ○ in the manual override boxes of the designated station in the above table.
 4. When the manifold outlet specifications are L (with selectable fitting), select fitting specification for each station, and enter ○ in the manifold fitting specification boxes of the above table.
 The 3-port specifications are only available in valve specification **T0**, **T1**, and **T2**.
 5. When mounting the individual air supply or exhaust spacer or stop valve, enter ○ in the spacer or stop valve boxes of the designated stations in the above table.
 6. Not available in the vacuum valves.
 7. Not available in external pilot type and vacuum valves.
 8. Not available in low-current type.
 9. Not available in low-current type and tandem 3-port valves.
 10. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.
 11. Only for wiring specification **-39□**.
 12. Not available for valve specification **T1**. In addition, the valve is used only as a double solenoid for **T2**.
 13. Not available with DIN connectors **(-39□)**.

Quantity	set	Delivery
----------	-----	----------

F18 Series

Monoblock Manifold F Type (Direct Piping Type)

Company name	
Contact person	
Order No.	

Specifications Confirmation Form 1/2

• Fill in selections inside the thick-lined boxes.

Manifold model **F18M** **F**
 FH
 Valve units
 2 to 20

Mounting valve model **stn.** **F18T** **Valve specification** - **Note 6** - **Note 1** - **Note 2** - - **Note 3** -

IP Specification _____
Blank : Standard
P^{Note6} : IP Specification

Manual override _____
Blank : Manual override button
R : Manual override lever^{Note1}
83 : Protruding locking type^{Note7}

Valve outlet type^{Note2} _____
 Can be selected only when the manifold type is **F** (metric) .
FJ : With dual use φ8 and φ10 fitting block
FJ5 : With single use φ8 fitting block
FJ6 : With single use φ10 fitting block
FM : With Rc 1/4 female thread block
 Can be selected only when the manifold type is **F** (imperial).
FMH : With NPT1/4 female thread block

Wiring specification _____
Blank : L type plug connector, Without connector
PN : S type plug connector, Without connector
PS : S type plug connector, Lead wire length 300mm [11.8in.]
PL : L type plug connector, Lead wire length 300mm [11.8in.]
PS3 : S type plug connector, Lead wire length 3000mm [118in.]
PL3 : L type plug connector, Lead wire length 3000mm [118in.]
CPS : Pre-wired positive common terminal S type plug connector, Lead wire length 300mm [11.8in.]
CPL : Pre-wired positive common terminal L type plug connector, Lead wire length 300mm [11.8in.]
CPS3 : Pre-wired positive common terminal S type plug connector, Lead wire length 3000mm [118in.]
CPL3 : Pre-wired positive common terminal L type plug connector, Lead wire length 3000mm [118in.]
39L : DIN connector type with indicator^{Note8}
39N : DIN connector type without indicator^{Note8}

Voltage
DC24V
DC12V^{Note4}
AC100V^{Note5, 9}
AC120
AC240^{Note7}

Individual air supply and exhaust spacer, stop valve^{Note3}
Blank : No spacer and no stop valve
NP8 : Individual air supply spacer (with φ8 fitting)
NP0 : Individual air supply spacer (with φ10 fitting)
NR8 : Individual exhaust spacer (with φ8 fitting)
NR0 : Individual exhaust spacer (with φ10 fitting)

Enter ○ in each designated station in tables on the next page.

F18 Series

Monoblock Manifold F Type (Direct Piping Type)

Order Date Month/ Day/ Year/

Company name	
Contact person	
Order No.	

Specifications Confirmation Form 2/2

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve model	Mounting valve, block-off plate	Station	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	F18T0	2-position, for single solenoid only																				
F18T1	2-position, single solenoid specification																					
F18T2	2-position, double solenoid specification																					
F18T3	3-position, closed center																					
F18T4	3-position, exhaust center																					
F18T5	3-position, pressure center																					
F18TA	Tandem 3-port (NC and NC)																					
F18TB	Tandem 3-port (NO and NO)																					
F18TC	Tandem 3-port (NC and NO)																					
F18LT0	(Low current type) 2-position, for single solenoid only																					
F18LT1	(Low current type) 2-position, single solenoid specification																					
F18LT2	(Low current type) 2-position, double solenoid specification																					
F18LT3	(Low current type) 3-position, closed center																					
F18LT4	(Low current type) 3-position, exhaust center																					
F18LT5	(Low current type) 3-position, pressure center																					
F18LTA	(Low current type) Tandem 3-port (NC and NC)																					
F18LTB	(Low current type) Tandem 3-port (NO and NO)																					
F18LTC	(Low current type) Tandem 3-port (NC and NO)																					
F18BP	Block-off plate																					
P Note6	IP Specification																					
	Manual mechanism (-R) manual lever ^{Note1}																					
Valve type ^{Note2}	83 Protruding locking type ^{Note7}																					
	FJ With dual use fitting block																					
	FJ5 With single use fitting block																					
	FJ6 With single use fitting block																					
	FM With female thread block																					
	FMH With female thread block																					
NP8	Individual air supply spacer (with φ 8 fitting)																					
NP0	Individual air supply spacer (with φ 10 fitting)																					
NR8	Individual exhaust spacer (with φ 8 fitting)																					
NR0	Individual exhaust spacer (with φ 10 fitting)																					

- Notes: 1. To designate a manual override lever, enter ○ in the manual override boxes of the designated station in the above table.
 2. Select valve outlet type for each station, and enter ○ in the valve outlet type boxes of the above table. Note that the three port type only supports the **T0**, **T1**, and **T2** valve type.
 3. When mounting the individual air supply or exhaust spacer or stop valve, enter ○ in the spacer or stop valve boxes of the designated stations in the above table.
 4. Not available in low-current type.
 5. Not available in low-current type and tandem 3-port valves.
 6. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.
 7. Only for wiring specification -39□.
 8. Not available for valve specification **T1**. In addition, the valve is used only as a double solenoid for **T2**.
 9. Not available with DIN connectors (-39□).

Quantity	set	Delivery
----------	-----	----------

F18 Series

Split Manifold Non-Plug-in Type

Specifications Confirmation Form 2/2

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve models	Mounting valve, block-off plate	Station	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	F18T0	2-position, for single solenoid only																				
F18T1	2-position, single solenoid specification																					
F18T2	2-position, double solenoid specification																					
F18T3	3-position, closed center																					
F18T4	3-position, exhaust center																					
F18T5	3-position, pressure center																					
F18TA ^{Note9}	Tandem 3-port (NC and NC)																					
F18TB ^{Note9}	Tandem 3-port (NO and NO)																					
F18TC ^{Note9}	Tandem 3-port (NC and NO)																					
F18LT0	(Low current type) 2-position, for single solenoid only																					
F18LT1	(Low current type) 2-position, single solenoid specification																					
F18LT2	(Low current type) 2-position, double solenoid specification																					
F18LT3	(Low current type) 3-position, closed center																					
F18LT4	(Low current type) 3-position, exhaust center																					
F18LT5	(Low current type) 3-position, pressure center																					
F18LTA ^{Note9}	(Low current type) Tandem 3-port (NC and NC)																					
F18LTB ^{Note9}	(Low current type) Tandem 3-port (NO and NO)																					
F18LTC ^{Note9}	(Low current type) Tandem 3-port (NC and NO)																					
F18BPN	Block-off plate																					
P ^{Note12}	IP Specification																					
	Manual override (-R) Manual override lever ^{Note3}																					
Valve outlet type ^{Note4}	A1 With plate																					
	FJ With dual use fitting block																					
	FJ5 With single use fitting block																					
	FJ6 With single use fitting block																					
	FM With female thread block																					
	FMH With female thread block																					
Manifold fitting specification ^{Note5} (Manifold side outlet port)	J5 With single use fitting block																					
	J6 With single use fitting block																					
	MH With female thread block																					
NP8	Individual air supply spacer (with φ 8 fitting)																					
NP0	Individual air supply spacer (with φ 10 fitting)																					
NR8	Individual exhaust spacer (with φ 8 fitting)																					
NR0	Individual exhaust spacer (with φ 10 fitting)																					
	Port isolator (-SP) For 1(P) port ^{Note8}																					
	Port isolator (-SR) For 3(R2), 5(R1) ports ^{Note8}																					
	Port isolator (-SA) For 1(P), 3(R2), 5(R1) ports ^{Note8}																					

- Notes: 1. Cannot be mounted on the external pilot manifold.
 2. Cannot be mounted on the internal pilot manifold.
 3. To designate a manual override lever, enter ○ in the manual override boxes of the designated stations in the above table.
 4. When the manifold outlet specifications are "Blank", select fitting specification for each station, and enter ○ in the valve outlet type boxes of the above table.
 The 3-port specifications are only available in valve specifications **T0**, **T1**, and **T2**.
 5. When the manifold outlet specifications are L (with selectable fitting), select manifold fitting specification for each station, and enter ○ in the manifold fitting specification boxes of the above table.
 The 3-port specifications are only available in valve specifications **T0**, **T1**, and **T2**.
 6. When mounting the individual air supply or exhaust spacer, enter ○ in the one spacer box of the designated stations in the above table.
 7. To designate a port isolator box of the designated station, enter ○ in the port isolator box in the above table.
 8. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for -SA, or 1 each port isolator for -SP and -SR for a total of 2 locations.
 When shipping, the designated port isolators are mounted between the designated station and the station to its immediate left (the next smaller stn. No.).
 9. Not available in external pilot type.
 10. Not available in low-current type.
 11. Not available in low-current type and tandem 3-port valves.
 12. The IP65 protective structure around an electrical device that prevents the infiltration of solid foreign material and water from outside.

Quantity	set	Delivery
----------	-----	----------

F18 Series

Split Manifold Plug-in Type

Specifications Confirmation Form 1/2

Company name	
Contact person	
Order No.	

• Fill in selections inside the thick-lined boxes.

Manifold model

F 18 M **P** **PH** - - - -

Manifold outlet specification
J : With dual use fitting blocks
M : With female thread blocks
L : With selectable fitting blocks
Blank: With plates (direct piping type)

Pilot specification
Blank: Internal pilot manifold
G : External pilot manifold

Piping block specification (air supply and exhaust)
 Can be selected only when the manifold type is **P** (metric).
JR : With dual use fitting, right-side mounting
JL : With dual use fitting, left-side mounting
JD : With dual use fitting, both-side mounting
MR : With female thread, right-side mounting
ML : With female thread, left-side mounting
MD : With female thread, both-side mounting

Can be selected only when the manifold type is **PH** (imperial).
MRH: With female thread, right-side mounting
MLH: With female thread, left-side mounting
MDH: With female thread, both-side mounting

Wiring specification
F100 : Flat cable connector 10-pin
F101 : Flat cable connector 10-pin
F200 : Flat cable connector 20-pin
F201 : Flat cable connector 20-pin
F260 : Flat cable connector 26-pin (M2.6 mounting screws)
D250 : D-sub connector 25-pin^{Note12}
D251 : D-sub connector 25-pin^{Note12} (4-40UNC mounting screws)
D250U : D-sub connector 25-pin^{Note13}
D251U : D-sub connector 25-pin^{Note13}
D370NU : D-sub connector 37-pin without power terminal^{Note13}

Wiring position (wiring block)
Blank: Left-side mounting
R : Right-side mounting

Wiring connection specification
Blank: Packed wiring
W : Double wiring

Valve units
 2 to ^{Note}

Note: For the maximum number of units, check the table for maximum number of valve units by wiring specification on page 84.

Voltage
 DC12V^{Note9}
 DC24V
 AC100V^{Note9}
 AC120V^{Note9}

T200 : Terminal block (19 terminals, M3 screws)

Mounting valve model

stn. **F18T** **Valve specification** - ^{Note 3} - ^{Note 4} **A1** - ^{Note 5} - ^{Note 6} - ^{Note 7}

Operation type
Blank: Internal pilot type^{Note1}
G : External pilot type^{Note2}

Manual override
Blank: Manual override button
R : Manual override lever^{Note3}

Valve outlet type
A1 : With plate (When the manifold outlet specification are **J**, **M**, or **L**, the valve type should be **A1**.)
 Can be selected only when the manifold type is **P** and manifold outlet specification is "**Blank**" (metric).
FJ: With dual use $\phi 8$ and $\phi 10$ fitting block^{Note4}
FJ5: With single use $\phi 8$ fitting block^{Note4}
FJ6: With single use $\phi 10$ fitting block^{Note4}
FM: With Rc1/4 female thread block^{Note4}

Can be selected only when the manifold type is **PH** and manifold outlet specification is "**Blank**" (imperial).
FMH: With NPT1/4 female thread block

Manifold fitting specifications^{Note5}
 Can be selected only when manifold type is **P** and manifold outlet specification is **L** (with selectable fitting blocks (metric))
J5 : Manifold side outlet port with single use $\phi 8$ fitting block
J6 : Manifold side outlet port with single use $\phi 10$ fitting block

Can be selected only when manifold type is **PH** and manifold outlet specification is **L** (with selectable fitting blocks (imperial))
MH : With NPT1/4 female thread block

Individual air supply and exhaust spacer^{Note6}
Blank: No spacer
PP8 : Individual air supply spacer (with $\phi 8$ fitting)
PP0 : Individual air supply spacer (with $\phi 10$ fitting)
PR8 : Individual exhaust spacer (with $\phi 8$ fitting)
PR0 : Individual exhaust spacer (with $\phi 10$ fitting)

Port isolator
Blank: No port isolator
SP : For 1(P) port
SR : For 3(R2), 5(R1) ports
SA : For 1(P), 3(R2), 5(R1) ports

Voltage
 DC12V^{Note9}
 DC24V
 AC100V^{Note9}
 AC120V^{Note9}

When manifold outlet specifications are **J**, **M**, or **L**.

Enter in each designated station in tables on the next page.

F18 Series

Split Manifold Plug-in Type

Specifications Confirmation Form 2/2

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve models	Mounting valve, block-off plate	Station	Station																			
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	F18T0	2-position, for single solenoid only																				
	F18T1	2-position, single solenoid specification																				
	F18T2	2-position, double solenoid specification																				
	F18T3	3-position, closed center																				
	F18T4	3-position, exhaust center																				
	F18T5	3-position, pressure center																				
	F18TA ^{Note11}	Tandem 3-port (NC and NC)																				
	F18TB ^{Note11}	Tandem 3-port (NO and NO)																				
	F18TC ^{Note11}	Tandem 3-port (NC and NO)																				
	F18LT0	(Low current type) 2-position, for single solenoid only																				
	F18LT1	(Low current type) 2-position, single solenoid specification																				
	F18LT2	(Low current type) 2-position, double solenoid specification																				
	F18LT3	(Low current type) 3-position, closed center																				
	F18LT4	(Low current type) 3-position, exhaust center																				
	F18LT5	(Low current type) 3-position, pressure center																				
	F18LTA ^{Note11}	(Low current type) Tandem 3-port (NC and NC)																				
	F18LTB ^{Note11}	(Low current type) Tandem 3-port (NO and NO)																				
	F18LTC ^{Note11}	(Low current type) Tandem 3-port (NC and NO)																				
	F18BPP	Block-off plate																				
	F18BPP-1W	Block-off plate (wiring for single solenoid)																				
	Manual override (-R) Manual override lever ^{Note3}																					
Valve outlet type- ^{Note4}	FJ	With dual use fitting block																				
	FJ5	With single use fitting block																				
	FJ6	With single use fitting block																				
	FM	With female thread block																				
	FMH	With female thread block																				
Manifold fitting specification ^{Note5} (Manifold side outlet port)	J5	With single use fitting block																				
	J6	With single use fitting block																				
	MH	With female thread block																				
	PP8	Individual air supply spacer (with φ 8 fitting)																				
	PP0	Individual air supply spacer (with φ 10 fitting)																				
	PR8	Individual exhaust spacer (with φ 8 fitting)																				
	PR0	Individual exhaust spacer (with φ 10 fitting)																				
	Port isolator (-SP) For 1(P) port ^{Note8}																					
	Port isolator (-SR) For 3(R2), 5(R1) ports ^{Note8}																					
	Port isolator (-SA) For 1(P), 3(R2), 5(R1) ports ^{Note8}																					

- Notes: 1. Cannot be mounted on the external pilot manifold.
 2. Cannot be mounted on the internal pilot manifold.
 3. To designate a manual override lever, enter ○ in the manual override boxes of the designated stations in the above table.
 4. When the manifold outlet specifications are "Blank", select fitting specification for each station, and enter ○ in the valve outlet type boxes of the above table.
 The 3-port specifications are only available in valve specifications **T0**, **T1**, and **T2**.
 5. When the manifold outlet specifications are **L** (with selectable fitting), select manifold fitting specification for each station, and enter ○ in the manifold fitting specification boxes of the above table.
 The 3-port specifications are only available in valve specifications **T0**, **T1**, and **T2**.
 6. When mounting the individual air supply or exhaust spacer, enter ○ in the spacer boxes of the designated stations in the above table.
 7. To designate a port isolator, enter ○ in one port isolator box of the designated stations in the above table.
 8. Port isolators can be installed only when piping blocks are mounted on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for **-SA**, or 1 each port isolator for **-SP** and **-SR** for a total of 2 locations.
 When shipping, the designated port isolators are installed between the designated station and the station to its immediate left (the next smaller stn. No.).
 9. Not available in low-current type.
 10. AC100V and AC120V can only be used when wiring specifications are **-D250**□, **-D251**□ (D-sub connector), or **-T200** (terminal). In addition, not available in low-current type and tandem 3-port valves
 11. Not available in external pilot type.
 12. Can be selected only when the manifold type is **P**.
 13. Can be selected only when the manifold type is **PH**.



Quantity	set	Delivery
----------	-----	----------

F18 Series

Split Manifold Serial Transmission Type Specifications Confirmation Form 1/2

Company name	
Contact person	
Order No.	

• Fill in selections inside the thick-lined boxes.

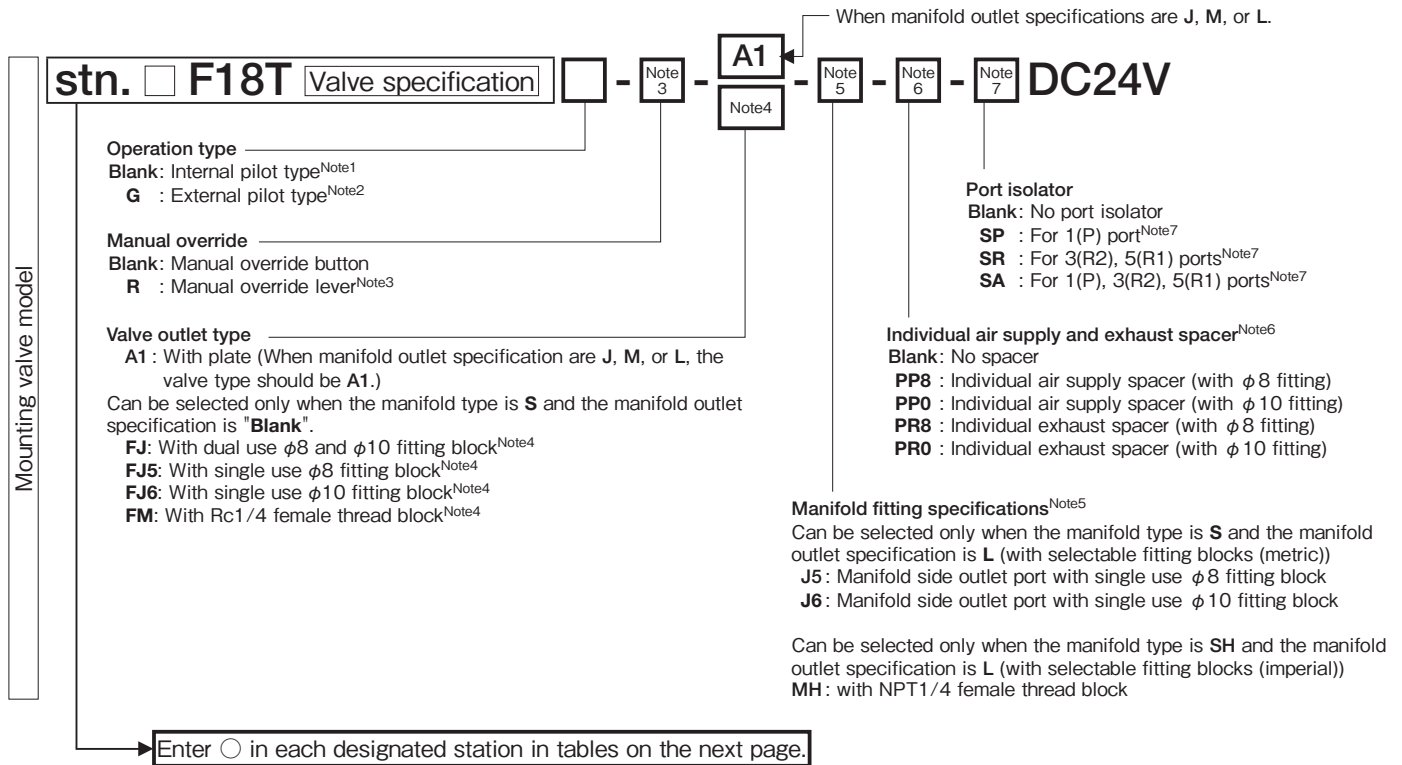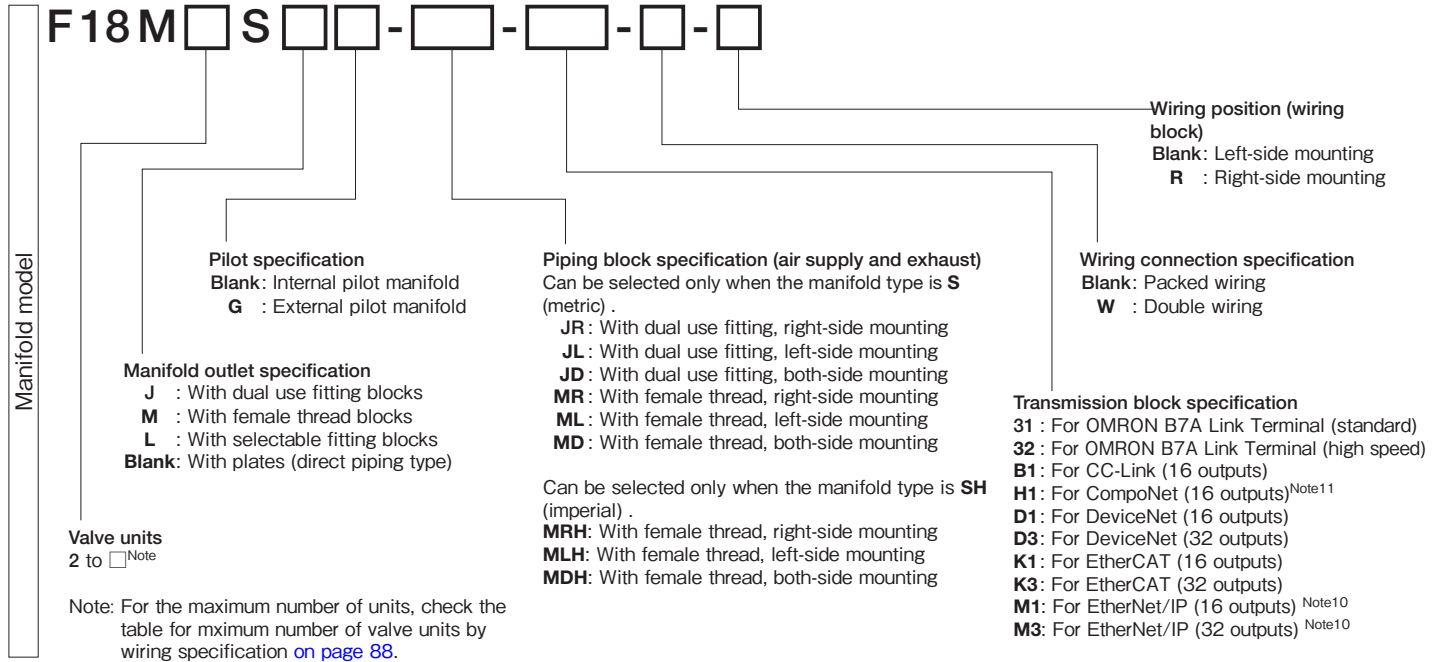

F18 Series

Split Manifold Serial Transmission Type

Specifications Confirmation Form 2/2

※For specifying the valve and block-off plate to be mounted at each station, enter ○ in each applicable box below.

Mounting valve models	Mounting valve, block-off plate	Station	Station																			
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
F18T0	2-position, for single solenoid only																					
F18T1	2-position, single solenoid specification																					
F18T2	2-position, double solenoid specification																					
F18T3	3-position, closed center																					
F18T4	3-position, exhaust center																					
F18T5	3-position, pressure center																					
F18TA ^{Note9}	Tandem 3-port (NC and NC)																					
F18TB ^{Note9}	Tandem 3-port (NO and NO)																					
F18TC ^{Note9}	Tandem 3-port (NC and NO)																					
F18LT0	(Low current type) 2-position, for single solenoid only																					
F18LT1	(Low current type) 2-position, single solenoid specification																					
F18LT2	(Low current type) 2-position, double solenoid specification																					
F18LT3	(Low current type) 3-position, closed center																					
F18LT4	(Low current type) 3-position, exhaust center																					
F18LT5	(Low current type) 3-position, pressure center																					
F18LTA ^{Note9}	(Low current type) Tandem 3-port (NC and NC)																					
F18LTB ^{Note9}	(Low current type) Tandem 3-port (NO and NO)																					
F18LTC ^{Note9}	(Low current type) Tandem 3-port (NC and NO)																					
F18BPP	Block-off plate																					
Manual override (-R) Manual override lever ^{Note3}																						
Valve outlet type ^{Note4}	FJ With dual use fitting block																					
	FJ5 With single use fitting block																					
	FJ6 With single use fitting block																					
	FM With female thread block																					
	FMH With female thread block																					
Manifold fitting specification ^{Note5} (Manifold side outlet port)	J5 With single use fitting block																					
	J6 With single use fitting block																					
	MH With female thread block																					
PP8	Individual air supply spacer (with φ 8 fitting)																					
PP0	Individual air supply spacer (with φ 10 fitting)																					
PR8	Individual exhaust spacer (with φ 8 fitting)																					
PR0	Individual exhaust spacer (with φ 10 fitting)																					
Port isolator (-SP) For 1(P) port ^{Note8}																						
Port isolator (-SR) For 3(R2), 5(R1) ports ^{Note8}																						
Port isolator (-SA) For 1(P), 3(R2), 5(R1) ports ^{Note8}																						

- Notes: 1. Cannot be mounted on the external pilot manifold.
 2. Cannot be mounted on the internal pilot manifold.
 3. To designate a manual override lever, enter ○ in the manual override boxes of the designated stations in the above table.
 4. When the manifold outlet specifications are "Blank", select fitting specification for each station, and enter ○ in the valve outlet type boxes of the above table.
 The 3-port specifications are only available in valve specifications **T0**, **T1**, and **T2**.
 5. When the manifold outlet specifications are **L** (with selectable fitting), select manifold fitting specification for each station, and enter ○ in the manifold fitting specification boxes of the above table.
 The 3-port specifications are only available in valve specifications **T0**, **T1**, and **T2**.
 6. When mounting the individual air supply or exhaust spacer, enter ○ in the spacer boxes of the designated stations in the above table.
 7. To designate a port isolator, enter ○ in one port isolator box of the designated stations in the above table.
 8. Port isolators can be installed only when piping blocks are installed on both sides. In addition, only 1 port isolator can be mounted in 1 manifold for **-SA**, or 1 each port isolator for **-SP** and **-SR** for a total of 2 locations.
 When shipping, the designated port isolators are installed between the designated station and the station to its immediate left (the next smaller stn. No.).
 9. Not available in external pilot type.
 10. Complies with the CE marking regulations.
 11. The **-H1** (for CompoNet (16 outputs)) transmission block is mountable on the left side only.


Quantity	set	Delivery
----------	-----	----------

Notification of Changes to the Solenoid Valves F10 and F15 Series Monoblock Manifold


1. Changes in the monoblock manifold (aluminum manifold) gasket

Along with the back pressure prevention valve becoming an option, the gasket configuration has also been changed. Note that a new gasket type cannot be fitted onto and used on an old type manifold. When replacing a mounted valve, order an old type gasket if you need to replace the gasket of an old type manifold. (Old type gasket model for the F10 Series: **Q-F10Z-GS1**, old type gasket model for the F15 Series: **Q-F15Z-GS1**)

For new type manifold



For old type manifold




Mounted valve	New/old type gasket	New type manifold	Old type manifold
New type valve	New type gasket	○	×
	Old type gasket	×	○
Old type valve	New type gasket	○	×
	Old type gasket	×	○


Note: There is no gasket replacement for a split manifold or serial transmission compatible manifold.

2. Determining whether a monoblock manifold A type or F type, or PC board manifold A type or F type is an old type or new type

New type manifold

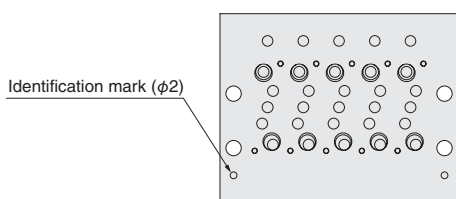

Old type manifold



If you have any questions regarding the above, contact your nearest KOGANEI sales office.

Limited Warranty

KOGANEI CORP. warrants its products to be free from defects in material and workmanship subject to the following provisions.

Warranty Period The warranty period is 180 days from the date of delivery.

Koganei Responsibility If a defect in material or workmanship is found during the warranty period, KOGANEI CORP. will replace any part proved defective under normal use free of charge and will provide the service necessary to replace such a part.

Limitations ● This warranty is in lieu of all other warranties, expressed or implied, and is limited to the original cost of the product and shall not include any transportation fee, the cost of installation or any liability for direct, indirect or consequential damage or delay resulting from the defects.

● KOGANEI CORP. shall in no way be liable or responsible for injuries or damage to persons or property arising out of the use or operation of the manufacturer's product.

● This warranty shall be void if the engineered safety devices are removed, made inoperative or not periodically checked for proper functioning.

● Any operation beyond the rated capacity, any improper use or application, or any improper installation of the product, or any substitution upon it with parts not furnished or approved by KOGANEI CORP., shall void this warranty.

● This warranty covers only such items supplied by KOGANEI CORP. The products of other manufacturers are covered only by such warranties made by those original manufacturers, even though such items may have been included as the components.

The specifications are subject to change without notice.

URL: <http://www.koganeiusa.com>

E-mail: sales@koganeiusa.com



KOGANEI CORPORATION

OVERSEAS DEPARTMENT

3-11-28, Midori-cho, Koganei City, Tokyo 184-8533, Japan
Tel: 81-42-383-7271 Fax: 81-42-383-7276

KOGANEI INTERNATIONAL AMERICA, INC.

48860 Millmont Dr., Suite 108C, Fremont, CA 94538, U.S.A.
Tel: 1-510-744-1626 Fax: 1-510-744-1676

SHANGHAI KOGANEI INTERNATIONAL TRADING CORPORATION

Room 2606-2607, Tongda Venture Building No.1, Lane 600, Tianshan Road,
Shanghai, 200051, China
Tel: 86-21-6145-7313 Fax: 86-21-6145-7323

TAIWAN KOGANEI TRADING CO., LTD.

Rm. 2, 13F., No88, Sec. 2, Zhongxiao E. Rd., Zhongzheng Dist., Taipei City 100,
Taiwan (ROC)
Tel: 886-2-2393-2717 Fax: 886-2-2393-2719

KOGANEI KOREA CO., LTD.

6F-601, Tower Bldg., 1005, Yeongdeu-dong, Giheung-gu, Yongin-si, Gyeonggi-do,
446-908, Korea
Tel: 82-31-246-0414 Fax: 82-31-246-0415

KOGANEI (THAILAND) CO., LTD.

3300/90, Tower B, Elephant Tower, 16th Fl., Phaholyothin Road, Chomphon,
Chatuchak, Bangkok 10900, Thailand
Tel: 66-2-937-4250 Fax: 66-2-937-4254

KOGANEI AUTOMATION (MALAYSIA) SDN.BHD.

Suite 29-2, Level 29, Menara 1MK, No.1, Jalan Kiara, Mont Kiara
50480, Kuala Lumpur, Malaysia
Tel: 60-12-537-7086

KOGANEI ASIA PTE. LTD.

69 Ubi Road 1, #05-18 Oxley Bizhub, Singapore 408731
Tel: 65-6293-4512 Fax: 65-6293-4513